

Phase noise of dispersion-managed solitons

Elaine T. Spiller^{1,2} and Gino Biondini¹

¹ State University of New York at Buffalo, Department of Mathematics, Buffalo, NY 14260 - USA

² Marquette University, Department of Mathematics Statistics and Computer Science, Milwaukee WI, 53201 - USA

(Dated: April 2, 2024)

We quantify noise-induced phase deviations of dispersion-managed solitons (DMS) in optical fiber communications and femtosecond lasers. We first develop a perturbation theory for the dispersion-managed nonlinear Schrödinger equation (DMNLSE) in order to compute the noise-induced mean and variance of the soliton parameters. We then use the analytical results to guide importance-sampled Monte-Carlo simulations of the noise-driven DMNLSE. Comparison of these results with those from the original, un-averaged, governing equations confirm the validity of the DMNLSE as a model for many dispersion-managed systems, and quantify the increased robustness of DMS with respect to noise-induced phase jitter.

PACS numbers: 05.45.Yv, 05.40.-a, 42.55.-f, 42.65.-k, 42.81.-i

The performance of many lightwave systems is ultimately limited by quantum noise. Scientifically and technologically important examples include optical fiber communication systems and femtosecond (fs) lasers: the former are a key enabling technology for the information age, while Ti:sapphire fs lasers have applications to optical atomic clocks. Estimating the performance of these systems is a timely problem. Because both kinds of systems are designed to operate with very high accuracies, however, failures result from the occurrence of unusually large deviations, which makes calculating error rates extremely difficult. Direct Monte-Carlo (MC) computations of failure rates are impractical due to the exceeding number of samples necessary to obtain reliable estimates, and analytical predictions are impossible due to the scale and complexity of these systems. In particular, errors in both systems are often phase-sensitive, and both systems employ the technique of dispersion management, whereby pulses propagate through a periodic concatenation of components with opposite signs of dispersion [1, 2]. The probability of rare events can often be efficiently calculated using importance sampling (IS), with which the noise is sampled from a biased distribution that makes the rare events occur more frequently. For IS to be successful, however, one must bias towards the most likely noise realizations that lead to the events of interest. For systems modeled by the nonlinear Schrödinger equation (NLSE), this is made possible using soliton perturbation theory (SPT) [3–6], but this tool is not available in dispersion-managed (DM) systems. Recently [11] we developed a perturbation theory for the dispersion-managed NLSE (DMNLSE) that governs the long-term dynamics of DM optical systems [8–10], and we performed ISMC simulations of the pulse amplitude and frequency. Here we employ this perturbation theory in order to compute noise-induced means and variances, and we develop IS for the DMNLSE by explicitly formulating and solving the optimal biasing problem. We then perform ISMC simulations of the pulse phase, where the choice of biasing is non-trivial. Finally, we compare these results to the original, un-averaged system as well as to systems with constant dispersion.

Perturbations of dispersion-managed solitons. The propagation of optical pulses in dispersion-managed fiber commu-

nication systems [1] and Ti:sapphire lasers [2] is described by an equation which we refer to as NLSE+DM:

$$i \frac{\partial q}{\partial z} + \frac{1}{2} d(z=z_a) \frac{\partial^2 q}{\partial t^2} + g(z=z_a) |q|^2 q = i v(z; z) : \quad (1)$$

Here z is the propagation distance, t is the retarded time, $q(z; z)$ is the slowly varying electric field envelope (rescaled to account for loss/amplification), $d(z=z_a)$ is the local dispersion, and $g(z=z_a)$ describes the periodic power variation due to loss/amplification. The choice of $d(z=z_a)$ is called a dispersion map, and z_a is the dispersion map period. The forcing is $v(z; z) = \sum_{n=1}^{N_a} v_n(t) \delta(z - nz_a)$, where $\delta(z)$ is the Dirac delta and $v_n(t)$ is white Gaussian noise, satisfying $E[v_n(t)] = 0$ and $E[v_n(t)v_{n'}(t')] = \sigma^2 \delta(t-t') \delta_{nn'}$, where $E[\cdot]$ denotes ensemble average, the asterisk complex conjugation, $\delta_{nn'}$ is the Kronecker delta and σ^2 is the noise variance.

Once the compression/expansion of the pulse in each dispersion map is properly factored out, the core pulse shape obeys the DMNLSE [8, 10]. Namely, to leading order we can approximate the solution of Eq. (1) as $\hat{q}(\omega; z; \zeta) = e^{iC(\zeta)\omega^2} \hat{u}(\omega; z)$, where $\hat{f}(\omega) = \int_{-\infty}^{\infty} e^{i\omega t} f(t) dt$ is the Fourier transform of $f(t)$ (all integrals are complete unless limits are given), and $\zeta = z - z_a$. Here $C(\zeta) = z_a \int_0^{\zeta} d(\zeta') \bar{d} d\zeta'$, where \bar{d} is the average dispersion. The exponential factor in front of $\hat{u}(\omega; z)$ accounts for the rapid “breathing”, while the slowly varying envelope $\hat{u}(\omega; z)$ satisfies the perturbed DMNLSE:

$$i \frac{\partial u}{\partial z} + \frac{1}{2} \bar{d} \frac{\partial^2 u}{\partial t^2} + \int_{-\infty}^{\infty} u_{(t')}^* u_{(t)} u_{(t+t')} R(t', t) dt' dt = i v(z; z); \quad (2)$$

where the asterisk denotes complex conjugate, and for brevity $u_{(t)} = u(z; t)$, etc. The kernel $R(t', t)$ quantifies the average nonlinearity over a dispersion map mitigated by dispersion management: $R(t', t) = \int_{-\infty}^{\infty} e^{i\omega t' + i\omega' t} r(\omega, \omega') d\omega d\omega'$, where $r(x) = \int_0^1 e^{iC(\zeta)} g(\zeta) d\zeta$.

The DMNLSE and its solutions depend on a parameter s , called the *reduced map strength*, which quantifies the size of the dispersion variations around their mean. Dispersion-managed solitons (DMS) are traveling-wave solutions of the

DMNLSE. If $u_o(\ell; z; s) = e^{i\lambda^2 z = 2} f(\ell; s)$, then $\hat{f}(\omega)$ satisfies a nonlinear integral equation which can be efficiently solved numerically [11]. The invariances of the DMNLSE then yield from $u_o(\ell; z; s)$ a four-parameter family of DMS:

$$u_{\text{dms}}(\ell; z; s) = e^{i\Theta(\ell; z)} A f(A(\ell; T); A^{-2}s); \quad (3)$$

where A and Ω are the DMS amplitude and frequency, $\Theta(\ell; z) = \Omega(\ell; T) + \Phi$ is the local phase, and T and Φ are respectively the mean time and mean phase. In the unperturbed case, the mean time and mean phase evolve according to $\dot{T} = \Omega$ and $\dot{\Phi} = (A^2 + \Omega^2)^{-1/2}$. [Hereafter, the dot denotes differentiation with respect to z .]

In the presence of perturbations, the DMS will evolve. If $u(\ell; z) = u_{\text{dms}} + w$ solves the noise-perturbed DMNLSE, $w(\ell; z)$ satisfies the corresponding perturbed linearized DMNLSE. But part of the noise goes to change the soliton parameters. The noise-induced DMS parameter changes at each map period are found by demanding that $w(\ell; z)$ remain small, and are written as $Q(\ell; z_a^+) = Q(\ell; z_a) + \Delta Q$, where for $Q = A; \Omega; T$ it is $\Delta Q = \text{Re}^{i\Theta} \underline{y}_Q; v_n(\ell) \text{ i } \underline{y}_Q; y_Q \text{ i}$, while [11]

$$\Delta\Phi = \text{Re}^{i\Theta} \underline{y}_\Phi; v_n(\ell) \text{ i } \underline{y}_\Phi; y_\Phi \text{ i} + \Omega \text{Re}^{i\Theta} \underline{y}_T; v_n(\ell) \text{ i } \underline{y}_\Omega; y_\Omega \text{ i}; \quad (4)$$

Here $\text{hf; gi} = \text{Re} \int f(\ell) g(\ell) d\ell$ is the inner product, $y_A(\ell); \dots; y_\Phi(\ell)$ are the neutral eigenmodes and generalized eigenmodes of the linearized DMNLSE, and $\underline{y}_A(\ell); \dots; \underline{y}_\Phi(\ell)$ are the adjoint modes [11]: $y_T = \partial U / \partial \xi$, $y_\Omega = i\xi U$,

$$y_\Phi = iU; \quad y_A = \frac{1}{A} U + \xi \frac{\partial U}{\partial \xi} + 2s \frac{\partial U}{\partial s}; \quad (5)$$

while $\underline{y}_\Phi = iy_A$, $\underline{y}_T = iy_\Omega = A$, $\underline{y}_\Omega = y_T = A$, and $\underline{y}_A = U$. Here $\xi = t / T(z)$, and $U(\ell; z) = u(\ell; z) e^{-i\Theta}$ is the DMS envelope. All of these results reduce to those arising from soliton perturbation theory for the NLSE [4] when $s = 0$.

Noise-induced parameter variances. When the perturbation in (2) represents noise, the above results yield a system of nonlinear stochastic differential equations (SDEs) for the evolution of the DMS parameters under the effect of noise:

$$\dot{Q} = v_Q(z); \quad \dot{\Phi} = \frac{1}{2} (A^2 + \Omega^2) + \Omega v_T(z) + v_\Phi(z); \quad (6)$$

for $Q = A; \Omega; T$, where the source terms are $v_Q(z) = \text{Re}^{i\Theta} \underline{y}_Q; S \text{ i } \underline{y}_Q; y_Q \text{ i}$ for all Q . We employ a continuum approximation of Eqs. (6), considering $v(\ell; z)$ to be a zero-mean Gaussian white-noise process with autocorrelation $\text{E} [S(\ell; z) S(\ell'; z)] = \sigma^2 \delta(\ell - \ell') \delta(z - z')$. The sources $v_A(z); \dots; v_\Phi(z)$ are then independent zero-mean white-noise processes, with autocorrelation $\text{E} [S_Q(z) S_{Q'}(z')] = \sigma_Q^2 \delta(z - z')$, where $\sigma_Q^2 = \sigma^2 \underline{y}_Q; k^2 \text{ i } \underline{y}_Q; y_Q \text{ i}^2$. All of these variances depend on the soliton amplitude A as well as on the map strength s , and therefore on the propagation distance z . As a result, it is not possible to integrate Eqs. (6) in closed form, even in the case of constant dispersion. If the amplitude deviations are not large, one can approximate $\sigma_A^2; \dots; \sigma_\Phi^2$ as constant. In this limit, Eqs. (6) can be integrated exactly, to give

$Q(z) = Q_o + W_Q(z)$ for $Q = A; \Omega$, while

$$T(z) = T_o + \int_0^z \Omega(z') dz' + W_T(z); \quad (7a)$$

$$\Phi(z) = \frac{1}{2} \int_0^z (A^2(z') + \Omega^2(z')) dz' + \int_0^z \Omega(z') S_T(z') dz' + W_\Phi(z); \quad (7b)$$

where $W_Q(z) = \int_0^z S_Q(z') dz'$ is a zero-mean Wiener process with autocorrelation $\text{E} [W_Q(z) W_{Q'}(z')] = \sigma_Q^2 \delta_{QQ'} \min(z, z')$. Unlike other soliton parameters, the mean value of the soliton phase is affected by the noise:

$$\text{E} [\Phi(L)] = \frac{1}{2} (A_o^2 + \Omega_o^2) L + \frac{1}{4} (\sigma_A^2 + \sigma_\Omega^2) L^2; \quad (8)$$

Stochastic calculus also yields the variances of the noise-perturbed output soliton parameters as $\text{var}[A(L)] = \sigma_A^2 L$, $\text{var}[\Omega(L)] = \sigma_\Omega^2 L$, $\text{var}[T(L)] = \sigma_T^2 L + \frac{1}{3} \sigma_\Omega^2 L^3$ and

$$\text{var}[\Phi(L)] = (\sigma_\Phi^2 + \Omega_o^2 \sigma_\Omega^2) L + \Omega_o \sigma_T^2 \sigma_\Omega^2 L^2 + \frac{1}{3} (A_o^2 \sigma_A^2 + \Omega_o^2 \sigma_\Omega^2) L^3 + \frac{1}{12} (\sigma_A^4 + \sigma_\Omega^4) L^4; \quad (9)$$

The cubic dependence on distance of the phase jitter due to the Kerr effect is the Gordon-Mollenauer jitter [12], but note that additional contributions are present. Remarkably, these results are formally identical to those for the NLSE [13]. The dependence of the variance on the soliton amplitude, however, is dramatically different, due to the different dependence on A of the norms and inner products [11]. More importantly, these results are not enough to accurately estimate the occurrence of those rare events in which the noise produces large phase deviations, because: (i) the prediction for the mean phase is inaccurate, as we show below; (ii) the knowledge of noise-induced means and variances is not enough to estimate behavior in the tails, because not all soliton parameters are Gaussian-distributed; (iii) even if the output probability density functions (PDFs) were Gaussian, extrapolating the results to reach the distribution tails would magnify all uncertainties exponentially, thereby making any prediction meaningless.

Most-likely noise-induced phase deviations. Even though perturbation theory is not enough by itself to predict failure rates, it provides a key tool to implement IS. To successfully apply IS, one must first find the most likely noise realization subject to the constraint of achieving a given parameter change. For additive white Gaussian noise, this problem is solved by minimizing the negative of the argument of the exponential in the noise PDF, namely the integral $\int \mathcal{Y}_n(x) dx$, subject to the constraint $\Delta Q_n = \Delta Q_{\text{target}}$. The solution is [11]:

$$v_{n, \text{opt}}(\ell) = \Delta Q_{\text{target}} e^{i\Theta(\ell)} \underline{y}_Q(\ell) \underline{y}_Q; y_Q \text{ i} = k y_Q k^2; \quad (10)$$

To induce a larger than normal parameter change, one can then bias the noise by concentrating the MC samples around $v_{n, \text{opt}}(x)$. That is, $v_{n, \text{biased}}(\ell) = v_{n, \text{opt}}(\ell) + v_n(\ell)$, where $v_{n, \text{opt}}(\ell)$ is given above and $v_n(\ell)$ is unbiased.

Once the most likely noise realization that produces a given parameter change ΔQ_n at each map period is known, one must

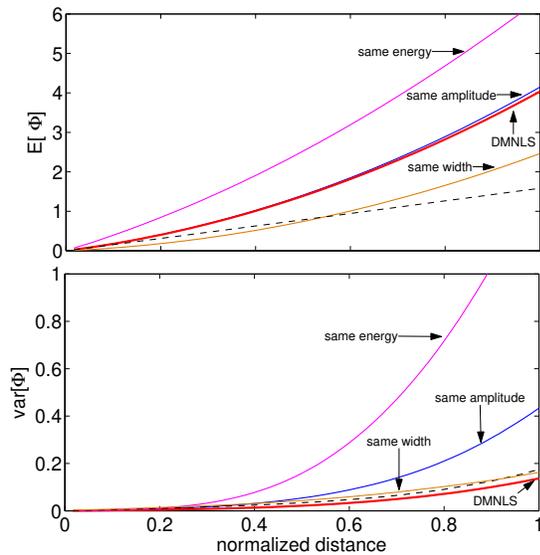


FIG. 1: (Color online) Mean (top) and variance (bottom) of the soliton phase as reconstructed with standard MC simulations. Thick red lines: DMNLS; blue lines: constant-dispersion NLSE soliton with same amplitude as the DMS; magenta lines: NLSE soliton with same energy; orange lines: NLSE soliton with same width. The dashed black lines show the predictions from perturbation theory.

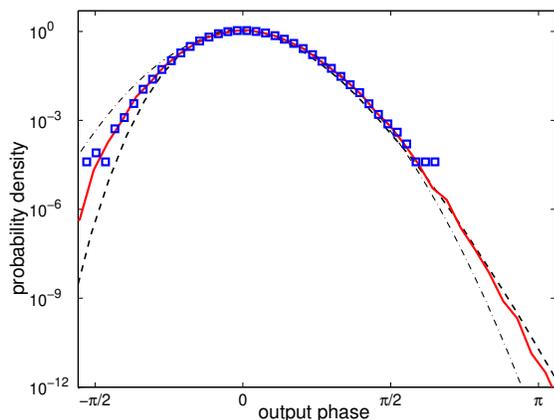


FIG. 2: (Color online) PDF of output phase. Thick red curve: ISMC simulation of DMNLS with 50,000 samples. Blue squares: standard MC simulation of the NLSE+DM with 250,000 samples. Dashed curve: ISMC simulation of the noise-driven SDEs (6). Dot-dashed curve: a Gaussian PDF with variance given by (9).

from Gaussian, but they agree very well with each other as far down in probability as the unbiased MC simulations can reach. Conversely, while the Gaussian approximation agrees well near the peak of the PDF, for deviations from the mean phase of π or more (a value that is relevant for fs lasers) it is off by several orders of magnitude. Similarly, the SDEs obtained from perturbation theory fail to accurately reproduce the full dynamics of the soliton phase at lower-than-average values of phase. Remarkably, however, ISMC simulations guided by perturbation theory yield the correct phase behavior.

Importantly, results from the noise-perturbed DMNLS

and NLSE+DM agree *pathwise*, not just in the overall PDFs at the output. That is, they agree for each noise realization as a function of distance. These results, which are surprising given the “softness” of the phase and the complexity of the system (nonlinearity, dispersion, noise, large deviations etc.), provide further confirmation of the validity and robustness of the DMNLS in capturing the essential dynamics of DM systems. Its usefulness is also increased by the availability of tools such as the perturbation theory presented here, an analogue of which is lacking for the NLSE+DM.

To our knowledge, this is the first time that the probability of large phase deviations in dispersion-managed systems has been quantified. Similar dynamics should also arise for non-solitonic pulses, but the analysis for that case will be more complicated because generic pulses do not preserve a flat phase across their temporal profile upon propagation.

An important question is also whether these results can be used in fs lasers in order to quantify the probability of the occurrence of phase slips in optical atomic clocks. Since gain and loss play an obvious role in lasers, one could expect that it will be necessary to derive a perturbation theory for the non-conservative version of the DMNLS that was derived as a model for fs lasers [16]. Since the DMNLS itself provides a surprisingly good quantitative description of these lasers [15], however, whether or not such an extension will indeed be necessary remains at present an open question.

We thank S. T. Cundiff and W. L. Kath for many insightful discussions. This work was partially supported by NSF under grants DMS-0112069, DMS-0506101 and DMS-0757527.

Electronic address: biondini@buffalo.edu.

- [1] L. F. Mollenauer and J. P. Gordon, *Solitons in optical fibers: fundamentals and applications* (Academic Press, 2006)
- [2] J. Ye and S. T. Cundiff, *Femtosecond optical frequency comb: principle, operation and applications* (Springer, 2004)
- [3] R. O. Moore, G. Biondini and W. L. Kath, *Opt. Lett.* **28**, 105 (2003)
- [4] R. O. Moore, G. Biondini and W. L. Kath, *SIAM Rev.*, **50**, 523 (2008)
- [5] E. Spiller, W. Kath, R. Moore and C. McKinstrie, *IEEE Photon. Technol. Lett.* **17**, 1022 (2005)
- [6] A. Tonello, S. Wabnitz, I. Gabitov and R. Indik, *IEEE Photon. Technol. Lett.* **18**, 886 (2006)
- [7] G. Biondini, W. L. Kath and C. R. Menyuk, *IEEE J. Lightwave Technol.* **22**, 1201 (2004); **24**, 1065 (2006)
- [8] M. J. Ablowitz and G. Biondini, *Opt. Lett.* **23**, 1668 (1998)
- [9] M. J. Ablowitz, B. Ilan and S. T. Cundiff *Opt. Lett.* **29**, (2004)
- [10] I. R. Gabitov and S. K. Turitsyn, *Opt. Lett.* **21**, 327 (1996)
- [11] J. Li, E. Spiller and G. Biondini, *Phys. Rev. A* **75**, 53818 (2007)
- [12] J. P. Gordon and L. F. Mollenauer, *Opt. Lett.* **15**, 1351 (1990)
- [13] K.-P. Ho, *J. Opt. Soc. Am. B* **21**, 266 (2004)
- [14] E. T. Spiller and W. L. Kath, *SIAM J. Appl. Dyn. Syst.* **7**, 868 (2008)
- [15] Q. Quraishi, S. T. Cundiff, B. Ilan and M. J. Ablowitz, *Phys. Rev. Lett.* **94**, 243904 (2005)
- [16] G. Biondini, *Nonlinearity* **21**, 2849 (2008)