

A Novel Compressed Sensing Based Model for Reconstructing Sparse Signals Using Phase Sparse Character

Zhengli Xing¹, Jie Zhou^{1*}, Jiangfeng Ye¹, Jun Yan¹, Lin Zou², Qun Wan²

¹*Institute of Electronic Engineering, China Academy of Engineering Physics, Mianyang, China*

²*School of Electronic Engineering, University of Electronics Science and Technology of China, Chengdu, China*

author_correspond@163.com

Abstract—Phase modulation is a commonly used modulation mode in digital communication, which usually brings phase sparsity to digital signals. It is naturally to connect the sparsity with the newly emerged theory of compressed sensing (CS), which enables sub-Nyquist sampling of high-bandwidth to sparse signals. For the present, applications of CS theory in communication field mainly focus on spectrum sensing, sparse channel estimation etc. Few of current researches take the phase sparse character into consideration. In this paper, we establish the novel model of phase modulation signals based on phase sparsity, and introduce CS theory to the phase domain. According to CS theory, rather than the bandwidth, the sampling rate required here is scaling with the symbol rate, which is usually much lower than the Nyquist rate. In this paper, we provide analytical support for the model, and simulations verify its validity.

Index Terms—compressed sensing, phase modulation, phase sparsity

I. INTRODUCTION

As to digital modulation, phase, frequency and amplitude are commonly used parameters in digital communication. Using different parameters in the modulation procedure, there are various types of modulation, such as one-parameter modulation (PSK, ASK, FSK, OQPSK, MSK) and multi-parameter modulation (APSK, QAM). As the modulation parameters are different, different modulation types need different models to describe, resulting the variety of demodulation procedures, which also increases the complexity of the receiver.

On the other side, frequency resources are getting more and more scarce as user increase sharply, which encourages the popularization of high-frequency and wideband signals. However, it undoubtedly poses a heavy burden to Analog to Digital Converter (ADC).

In recent years, Compressed Sensing (CS) theory has emerged, with the ability of sampling sparse high-bandwidth signals at sub-Nyquist rate. CS theory exploits the sparsity of high dimensional signals, and enables the reconstruction of signals from some nonuniform measurements. The number of required measurements depend on the sparsity of the signals,

rather than the bandwidth. With the compressed measurements, it is possible to reconstruct the original signal by solving a convex optimization problem.

In this paper, based on the analysis of the phase modulation, we establish the sparse model of digital signals, whose constellation diagrams are sparse in the complex plane. As can be seen below, our model can be applied to all phase sparse signals, whose constellations are some discrete points, such as PSK, MSK, OQPSK, QAM, APSK, et al. Considering all the modulation parameters, the reconstruction can also be regarded as a joint demodulation procedure. In this model, the number of nonzero elements equals that of symbols. From CS theory, this means the rate of nonuniform Compressive Sampling (NCS) scales with the symbol rate. Whereas, according to the Nyquist sampling theorem, sampling rate should at least be two times of the bandwidth to avoid aliasing, which can be much higher than the symbol rate, especially for the wideband signals.

The remainder of this paper is organized as follows. In section II, we introduce the signal model and establish the sparse phase model. Section III describes the CS theory and the compressive sampling model. Discussions are made in Section IV, followed by simulation results in Section V. Finally, Section VI concludes the paper.

II. SPARSE PHASE MODEL

For digital modulation, phase is a key parameter. And for many types of modulation utilizing phase, the constellation diagrams are some discrete points in the complex plane, showing sparse character.

A. Signal Model

It is known that, the bit streams will be processed in order of mapping into constellation, square root raised cosine (SRRC) filtering and quadrature modulating.

Here, we define $\mathbf{r} \in \mathbb{C}^{N \times 1}$ to be the vector of uniform samples of the signal:

$$\mathbf{r} = [r_1, \dots, r_N]^T \quad (1)$$

Taking the modulation procedure into consideration, the received signal can be decomposed as follows:

$$\mathbf{r}_a = \begin{bmatrix} e_1 & & \\ & \ddots & \\ & & e_N \end{bmatrix} \begin{bmatrix} s_1 \\ \vdots \\ s_N \end{bmatrix} = \mathbf{E}\mathbf{s} \quad (2)$$

and

$$\mathbf{E} = \begin{bmatrix} e_1 & & \\ & \ddots & \\ & & e_N \end{bmatrix} \in \mathbb{C}^{N \times N} \quad (3)$$

$$\mathbf{s} = [s_1, \dots, s_N]^T \in \mathbb{C}^{N \times 1}$$

where $e_i = \exp(j2\pi f_c t_i)$, and f_c is the carrier frequency, \mathbf{E} is the carrier wave matrix. \mathbf{s} is the vector of symbols after baseband modulation. It can be seen that, (2) functions as the procedure of quadrature modulation.

If we denote the number of symbols after constellation as M . We can rewrite as follows:

$$\mathbf{s} = \mathbf{F}\mathbf{b} = \mathbf{F}_1\mathbf{U}\mathbf{b}$$

$$\mathbf{F} \in \mathbb{R}^{N \times M} \quad (4)$$

$$\mathbf{b} = [b_1, b_2, \dots, b_M]^T \in \mathbb{C}^{M \times 1}$$

where \mathbf{b} is the sequence of constellated symbols. \mathbf{F} is the baseband shaping matrix, containing the procedure of SRRC filtering and interpolation. In order to express these two functions more clearly, we can decompose \mathbf{F} into separate matrices, \mathbf{F}_1 and \mathbf{U} , which are filtering matrix and interpolation matrix respectively. And the expression of \mathbf{F}_1 and \mathbf{U} are:

$$\mathbf{F}_1 = \begin{bmatrix} c_1 & \dots & c_L & & \\ & c_1 & \dots & c_L & \\ & & \ddots & & \ddots \\ & & & c_1 & \dots & c_L \end{bmatrix} \in \mathbb{R}^{N \times N} \quad (5)$$

$$\mathbf{U} = \mathbf{I} \otimes \mathbf{y} \in \mathbb{R}^{N \times M}$$

and

$$\mathbf{c} = [c_1 \dots c_L]$$

$$\mathbf{I} = \begin{bmatrix} 1 & & & \\ & 1 & & \\ & & \ddots & \\ & & & 1 \end{bmatrix} \in \mathbb{R}^{M \times M} \quad (6)$$

$$\mathbf{y} = [1 \ 0 \ \dots \ 0]^T \in \mathbb{R}^{n_s \times 1}$$

where \mathbf{c} is the coefficients vector of SRRC, L is the number of coefficients. L is decided by the order of SRRC, and \mathbf{c} is decided by the order and the roll-off factor α of SRRC. \mathbf{I} is an identity matrix, whose order equals the number of symbol number. \mathbf{y} is the interpolation vector, M is the symbol number, $n_s = N/M$ is the rate of interpolation, ‘ \otimes ’ denotes the Kronecker product.

As to \mathbf{b} , different types of signals have different forms.

For PSK, the constellation model is []:

$$b_k = \exp(j2\pi(m_k - 1)/M') \quad (7)$$

where $M' \in \{2, 4, 8, \dots\}$ is the number of unique phases used, m_k is the k th transmitted symbol.

For rectangular QAM, the signal model is [00987656]:

$$b_k = A_I + jA_Q \quad (8)$$

where A_I and A_Q are the signal amplitudes of in-phase and quadrature components, respectively. In an $I \times Q$ R-QAM scheme, $\log_2(I \cdot Q)$ bits of serial information stream are grouped to be mapped onto 2-dimensional signal constellation. Among the grouped information, $\log_2 I$ bits are mapped onto the in-phase channel, whose amplitude A_I is selected over the set of $\{\pm d, \pm 3d, \dots, \pm(I-1)d\}$. Similarly, the $\log_2 Q$ bits are mapped onto the quadrature channel, whose amplitude A_Q is selected over the set of $\{\pm d, \pm 3d, \dots, \pm(Q-1)d\}$.

For APSK, the signal constellation point b_k is drawn from a set \mathbf{X} given by []:

$$\mathbf{X} = \begin{cases} r_1 e^{j\left(\frac{2\pi}{n_1}i + \theta_1\right)} & i = 0, \dots, n_1 - 1 \\ r_2 e^{j\left(\frac{2\pi}{n_2}i + \theta_2\right)} & i = 0, \dots, n_2 - 1 \\ \vdots & \\ r_{n_r} e^{j\left(\frac{2\pi}{n_r}i + \theta_{n_r}\right)} & i = 0, \dots, n_{n_r} - 1 \end{cases} \quad (9)$$

where we have defined n_i , r_i and θ_i as the number of points, the radius and the relative phase shift corresponding to the i -th ring respectively. We can nickname such modulations as $n_1 + n_2 + \dots + n_{n_r}$ - APSK.

The constellation diagram for QPSK, 16QAM and 4-12APSK are shown in Figure 1(a)-(c) respectively.

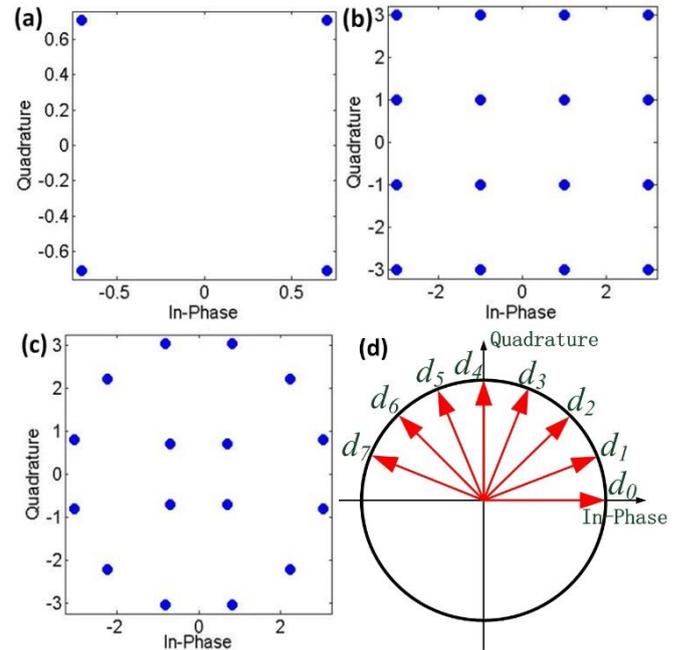


Figure 1. Constellation diagrams for QPSK, 16QAM, 4-12APSK and the sparse vector

Hence, \mathbf{r} can be rewritten as:

$$\mathbf{r} = \mathbf{E}\mathbf{F}_1\mathbf{U}\mathbf{b} \quad (10)$$

B. Sparse Phase model

From the signal model defined in Section II-A, we can see that, for MPSK, MQAM and $n_1 + n_2 + \dots + n_{n_r}$ - APSK ($M = n_1 + n_2 + \dots + n_{n_r}$) signals, the modulated symbol can

where K is the signal number, \mathbf{r}_i is the i th signal, Ψ_i is the sparse basis for the i th signal, θ_i is the sparse vector of \mathbf{r}_i on the basis of Ψ_i .

As to multi-signals model, the measured signal is the mixture of several signals. And shown in (33), different signal may have different sparse matrices.

C. Discussion about the Measurement Number

In CS theory, one important parameter is the sparsity. Here, we define the sparse ratio as the ratio of non-zero components' number to the total number:

$$\lambda_0 = \|\theta\|_0 / |\theta|_c \quad (34)$$

where $\|\cdot\|_0$ is the l_0 norm, which measures the number of non-zero components [1]. $|\cdot|_c$ is the cardinality.

Based on the discussion of Section II and III, it is easy to conclude:

$$\begin{cases} \lambda_0 = 1/J & \text{for PSK, OQPSK and MSK} \\ 1/J < \lambda_0 < 2/J & \text{for QAM and APSK} \end{cases} \quad (35)$$

For the Gaussian measurement matrix we use here, the number of measurements needed is [1]:

$$K \sim O\left(M \log \frac{1}{\lambda_0}\right) \sim O(M \log J) \quad (36)$$

In CS theory, one key concept is so-call 'Information', and in the phase sparse model proposed here, it is clear that the 'Information' is in fact the symbols. According to (36), the compressive sampling rate scales with the symbol rate R_s , and the ratio is $c \cdot \log J$ (c is a constant ranging in $[1, 2)$). Whereas, from the Nyquist sampling rule, the sampling rate should be more than 2 times of the bandwidth, which usually scales with the highest frequency of the signal and much higher than the symbol rate. That means, compressive sampling can greatly reduce the sampling rate.

V. SIMULATIONS

In this section, we give some simulation results about model we proposed. Simulation scenarios are set as follows: $M=64$, roll-off factor of SRRC $\alpha=0.35$, $f_c=400\text{Hz}$, $R_s=100\text{Hz}$. Here, the Nyquist rate of uniform sampling is $f_s=1.6\text{kHz}$ to avoid aliasing, which means $N=1024$.

We can define the compression ratio as:

$$\eta = K / L \quad (37)$$

In the simulation below, we set $K=3M=192$, i.e. $\eta=0.1875$. Figure 2(a) depicts the constellation diagram of QPSK signal, and Figure 2(b) is the reconstruction result. Figure 2(c) is the simulation result of θ and Figure 2(d) presents the partition amplification result. Since we set $J=8$ in our simulation, Figure 2(d) shows that, there is only one non-zero element in every 8 elements of the solution for QPSK signal, which is consistent with our model.

Figure 2(e) and (f) are the real part and imaginary part of the original transmitted signal and the reconstructed results separately. It is obvious that, the reconstruction results are identical with the original data.

Figure 3(a)-(e) and Figure 4(a)-(e) are the simulation results of 16QAM and 16APSK respectively. As shown in Figure 3(c) and Figure 4(c), since the constellation points of QAM and APSK and more than one amplitudes, the solutions

also have several amplitudes. Whereas, solutions are sparse.

Figure 5(a)-(e) are the corresponding simulation results of OQPSK signal, we can see the results are consistent with our analysis in Section IV-A.

Figure 6(a)-(f) are the simulation results of multi-signals. In the simulation, the mixed signal consists of two independent signal, QPSK and 16QAM. The simulation For the QPSK signal, the scenarios are set as follows: For QPSK signal, $M=64$, $\alpha=0.35$, $f_c=400\text{Hz}$, $R_s=100\text{Hz}$, $f_s=1.6\text{kHz}$. For 16QAM, $M=64$, $\alpha=0.35$, $f_c=500\text{Hz}$, $R_s=200\text{Hz}$, $f_s=3.2\text{kHz}$.

Figure 6(a) and Figure 6(b) are the reconstructed QPSK and 16QAM signals' constellation diagrams, we can see the reconstructed constellation diagrams are in accordance with the theoretical ones. Figure 6(c) shows the mixed signal's constellation diagram, in which QPSK and 16QAM signals' constellations have no influence on each other. Figure 6(d) and Figure 6(e) are the sparse vectors. As discussed above, for QPSK signal, the sparse vector has only one amplitude, and for 16QAM signal, the sparse vector has more than one amplitudes.

Figure 7(a)-(d) are the simulation results of the constellations of QPSK signals, with carrier phase deviation, timing offset, carrier frequency offset, and Gaussian white noise separately. As to Figure 7(a), we set the carrier phase deviation as $\pi/4$ in the simulation. It can be seen that, the residual carrier phase is transferred to the constellation diagram, resulting the $\pi/4$ full rotation of the constellation. Similar analyses can be made to Figure 7(b)-(d).

VI. CONCLUSION

Based on the analysis of digital signal's modulation procedure, we proposed the phase sparse model. Introducing the CS theory, compressed sampling is applied to phase sparse signals, which can greatly reduce the required sampling rate. Relative simulation verified the proposed model.

What we have to admit is that, some issues, such as how to obtain the exact carrier frequency, carrier phase deviation, and how to realize symbol timing and carrier frequency synchronization before applying our model still remain to be further studied in our future work.

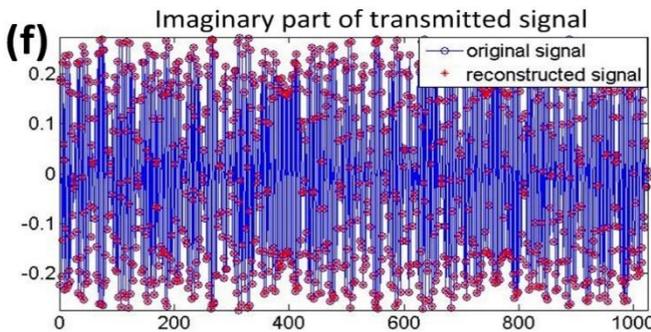
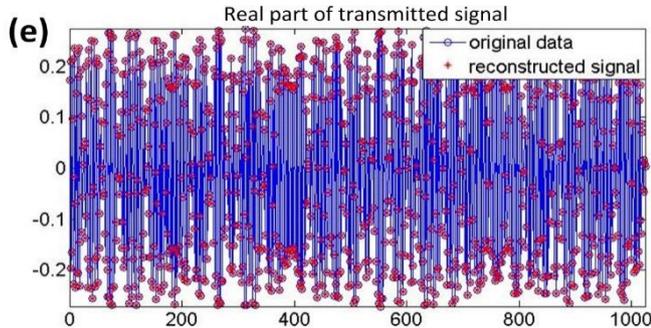
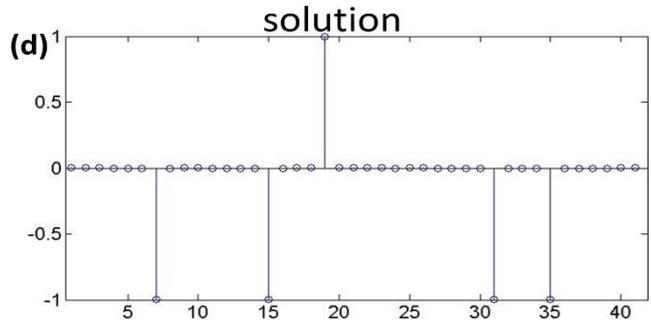
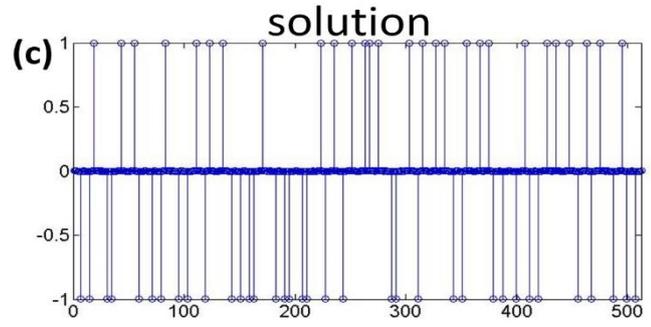
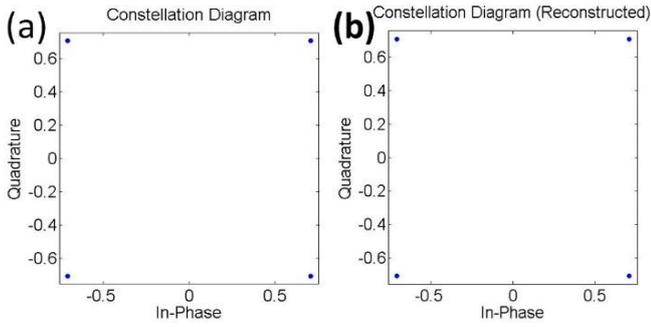


Figure 2. Simulation results of QPSK signals

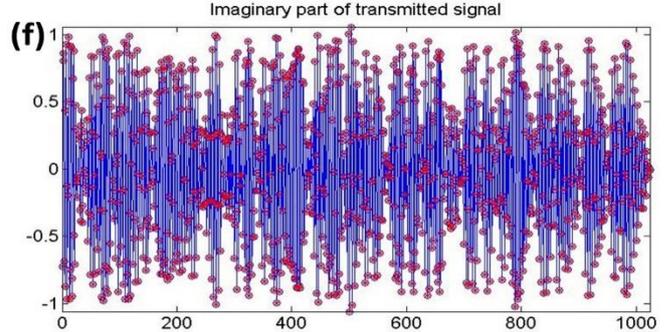
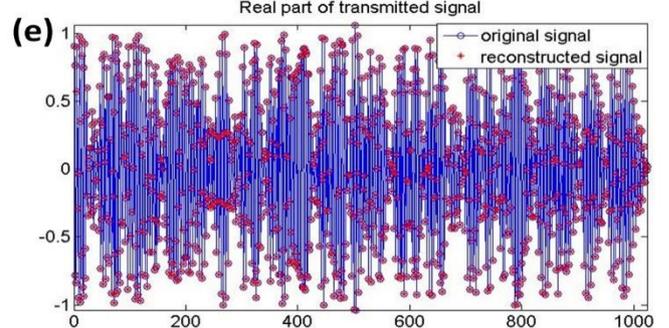
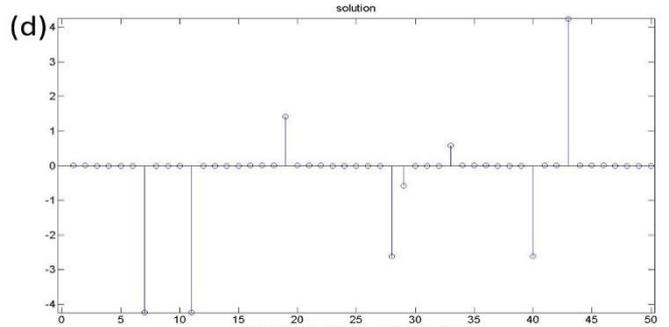
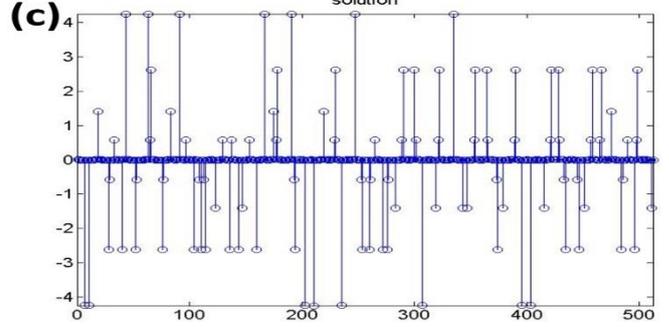
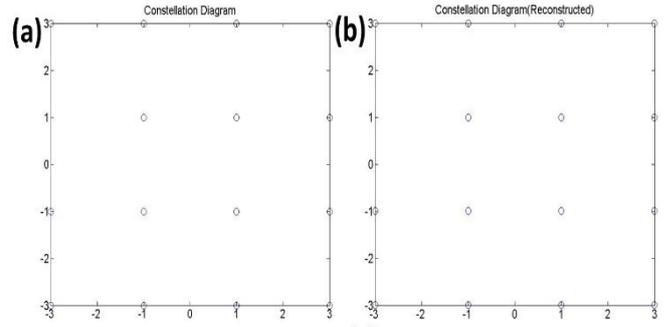


Figure 3. Simulation results of 16QAM signals

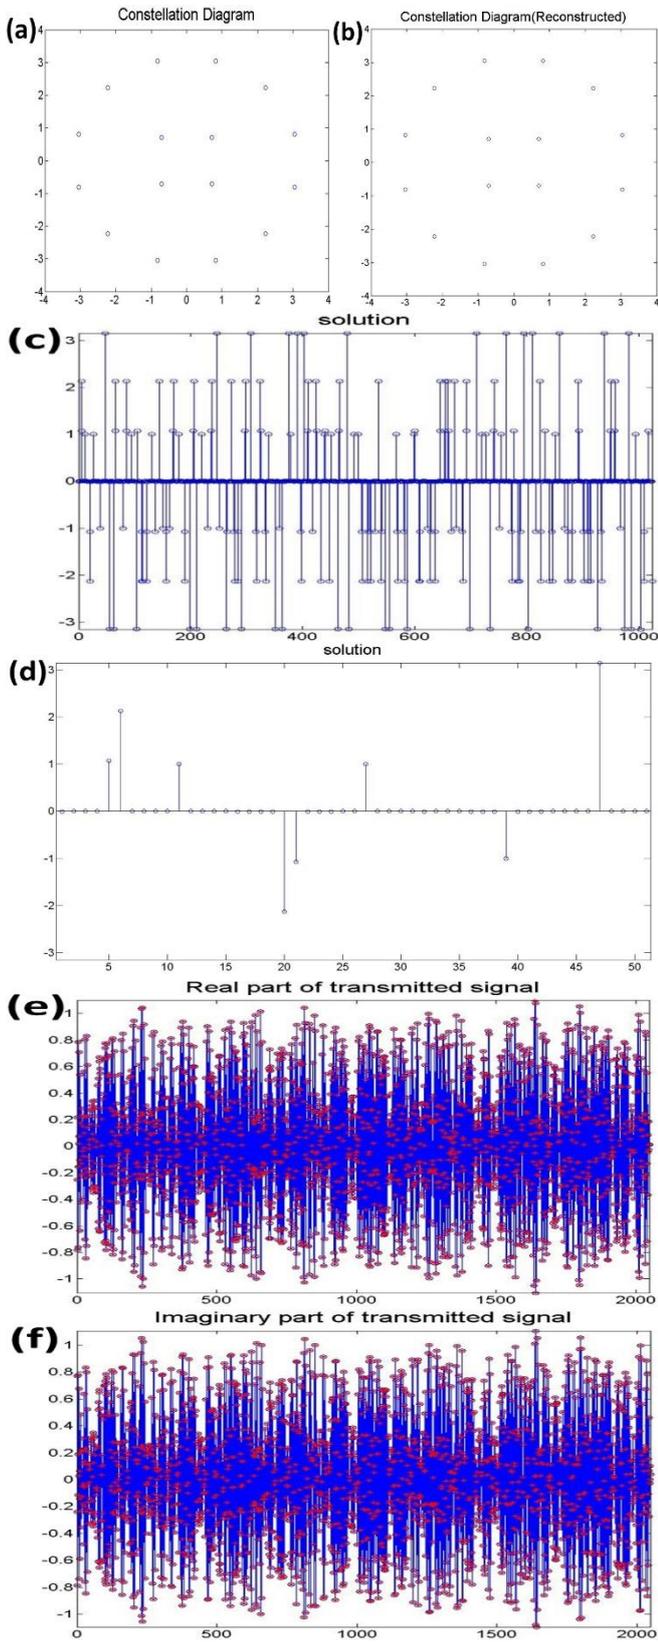


Figure 4. Simulation results of 4-12APSK signals

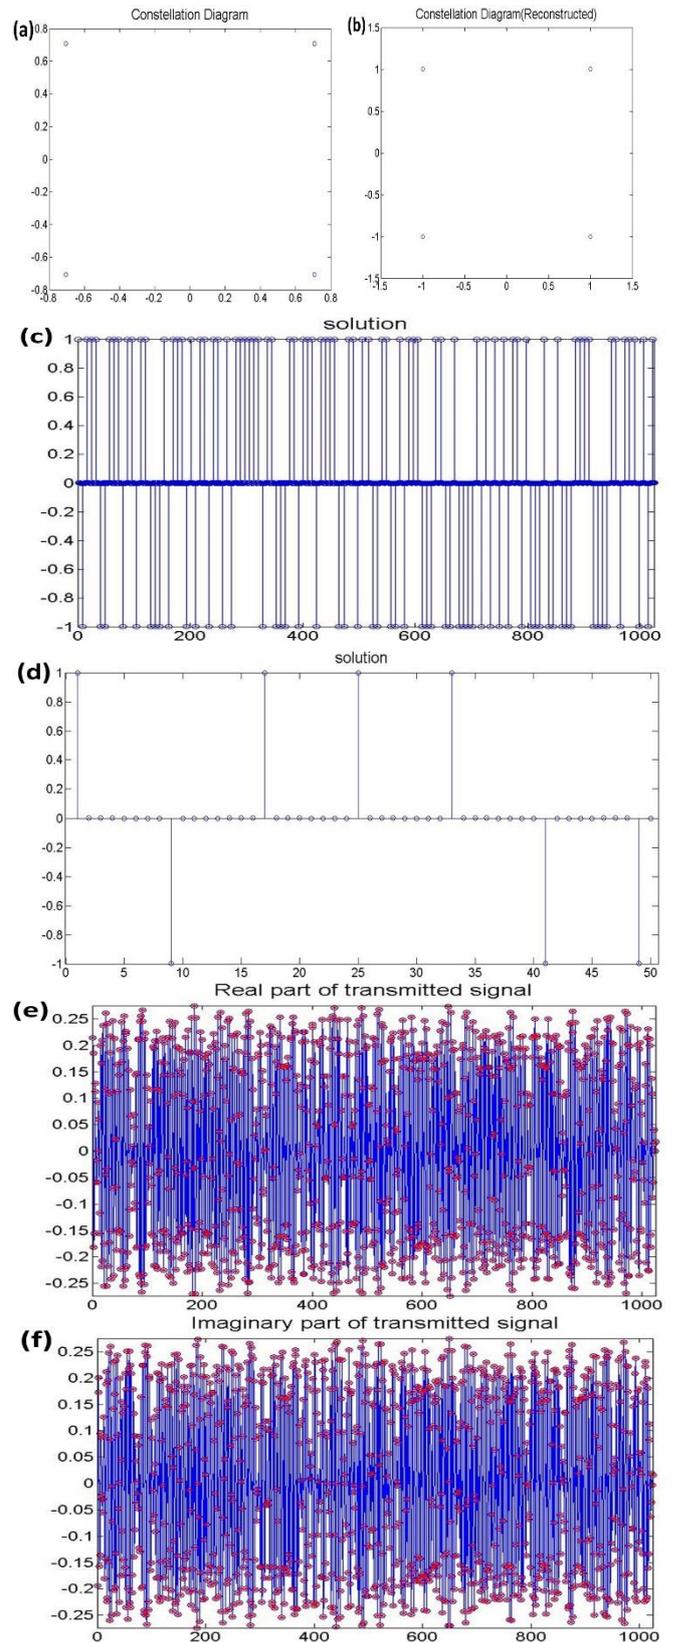


Figure 5. Simulation results of OQPSK signals

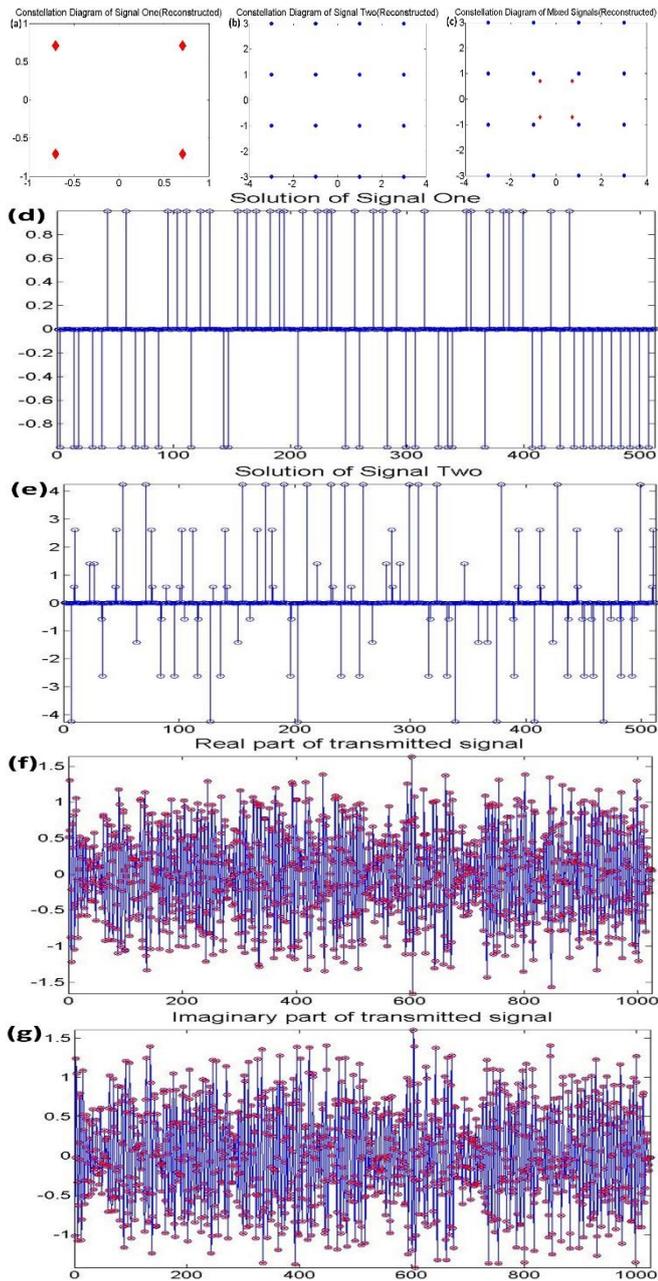


Figure 6. Simulation results of mixed signals

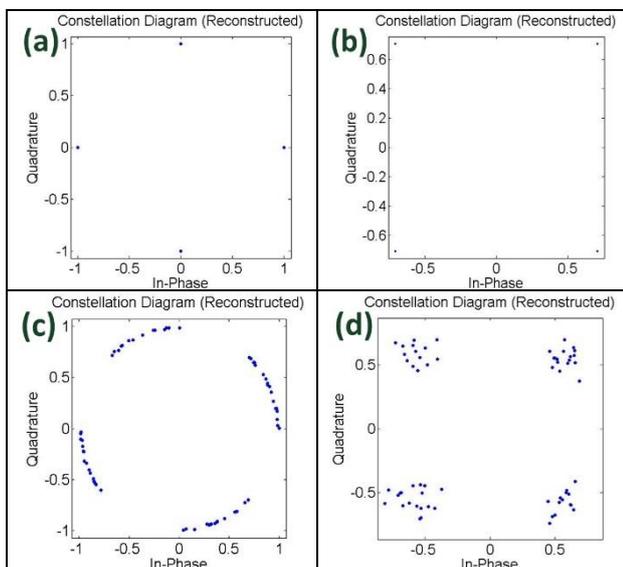


Figure 7. Simulations with carrier phase deviation, timing offset, carrier frequency offset, and Gaussian white noise

REFERENCES

- [1] W.-K. Chen, *Linear Networks and Systems* (Book style). Belmont, CA: Wadsworth, 1993, pp. 123–135.
- [2] H. Poor, *An Introduction to Signal Detection and Estimation*. New York: Springer-Verlag, 1985, ch. 4.
- [3] B. Smith, “An approach to graphs of linear forms (Unpublished work style)”, unpublished.
- [4] E. H. Miller, “A note on reflector arrays (Periodical style—Accepted for publication)”, *IEEE Trans. Antennas Propagat.*, to be published.
- [5] J. Wang, “Fundamentals of erbium-doped fiber amplifiers arrays (Periodical style—Submitted for publication)”, *IEEE J. Quantum Electron.*, submitted for publication.
- [6] M. Young, *The Technical Writers Handbook*. Mill Valley, CA: University Science, 1989.
- [7] J. U. Duncombe, “Infrared navigation—Part I: An assessment of feasibility (Periodical style)”, *IEEE Trans. Electron Devices*, vol. ED-11, pp. 34–39, Jan. 1959. [Online]. Available: <http://dx.doi.org/10.4316/iee.1959.3422>
- [8] S. Chen, B. Mulgrew, and P. M. Grant, “A clustering technique for digital communications channel equalization using radial basis function networks”, *IEEE Trans. Neural Networks*, vol. 4, pp. 570–578, Jul. 1993.
- [9] R. W. Lucky, “Automatic equalization for digital communication”, *Bell Syst. Tech. J.*, vol. 44, no. 4, pp. 547–588, Apr. 1965.
- [10] S. P. Bingulac, “On the compatibility of adaptive controllers (Published Conference Proceedings style)”, in *Proc. 4th Annu. Allerton Conf. Circuits and Systems Theory*, New York, 1994, pp. 8–16.
- [11] G. R. Faulhaber, “Design of service systems with priority reservation”, in *Conf. Rec. 1995 IEEE Int. Conf. Communications*, pp. 3–8.
- [12] W. D. Doyle, “Magnetization reversal in films with biaxial anisotropy”, in *1987 Proc. INTERMAG Conf.*, pp. 2.2-1–2.2-6.
- [13] G. W. Juette and L. E. Zeffanella, “Radio noise currents in short sections on bundle conductors (Presented Conference Paper style)”, presented at the IEEE Summer power Meeting, Dallas, TX, Jun. 22–27, 1990, Paper 90 SM 690-0 PWRs.
- [14] J. Williams, “Narrow-band analyzer (Thesis or Dissertation style)”, Ph.D. dissertation, Dept. Elect. Eng., Harvard Univ., Cambridge, MA, 1993.
- [15] N. Kawasaki, “Parametric study of thermal and chemical nonequilibrium nozzle flow”, M.S. thesis, Dept. Electron. Eng., Osaka Univ., Osaka, Japan, 1993.
- [16] J. P. Wilkinson, “Nonlinear resonant circuit devices (Patent style)”, U.S. Patent 3 624 12, July 16, 1990.
- [17] *IEEE Criteria for Class IE Electric Systems* (Standards style), IEEE Standard 308, 1969.
- [18] *Letter Symbols for Quantities*, ANSI Standard Y10.5-1968.
- [19] R. E. Haskell and C. T. Case, “Transient signal propagation in lossless isotropic plasmas (Report style)”, USAF Cambridge Res. Lab., Cambridge, MA Rep. ARCRL-66-234 (II), 1994, vol. 2.
- [20] E. E. Reber, R. L. Michell, and C. J. Carter, “Oxygen absorption in the Earth’s atmosphere”, Aerospace Corp., Los Angeles, CA, Tech. Rep. TR-0200 (420-46)-3, Nov. 1988.
- [21] (Handbook style) *Transmission Systems for Communications*, 3rd ed., Western Electric Co., Winston-Salem, NC, 1985, pp. 44–60.
- [22] *Motorola Semiconductor Data Manual*, Motorola Semiconductor Products Inc., Phoenix, AZ, 1989