

# Heralded amplification of photonic qubits

Natalia Bruno, Vittorio Pini, Anthony Martin, Boris Korzh,  
Félix Bussières, Hugo Zbinden, Nicolas Gisin, and Robert Thew\*  
*Group of Applied Physics, University of Geneva, CH-1211 Geneva 4, Switzerland*

Varun Verma, Sae Woo Nam, Richard Mirin, and Adriana Lita  
*National Institute of Standards and Technology, 325 Broadway, Boulder, Colorado 80305, USA*

Francesco Marsili  
*et Propulsion Laboratory, California Institute of Technology,  
4800 Oak Grove Dr., Pasadena, California 91109, USA*

Nicolas Sangouard  
*Department of Physics, University of Basel, CH-4056 Basel, Switzerland*

We demonstrate heralded qubit amplification for Time-Bin and Fock-state qubits in an all-fibre, telecom-wavelength, scheme that highlights the simplicity, the stability and potential for fully integrated photonic solutions. Exploiting high-efficiency superconducting detectors, the gain, the fidelity and the performance of the amplifier are studied as a function of loss. We also demonstrate the first heralded Fock-state qubit amplifier without post-selection. This provides a significant advance towards demonstrating Device-Independent Quantum Key Distribution as well as fundamental tests of quantum mechanics over extended distances.

## INTRODUCTION

Terrestrial quantum communication mainly relies on the efficient transmission of photonic states through fibre optic networks [1]. Photon loss represents one of the most significant challenges for photonic quantum technologies to overcome not only for applications in quantum communication, but for metrology [2] and fundamental tests of quantum physics [3]. Recently, a novel approach for QKD has been proposed. It relies on a Bell test and makes the security device independent (DI-QKD), i.e. the measurement devices and the sources can be treated as black boxes [4–6]. However, this requires the violation of a Bell inequality free of the detection loophole [3, 7, 8]. Heralded Qubit Amplification (HQA) [6, 9–11] provides a teleportation based solution to overcome transmission loss, e. g. in the fiber optics used for telecommunication, thus providing a route towards a loophole-free Bell test over tens of kilometers and eventually DI-QKD.

Heralded amplification has previously been demonstrated in proof-of-principle experiments in the visible [12] and telecom regimes [13, 14]. There has also been interest in exploiting this for continuous variable systems to reduce noise [15–17] and extend transmission distances [18–20]. Fundamental tests of single photon addition and subtraction have also been explored in the same context [21, 22]. Here, we work in the telecom regime and develop simple, all-fibre, linear optic circuits for schemes adapted for quantum communication; exploiting Time-bin [23] and Fock-state [24] encodings. In the case of the Fock-state scheme we demonstrate the first HQA without post-selection.

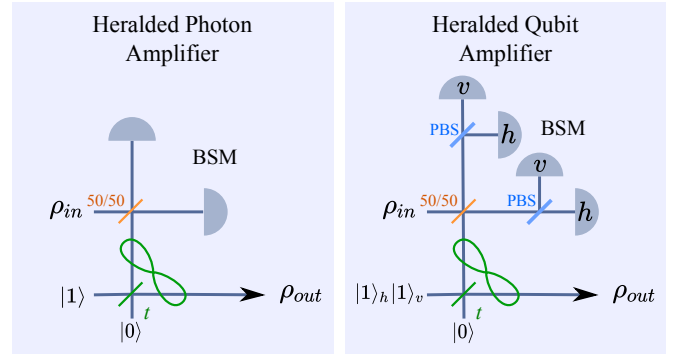


FIG. 1. Left: heralded single photon amplifier. Right: linear circuit for the heralded polarisation-qubit amplifier.

## PRINCIPLE

The principle for heralded qubit amplification follows directly from a teleportation protocol.

Consider FIG. 1, where an unknown input qubit state is combined with one mode of an entangled state.

An initial qubit state  $|\psi_{\text{in}}\rangle = \alpha|\phi\rangle + \beta|\phi^\perp\rangle$ , is transmitted, for example, through a fibre optic channel. It will undergo loss, such that the resulting state is in a statistical mixture of the initial state and vacuum:

$$\rho_{\text{in}} = (1 - P_{\text{in}})|0\rangle\langle 0| + P_{\text{in}}|\psi_{\text{in}}\rangle\langle\psi_{\text{in}}|, \quad (1)$$

where  $P_{\text{in}}$  is the channel transmission. This will be the input state for the HQA, which also requires mutually orthogonal auxiliary states that span the relevant qubit space,  $|\psi\rangle_a \equiv |\phi\rangle \otimes |\phi^\perp\rangle$ . In the case of Fock-state qubits, as shown in FIG. 1 (Left), the ancilla state is  $|1\rangle \otimes |0\rangle$ .

This is easily extended to polarisation qubits, or similarly time-bin qubits, by coherently combining two single-photon amplifiers - one for each mode, see FIG. 1 (Right).

A Bell state measurement (BSM) acting on the initial qubit and an ancilla qubit teleports the input state into the output one, which is the other mode of the entangled state. The use of an unbalanced beam splitter (with transmission  $t$ ) allows for the teleportation to be biased so as to reduce the vacuum contribution. The resulting output state is still a mixture between the vacuum and the initial qubit, up to a unitary transformation  $U$  that depends on the result of the BSM. However, it now has different relative weights:

$$\rho_{out} = (1 - G(t)P_{in})|0\rangle\langle 0| + G(t)P_{in}U|\psi_{in}\rangle\langle\psi_{in}|U^{-1}. \quad (2)$$

The gain  $G(t)$  is the ratio between the probability of having a photon in the output given a successful BSM,  $P_{out}$ , and the probability of having a qubit at the input,  $P_{in}$ . In the ideal case, it tends to  $t/(1-t)$  in the limit of high loss. In practice, considering realistic experimental conditions, it also depends on the coupling efficiency of the ancilla  $P_a$  and the detection efficiency  $\eta$ . Moreover, having non photon-number-resolving (PNR) detectors increases the probability of heralding the vacuum, and therefore it reduces the gain with respect to the ideal case. If one takes into account non PNR detectors with efficiency  $\eta$  on the BSM and a probability  $P_a$  of having an ancilla (for simplicity, we consider  $P_a$  to be the same for both auxiliary photons), we can define the gain as:

$$G(t) = \frac{P_{out}}{P_{in}} = \frac{P_a t}{P_a(1-t)(1-P_{in}\eta) + P_{in}}. \quad (3)$$

As we can see, a low ancilla input probability  $P_a$  and a poor detection efficiency  $\eta$  reduce the gain. Notice that a proposed modification of the original scheme allows one to improve the gain by eliminating the case in which two auxiliary photons are reflected [10]. However, this scheme is more demanding from an experimental point of view as it requires a phase-stabilised interferometer between the unbalanced beam splitter and the BSM.

## EXPERIMENTAL SETUP

### Concept

In this work, we use time-bin qubits, e.g.  $|\psi_{in}\rangle = \frac{1}{\sqrt{2}}(|s_H\rangle + e^{i\Delta\phi}|\ell_V\rangle)$ . The polarisation is used to label and switch the *short* and *long* paths to improve efficiency [25, 26], requiring the ancilla state to be of the form  $|\psi\rangle_a = |s_H\rangle \otimes |\ell_V\rangle$ .

FIG. 2 shows the experimental setup where four indistinguishable photons are generated by Spontaneous Parametric Down Conversion (SPDC). Detector  $D_1$  heralds a

single photon that is sent into an interferometer to prepare the time-bin qubit. The other source provides the two ancilla photons, where one is delayed with respect to the other by  $\Delta_2$ , corresponding to the path-length difference in the time-bin interferometer. The delay between the *short* photon from each source is determined by  $\Delta_1$ . It is critical that the arrival times of the two ancilla photons match the two qubit modes for the BSM to occur with high fidelity. The phase of the initial qubit can be varied and loss can be added before the HQA. The output state is then sent back to the same interferometer to verify the fidelity with respect to the initial state.

We then analyse the result based on the four-fold coincidences between the heralded single photon  $D_1$ , a successful BSM  $D_2$  and  $D_3$ , and the output state  $D_4$  detected by MoSi superconducting nanowire single photon detectors (SNSPD) with an efficiency of 70 % [27]. By exploiting the fast recovery time (80 ns) of these detectors, each one is used twice in each run of the experiment, i.e. with two different and well distinguished arrival times discriminated via the clock of the pump laser.

### Heralded single photon source.

The heralded single photon source used in this work is based on a SPDC process in a 3 cm bulk Periodically Poled Potassium Titanyl Phosphate (PP-KTP) crystal, with type II phase matching conditions. With this material, adjusting the poling period, the crystal length and the pump pulse duration, it is possible to achieve quasi phase matching conditions that allow the generation of spectrally separable photon pairs [28–30]. Moreover, purity is optimised when the photons are selected in a single spatial mode with a high heralding efficiency [31].

A 76 MHz picosecond pulsed laser at 772 nm pumps the crystal in a double-pass configuration, generating pairs of photons in each direction, for a total of four photons, degenerate at 1544 nm. The setup is symmetrical: for each of the two passes of the pump through the crystal, the two daughter photons are separated by a polarisation beam splitter (PBS) and then coupled into single mode fibres. The achieved heralding efficiency after coupling into single mode fibers (SMF) is measured to be  $0.86 \pm 0.04$  for the qubit (pair generated in the first passage through the crystal),  $0.80 \pm 0.04$  on average for the two ancillae (generated in the second passage through the crystal), not considering the detection efficiency. A Hong-Ou-Mandel (HOM) interference experiment between two photons produced in independent sources gives a visibility of  $0.92 \pm 0.03$ , indicating high spectral purity without any filtering [30]. To increase the single mode character of the generated photons, two 100 GHz filters are placed before the heralding, BSM, detectors, allowing one to herald the output state in a well defined spectral mode.



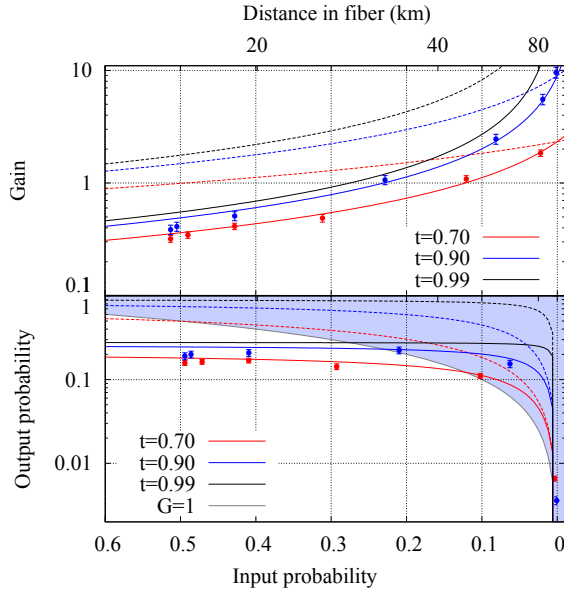


FIG. 3. Top: Gain as a function of the input probability  $P_{in}$ . The red and blue points correspond to unbalanced beam splitters with transmission  $t = 0.7$  and  $t = 0.9$ , respectively. Black corresponds to  $t = 0.99$ . Solid lines take account the measured transmission loss for the ancillae, dashed lines are calculated assuming the best case scenario in which the probability of having an ancilla is  $P_a = 0.9$ . Bottom: Output probability as a function of the input probability  $P_{in}$ . The colored area indicates where the gain becomes higher than 1, i. e. one actually has amplified the input state.

$D_4$ , by  $D_1$ - $D_2$ - $D_3$ . This allows us to determine the gain of the amplifier as a function of  $P_{in}$ . The coincidence rate is around 10 counts/minute for each of the two curves,  $t = 0.7$  and  $t = 0.9$ , and it drops linearly with the input probability  $P_{in}$ . For this reason, when measuring the gain, we increase the time of measurement by a factor  $1/P_{in}$  in order to have the same statistics for each run. The measurement corresponding to the highest value of  $P_{in}$  was taken by recording timestamps of the detections for 900 s. Error bars are calculated assuming poissonian statistics of photon counting.

## RESULT

FIG. 3 shows that the experimental results are in good agreement with the theoretical prediction. The measurement is done for two different values of  $t$ : 0.7 and 0.9. In the case of  $t = 0.9$ , the gain reaches the maximum value of 9, fixed by  $t/(1-t)$ . The dashed lines in FIG. 3 show the gain when the excess loss for the ancillae are factored out – we keep experimentally feasible values for  $P_a = 90\%$  [31]. To measure the Fidelity of the output state, defined as  $\mathcal{F} = \langle \psi_{in} | \rho_{out} | \psi_{in} \rangle$ , we project the output state on the input. Varying the phase  $\Delta\phi$  of the input qubit, we can observe oscillations in the four fold

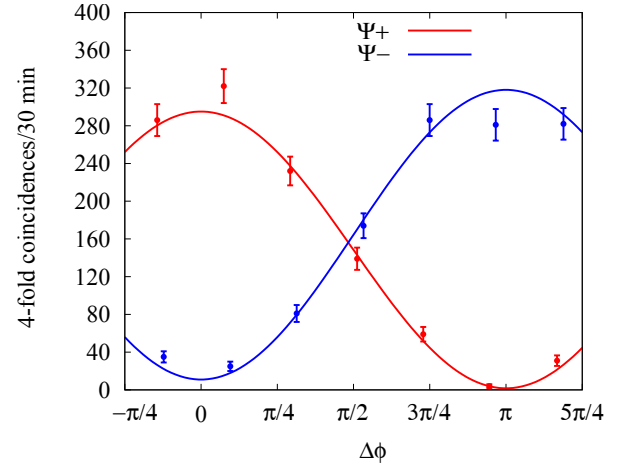


FIG. 4. Analysis of the output state as a function of  $\Delta\phi$ . The visibilities are  $0.98 \pm 0.02$  and  $0.93 \pm 0.02$  for the red and the blue curve, respectively, leading to fidelities of  $0.99 \pm 0.01$  and  $0.97 \pm 0.01$ . For this measurement  $t = 0.7$  and  $P_{in} = 0.47 \pm 0.04$ .

coincidence rates, as shown in FIG. 4. The two curves correspond to the two possible outputs of the BSM: at  $\Delta\phi = 0$ , the output obtained when projecting onto  $\Psi^+$  gives the maximum overlap, while the output related to  $\Psi^-$  is orthogonal to the qubit, since a phase shift of  $\pi$  (the unitary operation from equation 2) is needed to recover the input state. By measuring the visibility of the fringes observed as a function of the phase difference  $\Delta\phi$ , we can estimate the Fidelity as  $\mathcal{F} = (1+V)/2$ . The visibilities for the two curves shown in FIG. 4 are  $0.98 \pm 0.02$  and  $0.93 \pm 0.02$ , leading to fidelities of  $0.99 \pm 0.01$  and  $0.97 \pm 0.01$ . Each point is measured fixing the phase at a maximum for one output of the BSM and minimum for the other one. We use these two points to check that the fidelity is constant for each value of gain.

The main figure of merit is, however, the output probability  $P_{out}$ , plotted in FIG. 3 as a function of  $P_{in}$ . To be more specific,  $P_{out}$  is the probability of having a qubit at the output once a successful BSM is announced. From FIG. 3 one can see that the main limitation on the performance of the amplifier is given by the coupling efficiency of the ancilla  $P_a$ , which, multiplied by  $t$ , gives the upper bound on the output probability. Again, the theory and experiment are in good agreement and when the excess loss (ancillae preparation) is factored out we are clearly in a regime of net gain. n.b. if a beam splitting ration of  $t = 0.99$  is used, an output probability  $P_{out} > 82.3\%$  is achievable, which would meet the requirements for DIQKD even for distances up to 40 km.

Finally, using the same setup, we demonstrate heralded (single) photon amplification (HPA) with no postselection, as proposed in the seminal work of [9]. Indeed, this experiment requires two independent heralded single photons, which can be realised with our four-photon

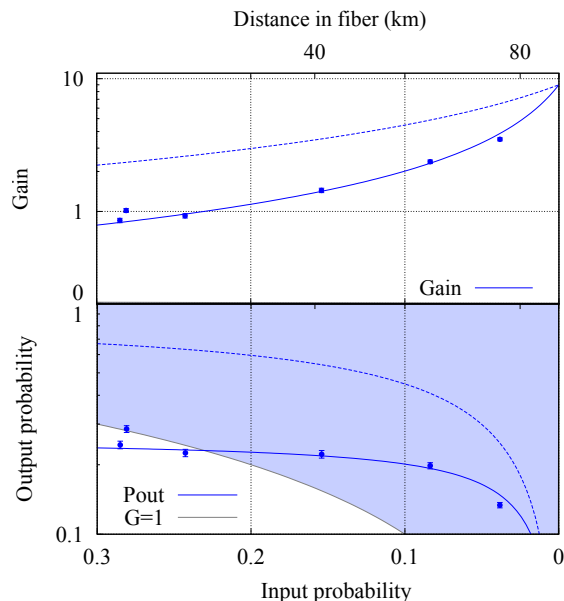


FIG. 5. The gain with  $t = 0.9$  and output probability, of the single photon heralded qubit amplifier. Solid lines are calculated taking in account the measured transmission losses, dashed lines are calculated assuming  $P_a = 0.9$ .

source. In previous works [13, 14], some of the authors have shown the heralded amplification of photons using two photons coming from the same SPDC process as input and ancilla. In the present work, referring to the experimental scheme depicted in FIG. 2, the time-bin qubit preparation (and analysis) stage can be removed and only one (heralded) ancilla photon is sent to the amplifier. This enables us to perform non-postselected HPA, i. e. the amplification is conditioned only upon the detection of the two heralding photons plus the BSM. FIG. 5 shows the gain and the output probability as a function of the input probability measured in our setup. As before the dashed lines indicate the performance without excess loss.

## CONCLUSION

We have demonstrated an all-fibre heralded qubit amplifier operating in the telecom regime for both time-bin and Fock-state qubits, showing the first post-selection free operation in the case of the latter. The implementation highlights the suitability for a fully integrated photonics solution, where the addition of photonic sources and even detectors could further assist the efficiency of these devices. While a gain of 9 is realised with the current system, the key parameter is the efficiency of the HQA, which is limited primarily by  $P_a$ .

Recently, a new scheme for characterizing entanglement for Fock-state systems [33, 34] was demonstrated; by extending this to systems with independent photon

sources, as required here, heralded qubit amplification should provide an experimentally feasible path towards loophole-free Bell tests and DIQKD over tens of kilometers.

## ACKNOWLEDGMENTS

The authors would like to thank Alexey Tiranov for discussions. This work was supported by the Swiss NCCR QSIT, the EU projects SIQS and DIQIP and the DARPA Quiness program and the SNSF (Grant No. PP00P2 150579). Part of the research was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.

\* robert.thew@unige.ch

- [1] N. Gisin and R. Thew, *Nature Photonics* **1**, 165 (2007).
- [2] V. Giovannetti, S. Lloyd, and L. Maccone, *Nature Photonics* **5**, 222 (2011).
- [3] N. Brunner, D. Cavalcanti, S. Pironio, V. Scarani, and S. Wehner, *Reviews of Modern Physics* **86**, 419 (2014).
- [4] A. Acín, N. Brunner, N. Gisin, S. Massar, S. Pironio, and V. Scarani, *Phys. Rev. Lett.* **98**, 230501 (2007).
- [5] D. Mayers and A. Yao, “Quantum cryptography with imperfect apparatus,” (1998).
- [6] N. Gisin, S. Pironio, and N. Sangouard, *Phys. Rev. Lett.* **105**, 070501 (2010).
- [7] B. G. Christensen, K. T. McCusker, J. B. Altepeter, B. Calkins, T. Gerrits, A. E. Lita, A. Miller, L. K. Shalm, Y. Zhang, S. W. Nam, N. Brunner, C. C. W. Lim, N. Gisin, and P. G. Kwiat, *Physical Review Letters* **111**, 130406 (2013).
- [8] M. Giustina, A. Mech, S. Ramelow, B. Wittmann, J. Kofler, J. Beyer, A. Lita, B. Calkins, T. Gerrits, S. W. Nam, R. Ursin, and A. Zeilinger, *Nature* **497**, 227 (2013).
- [9] T. C. Ralph and A. P. Lund, *Quantum Communication Measurement and Computing Proceedings of 9th International Conference*, Ed. A. Lvovsky, 155 (2009).
- [10] D. Pitkanen, X. Ma, R. Wickert, P. van Loock, and N. Lütkenhaus, *Phys. Rev. A* **84**, 022325 (2011).
- [11] M. Curty and T. Moroder, *Physical Review A* **84**, 010304 (2011).
- [12] S. Kocsis, G. Y. Xiang, T. C. Ralph, and G. J. Pryde, *Nat. Phys.* **9**, 23 (2013).
- [13] C. I. Osorio, N. Bruno, N. Sangouard, H. Zbinden, N. Gisin, and R. T. Thew, *Phys. Rev. A* **86**, 23815 (2012).
- [14] N. Bruno, V. Pini, A. Martin, and R. T. Thew, *New Journal of Physics* **15**, 093002 (2013).
- [15] F. Ferreyrol, M. Barbieri, R. Blandino, S. Fossier, R. Tualle-Broui, and P. Grangier, *Phys. Rev. Lett.* **104**, 123603 (2010).
- [16] M. Barbieri, F. Ferreyrol, R. Blandino, R. Tualle-Broui, and P. Grangier, *Laser Physics Letters* **8**, 411 (2011).
- [17] J. S. Neergaard-Nielsen, Y. Eto, C.-W. Lee, H. Jeong, and M. Sasaki, *Nat Photon* **7**, 439 (2013).

- [18] H. M. Chrzanowski, N. Walk, S. M. Assad, J. Janousek, S. Hosseini, T. C. Ralph, T. Symul, and P. K. Lam, *Nature Photonics* **8**, 333 (2014).
- [19] M. Fuwa, S. Toba, S. Takeda, P. Marek, L. Mista, R. Filip, P. van Loock, J.-I. Yoshikawa, and A. Furusawa, *Phys. Rev. Lett.* **113**, 223602 (2014).
- [20] A. E. Ulanov, I. A. Fedorov, A. A. Pushkina, Y. V. Kurochkin, T. C. Ralph, and A. I. Lvovsky, *arXiv:1504.00886 [quant-ph]* (2015).
- [21] J. Fiurášek, *Phys. Rev. A* **80**, 053822 (2009).
- [22] A. Zavatta, J. Fiurášek, and M. Bellini, *Nat. Photon.* **5**, 52 (2011).
- [23] J. Brendel, N. Gisin, W. Tittel, and H. Zbinden, *Phys. Rev. Lett.* **82**, 2594 (1999).
- [24] N. Sangouard, C. Simon, J. Minar, H. Zbinden, H. de Riedmatten, and N. Gisin, *Physical Review A* **76**, 050301 (2007).
- [25] P. D. Townsend, J. G. Rarity, and P. R. Tapster, *Electronics Letters* **29**, 1291 (1993).
- [26] R. T. Thew, S. Tanzilli, L. Krainer, S. C. Zeller, A. Rochas, I. Rech, S. Cova, H. Zbinden, and N. Gisin, *New Journal of Physics* **8**, 32 (2006).
- [27] V. B. Verma, B. Korzh, F. Bussi eres, R. D. Horansky, S. D. Dyer, A. E. Lita, I. Vayshenker, F. Marsili, M. D. Shaw, H. Zbinden, R. P. Mirin, and S. W. Nam, *arXiv:1504.02793 [physics.ins-det]* (2015).
- [28] W. Grice, A. U'ren, and I. Walmsley, *Phys. Rev. A* **64**, 063815 (2001).
- [29] P. J. Mosley, J. S. Lundeen, B. J. Smith, P. Wasylczyk, A. B. U'ren, C. Silberhorn, and I. A. Walmsley, *Phys. Rev. Lett.* **100**, 133601 (2008).
- [30] N. Bruno, A. Martin, T. Guerreiro, B. Sanguinetti, and R. T. Thew, *Opt. Express* **22**, 17246 (2014).
- [31] T. Guerreiro, A. Martin, B. Sanguinetti, N. Bruno, H. Zbinden, and R. T. Thew, *Opt. Express* **21**, 27641 (2013).
- [32] A. J. Miller, A. E. Lita, B. Calkins, I. Vayshenker, S. M. Gruber, and S. W. Nam, *Opt. Express* **19**, 9102 (2011).
- [33] F. Monteiro, V. C. Vivoli, T. Guerreiro, A. Martin, J. D. Bancal, H. Zbinden, R. T. Thew, and N. Sangouard, *Physical Review Letters* **114**, 170504 (2015).
- [34] V. C. Vivoli, P. Sekatski, J.-D. Bancal, C. C. W. Lim, A. Martin, R. T. Thew, H. Zbinden, N. Gisin, and N. Sangouard, *New Journal of Physics* **17**, 023023 (2015).