

Waveform Design for Wireless Power Transfer

Bruno Clerckx and Ekaterina Bayguzina

Abstract—Far-field Wireless Power Transfer (WPT) has attracted significant attention in recent years. Despite the rapid progress, the emphasis of the research community in the last decade has remained largely concentrated on improving the design of energy harvester (so-called rectenna) and has left aside the effect of transmitter design. Inspired by tools from wireless communication, we study the design and optimization of transmit waveform so as to enhance the DC power at the output of the rectenna. We derive a tractable model of the non-linearity of the rectenna and use it to design novel multisine waveforms that are adaptive to the channel state information (CSI). Through realistic simulations, significant gains (in terms of harvested DC power) are demonstrated over adaptive waveforms designed based on a linear model of the rectenna and over non-adaptive waveforms. We also compute analytically the theoretical scaling laws of the harvested energy for various waveforms as a function of the number of sinewaves and transmit antennas. Those scaling laws highlight the benefits of CSI knowledge at the transmitter in WPT and of a WPT design based on a non-linear rectenna model over a linear model. Finally, we introduce a promising architecture relying on large-scale multisine multi-antenna waveforms dedicated to WPT.

I. INTRODUCTION

WIRELESS Power Transfer (WPT) via radio-frequency radiation has a long history that is nowadays attracting more and more attention. RF radiation has indeed become a viable source for energy harvesting with clear applications in Wireless Sensor Networks (WSN) and Internet of Things (IoT) [2]. The major challenge facing far-field wireless power designers is to find ways to increase the DC power level at the output of the rectenna without increasing the transmit power, and for devices located tens to hundreds of meters away from the transmitter. To that end, the vast majority of the technical efforts in the literature have been devoted to the design of efficient rectennas, a.o. [2]–[4]. A rectenna harvests ambient electromagnetic energy, then rectifies and filters it (using a diode and a low pass filter). The recovered DC power then either powers a low power device directly, or is stored in a super capacitor for higher power low duty-cycle operation.

Interestingly, the overall RF-to-DC conversion efficiency of the rectenna is not only a function of its design but also of its input waveform. However, the waveform design has received less attention [5]–[7]. In [5], [6], a multisine signal excitation is shown through analysis, simulations and measurements to enhance the DC power and RF-DC conversion efficiency over a single sinewave signal. In [7], various input waveforms

(OFDM, white noise, chaotic) are considered and experiments show that waveforms with high peak to average power ratio (PAPR) increase RF-to-DC conversion efficiency. Even though those papers provide some useful insights into the impact of waveform design onto WPT performance, there are many limitations in the WPT waveform design literature: 1) there has not been any formal tool to design and optimize waveforms for WPT so far, 2) multipath fading (well known in wireless communications) has been ignored despite its tremendous impact on the received waveform at the input of the rectenna, 3) the Channel State Information (CSI) is assumed unknown to the transmitter, 4) the transmitter is commonly equipped with a single antenna.

In this paper we address the important problem of waveform design for WPT and tackle all the aforementioned limitations. We focus on multisine waveforms due to their tractability and usefulness in wireless communication systems. The contributions of the paper are summarized as follows.

First, we introduce a simple and tractable analytical model of the rectenna non-linearity through the second and higher order terms in the Taylor expansion of the diode characteristics. Comparison is made with a linear model, as in [8], that only accounts for the second order term.

Second, assuming perfect CSI at the Transmitter (CSIT) can be attained¹ and making use of the rectenna model, we design multi-antenna multisine WPT waveform for transmission over a multipath channel. We formulate an optimization problem to adaptively change the waveform weights as a function of the CSI so as to maximize the rectenna output DC current. The globally optimal phases of the multisine waveform weights are obtained in closed form while the locally optimal amplitudes are shown to result from a non-convex posynomial maximization problem subject to a power constraint.

Third, the waveform design is generalized to multi-user WPT and to account for PAPR constraints. The design results from a signomial maximization problem.

Fourth, scaling laws of the harvested energy with various waveforms are analytically derived as a function of the number of sinewaves N , the number of transmit antennas M and the propagation conditions. We show for instance that in frequency-flat and frequency-selective channels and for a fixed transmit power constraint, the DC current at the output of the rectifier theoretically increases linearly with N . Interestingly, while such a scaling law is achievable in frequency-flat channels without CSIT, it is achievable in frequency-selective channel only in the presence of CSIT. The results motivate the usefulness of transmitting multisine waveforms and acquiring CSIT in WPT, especially in frequency-selective channels.

¹CSIT can be acquired by assuming that the WPT architecture is equipped with a pilot transmission phase and a channel estimator.

The authors are with the EEE department at Imperial College London, London SW7 2AZ, United Kingdom (email: {b.clerckx,ekaterina.bayguzina08}@imperial.ac.uk). Bruno Clerckx is also with the School of Electrical Engineering, Korea University, Seoul 136-701, Korea. This work has been partially supported by the EPSRC of the UK under grants EP/K502856/1 and EP/L504786/1. The material in this paper was presented in part at the IEEE ISWCS 2015 [1]. Manuscript version February 13, 2022

Fifth, the waveforms designed for WPT, adaptive to the CSI and accounting for the rectifier non-linearity, are shown through realistic evaluations to provide significant gains over state-of-the-art waveforms and over those optimized based on the linear model of the rectifier. As a main takeaway observation, those results highlight the importance of modeling and accounting for the non-linearity of the rectenna in any system design involving wireless power.

Sixth, simulations and scaling laws finally motivate the introduction of a promising architecture based on large-scale multisine multi-antenna waveform for WPT.

Organization: Section II introduces the system model and section III models the rectenna. Section IV tackles the waveform optimization for a single and multiple rectennas, with and without PAPR constraints. Section V analytically derives the scaling laws of the harvested energy. Section VI evaluates the performance and section VII concludes the work.

Notations: Bold lower case and upper case letters stand for vectors and matrices respectively whereas a symbol not in bold font represents a scalar. $\|\cdot\|_F^2$ refers to the Frobenius norm of a matrix. $\mathcal{E}\{\cdot\}$ refers to the expectation/averaging operator. \cdot^* , \cdot^T and \cdot^H refer to the conjugate, transpose and conjugate transpose of a matrix, respectively. $\mathbf{1}_N$ and $\mathbf{0}_N$ refer to the $N \times 1$ vector with entries equal to 1 and 0, respectively. λ_{max} refers to the largest eigenvalue of a matrix. \log is in base e .

II. WPT SYSTEM MODEL

Consider the transmitter made of M antennas and N sinewaves whose multisine transmit signal at time t on transmit antenna $m = 1, \dots, M$ is given by

$$x_m(t) = \Re \left\{ \sum_{n=0}^{N-1} w_{n,m} e^{jw_n t} \right\} \quad (1)$$

with $w_{n,m} = s_{n,m} e^{j\phi_{n,m}}$ where $s_{n,m}$ and $\phi_{n,m}$ refer to the amplitude and phase of the n^{th} sinewave at frequency w_n on transmit antenna m , respectively. We assume for simplicity that the frequencies are evenly spaced, i.e. $w_n = w_0 + n\Delta_w$ with $\Delta_w = 2\pi\Delta_f$ the frequency spacing. The magnitudes and phases of the sinewaves can be collected into matrices \mathbf{S} and $\mathbf{\Phi}$. The (n, m) entry of \mathbf{S} and $\mathbf{\Phi}$ write as $s_{n,m}$ and $\phi_{n,m}$, respectively. The m^{th} column of \mathbf{S} is denoted as \mathbf{s}_m . The transmitter is subject to a transmit power constraint $\sum_{m=1}^M \mathcal{E}\{|x_m|^2\} = \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P$. Stacking up all transmit signals, we can write the transmit signal vector as $\mathbf{x}(t) = \Re\{\sum_{n=0}^{N-1} \mathbf{w}_n e^{jw_n t}\}$ where $\mathbf{w}_n = [w_{n,1} \dots w_{n,M}]^T$.

The multi-antenna transmitted sinewaves propagate through a multipath channel, characterized by L paths whose delay, amplitude, phase and direction of departure (chosen with respect to the array axis) are respectively denoted as τ_l , α_l , ξ_l and θ_l , $l = 1, \dots, L$. We assume transmit antennas are closely located so that τ_l , α_l and ξ_l are the same for all transmit antennas (assumption of a narrowband balanced array) [9]. Denoting $\zeta_{n,m,l} = \xi_l + \Delta_{n,m,l}$ with $\Delta_{n,m,l}$ the phase shift between the m^{th} transmit antenna and the first one³, the signal

²Note that \mathbf{w}_n and $w_{n,m}$ should not be confused with w_n .

³For a Uniform Linear Array (ULA), $\Delta_{n,m,l} = 2\pi(m-1)\frac{d}{\lambda_n} \cos(\theta_l)$ where d is the inter-element spacing, λ_n the wavelength of the n^{th} sinewave.

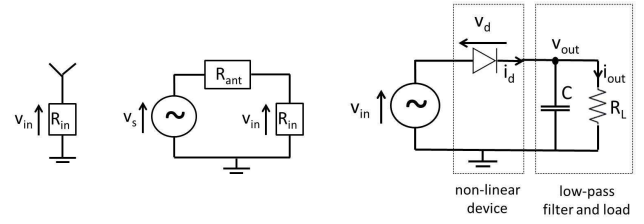


Fig. 1. Antenna equivalent circuit (left) and a single diode rectifier (right).

transmitted by antenna m and received at the single-antenna receiver after multipath propagation can be written as

$$\begin{aligned} y_m(t) &= \sum_{n=0}^{N-1} \sum_{l=0}^{L-1} s_{n,m} \alpha_l \cos(w_n(t - \tau_l) + \zeta_{n,m,l} + \phi_{n,m}) \\ &= \sum_{n=0}^{N-1} s_{n,m} A_{n,m} \cos(w_n t + \psi_{n,m}) \end{aligned} \quad (2)$$

where the amplitude $A_{n,m}$ and the phase $\psi_{n,m}$ are such that

$$A_{n,m} e^{j\psi_{n,m}} = A_{n,m} e^{j(\phi_{n,m} + \bar{\psi}_{n,m})} = e^{j\phi_{n,m}} h_{n,m} \quad (3)$$

with $h_{n,m} = A_{n,m} e^{j\bar{\psi}_{n,m}} = \sum_{l=0}^{L-1} \alpha_l e^{j(-w_n \tau_l + \zeta_{n,m,l})}$ the frequency response of the channel of antenna m at w_n . The vector channel is defined as $\mathbf{h}_n = [h_{n,1} \dots h_{n,M}]$.

The total received signal comprises the sum of (2) over all transmit antennas, namely

$$y(t) = \sum_{n=0}^{N-1} X_n \cos(w_n t + \delta_n) = \Re \left\{ \sum_{n=0}^{N-1} \mathbf{h}_n \mathbf{w}_n e^{jw_n t} \right\} \quad (4)$$

where $X_n e^{j\delta_n} = \sum_{m=1}^M s_{n,m} A_{n,m} e^{j\psi_{n,m}} = \mathbf{h}_n \mathbf{w}_n$.

III. ANALYTICAL MODEL OF THE RECTENNA

We derive a simple and tractable model of the rectenna circuit and express the output DC current as a function of the waveform parameters. The model relies on several assumptions made to make the model tractable and be able to optimize the waveforms. Performance evaluations will be conducted in Section VI using a more accurate circuit simulator.

A. Antenna Equivalent Circuit

Assume a rectenna whose input impedance R_{in} is connected to a receiving antenna as in Fig 1. The signal $y(t)$ impinging on the antenna has an average power $P_{av} = \mathcal{E}\{|y(t)|^2\}$. Following [11], the antenna is assumed lossless and modeled as an equivalent voltage source $v_s(t)$ in series with an impedance $R_{ant} = 50\Omega$, as illustrated in Fig 1.

With perfect matching ($R_{in} = R_{ant}$), the received power P_{av} is completely transferred to the rectenna's input impedance such that $P_{av} = \mathcal{E}\{|v_{in}(t)|^2\}/R_{in}$ where $v_{in}(t)$ is the rectifier's input voltage. Under perfect matching, $v_{in}(t)$ is half of $v_s(t)$ and both can be related to the received signal $y(t)$ as $v_s(t) = 2y(t)\sqrt{R_{ant}}$ and $v_{in}(t) = y(t)\sqrt{R_{ant}}$, such that $P_{av} = \mathcal{E}\{|v_{in}(t)|^2\}/R_{in} = \mathcal{E}\{|y(t)|^2\} R_{ant}/R_{in} = \mathcal{E}\{|y(t)|^2\}$. We also assume that the antenna noise is too small to be harvested so as no antenna noise term is added and $v_{in}(t)$ is delivered as such to the rectifier.

B. Rectifier and Diode Non-Linearity

A rectifier is always made of a non-linear device (e.g. diode) followed by a low pass filter (LPF) with load [3], [5], [6]. A simplified rectifier circuit is illustrated in Fig 1. We assume that its input impedance has been perfectly matched to the antenna impedance.

The current $i_d(t)$ flowing through an ideal diode (neglecting its series resistance) relates to the voltage drop across the diode $v_d(t) = v_{in}(t) - v_{out}(t)$ as $i_d(t) = i_s(e^{\frac{v_d(t)}{n v_t}} - 1)$ where i_s is the reverse bias saturation current, v_t is the thermal voltage, n is the ideality factor (assumed equal to 1.05). In order to express the non-linearity of the diode, we take a Taylor expansion of the exponential function around a fixed operating voltage drop $v_d = a$ such that the diode current can be equivalently written as

$$i_d(t) = \sum_{i=0}^{\infty} k_i (v_d(t) - a)^i = \sum_{i=0}^{\infty} k_i (v_{in}(t) - v_{out}(t) - a)^i, \quad (5)$$

where $k_0 = i_s(e^{\frac{a}{n v_t}} - 1)$ and $k_i = i_s \frac{e^{\frac{a}{n v_t}}}{i! (n v_t)^i}$, $i = 1, \dots, \infty$. As such, it is not easy to infer from (5) the exact dependencies of the diode current on the waveform parameters since both $v_{in}(t)$ and $v_{out}(t)$ will depend and fluctuate over time as a function of the waveform. Nevertheless, assuming a steady-state response, an ideal rectifier would deliver a constant output voltage v_{out} that would track the largest peaks of the input voltage $v_{in}(t)$ [11]. As a consequence, the output current delivered to the load i_{out} would also be constant. Denoting the magnitude of the peaks of $v_{in}(t)$ as \hat{v}_{in} , $v_{out} = \hat{v}_{in}$. In this ideal rectifier, since v_{out} is a constant (we drop the time dependency), a suitable choice of the operating voltage drop a would be $a = \mathcal{E}\{v_{in}(t) - v_{out}\} = -v_{out} = -\hat{v}_{in}$ since $\mathcal{E}\{v_{in}(t)\} = \sqrt{R_{ant}} \mathcal{E}\{y(t)\} = 0$. Under such assumptions, (5) can simply be written as

$$i_d(t) = \sum_{i=0}^{\infty} k_i v_{in}(t)^i = \sum_{i=0}^{\infty} k_i R_{ant}^{i/2} y(t)^i, \quad (6)$$

which makes the dependency between the diode current $i_d(t)$, the received waveform $y(t)$ and therefore the transmitted waveforms $\{x_m(t)\}$ much more explicit.

The problem at hand will be the design of $\{x_m(t)\}$ such that the output DC current is maximized. Under the ideal rectifier assumption, the current delivered to the load in a steady-state response is constant and given by $i_{out} = \mathcal{E}\{i_d(t)\}$. In order to make the optimization tractable, we truncate the Taylor expansion to the n_o^{th} order. We consider two models: a non-linear model that truncates the Taylor expansion to the n_o^{th} order but retains the fundamental non-linear behaviour of the diode and a linear model that truncates to the second order term and ignores the non-linearity.

C. A Non-Linear Model

After truncation, the output current approximates as

$$i_{out} = \mathcal{E}\{i_d(t)\} \approx \sum_{i=0}^{n_o} k_i R_{ant}^{i/2} \mathcal{E}\{y(t)^i\}. \quad (7)$$

Applying (4) to (7) involves the computation of $y(t)^i$, illustrated in (8), (9) and (10) for $i = 2, 3, 4$. In order to simplify the notations, (8) makes use of w^{++} and δ^{++} to denote $w_{n_0} + w_{n_1}$ and $\delta_{n_0} + \delta_{n_1}$, respectively. Hence the sign of $\{w_{n_0}, w_{n_1}\}$ and $\{\delta_{n_0}, \delta_{n_1}\}$ is reflected as a superscript. Similarly, $w^{+-} = w_{n_0} - w_{n_1}$ and $\delta^{+-} = \delta_{n_0} - \delta_{n_1}$. In (9) and (10), we use the same convention, e.g. $w^{++++} = w_{n_0} + w_{n_1} + w_{n_2} + w_{n_3}$, $w^{++--} = w_{n_0} + w_{n_1} - w_{n_2} - w_{n_3}$, etc. Averaging over time, we get an approximation of the DC component of the current at the output of the rectifier (and the low-pass filter) with a multisine excitation over a multipath channel as $i_{out} \approx k_0 + z_{DC}(\mathbf{S}, \Phi)$ where

$$z_{DC}(\mathbf{S}, \Phi) = \sum_{i \text{ even}, i \geq 2}^{n_o} k_i R_{ant}^{i/2} \mathcal{E}\{y(t)^i\} \quad (11)$$

with $\mathcal{E}\{y(t)^2\}$, $\mathcal{E}\{y(t)^4\}$ and $\mathcal{E}\{y(t)^6\}$ detailed in (12), (14) and (15), respectively (at the top of next page). There is no odd (first, third, fifth, etc) order terms since $\mathcal{E}\{y(t)^i\} = \mathcal{E}\{y(t)^i\} = 0$ for i odd. In (8) and (10), only terms with an equal number of $+$ and $-$ lead to a DC component in (12) and (14) following the assumption on evenly spaced frequencies.

We note that the second order term (12) is linear, with the DC power being the sum of the power harvested on each frequency. On the other hand, even terms with $i \geq 4$ such as (14) and (15) are responsible for the non-linear behaviour of the diode since they are function of terms expressed as the product of contributions from different frequencies.

D. A Linear Model

The linear model was originally introduced a few decades ago in [8]. It could be argued that if $y(t)$ is very small (i.e. for a very low input power), the higher order terms would not contribute much to z_{DC} . Hence, the linear model only accounts for the second order term in the Taylor expansion such that $z_{DC} = k_2 R_{ant} \mathcal{E}\{y(t)^2\}$. It therefore completely omits the non-linearity behavior of the rectifier. The linear model is motivated by its simplicity rather than its accuracy. Its accuracy is actually questionable in the RF literature with experiments demonstrating that the non-linearity is an essential property of the rectenna [10]. Nevertheless, the loss incurred by using a linear vs a non-linear model in the WPT waveform design has never been addressed so far.

In the next section, we derive tools to design waveforms under the assumption of a linear and non-linear model.

IV. WPT WAVEFORM OPTIMIZATION

Assuming the rectifier characteristics k_i (with i even) and the CSI (in the form of frequency response $h_{n,m}$) is known to the transmitter, we aim at finding the optimal set of amplitudes and phases \mathbf{S}, Φ that maximizes i_{out} , i.e.

$$\max_{\mathbf{S}, \Phi} i_{out}(\mathbf{S}, \Phi) \quad \text{subject to} \quad \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P. \quad (16)$$

From the previous section, we however note that k_i are functions of $a = v_{out}$ which is affected by the choice of \mathbf{S}, Φ . Similarly, \mathbf{S}, Φ are functions of k_i . This suggests that k_i and \mathbf{S}, Φ should be iteratively computed by fixing k_i when \mathbf{S}, Φ are optimized and inversely. We here assume that k_i have been

$$y(t)^2 = \frac{1}{2} \sum_{n_0, n_1} X_{n_0} X_{n_1} [\cos(w^{++}t + \delta^{++}) + \cos(w^{+-}t + \delta^{+-})], \quad (8)$$

$$y(t)^3 = \frac{1}{4} \sum_{n_0, n_1, n_2} X_{n_0} X_{n_1} X_{n_2} [\cos(w^{+++}t + \delta^{+++}) + \cos(w^{++-}t + \delta^{++-}) + \cos(w^{+-+}t + \delta^{+-+}) + \cos(w^{+--}t + \delta^{+--})], \quad (9)$$

$$y(t)^4 = \frac{1}{8} \sum_{\substack{n_0, n_1, \\ n_2, n_3}} X_{n_0} X_{n_1} X_{n_2} X_{n_3} [\cos(w^{++++}t + \delta^{++++}) + \cos(w^{++--}t + \delta^{++--}) + \cos(w^{+-+-}t + \delta^{+-+-}) + \cos(w^{+--+}t + \delta^{+--+}) \\ + \cos(w^{+---}t + \delta^{+---}) + \cos(w^{----}t + \delta^{----}) + \cos(w^{+-+-}t + \delta^{+-+-}) + \cos(w^{+--+}t + \delta^{+--+})]. \quad (10)$$

$$\mathcal{E}\{y(t)^2\} = \frac{1}{2} \left[\sum_{n=0}^{N-1} X_n^2 \right] = \frac{1}{2} \left[\sum_{n=0}^{N-1} |\mathbf{h}_n \mathbf{w}_n|^2 \right] = \frac{1}{2} \left[\sum_{n=0}^{N-1} \sum_{m_0, m_1} s_{n, m_0} s_{n, m_1} A_{n, m_0} A_{n, m_1} \cos(\psi_{n, m_0} - \psi_{n, m_1}) \right], \quad (12)$$

$$\mathcal{E}\{y(t)^4\} = \frac{3}{8} \left[\sum_{\substack{n_0, n_1, n_2, n_3 \\ n_0 + n_1 = n_2 + n_3}} X_{n_0} X_{n_1} X_{n_2} X_{n_3} \cos(\delta_{n_0} + \delta_{n_1} - \delta_{n_2} - \delta_{n_3}) \right] = \frac{3}{8} \Re \left\{ \sum_{\substack{n_0, n_1, n_2, n_3 \\ n_0 + n_1 = n_2 + n_3}} \mathbf{h}_{n_0} \mathbf{w}_{n_0} \mathbf{h}_{n_1} \mathbf{w}_{n_1} (\mathbf{h}_{n_2} \mathbf{w}_{n_2})^* (\mathbf{h}_{n_3} \mathbf{w}_{n_3})^* \right\}, \quad (13)$$

$$= \frac{3}{8} \left[\sum_{\substack{n_0, n_1, n_2, n_3 \\ n_0 + n_1 = n_2 + n_3}} \sum_{\substack{m_0, m_1, \\ m_2, m_3}} \left[\prod_{j=0}^3 s_{n_j, m_j} A_{n_j, m_j} \right] \cos(\psi_{n_0, m_0} + \psi_{n_1, m_1} - \psi_{n_2, m_2} - \psi_{n_3, m_3}) \right]. \quad (14)$$

$$\mathcal{E}\{y(t)^6\} = \frac{5}{16} \left[\sum_{\substack{n_0, n_1, n_2, n_3, n_4, n_5 \\ n_0 + n_1 + n_2 = n_3 + n_4 + n_5}} \sum_{\substack{m_0, m_1, m_2, \\ m_3, m_4, m_5}} \left[\prod_{j=0}^5 s_{n_j, m_j} A_{n_j, m_j} \right] \cos(\psi_{n_0, m_0} + \psi_{n_1, m_1} + \psi_{n_2, m_2} - \psi_{n_3, m_3} - \psi_{n_4, m_4} - \psi_{n_5, m_5}) \right]. \quad (15)$$

computed for a given a and we aim at finding the optimal \mathbf{S}, Φ . For a fixed a , k_0 is fixed and is not affected by the choice of \mathbf{S}, Φ . Hence problem (16) can equivalently be written as

$$\max_{\mathbf{S}, \Phi} z_{DC}(\mathbf{S}, \Phi) \quad \text{subject to} \quad \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P. \quad (17)$$

A. Linear Model-based Design

With the linear model, problem (17) is equivalent to

$$\max_{\mathbf{w}_n} \sum_{n=0}^{N-1} |\mathbf{h}_n \mathbf{w}_n|^2 \quad \text{s.t.} \quad \frac{1}{2} \left[\sum_{n=0}^{N-1} \|\mathbf{w}_n\|^2 \right] \leq P. \quad (18)$$

The solution simply consists in performing a matched beam-former on a single sinewave, namely the one corresponding to the strongest channel $\bar{n} = \arg \max_i \|\mathbf{h}_i\|^2$. Hence,

$$\mathbf{w}_n^* = \begin{cases} \sqrt{2P} \mathbf{h}_n^H / \|\mathbf{h}_n\|, & n = \bar{n}, \\ \mathbf{0}, & n \neq \bar{n}. \end{cases} \quad (19)$$

We denote solution (19) as the adaptive single sinewave (ASS) strategy. With such a linear model, a single-sine waveform is favoured over a multisine waveform.

B. Towards a Non-Linear Model-based Design

To get some insights into the necessity to account for the non-linear terms (e.g. $4^{th}, 6^{th}$) and into the impact of multipath on the waveform design, let us consider a toy example with the simplest multisine: $N = 2, M = 1$. We also assume $n_o = 4$. For readability, we drop the antenna index and assume real frequency domain channel h_n . Since $\psi_n = 0$, let us choose $\phi_n = 0$ so that $\psi_n = 0$ (and all $\cos(\cdot) = 1$) in (12) and (14) $\forall n, m$. Since for $N = 2$, indices n_0, n_1, n_2, n_3 in (14) can

take either value 0 or 1, we can easily identify cases for which $n_0 + n_1 = n_2 + n_3$ and then write from (11)

$$z_{DC}(s_0, s_1) = \tilde{k}_2 (s_0^2 A_0^2 + s_1^2 A_1^2) + \tilde{k}_4 [(s_0^2 A_0^2 + s_1^2 A_1^2)^2 + 2s_0^2 s_1^2 A_0^2 A_1^2] \quad (20)$$

where $\tilde{k}_2 = k_2 R_{ant}/2$ and $\tilde{k}_4 = 3k_4 R_{ant}^2/8$. From (20), we note that $z_{DC}(s_0, s_1)$ is a function of the term $s_0^2 A_0^2 + s_1^2 A_1^2$, whose maximization subject to the sum power constraint $s_0^2 + s_1^2 \leq 2P$ would lead to the ASS strategy (19), i.e. allocate all the power to sinewave 1 if $A_1 > A_0$ and to sinewave 0 otherwise. However the presence of the term $2s_0^2 s_1^2 A_0^2 A_1^2$ suggests that such a single-sinewave strategy is in general sub-optimal for the maximization of z_{DC} . In problem (17) with $N = 2$ and $M = 1$, we note that equality $\frac{1}{2} \|\mathbf{S}\|_F^2 = P$ is satisfied at optimality and we write the Lagrangian as

$$\mathcal{L} = \tilde{k}_2 (s_0^2 A_0^2 + s_1^2 A_1^2) + \tilde{k}_4 (s_0^4 A_0^4 + s_1^4 A_1^4 + 4s_0^2 s_1^2 A_0^2 A_1^2) + \lambda (s_0^2 + s_1^2 - 2P). \quad (21)$$

Differentiating w.r.t. s_0, s_1, λ and equating to 0, we find three valid stationary points (s_0^2, s_1^2) (such that $0 \leq s_0^2 \leq 2P$ and $0 \leq s_1^2 \leq 2P$) given by $(2P, 0)$, $(0, 2P)$ and (s_0^{*2}, s_1^{*2}) where

$$s_0^{*2} = \frac{8P\tilde{k}_4 A_0^2 A_1^2 + \tilde{k}_2 A_0^2 - 4P\tilde{k}_4 A_1^4 - \tilde{k}_2 A_1^2}{8\tilde{k}_4 A_0^2 A_1^2 - 2\tilde{k}_4 A_0^4 - 2\tilde{k}_4 A_1^4}, \quad (22)$$

$$s_1^{*2} = 2P - s_0^{*2}. \quad (23)$$

For given A_0, A_1 , the global optimum strategy is given by one of those three stationary points. The maximum achievable $z_{DC}^* = \max\{z_{DC}(\sqrt{2P}, 0), z_{DC}(0, \sqrt{2P}), z_{DC}(s_0^*, s_1^*)\}$. The first two points correspond to the ASS strategy, allocating

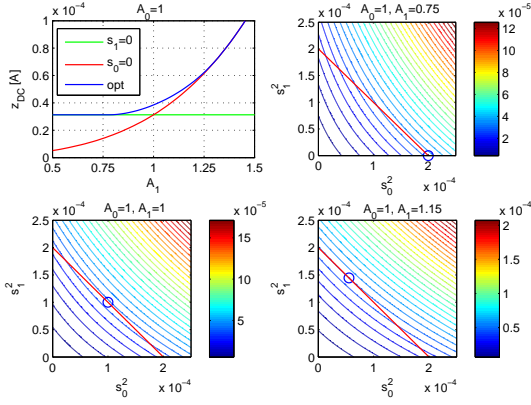


Fig. 2. z_{DC} as a function of A_1 and contours of z_{DC} as a function of s_0^2 and s_1^2 . The straight line refers to the power constraint and the circle to the optimal power allocation strategy. $P = -40\text{dBW}$.

transmit power to sinewave 0 and 1, respectively. Fig 2 illustrates z_{DC} as a function of A_1 for $A_0 = 1$ with three strategies: single-sinewave transmission (i.e. $s_0 = 0$ and $s_1 = 0$) and the optimal transmission leading to z_{DC}^* . The contours of z_{DC} as a function of s_0^2 and s_1^2 are also illustrated for $A_0 = 1$ and $A_1 = 0.75, 1, 1.15$. We note that the ASS strategy is optimal if A_0 is sufficiently larger than A_1 or inversely. However, when the channel is frequency flat, i.e. $A_1 \approx A_0$, the optimal strategy would allocate power to the two sinewaves and the ASS strategy is suboptimal.

The results, though based on a very simple scenario, highlight that depending on the CSI, the transmission waveform should be adapted if we aim at maximizing the output DC power. Moreover, it also shows the benefits of allocating power over multiple sinewaves for some channel states, which is in sharp contrast with the ASS strategy (19) originating from the linear model. More generally, looking at (14), the ASS strategy would unlikely be a right strategy if we account for the non-linearity of the diode, due to the presence of $\prod_{j=0}^3 s_{n_j, m_j} A_{n_j, m_j}$ in the fourth order term.

Remark 1: It should be noted that RF experiments in [5]–[7] have shown the benefits of allocating power uniformly across multiple sinewaves. The above discussion highlights theoretically the benefits of allocating power over multiple sinewaves for some channel states and therefore backs up the experimental results. On the other hand, the linear model motivates the use of a single sinewave (ASS) for all channel states, and therefore contradicts the RF experiment results.

Deriving a formal algorithm that can generate optimized waveforms for any multipath configuration and any N , M , n_o so as to maximize the DC output current is a non-trivial problem that is discussed in the next section.

C. Non-Linear Model-based Design

We aim at deriving a waveform design strategy that is general enough to cope with any Taylor expansion order n_o . The optimal phases Φ can be obtained first in closed form and the optimal amplitudes \mathbf{S} can then be computed numerically.

To maximize $z_{DC}(\mathbf{S}, \Phi)$, we should guarantee all $\cos(\cdot)$ to be equal to 1 in (12), (14) and (15). This can be satisfied by choosing $\psi_{n,m} = 0 \forall n, m$ (and therefore $\delta_n = 0 \forall n$), which implies from (3) to choose the optimal sinewave phases as

$$\phi_{n,m}^* = -\bar{\psi}_{n,m}. \quad (24)$$

Φ^* is obtained by collecting $\phi_{n,m}^* \forall n, m$ into matrix. With such a phase choice, all sinewaves in (4) are in-phase at the rectenna input. Moreover, $\psi_{n,m} = 0$ and $X_n = \sum_{m=1}^M s_{n,m} A_{n,m}$ such that $z_{DC}(\mathbf{S}, \Phi^*)$ is simply obtained from (11) with all $\cos(\cdot)$ replaced by 1 in (12), (14) and (15).

Recall from [13] that a monomial is defined as the function $g : \mathbb{R}_{++}^N \rightarrow \mathbb{R} : g(\mathbf{x}) = c x_1^{a_1} x_2^{a_2} \dots x_N^{a_N}$ where $c > 0$ and $a_i \in \mathbb{R}$. A sum of K monomials is called a posynomial and can be written as $f(\mathbf{x}) = \sum_{k=1}^K g_k(\mathbf{x})$ with $g_k(\mathbf{x}) = c_k x_1^{a_{1k}} x_2^{a_{2k}} \dots x_N^{a_{Nk}}$ where $c_k > 0$. As we can see from (12), (14) and (15), $z_{DC}(\mathbf{S}, \Phi^*)$ is a posynomial, and so it is for any order n_o in the Taylor expansion. The higher the order, the larger the number of terms in the posynomial.

The optimization problem becomes $\max_{\mathbf{S}} z_{DC}(\mathbf{S}, \Phi^*)$ subject to $\frac{1}{2} \|\mathbf{S}\|_F^2 \leq P$. It therefore consists in maximizing a posynomial subject to a power constraint (which itself is written as a posynomial). This problem is not a standard Geometric Program (GP) but it can be transformed to an equivalent problem by introducing an auxiliary variable t_0

$$\min_{\mathbf{S}, t_0} 1/t_0 \quad (25)$$

$$\text{subject to } \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P, \quad (26)$$

$$z_{DC}(\mathbf{S}, \Phi^*)/t_0 \geq 1. \quad (27)$$

This is known as a Reverse Geometric Program due to the minimization of a posynomial subject to upper and lower bounds inequality constraints [13], [14]. Note that $z_{DC}(\mathbf{S}, \Phi^*)/t_0 \geq 1$ is equivalent to $t_0/z_{DC}(\mathbf{S}, \Phi^*) \leq 1$. However $1/z_{DC}(\mathbf{S}, \Phi^*)$ is not a posynomial, therefore preventing the use of standard GP tools. The idea is to lower bound $z_{DC}(\mathbf{S}, \Phi^*)$ by a monomial $\bar{z}_{DC}(\mathbf{S})$, i.e. upper bound $1/z_{DC}(\mathbf{S}, \Phi^*)$ by the monomial $1/\bar{z}_{DC}(\mathbf{S})$ (since the inverse of a monomial is still a monomial) [14]. Let $\{g_k(\mathbf{S}, \Phi^*)\}$ be the monomial terms in the posynomial $z_{DC}(\mathbf{S}, \Phi^*) = \sum_{k=1}^K g_k(\mathbf{S}, \Phi^*)$. The choice of the lower bound relies on the fact that an arithmetic mean is greater or equal to the geometric mean. Hence, $z_{DC}(\mathbf{S}, \Phi^*) \geq \prod_{k=1}^K \left(\frac{g_k(\mathbf{S}, \Phi^*)}{\gamma_k} \right)^{\gamma_k} = \bar{z}_{DC}(\mathbf{S})$, where $\gamma_k \geq 0$ and $\sum_{k=1}^K \gamma_k = 1$. Since

$$1/z_{DC}(\mathbf{S}, \Phi^*) \leq 1/\bar{z}_{DC}(\mathbf{S}), \quad (28)$$

we can replace (in a conservative way) inequality $t_0/z_{DC}(\mathbf{S}, \Phi^*) \leq 1$ by $t_0/\bar{z}_{DC}(\mathbf{S}) = t_0 \prod_{k=1}^K (g_k(\mathbf{S}, \Phi^*)/\gamma_k)^{-\gamma_k} \leq 1$. For a given choice of $\{\gamma_k\}$, problem (25)-(27) is now replaced by the standard GP

$$\min_{\mathbf{S}, t_0} 1/t_0 \quad (29)$$

$$\text{subject to } \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P, \quad (30)$$

$$t_0 \prod_{k=1}^K \left(\frac{g_k(\mathbf{S}, \Phi^*)}{\gamma_k} \right)^{-\gamma_k} \leq 1, \quad (31)$$

⁴We display terms for $n_o \leq 6$ but the derived algorithm works for any n_o .

that can be solved using existing software, e.g. CVX [16].

Note that the tightness of the upper bound (28) heavily depends on the choice of $\{\gamma_k\}$. Following [13], [15], an iterative procedure can be used where at each iteration the standard GP (29)-(31) is solved for an updated set of $\{\gamma_k\}$. Assuming a feasible set of magnitude $\mathbf{S}^{(i-1)}$ at iteration $i-1$, compute at iteration i $\gamma_k = g_k(\mathbf{S}^{(i-1)}, \Phi^*) / z_{DC}(\mathbf{S}^{(i-1)}, \Phi^*) \forall k$ and solve problem (29)-(31) to obtain $\mathbf{S}^{(i)}$. Repeat the iterations till convergence. Algorithm 1 summarizes the procedure.

Algorithm 1 WPT Waveform

- 1: **Initialize:** $i \leftarrow 0$, Φ^* in (24), \mathbf{S} , $z_{DC}^{(0)} = 0$
 - 2: **repeat**
 - 3: $i \leftarrow i + 1$, $\tilde{\mathbf{S}} \leftarrow \mathbf{S}$
 - 4: $\gamma_k \leftarrow g_k(\tilde{\mathbf{S}}, \Phi^*) / z_{DC}(\tilde{\mathbf{S}}, \Phi^*)$, $k = 1, \dots, K$
 - 5: $\mathbf{S} \leftarrow \arg \min (29) - (31)$
 - 6: $z_{DC}^{(i)} \leftarrow z_{DC}(\mathbf{S}, \Phi^*)$
 - 7: **until** $|z_{DC}^{(i)} - z_{DC}^{(i-1)}| < \epsilon$ or $i = i_{\max}$
-

Since the original problem (25)-(27) is nonconvex, the final solution is a local optimum (not guaranteed to be global).

D. PAPR Constraints

In practice, it may be useful to constrain the PAPR of the transmitted waveform in order to increase the efficiency of the power amplifier. From (1), the PAPR on antenna m can be defined as $PAPR_m = \frac{\max_t |x_m(t)|^2}{\mathcal{E}\{|x_m(t)|^2\}} = \frac{\max_t |x_m(t)|^2}{\frac{1}{2} \|\mathbf{s}_m\|^2}$. The PAPR constraint on antenna m writes as $PAPR_m \leq \eta$. Problem (16) is now subject to an extra constraint

$$\max_{\mathbf{S}, \Phi} i_{out}(\mathbf{S}, \Phi) \quad (32)$$

$$\text{subject to } \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P, \quad (33)$$

$$PAPR_m \leq \eta, \forall m. \quad (34)$$

In the sequel, we will assume the use of the phase Φ^* in (24) and optimize the amplitude \mathbf{S} .

By oversampling the transmit signals at $t_q = q \frac{T}{NO_s}$ for $q = 0, \dots, NO_s - 1$ with $T = 1/\Delta_f = \frac{2\pi}{\Delta_w}$ and O_s the oversampling factor, the PAPR constraint can be rewritten as $|x_m(t_q)|^2 \leq \frac{1}{2} \eta \|\mathbf{s}_m\|^2$, $\forall q = 0, \dots, NO_s - 1$ for sufficiently large O_s . Assuming the phase Φ^* in (24), we can write

$$|x_m(t_q)|^2 = \sum_{n_0, n_1} s_{n_0, m} s_{n_1, m} \cos(w_{n_0} t_q + \phi_{n_0, m}^*) \cos(w_{n_1} t_q + \phi_{n_1, m}^*). \quad (35)$$

The quantity $|x_m(t_q)|^2$ is not a posynomial anymore as some of the coefficients c_k are negative. $|x_m(t_q)|^2$ is now written as a signomial, i.e. the sum of monomials whose coefficients c_k can be either positive or negative, $f(\mathbf{x}) = f_1(\mathbf{x}) - f_2(\mathbf{x})$ where $f_j(\mathbf{x}) = \sum_{k=1}^{K_j} g_{jk}(\mathbf{x})$ and $g_{jk}(\mathbf{x}) = c_{jk} x_1^{a_{1jk}} x_2^{a_{2jk}} \dots x_N^{a_{Njk}}$ with $c_{jk} > 0$. Let us write the signomial $|x_m(t_q)|^2 = f_{mq1}(\mathbf{S}, \Phi^*) - f_{mq2}(\mathbf{S}, \Phi^*)$. We therefore have the inequality $f_{mq1}(\mathbf{S}, \Phi^*) - f_{mq2}(\mathbf{S}, \Phi^*) \leq \frac{1}{2} \eta \|\mathbf{s}_m\|^2$ or equivalently $\frac{f_{mq1}(\mathbf{S}, \Phi^*)}{\frac{1}{2} \eta \|\mathbf{s}_m\|^2 + f_{mq2}(\mathbf{S}, \Phi^*)} \leq 1$. This is a standard

sign inequality but the quotient of posynomials is not a posynomial. Writing the denominator as a sum of monomials, $\frac{1}{2} \eta \|\mathbf{s}_m\|^2 + f_{mq2}(\mathbf{S}, \Phi^*) = \sum_{k=1}^{K_{mq2}} g_{mq2k}(\mathbf{S}, \Phi^*)$, we can perform a single condensation and replace the original inequality by the following inequality

$$f_{mq1}(\mathbf{S}, \Phi^*) \prod_{k=1}^{K_{mq2}} \left(\frac{g_{mq2k}(\mathbf{S}, \Phi^*)}{\gamma_{mq2k}} \right)^{-\gamma_{mq2k}} \leq 1 \quad (36)$$

with $\gamma_{mq2k} \geq 0$ and $\sum_{k=1}^{K_{mq2}} \gamma_{mq2k} = 1$. For a given choice of $\{\gamma_k, \gamma_{mq2k}\}$ and assuming Φ^* , the optimization problem (32)-(34) is now replaced by the standard GP

$$\min_{\mathbf{S}, t_0} 1/t_0 \quad (37)$$

$$\text{s.t. } \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P, \quad (38)$$

$$t_0 \prod_{k=1}^K \left(\frac{g_k(\mathbf{S}, \Phi^*)}{\gamma_k} \right)^{-\gamma_k} \leq 1, \quad (39)$$

$$f_{mq1}(\mathbf{S}, \Phi^*) \prod_{k=1}^{K_{mq2}} \left(\frac{g_{mq2k}}{\gamma_{mq2k}} \right)^{-\gamma_{mq2k}} \leq 1, \forall m, q \quad (40)$$

Problem (37)-(40) can now be solved at each iteration of an iterative procedure where $\{\gamma_k, \gamma_{mq2k}\}$ are updated. The whole optimization procedure is summarized in Algorithm 2.

Algorithm 2 WPT Waveform with PAPR Constraints

- 1: **Initialize:** $i \leftarrow 0$, Φ^* in (24), \mathbf{S} , $z_{DC}^{(0)} = 0$
 - 2: **repeat**
 - 3: $i \leftarrow i + 1$, $\tilde{\mathbf{S}} \leftarrow \mathbf{S}$
 - 4: $\gamma_k \leftarrow g_k(\tilde{\mathbf{S}}, \Phi^*) / z_{DC}(\tilde{\mathbf{S}}, \Phi^*)$, $k = 1, \dots, K$
 - 5: $\gamma_{mq2k} \leftarrow g_{mq2k}(\tilde{\mathbf{S}}, \Phi^*) / (\frac{1}{2} \eta \|\tilde{\mathbf{s}}_m\|^2 + f_{mq2}(\tilde{\mathbf{S}}, \Phi^*))$,
 $m = 1, \dots, M$, $q = 0, \dots, NO_s - 1$, $k = 1, \dots, K_{mq2}$
 - 6: $\mathbf{S} \leftarrow \arg \min (37) - (40)$
 - 7: $z_{DC}^{(i)} \leftarrow z_{DC}(\mathbf{S}, \Phi^*)$
 - 8: **until** $|z_{DC}^{(i)} - z_{DC}^{(i-1)}| < \epsilon$ or $i = i_{\max}$
-

Here again, the final solution is not guaranteed to be the global optimum, but only a local optimum.

E. Extension to Multiple Rectennas

Consider now the extension to U rectennas. Those rectennas could either belong to a single user (i.e. point-to-point MIMO WPT) or spread across multiple users (i.e. MU-MISO WPT). In this multiple rectennas setup, the energy harvested by a given rectenna $z_{DC,q}$ in general depends on the energy harvested by the other rectennas $z_{DC,p}$, $p \neq q$. Indeed, a given waveform may be suitable for a given rectenna but found inefficient for another rectenna. Hence, there exists a trade-off between the energy harvested by the different rectennas. The energy region \mathcal{Z}_{DC} formulates this trade-off by expressing the set of all rectenna harvested energy $(z_{DC,1}, \dots, z_{DC,U})$ that are simultaneously achievable. The boundary of the energy region can be derived by considering a weighted sum of DC component at each user where weights v_u , $u = 1, \dots, U$, account for the multi-rectenna fairness.

The optimization problem now consists in finding the optimal set of amplitudes and phases (across frequencies) that maximize the weighted sum of DC components $z_{DC,u}$, i.e.

$$\max_{\mathbf{S}, \Phi} Z_{DC}(\mathbf{S}, \Phi) = \sum_{u=1}^U v_u z_{DC,u}(\mathbf{S}, \Phi) \quad \text{s.t.} \quad \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P. \quad (41)$$

From Section II, after adding the index u to any user specific variable, we define $X_{n,u} e^{j\delta_{n,u}} = \sum_{m=1}^M s_{n,m} A_{n,m,u} e^{j\psi_{n,m,u}}$ and $A_{n,m,u} e^{j\psi_{n,m,u}} = e^{j\phi_{n,m}} h_{n,m,u}$ with $h_{n,m,u} = A_{n,m,u} e^{j\psi_{n,m,u}}$ the frequency response of the channel of rectenna u on transmit antenna m at w_n .

1) *Linear Model*: The ASS strategy (19) is generalized as

$$\max_{\mathbf{w}_n} \sum_{n=0}^{N-1} \|\tilde{\mathbf{H}}_n \mathbf{w}_n\|^2 \quad \text{s.t.} \quad \frac{1}{2} \left[\sum_{n=0}^{N-1} \|\mathbf{w}_n\|^2 \right] \leq P \quad (42)$$

with $\tilde{\mathbf{H}}_n = [\tilde{\mathbf{h}}_{n,1}^T \dots \tilde{\mathbf{h}}_{n,U}^T]^T$ and $\tilde{\mathbf{h}}_{n,u} = \sqrt{k_2 v_u} \mathbf{h}_{n,u}$. The solution consists in transmitting on a single sinewave $\tilde{n} = \arg \max_i \lambda_{\max}(\tilde{\mathbf{H}}_i^H \tilde{\mathbf{H}}_i)$ and along the dominant right singular vector of $\tilde{\mathbf{H}}_{\tilde{n}}$. Hence,

$$\mathbf{w}_n^* = \begin{cases} \sqrt{2P} \mathbf{v}_{\max,n}, & n = \tilde{n}, \\ 0, & n \neq \tilde{n}, \end{cases} \quad (43)$$

where $\mathbf{v}_{\max,n}$ is the dominant right singular vector of $\tilde{\mathbf{H}}_n$. Solution (43) naturally boils down to (19) for $U = 1$.

2) *Non-Linear Model*: Unfortunately, guaranteeing $\psi_{n,m,u} = 0 \forall n, m, u$ is not possible (NMU constraints and NM variables only). This implies that, for a given choice of phase matrix $\Phi = \Phi'$, some cosine functions in (12), (14) and (15) are positive while others are negative. $Z_{DC}(\mathbf{S}, \Phi')$ is now written as a signomial since some of the coefficients c_k are negative.

Similarly to the single rectenna scenario, we can convert the maximization problem into a minimization by introducing the auxiliary variable t_0 . The problem writes as (25)-(27) with (27) replaced by $Z_{DC}(\mathbf{S}, \Phi')/t_0 \geq 1$. Condition $Z_{DC}(\mathbf{S}, \Phi') = f_1(\mathbf{S}, \Phi') - f_2(\mathbf{S}, \Phi') \geq t_0$ can be replaced by

$$\frac{t_0 + f_2(\mathbf{S}, \Phi')}{f_1(\mathbf{S}, \Phi')} = (t_0 + f_2(\mathbf{S}, \Phi')) \prod_{k=1}^{K_1} \left(\frac{g_{1k}}{\gamma_{1k}} \right)^{-\gamma_{1k}} \leq 1 \quad (44)$$

where $\gamma_{1k} \geq 0$, $\sum_{k=1}^{K_1} \gamma_{1k} = 1$ and $\{g_{1k}\}$ are the monomial terms in the posynomial $f_1(\mathbf{S}, \Phi') = \sum_{k=1}^{K_1} g_{1k}(\mathbf{S}, \Phi')$. For a given choice of $\{\gamma_{1k}\}$, we now get the standard GP

$$\min_{\mathbf{S}, t_0} 1/t_0 \quad (45)$$

$$\text{s.t.} \quad \frac{1}{2} \|\mathbf{S}\|_F^2 \leq P, \quad (46)$$

$$(t_0 + f_2(\mathbf{S}, \Phi')) \prod_{k=1}^{K_1} \left(\frac{g_{1k}(\mathbf{S}, \Phi')}{\gamma_{1k}} \right)^{-\gamma_{1k}} \leq 1. \quad (47)$$

Similarly to the point-to-point optimization, Problem (45)-(47) can now be solved at each iteration of an iterative procedure where $\{\gamma_{1k}\}$ are updated. Note that Problem (45)-(47) boils down to Problem (29)-(31) if $f_2 = 0$. The whole optimization procedure is summarized in Algorithm 3.

Algorithm 3 WPT Waveform with Multiple Rectennas

```

1: Initialize:  $i \leftarrow 0$ ,  $\Phi'$ ,  $\mathbf{S}$ ,  $Z_{DC}^{(0)} = 0$ 
2: repeat
3:    $i \leftarrow i + 1$ ,  $\tilde{\mathbf{S}} \leftarrow \mathbf{S}$ 
4:    $\gamma_{1k} \leftarrow g_{1k}(\tilde{\mathbf{S}}, \Phi') / f_1(\tilde{\mathbf{S}}, \Phi')$ ,  $k = 1, \dots, K_1$ 
5:    $\mathbf{S} \leftarrow \arg \min (45) - (47)$ 
6:    $Z_{DC}^{(i)} \leftarrow Z_{DC}(\mathbf{S}, \Phi')$ 
7: until  $|Z_{DC}^{(i)} - Z_{DC}^{(i-1)}| < \epsilon$  or  $i = i_{\max}$ 

```

Motivated by the linear model optimization, a good choice for the phase Φ' in Algorithm 3, even though not optimal, consists in choosing the (n, m) entries of Φ' as $\phi'_{n,m} = \text{phase}(v_{\max,n,m})$ where $v_{\max,n,m}$ is the m^{th} entry of the dominant right singular vector $\mathbf{v}_{\max,n}$, $\forall n, m$.

V. SCALING LAWS OF WPT

In order to further motivate the usefulness of multisine waveform optimization and in order to get some insight into the fundamental limits of WPT, we want to quantify how z_{DC} and Z_{DC} scale as a function of N , M and U . For simplicity we truncate the Taylor expansion to the fourth order and therefore consider the metric $z_{DC}(\mathbf{S}, \Phi) = k_2 R_{ant} \mathcal{E}\{y(t)^2\} + k_4 R_{ant}^2 \mathcal{E}\{y(t)^4\}$. The scaling laws also draw insights into the usefulness of CSIT for WPT. We consider frequency-flat and frequency-selective channels.

We assume that the complex channel gains $\alpha_l e^{j\xi_l}$ are modeled as independent circularly symmetric complex Gaussian random variables. α_l are therefore independent Rayleigh distributed such that $\alpha_l^2 \sim \text{EXPO}(\lambda_l)$ with $1/\lambda_l = \beta_l = \mathcal{E}\{\alpha_l^2\}$. The impulse responses have a constant average received power normalized to 1 such that $\sum_{l=0}^{L-1} \beta_l = 1$.

A. Frequency-Flat Channels

We first assume a single transmit antenna (and drop the antenna index) in a point-to-point ($U = 1$) system and consider a frequency flat channel with $\tilde{\psi}_n = \tilde{\psi}$ and $A_n = A \forall n$. This is met when the bandwidth of the multisine waveform $(N-1)\Delta_f$ is much smaller than the channel coherence bandwidth.

Making use of (11), (12), (14) and (15), it is clear that choosing $\Phi^* = \mathbf{0}_N$ is optimal for any A and $\tilde{\psi}$. Recalling the power constraint $\sum_n s_n^2 = 2P$, we can then write

$$z_{DC}(\mathbf{S}, \Phi^*) = k_2 A^2 R_{ant} P + \frac{3k_4}{8} A^4 R_{ant}^2 F \quad (48)$$

where

$$F = \sum_{\substack{n_0, n_1, n_2, n_3 \\ n_0 + n_1 = n_2 + n_3}} s_{n_0} s_{n_1} s_{n_2} s_{n_3}. \quad (49)$$

Finding a closed form solution of the optimal \mathbf{S} is challenging. We can lower bound F as $F \geq \sum_{n=0}^{N-1} s_n^4 + 2 \sum_{\substack{n_0, n_1 \\ n_0 \neq n_1}} s_{n_0}^2 s_{n_1}^2 = 4P^2 + 2 \sum_{\substack{n_0, n_1 \\ n_0 < n_1}} s_{n_0}^2 s_{n_1}^2$. Subject to the power constraint, the lower bound is maximized by allocating power uniformly across sinewaves, i.e. $s_n = \sqrt{2P}/\sqrt{N}$ such that $\mathbf{S} = \sqrt{2P}/\sqrt{N} \mathbf{1}_N$. We will denote as UP this non-adaptive waveform strategy characterized by $\mathbf{S} = \sqrt{2P}/\sqrt{N} \mathbf{1}_N$ and $\Phi = \mathbf{0}_N$. UP is suboptimal for $N > 2$

and optimal for $N = 2$ (as already found in Section 2 when $A_0 = A_1$), for which the inequality is replaced by an equality. Nevertheless for $N > 2$, UP almost reaches the optimum obtained with Algorithm 1, as confirmed in Section VI.

The value of z_{DC} with the UP strategy, simply denoted as $z_{DC,UP}$, can be thought of as a lower bound on $z_{DC}(\mathbf{S}^*, \Phi^*)$ (with optimal amplitude and phase strategy) in frequency-flat channels. Plugging $s_n = \sqrt{2P}/\sqrt{N} \forall n$ into (48), we get

$$z_{DC,UP} = k_2 A^2 R_{ant} P + k_4 A^4 R_{ant}^2 \frac{2N^2 + 1}{2N} P^2 \quad (50)$$

since that there are $N(2N^2 + 1)/3$ terms in the sum of (49).

In frequency-flat channels, $A \approx \sum_l \alpha_l e^{j\zeta_l}$. Taking the expectation over A , $\bar{z}_{DC,UP} = \mathcal{E}\{z_{DC,UP}\}$ is written as

$$\begin{aligned} \bar{z}_{DC,UP} &= k_2 R_{ant} P + 2k_4 R_{ant}^2 \frac{2N^2 + 1}{2N} P^2 \\ &\stackrel{N \nearrow}{\approx} k_2 R_{ant} P + 2k_4 R_{ant}^2 N P^2 \end{aligned} \quad (51)$$

since $\mathcal{E}\{A^2\} = \sum_l \beta_l = 1$ and $\mathcal{E}\{A^4\} = 2 \sum_l \beta_l^2 + 2 \sum_l \sum_{l' \neq l} \beta_l \beta_{l'} = 2$ by making use of the moments of an exponential distribution ($\mathcal{E}\{\alpha_l^4\} = 2\beta_l^2$).

Equations (50) and (51) suggest that $z_{DC,UP}$ and $\bar{z}_{DC,UP}$ (and therefore $z_{DC}(\mathbf{S}^*, \Phi^*)$) linearly increase with N in frequency-flat channels. This is remarkable as it is achieved with a fixed waveform (non-adaptive to the CSI) and therefore without CSI feedback. We also note that the linear increase originates from the non-linearity of the rectifier as it only appears in the fourth order term. On the contrary, the transmission with a single sinewave ($N = 1$) or with the ASS strategy would perform significantly worse with $z_{DC,SS/ASS} = k_2 A^2 R_{ant} P + \frac{3k_4}{2} A^4 R_{ant}^2 P^2$ and $\bar{z}_{DC,SS/ASS} = k_2 R_{ant} P + 3k_4 R_{ant}^2 P^2$. The multisine waveform with uniform power allocation would achieve a relative gain over a single-sinewave strategy on a frequency-flat channel that linearly increases with N . This gain highlights the potential of optimizing multisine waveforms and modeling the non-linearity of the rectifier.

Let us now look at multiple transmit antennas ($M \geq 1$). Since the channel is frequency flat, $\mathbf{h}_n = \mathbf{h}$, $\forall n$. Let us assume a simple strategy (denoted as UPMF) consisting in performing uniform power (UP) allocation in the frequency domain and matched beamforming (MF) in the spatial domain. We therefore write $\mathbf{w}_n = \sqrt{2P/N} \frac{\mathbf{h}_n^H}{\|\mathbf{h}\|}$, $\forall n$. Making use of similar steps as in (50), the harvested energy z_{DC} writes as

$$z_{DC,UPMF} = k_2 R_{ant} P \|\mathbf{h}\|^2 + k_4 R_{ant}^2 \frac{2N^2 + 1}{2N} P^2 \|\mathbf{h}\|^4. \quad (52)$$

After averaging over the channel distribution and making use of the moments of a χ_{2M}^2 random variable, we get

$$\begin{aligned} \bar{z}_{DC,UPMF} &= k_2 R_{ant} P M + k_4 R_{ant}^2 P^2 \frac{2N^2 + 1}{2N} M(M+1) \\ &\stackrel{N, M \nearrow}{\approx} k_2 R_{ant} P M + k_4 R_{ant}^2 P^2 N M^2. \end{aligned} \quad (53)$$

The UPMF strategy enables an increase of \bar{z}_{DC} proportionally to NM^2 and would rely on CSIT knowledge to perform spatial matched beamforming. While M has an impact on both the second order and fourth order term, N only appears in the fourth order term. Scaling law (53) highlights that any increase

of $\bar{z}_{DC,UPMF}$ by a factor 2 requires either increasing the number of sinewaves (N) by a factor 2 for a fixed number of transmit antennas (M) or increase the number of transmit antennas by a factor $\sqrt{2}$ for a fixed number of sinewaves.

Let us now look at the presence of multiple rectennas ($U \geq 1$) and focus on $N \geq 1$ and $M = 1$ for simplicity. Assuming the channels to each rectenna are identically distributed, the use of the UP strategy leads to an average harvested energy at rectenna u , $\bar{z}_{DC,UP,u} = \bar{z}_{DC,UP}$, that scales as (51). Hence the sum energy $\bar{Z}_{DC,UP} = \sum_{u=1}^U \bar{z}_{DC,u} = U \bar{z}_{DC,UP} \stackrel{N \nearrow}{\approx} k_2 R_{ant} U P + 2k_4 R_{ant}^2 U N P^2$ linearly increases with N and U . In frequency-flat channels with U rectennas, the energy region \mathcal{Z}_{DC} with UP strategy is a hypercube with each rectenna's harvested energy scaling linearly with N , i.e. the same quantity of energy as if it was alone in the system. Therefore adding more rectennas comes for free and does not compromise each rectenna's performance.

B. Frequency-Selective Channels

We assume a frequency selective channel with $L \gg 1$ and frequencies w_n far apart from each other such that the frequency domain circularly symmetric complex Gaussian random channel gains $h_{n,m}$ fade independently (phase and amplitude-wise) across frequencies and antennas.

Let us first consider $M = 1$ and a waveform not adaptive to the CSI whose set of amplitude and phase is given by \mathbf{S} and Φ . We write $z_{DC}(\mathbf{S}, \Phi) = \frac{k_2}{2} R_{ant} \left[\sum_{n=0}^{N-1} X_n^2 \right] + \frac{3k_4}{8} R_{ant}^2 \left[\sum_{n=0}^{N-1} X_n^4 + 2 \sum_{\substack{n_0, n_1 \\ n_0 \neq n_1}} X_{n_0}^2 X_{n_1}^2 + R \right]$ where R contains all the remaining terms in the sum expansion (13). Those terms are such that $\delta_{n_0} + \delta_{n_1} - \delta_{n_2} - \delta_{n_3} \neq 0$. We can compute the expectation of $z_{DC}(\mathbf{S}, \Phi)$ over $\{h_n\}$. We note that $\mathcal{E}\{R\} = 0$ because for any fixed phase of the waveform, quantities $\delta_{n_0} + \delta_{n_1} - \delta_{n_2} - \delta_{n_3}$ in R would be uniformly distributed over 2π (since the phase of h_n is uniformly distributed over 2π) such that $\mathcal{E}\{\cos(\delta_{n_0} + \delta_{n_1} - \delta_{n_2} - \delta_{n_3})\} = 0$. Moreover, $\mathcal{E}\{X_n^2\} = s_n^2 \mathcal{E}\{A_n^2\} = s_n^2$ and $\mathcal{E}\{X_n^4\} = s_n^4 \mathcal{E}\{A_n^4\} = 2s_n^4$. Recalling the power constraint $\sum_{n=0}^{N-1} s_n^2 = 2P$, we can write $\sum_{n=0}^{N-1} \mathcal{E}\{X_n^4\} + 2 \sum_{\substack{n_0, n_1 \\ n_0 \neq n_1}} \mathcal{E}\{X_{n_0}^2\} \mathcal{E}\{X_{n_1}^2\} = 2 \left[\sum_{n_0} s_{n_0}^2 \right] \left[\sum_{n_1} s_{n_1}^2 \right] = 8P^2$, therefore leading to

$$\bar{z}_{DC} = \mathcal{E}\{z_{DC}\} = k_2 R_{ant} P + 3k_4 R_{ant}^2 P^2. \quad (54)$$

This highlights that in the presence of frequency-selective Rayleigh fading channels (with $L \gg 1$), \bar{z}_{DC} is independent of N and the waveform design, i.e. any fixed multisine waveform would achieve the same \bar{z}_{DC} . In the absence of CSIT, transmitting over a single sinewave ($N = 1$) is enough in frequency-selective channels. In the presence of multiple rectennas, the sum energy writes as $\bar{Z}_{DC,UP} = U \bar{z}_{DC,UP}$.

Let us consider the same frequency-selective channel but now assume an adaptive waveform, namely the ASS strategy (19) (still with $M = 1$), allocating all transmit power to the sinewave corresponding to the strongest channel gain. We compute the expectation of z_{DC} over $\{h_n\}$ as

$$\bar{z}_{DC,ASS} = \frac{k_2}{2} R_{ant} 2P \mathcal{E}\{E_{max}\} + \frac{3k_4}{8} R_{ant}^2 4P^2 \mathcal{E}\{E_{max}^2\}. \quad (55)$$

where $E_{max} = \max_n A_n^2$. Since $A_n^2 \sim \text{EXPO}(1)$, the pdf of E_{max} simply is $f_{E_{max}}(x) = N e^{-x} (1 - e^{-x})^{N-1}$. Using [12], $\mathcal{E}\{E_{max}\} = H_N$ and $\mathcal{E}\{E_{max}^2\} = 2S_N$ with

$$H_N = N \left[\sum_{k=0}^{N-1} (-1)^{k+N-1} \binom{N-1}{k} \frac{1}{(N-k)^2} \right], \quad (56)$$

$$S_N = N \left[\sum_{k=0}^{N-1} (-1)^{k+N-1} \binom{N-1}{k} \frac{1}{(N-k)^3} \right] \quad (57)$$

and we simply obtain

$$\bar{z}_{DC,ASS} = k_2 R_{ant} P H_N + 3k_4 R_{ant}^2 P^2 S_N. \quad (58)$$

After some calculations, it can be shown that

$$H_N = \sum_{k=1}^N \frac{1}{k} = \log N + \gamma + \epsilon_N \stackrel{N \nearrow}{\approx} \log N + \gamma \quad (59)$$

with γ the Euler-Mascheroni constant and ϵ_N scales as $\frac{1}{2N}$. Similarly, after some calculations, we can show that

$$\begin{aligned} S_N &= \sum_{k=1}^N \frac{1}{k} H_k = \sum_{k=1}^N \frac{\log k}{k} + \gamma H_N + \sum_{k=1}^N \frac{\epsilon_k}{k}, \\ &\stackrel{N \nearrow}{\approx} \frac{\log^2 N}{2} + \gamma_1 + \gamma \log N + \gamma^2 + \sum_{k=1}^N \frac{\epsilon_k}{k}, \end{aligned} \quad (60)$$

where γ_1 is the Stieltjes constant. This shows that $H_N \approx \log N$ and $S_N \approx \frac{\log^2 N}{2}$. We can now write

$$\bar{z}_{DC,ASS} \stackrel{N \nearrow}{\approx} k_2 R_{ant} P \log N + \frac{3}{2} k_4 R_{ant}^2 P^2 \log^2 N. \quad (61)$$

Thanks to the frequency selectivity, the ASS strategy enables an increase of the second order and fourth order terms proportionally to $\log N$ and $\log^2 N$, respectively.

Looking now at the UPMF strategy $\mathbf{w}_n = \sqrt{2P/N} \mathbf{h}_n^H / \|\mathbf{h}_n\|$ (for $N, M \geq 1$), we can write

$$\bar{z}_{DC,UPMF} = k_2 R_{ant} P M + \frac{3}{2} k_4 R_{ant}^2 \frac{P^2}{N^2} W. \quad (62)$$

where $W = \sum_{\substack{n_0, n_1, n_2, n_3 \\ n_0 + n_1 = n_2 + n_3}} \mathcal{E}\{\|\mathbf{h}_{n_0}\| \|\mathbf{h}_{n_1}\| \|\mathbf{h}_{n_2}\| \|\mathbf{h}_{n_3}\|\}$.

We can now lower and upper bound (62). A lower bound is obtained by noting that $\mathcal{E}\{\prod_{j=0}^3 \|\mathbf{h}_{n_j}\|\} \geq \prod_{j=0}^3 \mathcal{E}\{\|\mathbf{h}_{n_j}\|\}$, $\forall n_0, n_1, n_2, n_3$. Equality holds when $n_0 \neq n_1 \neq n_2 \neq n_3$ due to the independence between channel gains in the frequency domain. Since $\|\mathbf{h}_n\|^2 \sim \chi_{2M}^2$, we can compute $\mathcal{E}\{\|\mathbf{h}_n\|\} = \Gamma(M + \frac{1}{2}) / \Gamma(M)$. The lower bound is simply obtained from $W \geq (\Gamma(M + \frac{1}{2}) / \Gamma(M))^4 N (2N^2 + 1) / 3$. Noting $\mathcal{E}\{\|\mathbf{h}_{n_0}\| \|\mathbf{h}_{n_1}\| \|\mathbf{h}_{n_2}\| \|\mathbf{h}_{n_3}\|\} \leq \mathcal{E}\{\|\mathbf{h}_{n_0}\|^4\} = M(M+1)$, we also obtain the upper bound by writing $W \leq M(M+1) N (2N^2 + 1) / 3$. Noting that $\lim_{M \rightarrow \infty} \frac{\Gamma(M+\alpha)}{\Gamma(M)M^\alpha} = 1$ ($\alpha \in \mathbb{R}$), both lower and upper bounds have the same scaling law for N, M growing large such that

$$\bar{z}_{DC,UPMF} \stackrel{N, M \nearrow}{\approx} k_2 R_{ant} P M + k_4 R_{ant}^2 P^2 N M^2. \quad (63)$$

This is the same scaling law as (53) in frequency flat channels. For $M = 1$, if the fourth order term is dominant or if N is

large enough, the UPMF strategy⁵ clearly outperforms the ASS strategy (i.e. linear versus log squared increase in N). On the other hand, if the second order term is dominant, the ASS strategy outperforms the UPMF strategy.

Table I summarizes the scaling laws for adaptive (based on CSIT) and non-adaptive (no CSIT) waveforms in frequency-flat and frequency-selective channels. We note again that for $M = 1$ a linear increase with N is achievable without CSIT in frequency-flat channels, while the same increase would require CSIT knowledge in frequency-selective channels. We also note that a linear model-based design leads to significantly lower scaling laws than the non-linear model-based design for frequency-flat and frequency-selective channels. This really highlights the importance of modeling higher order terms in the Taylor expansion, especially as N grows large and the transmit waveform is likely to be such such that $y(t)$ exhibits peaky behaviour in the time domain at the input of the rectifier.

C. Large-Scale Multi-Sine Multi-Antenna WPT

The previous scaling laws highlight the benefits of a large-scale multisine multi-antenna architecture. This is reminiscent of Massive MIMO in communication. The large dimension enables to simplify the waveform design by decoupling the spatial and frequency domain weights. A simple spatial matched beamformer $\mathbf{w}_n = s_n \mathbf{h}_n^H / \|\mathbf{h}_n\|$ (with $\sum_{n=0}^{N-1} s_n^2 = 2P$) would induce channel hardening on sinewave n such that by the law of large number $\lim_{M \rightarrow \infty} \|\mathbf{h}_n\| / \sqrt{M} = 1$ and

$$z_{DC} \stackrel{M \nearrow}{\approx} k_2 R_{ant} P M + \frac{3}{8} k_4 R_{ant}^2 M^2 F \quad (64)$$

where F is defined in (49). z_{DC} can now be maximized by using the optimal power allocation for frequency-flat channels. The suboptimal UP would be a good alternative.

VI. PERFORMANCE EVALUATIONS

We consider two types of performance evaluations, the first one is based on the simplified non-linear model introduced in Section III, while the second one relies on an actual and accurate modelling of the rectenna in PSpice.

A. Non-Linear Model-Based Performance Evaluations

The first type of evaluations consists in displaying z_{DC} averaged over many channel realizations for various waveforms. To that end, we assume a fourth order Taylor expansion and therefore consider the following metric $z_{DC}(\mathbf{S}, \Phi) = k_2 R_{ant} \mathcal{E}\{y(t)^2\} + k_4 R_{ant}^2 \mathcal{E}\{y(t)^4\}$. $k_2 = 0.0034$ and $k_4 = 0.3829$ have been computed for an operating point $a = 0$ and used as such to design and evaluate the waveforms.

We first consider a simple point-to-point scenario where the wireless channel is omitted, i.e. $A = 1$ and $\bar{\psi} = 0$ (representing a frequency flat channel) and a single transmit antenna. The received power, i.e. input power to the rectenna, is fixed to -20dBm. Fig 3 (top) confirms that in a frequency flat channel, z_{DC} with UP is close to that achieved by OPT, obtained from

⁵For $M = 1$, UPMF should not be confused with UP. UPMF is an adaptive waveform that relies on CSIT knowledge to match the channel phases on each sinewave while UP is a non-adaptive waveform with null phases.

TABLE I
SUMMARY OF SCALING LAWS.

Waveform	N, M	Frequency-Flat (FF)	Frequency-Selective (FS)
No CSIT			
$\tilde{z}_{DC,SS}$	$N = 1, M = 1$	$k_2 R_{ant} P + 3k_4 R_{ant}^2 P^2$	
$\tilde{z}_{DC,UP}$	$N \gg 1, M = 1$	$k_2 R_{ant} P + 2k_4 R_{ant}^2 N P^2$	$k_2 R_{ant} P + 3k_4 R_{ant}^2 P^2$
$\tilde{z}_{DC,UP}$	$N \geq 1, M = 1, U \geq 1$	$U \tilde{z}_{DC,UP} (v_u = 1, \forall u)$	$U \tilde{z}_{DC,UP} (v_u = 1, \forall u)$
CSIT			
$\tilde{z}_{DC,ASS}$	$N \gg 1, M = 1$	$k_2 R_{ant} P + 3k_4 R_{ant}^2 P^2$	$k_2 R_{ant} P \log N + \frac{3}{2} k_4 R_{ant}^2 P^2 \log^2 N$
$\tilde{z}_{DC,UPMF}$	$N \gg 1, M = 1$	$k_2 R_{ant} P + 2k_4 R_{ant}^2 P^2 N$	$\geq k_2 R_{ant} P + \pi^2 / 16 k_4 R_{ant}^2 P^2 N \leq k_2 R_{ant} P + 2k_4 R_{ant}^2 P^2 N$
$\tilde{z}_{DC,UPMF}$	$N \gg 1, M \gg 1$	$k_2 R_{ant} P M + k_4 R_{ant}^2 P^2 N M^2$	$k_2 R_{ant} P M + k_4 R_{ant}^2 P^2 N M^2$

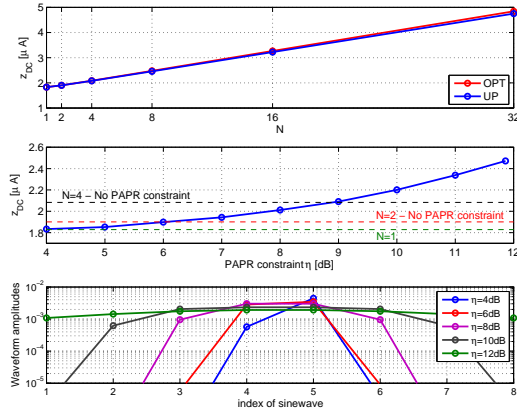


Fig. 3. z_{DC} as a function of N (top) and PAPR constraint η for $N = 8$ (middle). WPT waveform amplitude as a function of η for $N = 8$ (bottom). No wireless channel is assumed, i.e. $A = 1$ and $\tilde{\psi} = 0$, and $M = 1$.

Algorithm 1. Fig 3 (middle) investigates the impact of PAPR constraint on z_{DC} with the optimized waveform for $N = 8$ using Algorithm 2. Fig 3 (bottom) illustrates the corresponding shape of the waveform amplitudes s_n across frequencies for various PAPR constraints η . As η decreases, the allocation of power decreases on the side frequencies and concentrates more on the center frequencies. For large η , the optimized waveform never exactly reaches the UP waveform. Center frequencies get slightly larger magnitudes, which explains a slight increase in z_{DC} of OPT over UP in Fig 3 (top).

We now evaluate the performance of WPT waveforms in a point-to-point scenario representative of a WiFi-like environment at a center frequency of 5.18GHz with a 36dBm transmit power, isotropic transmit antennas (i.e. EIRP of 36dBm for $M = 1$), 2dBi receive antenna gain and 58dB path loss in a large open space environment with a NLOS channel power delay profile obtained from model B [17]. Taps are modeled as i.i.d. circularly symmetric complex Gaussian random variables. With one transmit antenna, this leads to an average received power of about -20dBm. The frequency gap is fixed as $\Delta_w = 2\pi\Delta_f$ with $\Delta_f = B/N$ and $B = 1, 10$ MHz. The N sinewaves are centered around 5.18GHz.

In Fig 4, we first illustrate the effect of frequency selectivity on the shape of the transmit waveform obtained using Algorithm 1. Fig 4 (top) illustrates the frequency response of a typical channel realization over 1MHz and 10 MHz bandwidth. Fig 4 (bottom) displays the magnitude of the waveform optimized for $N = 16$ (Algorithm 1) over such a channel

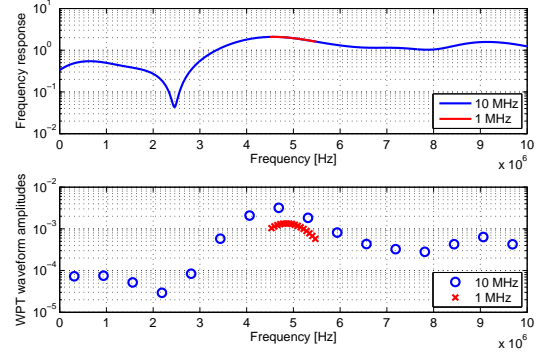


Fig. 4. Frequency response of the wireless channel and WPT waveform magnitudes ($N = 16$) for 1 MHz and 10 MHz bandwidths.

realization. Interestingly, the optimized waveform has a tendency to allocate more power to frequencies exhibiting larger channel gains. This is reminiscent of the water-filling power allocation strategy in communication. This observation also suggests a suboptimal low complexity waveform design that would allocate power proportionally to the channel strength. For comparison, recall that the ASS waveform, motivated by the linear model, would allocate all power to the frequency corresponding to the strongest channel gain.

We now evaluate the performance gain of the adaptive optimized (OPT) waveform (Algorithm 1) versus three baselines: a non-adaptive waveform not relying on CSIT and two adaptive waveforms relying on CSIT but not requiring the optimization of Section IV. From the scaling law analysis, a suitable choice of non-adaptive waveform for single antenna WPT is UP. We therefore choose the non-adaptive baseline waveform as $\phi_{n,m} = 0$ and $s_{n,m} = \sqrt{2P}/\sqrt{NM} \forall n, m$. Motivated by the observations made in Fig 4, the first adaptive baseline waveform is chosen as a matched filter (MF) allocating power to all sinewaves but proportionally to the channel strength, i.e. $\phi_{n,m} = -\tilde{\psi}_{n,m}$ and $s_{n,m} = cA_{n,m}$ with c a constant to guarantee the power constraint. Hence the difference between the optimized waveform and the one based on MF lies in a different choice of amplitudes. The second adaptive baseline waveform is the ASS, designed according to the linear model.

Fig 5 and 6 display z_{DC} averaged over many channel realizations as a function of (N, M) for two bandwidths $B = 1$ MHz and $B = 10$ MHz, respectively. We make the following observations. First, for small bandwidth ($B = 1$ MHz), the UP non-adaptive waveform performs pretty well in the presence of a single transmit antenna ($M = 1$),

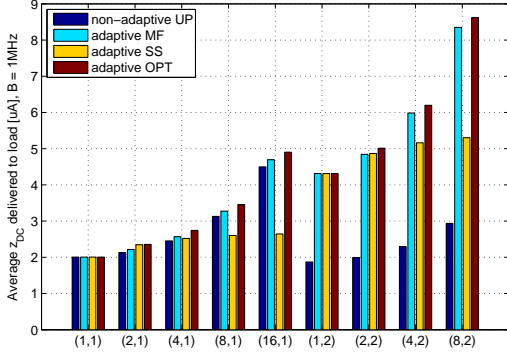


Fig. 5. Average z_{DC} as a function of (N, M) with $B = 1\text{MHz}$.

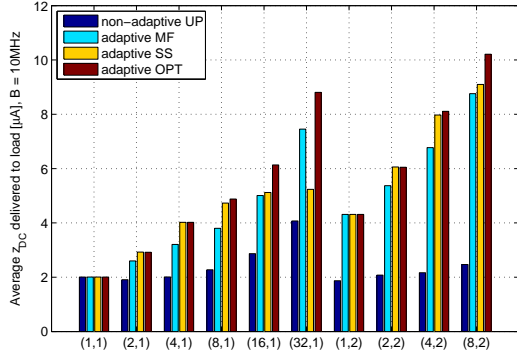


Fig. 6. Average z_{DC} as a function of (N, M) with $B = 10\text{MHz}$.

confirming that for channels with little frequency selectivity, CSI feedback is not needed. On the other hand, for larger bandwidth ($B = 10\text{MHz}$), the non-adaptive waveform is clearly outperformed by the adaptive waveforms, therefore highlighting the usefulness of CSI feedback in WPT even with a single transmit antenna. Second, for small bandwidth, the ASS waveform is significantly outperformed by the UP waveform for $M = 1$, despite the fact it requires CSI knowledge at the Transmitter. For larger bandwidth, the ASS waveform benefits from the channel frequency selectivity to get close performance to OPT for small N . As N increases, the ASS waveform is however clearly outperformed by the adaptive MF and OPT waveforms. This highlights the inaccuracy of the linear model in characterizing the rectifier and the inefficiency of the linear model-based design. The inefficiency is particularly severe as N increases irrespectively of the bandwidth. These observations confirm the predictions made from the scaling laws in Table I. Third, OPT outperforms all waveforms in all configurations. Fourth, MF is a good alternative to OPT, at least with small bandwidth, and does not require any optimization. For larger bandwidth, OPT shows a non-negligible gain over MF as N increases.

Fig 7 further analyzes the sensitivity of z_{DC} to the bandwidth for a fixed number of sinewaves $N = 16$ and various waveforms. Waveforms relying on uniform power allocation such as non-adaptive UP and adaptive UPMF experience some loss as the bandwidth increases and the channel becomes more frequency selective. On the other hand, adaptive OPT and

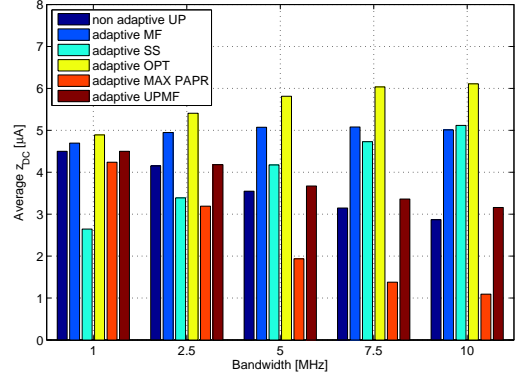


Fig. 7. Effect of Bandwidth B on z_{DC} for $N = 16$ and $M = 1$.

adaptive SS benefit from the frequency selectivity by favoring the strongest sinewave(s). In [7], experiments show that waveforms with high peak to average power ratio (PAPR) increase RF-to-DC conversion efficiency. The conclusion was drawn for various waveforms (OFDM, white noise, chaotic) that were not designed or optimized for wireless power transfer. Following this observation, we investigate whether designing waveforms so as to maximize the PAPR at the input of the rectenna, after the wireless channel, is a suitable approach. The adaptive waveform MAX PAPR in Fig 7 is designed following this philosophy. The MAX PAPR waveform uses the same phases as OPT but inverts the channel such that at the input to the rectifier, the waveform appears as an in-phase multisine with uniform power allocation (which is known to have the maximum PAPR of $10 \log_{10} 2N$ dB). This is mathematically formulated by choosing $s_n^2 = C/A_n^2$ where C is a constant to satisfy the transmit power constraint. Results show that this is a rather inefficient waveform design strategy. This originates from the relatively low magnitude of the waveform peaks due to the excessive amount of power wasted in inverting the wireless power to guarantee the maximum PAPR at the input of the rectenna. Note also that non-adaptive UP would lead to the highest transmit PAPR (i.e. PAPR of the transmit waveform, before the wireless channel) due the uniform allocation across 16 in-phase sinewaves. OPT on the other hand has a transmit PAPR always lower than UP despite providing higher z_{DC} .

Fig 8 further investigates the impact of PAPR on the performance of the optimized multisine waveforms. It considers the OPT waveform with 16 sinewaves uniformly spread over 3 different bandwidths. z_{DC} is plotted against the PAPR of the transmit waveform for each realization of the multipath channel, along with some linear regression fit. It is noted that there is some positive correlation between z_{DC} and PAPR, especially for small bandwidths. As the bandwidth increases and the wireless channel becomes more frequency selective, the optimized waveform has a tendency to allocate less power to the weakest channels, therefore leading to lower PAPR. This explains why as the bandwidth increases, the correlation between DC current and PAPR reduces.

Fig 9 reveals the performance of a large-scale multisine WPT using 4 suboptimal (though low complexity) waveforms

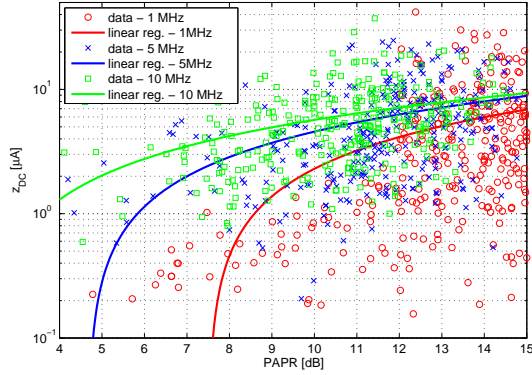


Fig. 8. z_{DC} versus transmit PAPR for $N = 16$ and $M = 1$.

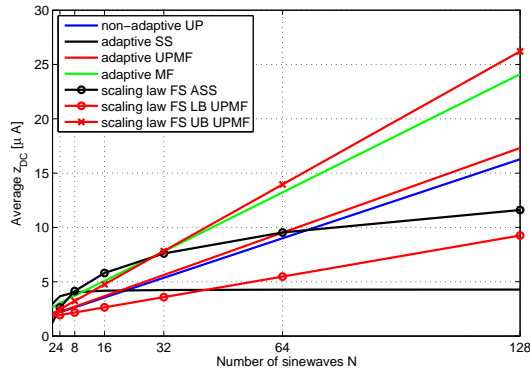


Fig. 9. Effect of N on z_{DC} for $M = 1$ and 5 MHz bandwidth.

(UP, ASS, UPMF and MF⁶) for $M = 1$ and 5 MHz bandwidth. The linear model-based ASS is significantly outperformed by the non-linear model-based design as N grows large. The scaling laws for ASS and UPMF over frequency-selective (FS) channels in Table I are also displayed for comparison.

B. Accurate and Realistic Performance Evaluations

The second type of evaluations is based on an accurate modeling of the rectenna in PSpice in order to validate the waveform optimization and the rectenna non-linearity model. To that end, the waveforms after the wireless channel have been used as inputs to the realistic rectenna of Fig 10 designed for an input power of -20dBm. The circuit contains an L-matching network [3] to guarantee a good matching between the rectifier and the antenna and to minimize the impedance mismatch due to variations in frequency and input power level of the input signal. The values of the capacitor C1 and the inductor L1 are optimized to match the antenna impedance to the average input impedance of the rectifier resulting from an input signal composed of 4 sinewaves and spread across $B = 10\text{MHz}$. $V_s = v_s(t) = 2y(t)\sqrt{R_{ant}}$ is set as the voltage source. The antenna and load impedances are set as $R1 = R_{ant} = 50\Omega$ and $R2 = R_L = 1600\Omega$, respectively. The output capacitor is chosen as $C2 = C_{out} = 100\text{pF}$ for

⁶The OPT waveform is not computed given the high computational complexity of the optimization for large N . This calls for future research on alternative optimization methods for large-scale waveforms.

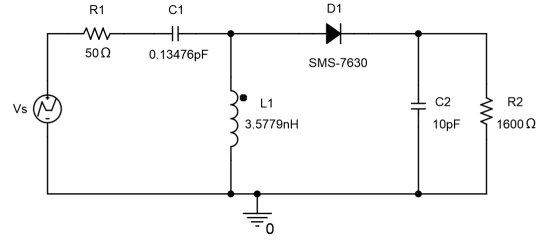


Fig. 10. Rectenna with a single diode and a L-matching network used for PSpice evaluations with $B = 10\text{MHz}$.

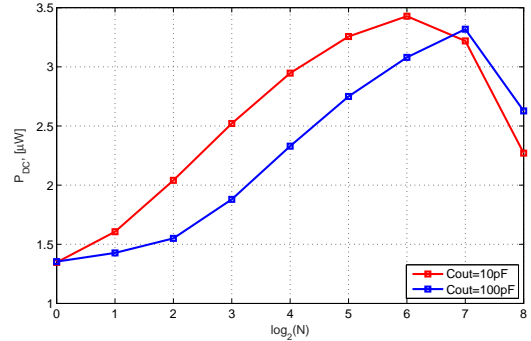


Fig. 11. P_{DC} as a function of N for $B = 10\text{MHz}$. No wireless channel is assumed, i.e. $A = 1$ and $\bar{\psi} = 0$, and $M = 1$.

$B = 1\text{MHz}$ and $C2 = C_{out} = 10\text{pF}$ for $B = 10\text{MHz}$ so that the output DC power is maximized and the rate of charge and discharge of C_{out} is maintained in proportion to the period of the waveform, i.e. for evaluations with $B = 1\text{MHz}$, C2 is replaced by a 100pF capacitor in Fig 10.

Fig 11 illustrates the increase of the harvested DC power as a function of N for a single transmit antenna and assuming no wireless channel, i.e. $A = 1$ and $\bar{\psi} = 0$ (representing a frequency flat channel). The harvested DC power is not a monotonically increasing function contrary to what was observed in Fig 3 with z_{DC} . This is explained by the fact that the rectenna has been optimized for 4 sinewaves. For $B = 10\text{MHz}$ and $N = 4$, $C_{out} = 10\text{pF}$ was found appropriate. Nevertheless, as N increases, for a fixed B , Δ_f decreases, which affects the rate of charge and discharge of the output capacitor. This shows that C_{out} (but also the load and the matching network) should ideally be adjusted as a function of N . We indeed notice that for large N , a larger capacitor of 100pF is better than 10pF. It is worth noting even if the rectenna design changes as a function of N , beyond a certain N , the peak of the voltage at the input of the diode would be higher than the diode breakdown voltage (2V for SMS7630), which would cause a sharp decrease in efficiency.

In Fig 12, considering the channel impulse response of Fig 4, we illustrate the time-domain evolution of the input and output voltages (in the form of $v_s(t)$ and $v_{out}(t)$) for the OPT and UP waveforms (with $N = 16$ and $B = 10\text{MHz}$). We also illustrate the effect of the output capacitance C_{out} on the performance. Large peaks in the input voltage occur with a periodicity of $1/\Delta_f = N/B = 1.6\mu\text{s}$. Output voltage is not flat contrary to what is expected with an ideal rectifier (as used in the non-linear model of Section III). This is due to the finite $R_L C_{out}$ chosen in the simulated (and optimized) rectifier

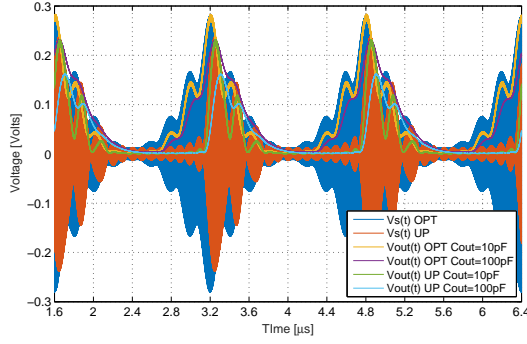


Fig. 12. $v_s(t)$ and $v_{out}(s)$ over the wireless channel of Fig 4 with OPT and UP waveforms for $N = 16$, $B = 10$ MHz and $C_{out} = 10\text{pF}, 100\text{pF}$.

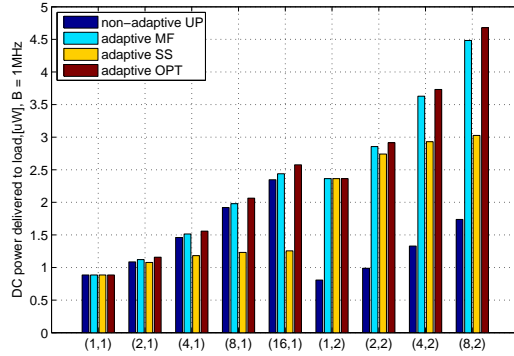


Fig. 13. Average DC power as a function of (N, M) with $B = 1\text{MHz}$.

of Fig 10. We note that a larger C_{out} leads to a smoother output voltage and a better discharging behaviour but a slower charging time and lower output peak voltages. A good value for C_{out} results from a compromise between those conflicting mechanisms that explains why a finite C_{out} is needed in practice. We also note that the OPT waveform leads to a higher output voltage than that obtained with the UP waveform. The harvested DC output power with $C_{out} = 100\text{pF}$ is given by $2.3281\mu\text{W}$ and $6.4157\mu\text{W}$, for UP and OPT, respectively. With $C_{out} = 10\text{pF}$, the harvested DC output power is slightly higher and given by $2.9435\mu\text{W}$ and $6.9387\mu\text{W}$, respectively.

Fig 13 and 14 display the average (over many channel realizations) harvested DC output power for $B = 1\text{MHz}$ and $B = 10\text{MHz}$, respectively. They confirm the observations made in Fig 5 and 6 and validate the rectenna non-linearity model⁷ and the waveform optimization. It highlights the significant (and increasing as N, M grow) gains achieved by the nonlinear model-based optimized waveforms. We also note that the average DC power with a 10 MHz bandwidth is larger than that with a 1 MHz bandwidth. This comes from the diode being turned on more often as Δ_f increases.

VII. CONCLUSIONS

The paper looks at a WPT link optimization and derives a methodology to design and optimize multisine waveforms for WPT. Assuming the CSI is available to the transmitter, the

⁷This does not mean that the model z_{DC} is accurate enough to predict the rectifier output DC power using $R_L (k_0 + z_{DC})^2$.

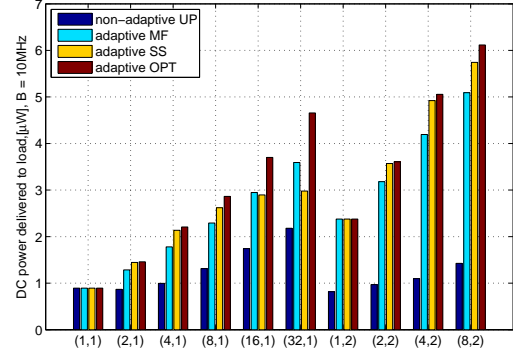


Fig. 14. Average DC power as a function of (N, M) with $B = 10\text{MHz}$.

waveforms result from a non-convex posynomial maximization problem and are shown through realistic simulations to provide significantly higher harvested DC power over various baseline waveforms under a fixed transmit power constraint. The results show the importance of accounting for the non-linearity of the rectifier in any design involving wireless power.

REFERENCES

- [1] B. Clerckx, E. Bayguzina, D. Yates, and P.D. Mitcheson, "Waveform Optimization for Wireless Power Transfer with Nonlinear Energy Harvester Modeling," IEEE ISWCS 2015, August 2015, Brussels.
- [2] H.J. Visser, R.J.M. Vullers, "RF Energy Harvesting and Transport for Wireless Sensor Network Applications: Principles and Requirements," Proceedings of the IEEE, Vol. 101, No. 6, June 2013.
- [3] M. Pinuela, P. Mitcheson and S. Lucyszyn, "Ambient RF energy harvesting in urban and semi-urban environments," IEEE Trans. on Microw. Theory and Techn., vol 61, no 7, July 2013.
- [4] J.A. Hagerty, F.B. Helmbrecht, W.H. McCalpin, R. Zane, and Z.B. Popovic, "Recycling Ambient Microwave Energy with Broad-Band Rectenna Arrays," IEEE Trans. MTT, vol 52, no 3, March 2004.
- [5] M.S. Trotter, J.D. Griffin and G.D. Durgin, "Power-Optimized Waveforms for Improving the Range and Reliability of RFID Systems," 2009 IEEE International Conference on RFID.
- [6] A. S. Boaventura and N. B. Carvalho, "Maximizing DC Power in Energy Harvesting Circuits Using Multisine Excitation," 2011 IEEE MTT-S International Microwave Symposium Digest (MTT).
- [7] A. Collado and A. Georgiadis, "Optimal Waveforms for Efficient Wireless Power Transmission," IEEE Microwave and Wireless Components Letters, vol. 24, no.5, May 2014.
- [8] S. Wetenskap, "Comparison of single diode vs. dual diode detectors for microwave power detection," in IEEE MTT-S Int. Microw. Symp. Dig., Boston, MA, USA, 1983, pp. 361-363.
- [9] B. Clerckx and C. Oestges, "MIMO Wireless Networks: Channels, Techniques and Standards for Multi-Antenna, Multi-User and Multi-Cell Systems," Academic Press (Elsevier), Oxford, UK, Jan 2013.
- [10] S. Ladan and K. Wu, "Nonlinear Modeling and Harmonic Recycling of Millimeter-Wave Rectifier Circuit," IEEE Trans. MTT, vol. 63, no. 3, March 2015.
- [11] J.-P. Curty, N. Joehl, F. Krummenacher, C. Dehollain, and M.J. Declercq, "A Model for μ -Power Rectifier Analysis and Design," IEEE Trans. on Circuits and Systems-I, vol. 52, no. 12, pp. 2771-2779, Dec. 2005.
- [12] I.S. Gradshteyn, I.M. Ryzhik, "Table of Integrals, Series, and Products," seventh edition, Academic Press, 2007.
- [13] M. Chiang, "Geometric Programming for Communication Systems," Foundations and Trends in Communications and Info. Theory, 2005.
- [14] R.J. Duffin and E.L. Peterson, "Geometric Programming with Signomials," J. of Optimization Theory and Applications, Vol. 11, No. 1, 1973.
- [15] C.S. Beightler and D.T. Philips, "Applied Geometric Programming," Wiley, 1976.
- [16] M. Grant, S. Boyd, and Y. Ye, "CVX: MATLAB software for disciplined convex programming [Online]," Available: <http://cvxr.com/cvx/>, 2015.
- [17] J. Medbo, P. Schramm, "Channel Models for HIPERLAN/2 in Different Indoor Scenarios," 3ERI085B, ETSI EP BRAN, March 1998.