

Quantization for Uplink Transmissions in Two-tier Networks with Femtocells

Chan Dai Truyen Thai and Marion Berbineau

Abstract

We propose two novel schemes to level up the sum-rate for a two-tier network with femtocell where the backhaul uplink and downlink connecting the Base Stations have limited capacity. The backhaul links are exploited to transport the information in order to improve the decoding of the macrocell and femtocell messages. In the first scheme, Quantize-and-Forward, the Femto Base Station (FBS) quantizes what it receives and forwards it to the Macro Base Station (MBS). Two quantization methods are considered: Elementary Quantization and Wyner-Ziv Quantization. In the second scheme, called Decode-and-Forward with Quantized Side Information (DFQSI) to be distinguished with the considered conventional Decode-and-Forward (DF) scheme. The DFQSI scheme exploits the backhaul downlink to quantize and send the information about the message in the macrocell to the FBS to help it better decode the message, cancel it and decode the message in the femtocell. The results show that there are interesting scenarios in which the proposed techniques offer considerable gains in terms of maximal sum rate and max minimal rate.

I. INTRODUCTION

A. Motivation

Femtocells are used to extend the service coverage to indoor areas and improve the capacity of cellular systems. In a two-tier network with femtocells, a femtocell Base Station (FBS) is connected to the Base Station of the macrocell (MBS) via a high-rate link. A two-tier network consists of interconnected macrocells and femtocells. If a macrocell and its femtocells use different frequency bands, then indoor areas can be well covered, but the overall spectral efficiency may deteriorate due to the need of additional bandwidth. In case they use the same frequency band, system capacity can be improved if the system is carefully designed to minimize the interference among different cells [1].

There are several types of interference-related issues in a femtocell network. A cross-tier interference occurs between a macrocell and a femtocell, while intra-tier interference arises among femtocells when

femtocells are installed close to each other. A known issue in systems with femtocells is the near-far problem, explained as follows. A femtocell is often installed around the edge of the macrocell since the signal from the macro BS is attenuated in this area, especially for indoor terminals. In this case, a nearby macrocell user needs to raise its transmit power in an uplink transmission in order to reach its remote MBS. Hence, it creates interference to the femtocell. For macrocell downlink transmission, the MBS also has to raise its transmit power to reach the users at the cell edge, which also increases its interference to the receivers in the femtocell.

B. Related work and Contribution

Femtocell networks have received a considerable research attention. [2] presents a thorough survey on femtocells including technical challenges and commercial aspects. [3] focuses on femtocell requirements and network architecture. Other discussed femtocell standardization history [4] [5], the necessity of femtocells and its advantages and disadvantages [6].

The existing works present several methods to cope with the interference in a femtocell network, such as: radio resource management, power control, access management, femtocell location management, antenna and other solutions. As in a radio resource management solution, carriers (in CDMA [7]) or sub-carriers (in OFDMA [8] [9]) are manually or dynamically arranged to optimally reduce the interference [10]. However, power control in femtocell or macrocell is often combined with frequency channel management to reduce interference [11] [12] [13]. In one of the hybrid solutions, interference-limited coverage area (ILCA) of a femtocell is defined as an area around the FBS in which interference to a femtocell is lower than an adjustable threshold. ILCA depends on the position of the femtocell within the macrocell. If the ILCA radius of a femtocell is larger than a certain value the same channel with the macrocell is used. Otherwise another channel is used [14]. In [15] different methods for interference mitigation for uplinks can be combined, such as receive antenna sectorization, two-tier network spectrum split, femtocell exclusion region, and a tier selection based femtocell handoff. It has been shown that completely closed or completely open access policies are not optimal [16]. Antenna related methods are also proposed in which multi-antenna [17] or switching among antennas [18] is considered.

Other interference mitigation methods have also been explored, such as user-assisted coverage and interference optimization [19], mobility management [20], minimizing pilot leakage outside the femtocell building [21], considering statistics of time periods for a signal travel from a macro user to its base station

and a FBS [22], pilot sensing to select frequency bands for femtocells among frequency bands of macro networks [23].

A scheme coping with the unreliability of the backhaul link is proposed in [24]. In the scheme, the message from each of the femto users is divided into layers. The number of message layers delivered to the MBS depends on the current status of the backhaul link. The MBS uses Multiple Access Channel and Successive Interference Cancellation to decode the desired messages. However, the paper considers real rather than complex channel gains. In a previous publication [25], we also propose to use the backhaul link to send the information of interference to the FBS so that it can better decode the received signal.

If at a certain time, there are an uplink and a downlink for two users using the same relay node. The transmissions can be combined in an overhearing scheme [32], [34], [36]. On the other hand, if there are two-hop users using different relay nodes: one has an uplink and one has a downlink, we have a multi-way scheme [33], [35], [37]. If we use the CDR, overhearing and multi-way schemes as described above to respective cases instead of the corresponding conventional schemes, several time slots are saved and a significant improvement is gained.

Regarding Quantize-and-Forward relaying, [26], [27] consider in-band relaying where the destination receives the signals from the sources and from the relay in the same band whereas the relaying of the FBS can be considered as out-of-band relaying [28]. In this paper we propose novel quantization schemes for out-of-band relaying. Specifically, we propose two schemes to exploit the backhaul links between the MBS and the FBS and facilitate the decoding of macro and femto uplink messages. In the first scheme, Quantize and Forward (QF), the FBS quantizes the received signal and forwards it to the MBS. Two quantization methods are considered: Elementary Quantization (EQ) and Wyner-Ziv Quantization (WZQ). The difference between EQ and WZQ is that in WZQ, the FBS takes into account the signal that the MBS receives from the macro user. The second proposed scheme is a Decode-and-Forward (DF) scheme based on a conventional DF scheme. However, in the proposed scheme, we exploit the backhaul downlink to facilitate the decoding of the uplink message in the femtocell and thus enable to increase the achievable rates. In the following sections, we present the conventional DF scheme, denoted as DF, as well as the proposed DF scheme, denoted as DFQSI. All schemes will be compared in terms of the maximum sum-rate and the minimum rate of two users.

The rest of the paper is organized as follows. Section II introduces the system model. Section III presents the DF and QF schemes for the case with backhaul uplink only while the QF scheme in the

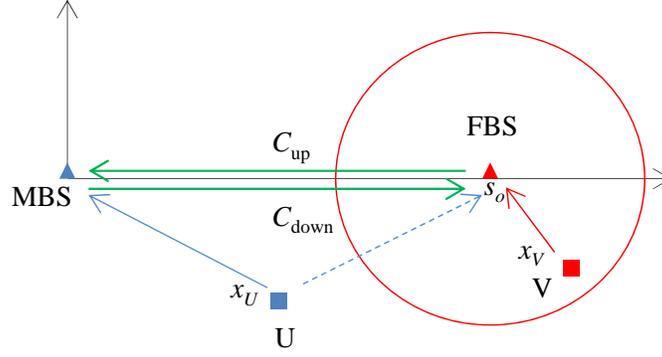


Fig. 1. We consider a two-tier network with one macrocell and one femtocell each with one user.

case with backhaul uplink and downlink is presented in Section IV. Section V introduces the performance metric used. Section VI presents and analyses the numerical results. Section VII concludes the paper.

II. SYSTEM MODEL

Consider a two-tier network with one macrocell and one femtocell as in Fig. 1. The MBS and the FBS are located at $(0, 0)$ and $(s_o, 0)$ of the coordinate system. The macrocell user U and the femtocell user V are randomly located inside a circle with the corresponding BS as the center and radius r_M and r_F respectively. The uplink messages of the users U and V are denoted by x_U and x_V , and they are destined to the MBS B and FBS F, respectively. The MBS and FBS are connected through a two-way backhaul link with capacity C_{up} and C_{down} (b/s/Hz) which are known at all stations. We assume that the uplink message from the femto user V to the FBS will be forwarded to the final destination via the MBS.

The reciprocal channel between station i and j is denoted by h_{ij} and known at all stations, $i \in \{U, V\}$, $j \in \{F, B\}$. The received signal and Additive White Gaussian Noise (AWGN) at station j are denoted by y_j and $z_j \sim \mathcal{CN}(0, \sigma^2)$ respectively. We therefore consider that a channel coefficient is given by $h = \sqrt{\frac{K}{d^\alpha}} g$, $K = \left(\frac{\lambda}{4\pi}\right) d_o^{\alpha-2}$, where α is the path loss exponent; K is a constant depending on the used frequency and the reference distance d_o ; d is the distance from the source to the destination; $10 \log_{10} g$ is the log-normal shadowing coefficient [15]. The distance from the femto user to the MBS is long. In addition, the femto user is very near the FBS, its transmit power is adjusted to a very low level. From all this, it is viable to assume that $h_{VB} = 0$ for the rest of the paper.

All wireless transmissions are in the same frequency band. Every station has a single antenna. We assume perfect power control for the transmissions from the macro user U to its BS and from the femto user V to its BS. By this assumption, the transmit power is equal to the inverse of the channel magnitude such that the received signal at the corresponding receiver has a power of P_R [15].

We use \triangleq to define a new variable or function. Denote $\gamma_{ij} \triangleq \frac{P_i |h_{ij}|^2}{\sigma^2}$, where P_i is the transmit power of station i , $i \in \{U, V\}$, $j \in \{F, B\}$, and $C(\gamma_{ij}) \triangleq \log_2(1 + \gamma_{ij})$ as the maximal achievable rate for a transmission over the channel h_{ij} without interference. The signals are denoted by using small letters (x, y, z) and the correspondent random variables are denoted using capitalized letters (X, Y, Z) . When a station quantizes signal x and sends the quantized version to another station over a backhaul link, the received signal at the receiver is written $\hat{x} = x + z_Q$ in which the quantization noise z_Q is assumed to be Gaussian [29]. The variance of the quantization noise depends on the capacity of the backhaul link.

III. RELAYING WITH THE BACKHAUL UPLINK ONLY

This section presents two relaying modes, DF and QF, when only the backhaul uplink is used ($C_{\text{up}} > 0$, $C_{\text{down}} = 0$). The DF scheme in this section is the conventional DF. The DFQSI scheme refers to the DF scheme when both backhaul uplink and downlink are used and will be presented in the next section.

When U sends message x_U to the MBS and V sends message x_V to the FBS. The FBS and MBS respectively receive the signals

$$\begin{cases} y_F = h_{UF}x_U + h_{VF}x_V + z_F, \\ y_B = h_{UB}x_U + z_B. \end{cases} \quad (1)$$

where z_F and z_B are AWGN at the FBS and MBS respectively. The achievable rates R_U, R_V are the uplink rates from U and V respectively that the MBS can decode with help from the FBS over the backhaul link.

The transmission rates of messages x_U and x_V can be calculated and selected in several ways. First, the MBS or the FBS can decode x_U treating the contribution of x_V as noise, cancels the contribution of x_U and decodes x_V . This decoding order is denoted as UV. The opposite order, VU, is decoding x_V treating the contribution of x_U as noise first. These two decoding orders give different transmission rate pairs for x_U and x_V . Knowing all channels, all stations are able to calculate the rates of x_U, x_V before the transmissions start. Which order is selected depends on the requirement of the rates or the priority of the users. In DF, decoding happens at the FBS. Hence, UV or VU refers to the two decoding order at the FBS. In the DF scheme, the FBS decodes x_V and forwards it to the MBS over the backhaul uplink. In the QF scheme, the FBS quantizes the received signal and forwards it to the MBS.

A. Decode and Forward

In DF, the message x_U is decoded at FBS and forwarded to the MBS through the backhaul link. Hence the transmission rate is limited to C_{up} . We consider the following two cases.

- The FBS decodes x_U from y_F treating x_V as noise. The achievable rate of x_U therefore satisfies

$$R_U \leq \log_2 \left(1 + \frac{|h_{UF}|^2}{|h_{VF}|^2 + \sigma^2} \right) = C \left(\frac{\gamma_{UF}}{\gamma_{VF} + 1} \right). \quad (2)$$

Thus x_U is cancelled and x_V is decoded with rate $R_V \leq C(\gamma_{VF})$. On the other hand, at the MBS, x_U is decoded with constraint $R_U \leq C(\gamma_{UB})$. With no quantization, the message x_V sent over the backhaul uplink with capacity C_{up} has to satisfy $R_V \leq C_{\text{up}}$. Finally,

$$R_V^{\text{DF-UV}} = \min \{ C_{\text{up}}, C(\gamma_{VF}) \}. \quad (3)$$

$$R_U^{\text{DF-UV}} = \min \left\{ C \left(\frac{\gamma_{UF}}{\gamma_{VF} + 1} \right), C(\gamma_{UB}) \right\}, \quad (4)$$

- The FBS decodes x_V from y_F treating x_U as noise. The achievable rate of x_V therefore satisfies

$$R_V \leq \log_2 \left(1 + \frac{|h_{VF}|^2}{|h_{UF}|^2 + \sigma^2} \right) = C \left(\frac{\gamma_{VF}}{\gamma_{UF} + 1} \right) \quad (5)$$

The uplink rate of the femto user is selected as

$$R_V^{\text{DF-VU}} = \min \left\{ C_{\text{up}}, C \left(\frac{\gamma_{VF}}{\gamma_{UF} + 1} \right) \right\}. \quad (6)$$

The uplink rate of the macro user is therefore selected as

$$R_U^{\text{DF-VU}} = C \left(\frac{|h_{UB}|^2}{\sigma^2} \right) = C(\gamma_{UB}). \quad (7)$$

B. Quantize and Forward

In this part, the FBS quantizes its received signal y_F to \hat{y}_F and forwards it to the MBS. In EQ, the signal is quantized by not taking into account that the MBS has a side information through the observation of y_B . Therefore, \hat{y}_F contains a redundant information. Another option is the WZQ which compresses the signals by taking into account that y_B is already available at the MBS. Eventually this more efficient compression will result in higher achievable rates for U and V [29].

The MBS receives from the FBS

$$\hat{y}_F = y_F + z_{Q_Y} = h_{UF}x_U + h_{VF}x_V + z_F + z_{Q_Y} \quad (8)$$

where z_{Q_Y} is the quantization noise. We consider two possible decoding orders.

1) QF-UV:

Proposition 3.1: If the decoding order at the MBS is UV, the achievable rates for macro and femto uplinks are

$$\begin{cases} R_U^{\text{QF-UV}} = C\left(\gamma_{UB} + \frac{\gamma_{UF}}{\gamma_{VF} + 1 + \beta}\right) \\ R_V^{\text{QF-UV}} = C\left(\frac{\gamma_{VF}}{1 + \beta}\right) \end{cases} \quad (9)$$

where $\beta = \frac{\sigma_Q^2}{\sigma^2} = \frac{\gamma_{UF} + \gamma_{VF} + 1}{2^{C_{\text{up}}} - 1}$ in case of EQ and $\beta = \frac{\gamma_{VF} + 1}{2^{C_{\text{up}}} - 1} + \frac{\gamma_{UF}}{(2^{C_{\text{up}}} - 1)(\gamma_{UB} + 1)}$ in case of WZQ.

Proof: From y_B and \hat{y}_F , the MBS first decodes x_U . R_U therefore satisfies

$$R_U \leq \log_2 \left(1 + \frac{|h_{UB}|^2}{\sigma^2} + \frac{|h_{UF}|^2}{|h_{VF}|^2 + \sigma^2 + \sigma_{Q_Y}^2} \right) = \log_2 \left(1 + \gamma_{UB} + \frac{\gamma_{UF}}{\gamma_{VF} + 1 + \beta} \right). \quad (10)$$

with $\beta = \frac{\sigma_{Q_Y}^2}{\sigma^2}$. The MBS cancels the contribution of x_U in \hat{y}_F and decodes x_V with

$$R_V \leq \log_2 \left(1 + \frac{|h_{VF}|^2}{\sigma^2 + \sigma_{Q_Y}^2} \right) = \log_2 \left(1 + \frac{\gamma_{VF}}{1 + \beta} \right). \quad (11)$$

Now we calculate β using two methods of quantizations.

- For EQ, the backhaul link has to carry an amount of information of $I(Y_F; \hat{Y}_F) = C\left(\frac{\mathbb{E}[|y_F|^2]}{\sigma_{Q_Y}^2}\right)$. Setting this to C_{up} , we have the quantization noise as

$$\sigma_{Q_Y}^2 = \frac{\mathbb{E}[|y_F|^2]}{2^{C_{\text{up}}} - 1} = \frac{|h_{UF}|^2 + |h_{VF}|^2 + \sigma^2}{2^{C_{\text{up}}} - 1} = \sigma^2 \frac{\gamma_{UF} + \gamma_{VF} + 1}{2^{C_{\text{up}}} - 1} \quad (12)$$

Thus

$$\beta = \frac{\sigma_{Q_Y}^2}{\sigma^2} = \frac{\gamma_{UF} + \gamma_{VF} + 1}{2^{C_{\text{up}}} - 1} \quad (13)$$

- For WZQ, the FBS quantizes y_F taking into account that the MBS knows y_B , therefore the capacity of the backhaul link C_{up} is allocated to

$$\begin{aligned} I(Y_F; \hat{Y}_F | Y_B) &= I(\hat{Y}_F; Y_F, Y_B) - I(\hat{Y}_F; Y_B) \\ &= I(\hat{Y}_F; Y_F) + I(\hat{Y}_F; Y_B | Y_F) - I(\hat{Y}_F; Y_B) \\ &= I(\hat{Y}_F; Y_F) - I(\hat{Y}_F; Y_B, X_U) + I(\hat{Y}_F; X_U | Y_B) \\ &= I(\hat{Y}_F; Y_F) - I(\hat{Y}_F; Y_B, X_U) + I(X_U; \hat{Y}_F, Y_B) - I(X_U; Y_B). \end{aligned} \quad (14)$$

The third equality is due to $I(Y_B; \hat{Y}_F | Y_F) = 0$ since $Y_B - Y_F - \hat{Y}_F$ is a Markov chain. We have

$$I(\hat{Y}_F; Y_F) = C \left(\frac{|h_{UF}|^2 + |h_{VF}|^2 + \sigma^2}{\sigma_{Q_Y}^2} \right) = \log_2 \left(1 + \frac{\gamma_{UF} + \gamma_{VF} + 1}{\beta} \right), \quad (15)$$

$$I(\hat{Y}_F; Y_B, X_U) = I(\hat{Y}_F; X_U) = C \left(\frac{\gamma_{UF}}{\gamma_{VF} + 1 + \beta} \right), \quad (16)$$

$$I(X_U; \hat{Y}_F, Y_B) = C \left(\gamma_{UB} + \frac{\gamma_{UF}}{\gamma_{VF} + 1 + \beta} \right), \quad (17)$$

$$I(X_U; Y_B) = C(\gamma_{UB}). \quad (18)$$

Substituting the above to (14), we have

$$I(Y_F; \hat{Y}_F | Y_B) = C \left(\frac{(\gamma_{VF} + 1)(\gamma_{UB} + 1) + \gamma_{UF}}{\beta(\gamma_{UB} + 1)} \right). \quad (19)$$

We use the uplink backhaul with capacity C_{up} to transmit the information above therefore $I(Y_F; \hat{Y}_F | Y_B) = C_{\text{up}}$. Solving the equation, we have

$$\beta = \frac{\gamma_{VF} + 1}{2^{C_{\text{up}}} - 1} + \frac{\gamma_{UF}}{(2^{C_{\text{up}}} - 1)(\gamma_{UB} + 1)}. \quad (20)$$

■

2) QF-VU:

Proposition 3.2: If the decoding order at the MBS is x_V, x_U , the achievable rates for macro and femto uplinks are

$$\begin{cases} R_U^{\text{QF-VU}} = C \left(\gamma_{UB} + \frac{\gamma_{UF}}{1+\beta} \right) \\ R_V^{\text{QF-VU}} = C \left(\frac{\gamma_{VF}}{\frac{\gamma_{UF}}{\gamma_{UB}+1} + 1 + \beta} \right) \end{cases} \quad (21)$$

where $\beta = \frac{\sigma_{Q_Y}^2}{\sigma^2} = \frac{\gamma_{UF} + \gamma_{VF} + 1}{2^{C_{\text{up}}} - 1}$ in case of EQ and $\beta = \frac{\gamma_{VF} + 1}{2^{C_{\text{up}}} - 1} + \frac{\gamma_{UF}}{(2^{C_{\text{up}}} - 1)(\gamma_{UB} + 1)}$ in case of WZQ.

Proof: From y_B and \hat{y}_F , the MBS first decodes x_V using MMSE-SIC as in [30] to get $R_V^{\text{QF-VU}}$ in (21). The quantization and other steps are conducted similarly to the ones of Proposition 3.1. ■

IV. RELAYING WITH BACKHAUL UPLINK AND DOWNLINK

In this part we introduce a different transmission scheme based on the following observation. By exploiting the backhaul downlink, the MBS can send some information about x_U or y_B to the FBS in order to help FBS to decode x_V when DF is used or quantize y_F in case of QF. However, when the FBS quantizes y_F using WZQ, it does not need to have y_B . With Gaussian signals, even knowing y_B completely at the transmitter side cannot contribute to a better quantization of y_F [31]. We therefore do not consider another version of QF in this section but only DF.

The MBS first decodes x_U from y_B . Then it quantizes and sends \hat{x}_U to the FBS; then FBS uses this side information in order to decode x_U , which enables to achieve higher rates:

$$\hat{x}_U = x_U + z_{Q_U}. \quad (22)$$

Denote $\gamma_{Q_U} = \frac{|x_U|^2}{\sigma_{Q_U}^2}$ as the SNR of the received signal over the downlink backhaul at the FBS. The downlink backhaul with capacity C_{down} is used to send an amount of information which is equal to

$$I(x_U, \hat{x}_U) = \frac{|x_U|^2}{\sigma_{Q_U}^2}. \quad (23)$$

Thus

$$\gamma_{Q_U} = 2^{C_{\text{down}}} - 1. \quad (24)$$

Combining y_F , in which x_V is treated as noise, and \hat{x}_U , the FBS decodes x_U with a rate

$$R_U \leq C \left(\gamma_{Q_U} + \frac{\gamma_{UF}}{\gamma_{VF} + 1 + \beta} \right) \quad (25)$$

in which γ_{Q_U} depends on how the quantization is conducted. Cancelling the contribution of x_U in y_F , the FBS decodes and forwards x_V to the MBS. Similar to Section III-A, we have

$$R_V^{\text{DFQSI-UV}} = \min \{C_{\text{up}}, C(\gamma_{VF})\}. \quad (26)$$

$$R_U^{\text{DFQSI-UV}} = \min \left\{ C \left(\gamma_{Q_U} + \frac{\gamma_{UF}}{\gamma_{VF} + 1} \right), C(\gamma_{UB}) \right\}. \quad (27)$$

In the second case, when the FBS decodes x_V treating x_U as noise, the scheme is exactly the same as the scheme in section III-A therefore $R_U^{\text{DFQSI-VU}} = R_U^{\text{DF-VU}}$ and $R_V^{\text{DFQSI-VU}} = R_V^{\text{DF-VU}}$.

V. PERFORMANCE METRIC

In any scheme, two decoding orders lead to two rate points (R_U, R_V) . The two points can make a pentagon or rectangular rate region as shown in Fig. 2. Any point on the line connecting two points can be achieved applying a suitable time sharing. Therefore, the *maximum sum-rate* corresponds to the point with a higher sum-rate.

The *maximum of the minimum rate of two users* corresponds to the intersection of the line $R_U = R_V$ and the outer line of the rate region. This can be proved by reasoning as follows. Assume that the intersection A (R^A, R^A) of the line $R_U = R_V$ and the outer line of the rate region is not the point B (R_U^B, R_V^B) of the maximum minimum rate. This means that when moving along the outer line of the rate region from A we can see B such that $R_U^B > R^A$ and $R_V^B > R^A$. It is equivalent to the fact that the rate region is not a convex polygon. However, a rate region is always a convex hull of all achievable rate points and therefore a polygon. Consequently, the assumption is wrong and thus A and B coincide.

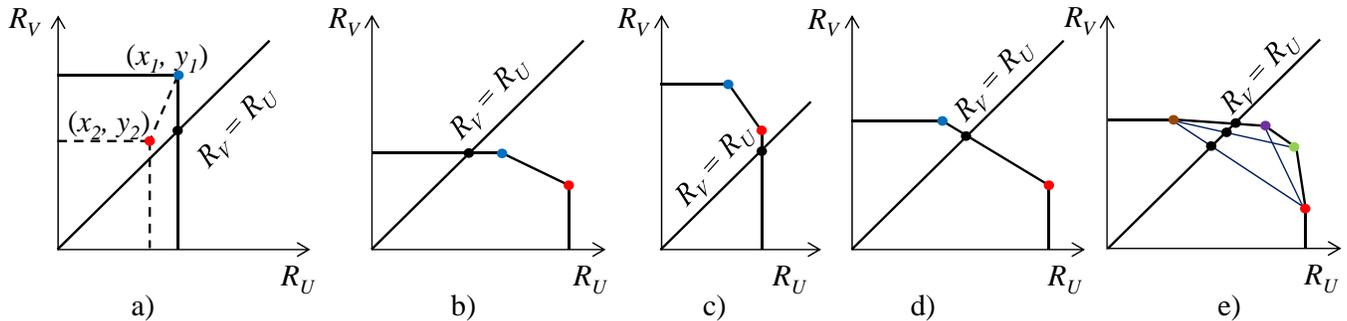


Fig. 2. To determine the maximum minimum rate of two users, several cases of rate regions are considered.

Proposition 5.1: If a rate region of a scheme is determined by two points (x_1, y_1) and (x_2, y_2) , the maximum of the minimum of two rates is given by

$$\begin{aligned} & \max_{(R_U, R_V)} \min(R_U, R_V) \\ & = f(x_1, x_2, y_1, y_2) \triangleq \begin{cases} \min(\max(x_1, x_2), \max(y_1, y_2)) & \text{if } (x_1 - x_2)(y_1 - y_2) > 0 \\ \max(\min(x_1, y_1), \min(x_2, y_2)) & \text{if } \begin{cases} (x_1 - x_2)(y_1 - y_2) < 0 \\ (x_1 - y_1)(x_2 - y_2) > 0 \end{cases} \\ \frac{x_1 y_2 - y_1 x_2}{y_2 - y_1 + x_1 - x_2} & \text{if } \begin{cases} (x_1 - x_2)(y_1 - y_2) < 0 \\ (x_1 - y_1)(x_2 - y_2) < 0. \end{cases} \end{cases} \quad (28) \end{aligned}$$

Proof: The first condition in (28) corresponds to the case when one point is “inside” another point as demonstrated in Fig. 2a). The condition is $(x_1 < x_2 \text{ and } y_1 < y_2)$ or $(x_2 < x_1 \text{ and } y_2 < y_1)$ which is equivalent to $(x_1 - x_2)(y_1 - y_2) > 0$. The minimum rate is therefore $\min(\max(x_1, x_2), \max(y_1, y_2))$.

The second condition in (28) corresponds to the case when two points are at one side of the line $R_U = R_V$ as demonstrated in Fig. 2b) and c). The third condition in (28) corresponds to the case when each point is at one side of the line $R_U = R_V$ as demonstrated in Fig. 2d). The minimum rate of these cases are easily obtained. ■

If a rate region is formed based on more than two rate points, we select the maximum of all minimum rates of each point pair which are formed by combining two points out of all the points. It is the highest point among the black points as in shown in Fig. 2e)

$$\max_{(R_U, R_V)} \min(R_U, R_V) = \max_{i,j} f(x_i, x_j, y_i, y_j) \quad (29)$$

VI. NUMERICAL RESULTS

We use Monte Carlo simulation to analyse the maximum sum-rate and the minimum rate of two users with cell radii $R_1 = 200\text{m}$, $R_2 = 20\text{m}$, path loss exponent $\alpha = 3$. In the first simulation, we vary C_{up} with

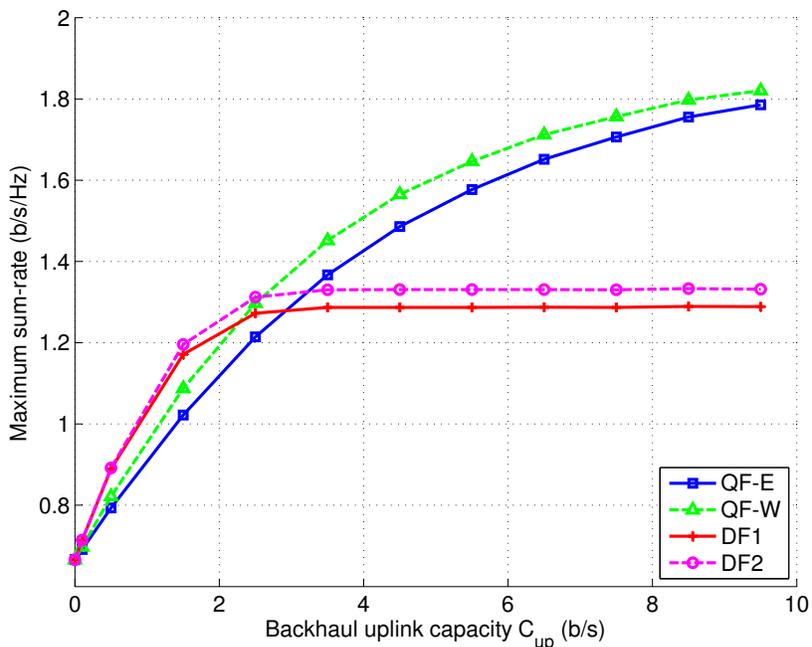


Fig. 3. Maximum sum-rate with $C_{down} = C_{up}$, $s_o = 150m$ and varied C_{up} .

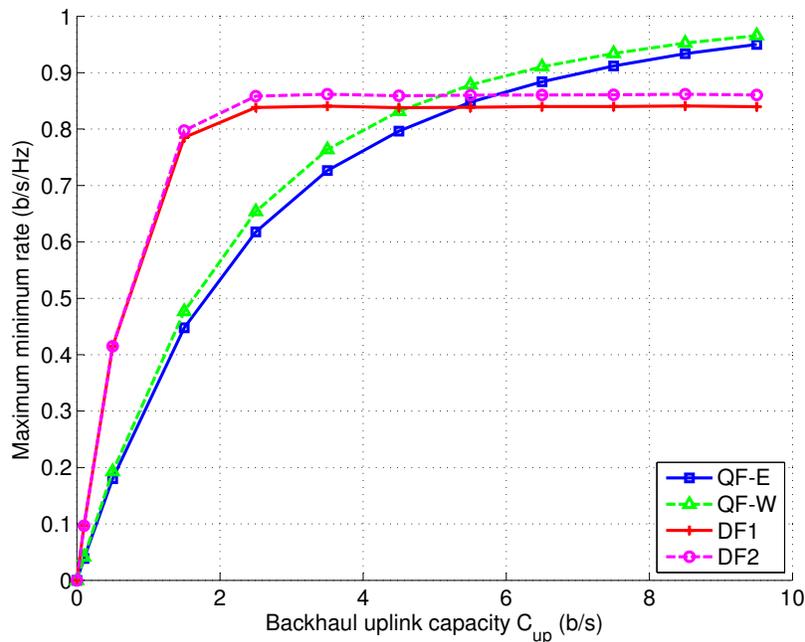


Fig. 4. Maximum minimum rate with $C_{down} = C_{up}$, $s_o = 150m$ and varied C_{up} .

fixed position of the FBS at $s_o = 150m$. The case with downlink backhaul, the DFQSI scheme, we assume $C_{down} = 3C_{up}$ to reflect the asymmetry of an ADSL link. Fig. 3 and 4 show the maximum sum-rate and the minimum rate of the two users respectively. The DF schemes have a higher sum-rate when C_{up} is low and a lower sum-rate than the QF schemes when C_{up} is high. Let us compare the DF and QF schemes in the case of VU decoding order. As seen in (6), (7) and (21), in most cases U is far away from the FBS

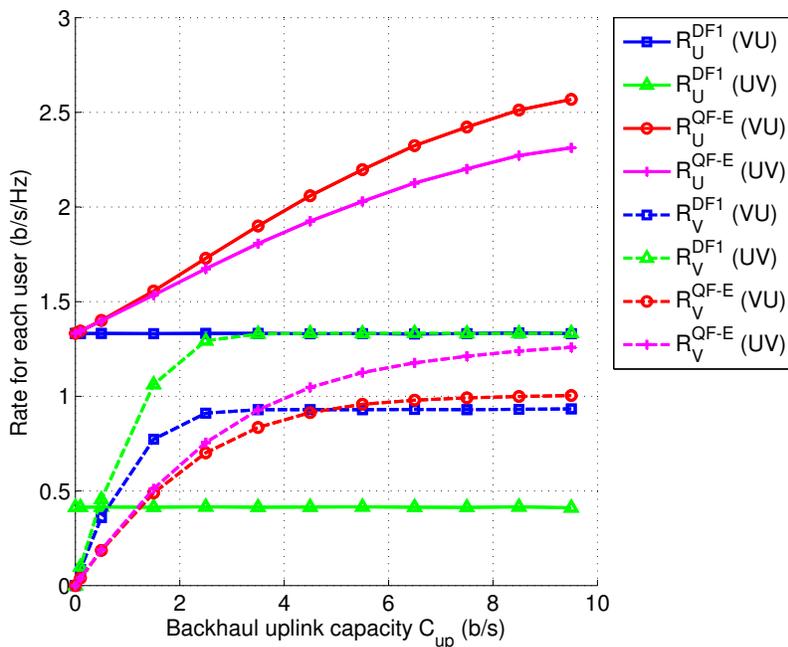


Fig. 5. Rate for each user with $C_{\text{down}} = C_{\text{up}}$, $s_o = 150\text{m}$ and varied C_{up} .

thus γ_{UF} is small and consequently $R_U^{QF} \approx R_U^{DF}$. It means that R_U almost does not change and depends only on γ_{UB} . The difference between the DF and QF schemes therefore depends on the difference on R_V . At low C_{up} , decoding at the FBS, the DF schemes avoid the quantization noise, which is high due to low C_{up} as seen in (5). The rate increases until reaching $\frac{\gamma_{VF}}{\gamma_{UF}+1}$ and is upper bounded by this value. At high C_{up} , the quantization noise, characterized by β , becomes negligible, the QF therefore continues to increase. The case with decoding order of UV can be explained in a similar way.

The superiority of a DF scheme compared to a QF scheme at low C_{up} in terms of the maximum minimum user rate is more obvious than in terms of sum-rate. This can be explained as follows. By quantizing the received signal and sending it to the MBS, in a QF scheme, the FBS actually facilitates the decoding of both x_U and x_V at the MBS for both decoding orders while, in a DF scheme, the backhaul uplink improves the decoding of x_V only. Consequently, as in seen in Fig. 4, in both decoding orders of a QF scheme, R_U is higher than R_V while in a DF scheme, R_U is higher than R_V only in the decoding order of VU. This makes the maximum minimum user rate in a QF scheme lower at low C_{up} .

In the second simulation, we vary s_o with fixed $C_{\text{up}} = 4$ b/s/Hz. The case with downlink backhaul, the DFQSI scheme, we assume $C_{\text{down}} = 1$ b/s/Hz to see the effect of a low-rate backhaul downlink. Fig. 6, 7 and 8 show the maximum sum-rate, the minimum rate of the two users and rate for each user respectively. When s_o increases, the FBS goes to the edge of the cell, being uniformly randomized

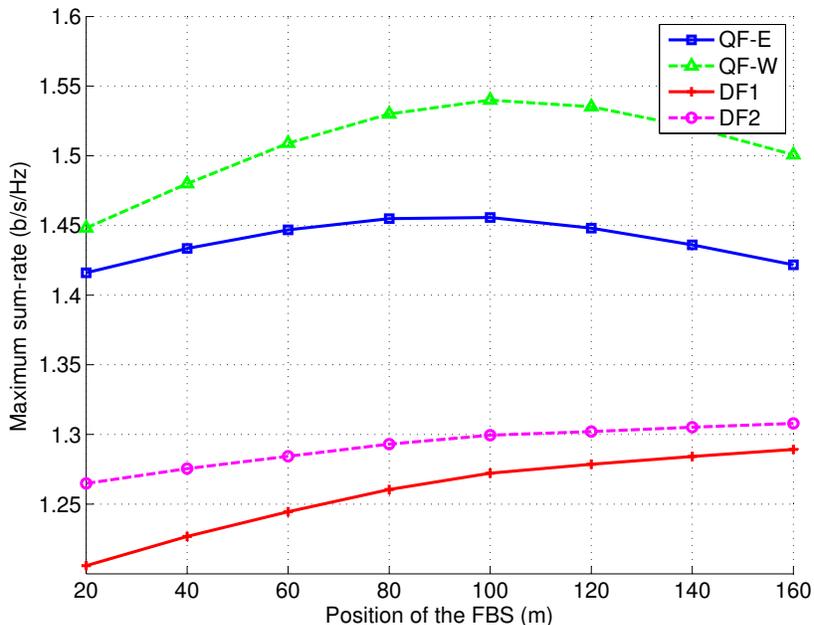


Fig. 6. Maximum sum-rate with $C_{\text{down}} = 1\text{b/s/Hz}$, $C_{\text{up}} = 4\text{b/s/Hz}$ and varied $s_o = 150$.

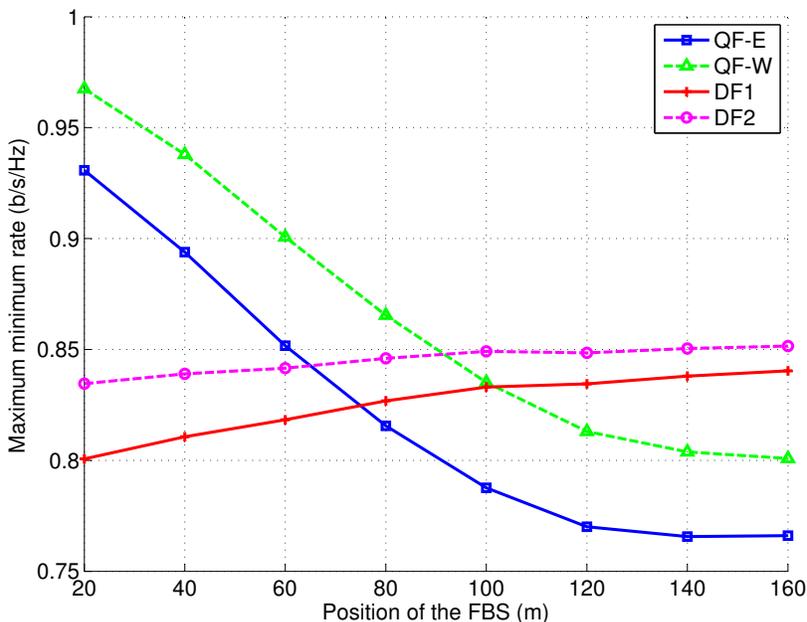


Fig. 7. Maximum minimum rate with $C_{\text{down}} = 1\text{b/s/Hz}$, $C_{\text{up}} = 4\text{b/s/Hz}$ and varied $s_o = 150$.

throughout the macrocell, on average, U becomes farther away from the FBS, while the U-MBS and V-FBS distances do not change thus γ_{UF} decreases while γ_{UB} and γ_{VF} do not change. The change of γ_{UF} affects the performance as follows. At high s_o , because γ_{UF} is small, the decoding order of VU at the FBS is better than the decoding order of UV. Consequently, the sum-rate of the DF schemes increases correspondingly. On the other hand, in the QF schemes, γ_{UF} plays a different role as it appears in both numerator and denominator of the SNR as seen in (9) and (21), the sum-rate therefore achieves a local

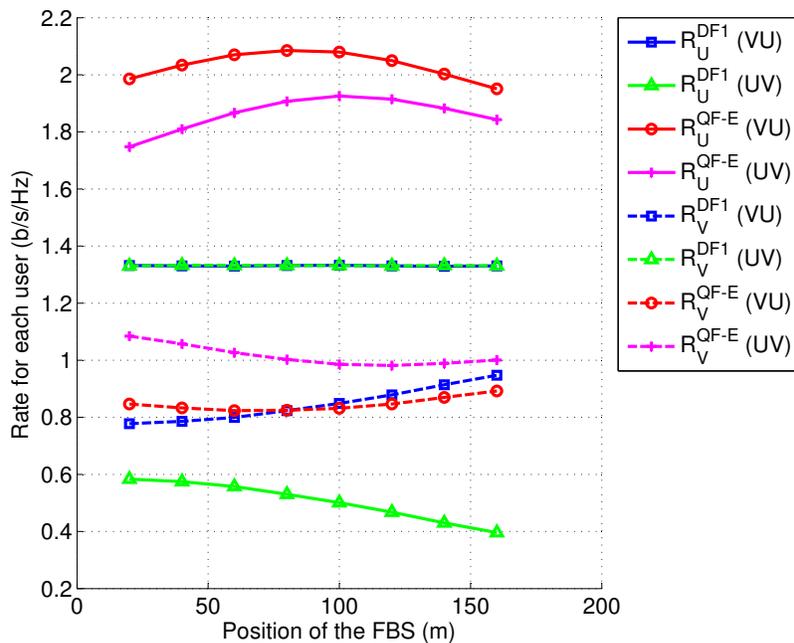


Fig. 8. Rate for each user with $C_{\text{down}} = 1\text{b/s/Hz}$, $C_{\text{up}} = 4\text{b/s/Hz}$ and varied $s_o = 150$.

maximum at a certain point. The minimum rate also has a similar tendency.

VII. CONCLUSION

We have proposed two novel quantization schemes, QF and DFQSI, which increase the performance of a two-tier network in terms of maximum sum-rate and minimum rate of two users. The comparison with a conventional scheme, DF, is considered and analyzed. The results show that the QF gives a much higher sum-rate compared to the DF schemes when the capacity of the backhaul uplink is high. If the backhaul uplink has a low capacity, the DF schemes are superior to the QF scheme. Therefore a better scheme can be chosen according to the capacity. On the other hand, the backhaul downlink also increases the sum-rate, in DFQSI, compared to the case it is not used at all, in DF.

REFERENCES

- [1] J. Andrews, H. Claussen, M. Dohler, S. Rangan and M. Reed, "Femtocells: Past, present, and future," *IEEE J. on Sel. Areas Commun.*, vol. 30, no. 3, pp. 497-508, Apr 2012.
- [2] V. Chandrasekhar, J. G. Andrews, and A. Gatherer, "Femtocell Networks: A Survey," *IEEE Comm. Magazine*, vol. 46, iss. 9, Sept 2008.
- [3] R. Kim, J. Kwak, and K. Etemad, "WiMAX femtocell: requirements, challenges, and solutions," *IEEE Communications Magazine*, vol. 47, pp. 84-91, Sep 2009.
- [4] D. Knisely, T. Yoshizawa, and F. Favichia "Standardization of Femtocells in 3GPP," *IEEE Comm. Magazine*, vol. 47, iss. 9, pp. 68-75 Sept 2009.
- [5] D. Knisely and F. Favichia "Standardization of Femtocells in 3GPP2," *IEEE Comm. Magazine*, vol. 47, iss. 9, pp. 76-82 Sept 2009.

- [6] S. Ortiz, "The Wireless Industry Begins to Embrace Femtocells," *Computer*, vol. 41, no. 7, pp. 14-17, July 2008.
- [7] L. Garcia, K. Pedersen and P. Mogensen, "Autonomous Component Carrier Selection: Interference Management in Local Area Environments for LTE-Advanced," *IEEE Comm. Magazine*, vol. 47, iss. 9, pp. 110-116, Sept 2009.
- [8] D. Lopez-Perez, A. Valcarce, G. de la Roche, and Jie Zhang, "OFDMA femtocells: a roadmap on interference avoidance," *IEEE Communications Magazine*, vol. 47, pp. 41-48, Sep 2009.
- [9] D. Lopez-Perez, G. Roche, A. Valcarce, Alpar Juttner, and J. Zhang, "Interference Avoidance and Dynamic Frequency Planning for WiMAX Femtocells Networks," in *Proc. IEEE ICCS*, pp. 1579-1584, Singapore, Nov 2008.
- [10] V. Chandrasekhar and J. Andrews, "Spectrum Allocation in Tiered Cellular Networks," *IEEE Trans. on Comm.*, vol. 57, no. 10, pp. 3059-3068, Oct 2009.
- [11] K. Han, Y. Choi, D. Kim, M. Na, S. Choi and Kiyong Han, "Optimization of femtocell network configuration under interference constraints," in *Proc. IEEE WiOPT*, pp. 1-7, Seoul, Jun 2009.
- [12] M. Yavuz, F. Meshkati, and S. Nanda, A. Pokhariyal, N. Johnson, B. Raghothaman, and A. Richardson, "Interference Management and Performance Analysis of UMTS/HSPA+ Femtocells," *IEEE Comm. Magazine*, vol. 47, iss. 9, pp. 102-109, Sept 2009.
- [13] X. Li, L. Qian, and D. Kataria, "Downlink Power Control in Co-Channel Macrocell Femtocell Overlay," in *Proc. IEEE 43rd CISS*, Mar 2009.
- [14] I. Guvenc, Moo-Ryong Jeong, F. Watanabe, and H. Inamura, "A Hybrid Frequency Assignment for Femtocells and Coverage Area Analysis for Co-Channel Operation," *IEEE Comm. Lett.*, vol. 12, iss. 12, pp. 880-882, Dec 2008.
- [15] V. Chandrasekhar and J. G. Andrews, "Uplink Capacity and Interference Avoidance for Two-Tier Femtocell Networks," *IEEE Trans. on Wireless Commun.*, vol. 8, no. 7, pp. 3498-3509, 2009.
- [16] D. Choi, P. Monajemi, S. Kang, and J. Villasenor, "Dealing with Loud Neighbors: The Benefits and Tradeoffs of Adaptive Femtocell Access," in *Proc. IEEE GLOBECOM 2008*, pp. 1-5., New Orleans, Nov 2008.
- [17] V. Chandrasekhar, M. Kountouris, and J. G. Andrews, "Coverage in Multi-Antenna Two-Tier Networks," *IEEE Trans on Wireless Comm.*, pp. 5314-5327, vol. 8, no. 10, Oct 2009.
- [18] H. Claussen, F. Pivit "Femtocell Coverage Optimization using Switched Multi-element Antennas," in *Proc. IEEE ICC*, pp. 1-6, Dresden, Germany, Jan 2009.
- [19] A. Schroder, H. Lundqvist, G. Nunzi and M. Brunner, "User-assisted coverage and interference optimization for broadband femtocells," in *Proc. IFIP/IEEE Int'l. Symp. on Integrated Network Management-Workshops*, pp. 199-204, Jun 2009.
- [20] L. Wang, Y. Zhang, and Z. Wei, "Mobility Management Schemes at Radio Network Layer for LTE Femtocells," in *Proc. IEEE VTC*, pp. 1-5, Barcelona, Apr 2009.
- [21] H. Claussen, L. Ho, and L. Samuel, "Self-optimization of Coverage for Femtocell Deployments," in *Proc. IEEE WTS*, pp. 278-285, Pomona, California, Apr 2008.
- [22] "Statistics of Macrocell-Synchronous Femtocell-Asynchronous Users-Delays for Improved Femtocell Uplink Receiver Design," *IEEE Comm. Lett.*, vol. 13, no. 4, pp 239-241, Apr 2009.
- [23] Tae-Hwan Kim and Tae-Jin Lee "Throughput Enhancement of Macro and Femto Networks By Frequency Reuse and Pilot Sensing Performance," in *Proc. IEEE IPCCC*, pp. 390-394, Austin, Texas, Dec 2008.
- [24] O. Simeone, E. Erkip, S.S. Shitz, "Robust Transmission and Interference Management for Femtocells with Unreliable Network Access," *IEEE J. Select. Areas Commun.*, Vol. 28, pp. 1469-1478, Dec 2010.
- [25] C. D. T. Thai and P. Popovski, "Interference cancelation schemes for uplink transmission in femtocells," in *Proc. IEEE GLOBECOM*, Miami, Nov. 2010.

- [26] S. Yao, M. Skoglund, T. Kim and H. Poor, "Half-Duplex Relaying Based on Quantize-and-Forward," in *Proc. IEEE ISIT*, pp. 2447-2451, Stockholm, Sweden, Aug 2011.
- [27] N. Ksairi, P. Ciblat, P. Bianchi and W. Hachem, "Performance Analysis over Slow Fading Channels of a Half-Duplex Single-Relay Protocol: Decode or Quantize and Forward," *IEEE Trans. on Commun.*, vol. 60, no. 7, pp. 2009-2016, Jul 2012.
- [28] O. Simeone and E. Erkip, "Gaussian Interference Channel Aided by a Relay with Out-of-Band Reception and In-Band Transmission," *IEEE Trans. on Commun.*, vol. 59, iss. 11, pp. 2976-2981, Nov 2011.
- [29] P. Popovski and O. Simeone, "Wireless Secrecy in Cellular Systems with Infrastructure-Aided Cooperation," *IEEE Trans. Information Forensics and Security*, vol. 4, iss. 2, pp. 242-256, Jun 2009.
- [30] C. Thai, P. Popovski, M. Kaneko and E. Carvalho, "Coordinated Transmissions to Direct and Relayed Users in Wireless Cellular Systems," in *Proc. IEEE ICC*, pp. 1-5, Kyoto, Japan, Jun 2011.
- [31] G. Kramer, "Topics in Multi-User Information Theory," DOI: 10.1561/0100000028, <http://www.lnt.ei.tum.de/fileadmin/staff/kramer/Papers/kramerNOV2.pdf>
- [32] F. Sun, T. M. Kim, A. J. Paulraj, E. de Carvalho, and P. Popovski, "Cell-Edge Multi-User Relaying with Overhearing," *IEEE Commun. Lett.*, Vol. 17, No. 6, June 2013.
- [33] H. Liu, P. Popovski, E. de Carvalho, Y. Zhao and F. Sun, "Four-Way Relaying in Wireless Cellular Systems," *IEEE Wireless Commun. Lett.*, Vol. 2, No. 4, Aug. 2013.
- [34] F. Sun, E. de Carvalho, "Degrees of Freedom of Asymmetrical Multi-Way Relay Networks," *IEEE International Workshop on Signal Processing Advances for Wireless Communications (SPAWC)*, 2011.
- [35] H. Liu, F. Sun, E. de Carvalho, P. Popovski, H. Thomsen, "MIMO Four-Way Relaying," *IEEE SPAWC*, 2013 (Invited Paper).
- [36] F. Sun, E. de Carvalho, "A Leakage-Based MMSE Beamforming Design for a MIMO Interference Channel," *IEEE Signal Process. Lett.*, Vol. 19, No. 6, June 2012.
- [37] T. M. Kim, F. Sun, and A. J. Paulraj, "Low-Complexity MMSE Precoding for Coordinated Multipoint with Per-Antenna Power Constraint," *IEEE Signal Process. Lett.*, Vol. 20, No. 4, Apr. 2013.