

On sampling theorem with sparse decimated samples

Nikolai Dokuchaev

Submitted: May 2, 2016. Revised: February 6, 2017

Abstract

The classical sampling Nyquist-Shannon-Kotelnikov theorem states that a band-limited continuous time function is uniquely defined by infinite two-sided sampling series taken with a sufficient frequency. The paper shows that these band-limited functions allows an arbitrarily close uniform approximation by functions that are uniquely defined by their extremely sparse subsamples representing arbitrarily small fractions of one-sided equidistant sample series with fixed oversampling parameter. In particular, for an arbitrarily large m , an arbitrarily small adjustment of a band-limited underlying function makes redundant $(m - 1)$ members of any sequence of m members of the sample. This allows to bypass, in a certain sense, the restriction on the sampling rate defined by the critical Nyquist rate. Application of this approach to more general non-bandlimited functions allows to approximate them by functions that are recoverable from equidistant samples with arbitrarily large distance between sampling points.

Keywords: sampling, bandlimitness, missing values, one-sided sequences, sparse samples.

MSC 2010 classification : 94A20, 94A12, 93E10

1 Introduction

The paper suggests a modification of the classical sampling theorem that is also known as Nyquist-Shannon theorem, Nyquist-Shannon-Kotelnikov theorem, Whittaker-Shannon-Kotelnikov theorem, Whittaker-Nyquist-Kotelnikov-Shannon theorem, which is one of the most basic results in the theory of signal processing and information science. This result was obtained independently by four authors [21, 11, 10, 14]. The theorem states that any band-limited function can be uniquely recovered without error from a infinite two-sided equidistant sampling sequence taken with sufficient frequency: the sampling rate must be at least twice the maximum frequency present in the signal (the critical Nyquist rate).

The author is with Department of Mathematics and Statistics, Curtin University, GPO Box U1987, Perth, Western Australia, 6845 (email N.Dokuchaev@curtin.edu.au).

Larger is the support for frequency, more frequent sampling is required. Therefore, if the sampling rate is preselected, then it is impossible to approximate a function of a general type by a band-limited function that is uniquely defined by its sample with this given sampling rate. This principle defines the choice of the sampling rate in almost all signal processing protocols; as far as we know, nobody even considered yet a possibility to bypass it. Numerous extensions of this theorem were obtained, including the case of nonuniform sampling and restoration of the signal with mixed samples; see some recent literature review in [1, 8, 17, 19, 22]. There were many works devoted to reducing the set of sampling points required for restoration of the underlying functions. In particular, it is known that a bandlimited function can be recovered without error from an oversampling sample sequence if a finite number of sample values is unknown. It is known [18] that the function can be recovered without error with a missing one-sided half of any oversampling sample sequence. It is also known [7] that the function can be recovered without error with a missing equidistant infinite subsequence consistent of n th member of the original sample sequence, i.e. that each n th member is redundant, under some additional constraints on the oversampling parameter. The constraints are such that the oversampling parameter is increasing if $n \geq 2$ is decreasing.

The present paper readdress the problem of reducing the sample required for reconstruction of the underlying continuous time band-limited function. It appears that analysis of the degeneracy of the classical frequency characteristic such as Z-transform and DFT is insufficient for overcoming these restrictions.

To solve the problem, we suggest to use some toughened requirements to the degeneracy for sequences, i.e. some augmented type of spectrum degeneracy for sequences such that, for a given integer $m > 0$, the processes $\hat{x} \in \ell_2$, featuring this degeneracy, must have the following properties:

- (i) \hat{x} can be recovered from a subsample $\hat{x}(km)$;
- (ii) these processes are dense in ℓ_2 , i.e. they can approximate any $x \in \ell_2$.

Let us describe briefly introduced below classes of processes with these properties. For $\hat{x} \in \ell_2$, we construct processes $x_d \triangleq \mathcal{M}_d x$, where $\mathcal{M}_d : \ell_2 \rightarrow \ell_2$ are special mappings representing certain alterations of x such as insertion of new terms, $d = 1, \dots, m$. In addition, we selected \mathcal{M}_d such that processes $x_d(t) = x(t)$ for $t \leq 0$ and that x and x_d be reconstructed from each other. We accepted that a process x features degeneracy of the spectrum in the augmented sense if all processes x_d have degenerate spectrums simultaneously. Detailed description of mappings \mathcal{M}_d is given in Section 2 below. Using this construction, we show that an arbitrarily small adjustment of a band-limited underlying function makes redundant $(m - 1)$ members of any subsequence of m members from an one-sided equidistant sample (Theorem 3). This m can be selected arbitrarily large, without increasing of oversampling pa-

parameter for the underlying sampling points. This allows to bypass, in a certain sense, the restriction on the sampling rate described by the critical Nyquist rate. In addition, application of this approach to more general non-bandlimited functions allows to approximate them by functions that are recoverable from equidistant samples with arbitrarily large distance between sampling points (Corollary 4). This may lead to new approaches to the aliasing problem arising in time discretization of non-bandlimited continuous time functions.

The proof is based on predictability of sequences satisfying augmented degeneracy conditions based on observations of sparse subsamples. We use a predicting algorithm representing a modification of the pathwise predicting algorithm suggested in [2] (see Proposition 2). Some problems related to implementation of the recovering algorithm and its robustness with respect to a noise contamination and data truncation is discussed in Section 4.

Some definitions

We denote by $L_2(D)$ the usual Hilbert space of complex valued square integrable functions $x : D \rightarrow \mathbf{C}$, where D is a domain.

For $f \in L_2(\mathbf{R})$, we denote by $F = \mathcal{F}f$ the function defined on $i\mathbf{R}$ as the Fourier transform of f ;

$$F(i\omega) = (\mathcal{F}f)(i\omega) = \int_{-\infty}^{\infty} e^{-i\omega t} f(t) dt, \quad \omega \in \mathbf{R}.$$

Here $i = \sqrt{-1}$ is the imaginary unit. For $f \in L_2(\mathbf{R})$, the Fourier transform F is defined as an element of $L_2(i\mathbf{R})$, i.e. $F(i\cdot) \in L_2(\mathbf{R})$.

For $\Omega > 0$, let $L_2^{BL,\Omega}(\mathbf{R})$ be the subset of $L_2(\mathbf{R})$ consisting of functions f such that $f(t) = (\mathcal{F}^{-1}F)(t)$, where $F(i\omega) \in L_2(i\mathbf{R})$ and $F(i\omega) = 0$ for $|\omega| > \Omega$.

We denote by \mathbb{Z} the set of all integers.

For $r \in [1, +\infty]$, we denote by ℓ_r the set of all sequences $x = \{x(k)\}_{k \in \mathbb{Z}} \subset \mathbf{C}$, such that $\|x\|_{\ell_r} = (\sum_{k=-\infty}^{\infty} |x(k)|^r)^{1/r} < +\infty$ for $r \in [1, \infty)$ or $\|x\|_{\ell_\infty} = \sup_{k \in \mathbb{Z}} |x(k)| < +\infty$ for $r = +\infty$.

Let $D^c \triangleq \{z \in \mathbf{C} : |z| > 1\}$, and let $\mathbb{T} = \{z \in \mathbf{C} : |z| = 1\}$.

For $x \in \ell_2$, we denote by $X = \mathcal{Z}x$ the Z-transform

$$X(z) = \sum_{k=-\infty}^{\infty} x(k) z^{-k}, \quad z \in \mathbf{C}.$$

Respectively, the inverse Z-transform $x = \mathcal{Z}^{-1}X$ is defined as

$$x(k) = \frac{1}{2\pi} \int_{-\pi}^{\pi} X(e^{i\omega}) e^{i\omega k} d\omega, \quad k = 0, \pm 1, \pm 2, \dots$$

For $x \in \ell_2$, the trace $X|_{\mathbb{T}}$ is defined as an element of $L_2(\mathbb{T})$.

Let \mathcal{W} be the set of all open subsets of $(-\pi, \pi]$. For $W \in \mathcal{W}$, let $\mathbb{L}^W(\mathbb{T})$ be the set of all mappings $X : \mathbb{T} \rightarrow \mathbb{C}$ such that $X(e^{i\omega}) \in L_2(-\pi, \pi)$ and $X(e^{i\omega}) = 0$ for $\omega \in W$. We will call the corresponding processes $x = \mathcal{Z}^{-1}X$ *band-limited*.

Let ℓ_2^{BL} be the subset of ℓ_2 consisting of sequences $\{x(k)\}_{k \in \mathbb{Z}}$ such that $x = \mathcal{Z}^{-1}X$ for some $X(e^{i\omega}) \in \cup_{W \in \mathcal{W}} \mathbb{L}^W(\mathbb{T})$. Let $\ell_2^{BL}(-\infty, s)$ be the subset of $\ell_2(-\infty, s)$ consisting of traces $\{x(k)\}_{k \leq s}$ of all $x \in \ell_2^{BL}$.

Let $H^r(D^c)$ be the Hardy space of functions that are holomorphic on D^c including the point at infinity with finite norm $\|h\|_{H^2(D^c)} = \sup_{\rho > 1} \|h(\rho e^{i\omega})\|_{L_r(-\pi, \pi)}$, $r \in [1, +\infty]$.

2 The main results

Let us formulate first an one-sided modification of Nyquist-Shannon-Kotelnikov Theorem; this modification is known and follows from the result [18].

Lemma 1 *Let $\Omega > 0$ and $\tau \in (0, \pi/\Omega]$ be given. Let $\{t_k\}_{k \in \mathbb{Z}} \subset \mathbf{R}$ be a sequence such that $t_k = \tau k$, $k \in \mathbb{Z}$. Then a band-limited function $f \in L_2^{BL, \Omega}(\mathbf{R})$ is uniquely defined by the sequence $\{f(t_k)\}_{k \in \mathbb{Z}}$. Furthermore, if $\tau \in (0, \pi/\Omega)$, then, for any $s \in \mathbb{Z}$, a band-limited function $f \in L_2^{BL, \Omega}(\mathbf{R})$ is uniquely defined by the one sided-sequence $\{f(t_k)\}_{k \leq s}$.*

In particular, Lemma 1 implies that, for any finite set S , $f \in L_2^{BL, \Omega}(\mathbf{R})$ is uniquely defined by the values $\{f(t_k)\}_{k \in \mathbb{Z} \setminus S}$; this was established in [6] by a different method. We cannot claim the same for some infinite sets of missing values. For example, it may happen that $f \in L_2^{BL, \Omega}(\mathbf{R})$ is not uniquely defined by the values $\{f(t_{2k})\}_{k \in \mathbb{Z}}$, if the sampling rate for this sample $\{f(t_{2k})\}_{k \in \mathbb{Z}}$ is lower than is the so-called critical Nyquist rate implied by the Nyquist-Shannon-Kotelnikov Theorem; see more examples in [7].

Let $\Omega > 0$ and $\tau \in (0, \pi/\Omega]$ be given.

For $\delta > 0$ and $m \geq 1$, $m \in \mathbb{Z}$, let

$$s_{m,k} = \frac{2\pi k - \pi}{m\tau}, \quad k = 0, 1, \dots, m-1,$$

$$I_{\delta,m} = \{\omega \in \mathbf{R} : \min_{k=0,1,\dots,m-1} |\omega - s_{m,k}| \leq \delta\}.$$

Definition 1 *Let $x \in \ell_2$, $\delta > 0$, $m \geq 1$, $m \in \mathbb{Z}$. We say that $x \in \mathcal{V}(\delta, m)$ if*

$$X(e^{i\omega}) = 0 \quad \text{for } \omega \in J_{\delta,m}, \quad (1)$$

where $X = \mathcal{Z}^{-1}x$.

Theorem 1 *Let $x \in \mathcal{V}(\delta, m)$ for some $\delta > 0$ and $m \geq 1$, $m \in \mathbb{Z}$. Then, for any $s \in \mathbb{Z}$ and $n \geq 0$, $n \in \mathbb{Z}$, the sequence $\{x(mk + n)\}_{k \in \mathbb{Z}}$ is uniquely defined by the values $\{x(mk + n)\}_{k \leq s}$.*

Clearly, Lemma 1 is a special case of Theorem 1 with $m = 1$.

For $m \geq 1$, $m \in \mathbb{Z}$, $d = 0, \dots, m - 1$, consider mappings $\mathcal{M}_d : \ell_2 \rightarrow \ell_2$ such that, for $x \in \ell_2$, the process $x_d = \mathcal{M}_d x$ is defined as

$$\begin{aligned} x_d(k) &= x(k), & k < 0, \\ x_d(k) &= x(0), & k = 0, 1, \dots, d, \\ x_d(k) &= x(k - d), & k = d + 1, d + 2, \dots \end{aligned} \tag{2}$$

In particular, $x_0 = x$.

Definition 2 We say that a process $x \in \ell_2$ features augmented degeneracy with parameters (δ, m) if $\mathcal{M}_d x \in \mathcal{V}(\delta, 2^d m)$ for $d = 0, 1, \dots, m - 1$. The set of these processes we denote as $\mathcal{U}(\delta, m)$.

Theorem 2 For any $m \in \mathbb{Z}$, $m \geq 1$, the set $\cup_{\delta > 0} \mathcal{U}(\delta, m)$ is everywhere dense in ℓ_2 .

Theorem 3 For any $s \in \mathbb{Z}$ and $m \in \mathbb{Z}$, $m \geq 2$, a process $x \in \cup_{\delta > 0} \mathcal{U}(\delta, m)$ is uniquely defined by the values $\{x(mk)\}_{k \leq s}$.

Theorem 4 Let $m \in \mathbb{Z}$, $m \geq 2$, $\Omega > 0$, $f \in L_2^{BL, \Omega}(\mathbf{R})$, and $\tau \in (0, \pi/\Omega]$, be given. Then for any $\varepsilon > 0$ there exists $\hat{f} \in L_2^{BL, \Omega}(\mathbf{R})$ such that $\{\hat{f}(t_k)\}_{k \in \mathbb{Z}} \in \mathcal{U}(\delta, m)$ and that $\sup_{t \in \mathbf{R}} |f(t) - \hat{f}(t)| \leq \varepsilon$. For any $s \in \mathbb{Z}$, this function \hat{f} is uniquely defined by the values $\{\hat{f}(t_{mk})\}_{k \leq s}$.

Remark 1 In the proof given below, we suggest an algorithm of calculation of the complete sample $\{\hat{f}(t_k)\}_{k \in \mathbb{Z}}$ from the set of values $\{\hat{f}(t_{mk})\}_{k \leq s}$. This leads to recovery of \hat{f} by standard methods.

Remark 2 In Theorem 4, the value ε can be selected arbitrarily small, and m can be selected arbitrarily large. This means that selection of a large m and an arbitrarily small adjustment of a band-limited function f (i.e. replacement f by \hat{f}) makes redundant every $(m - 1)$ members among any set of m samples. Since m can be arbitrarily large, the fraction of remaining samples that we need for recovery can be arbitrarily small.

Remark 3 Theorem 4 consider a subsequence of the left hand half of the sampling series; it is convenient for representation of past historical observations, for instance, for predicting problems. However, a similar statement can be formulated for a subsequence of the right hand half of the sampling series. More precisely, we could replace the set $\{\hat{f}(t_{mk})\}_{k \leq s}$ by the set $\{\hat{f}(t_{mk})\}_{k \geq q}$ with an arbitrarily selected $q \in \mathbb{Z}$. This would require to replace the predicting algorithm in the proofs below on its backward version which is rather technical.

Extension on non-bandlimited functions

Theorem 4 opens some opportunities for a long standing problem of sampling for functions that are not necessarily band-limited. Clearly, any $f \in L_1(\mathbf{R}) \cap L_2(\mathbf{R})$ can be approximated by bandlimited functions $f_\Omega \triangleq \mathcal{F}^{-1}(F\mathbb{I}_{[-\Omega, \Omega]})$, $F = \mathcal{F}f$, where $\Omega \rightarrow +\infty$. However, for any given τ , the samples $\{f_\Omega(\tau k)\}_{k \in \mathbb{Z}}$ are insufficient to define the function f_Ω if $\Omega > \pi/\tau$. This means that the sampling frequency has to be increased along with Ω . A related problem is aliasing of continuous time processes after time discretization.

It appears that Theorem 1 allows to overcome this obstacle in a certain sense as the following.

Corollary 1 *Let $\rho \in (0, 1]$ be given. For any $f \in L_1(\mathbf{R}) \cap L_2(\mathbf{R})$, $\varepsilon > 0$, and $\Delta > 0$, there exist $\bar{\Omega} > 0$ such that the following holds for any $\Omega \geq \bar{\Omega}$:*

- (i) $\sup_{t \in \mathbf{R}} |f(t) - f_\Omega(t)| \leq \varepsilon$, where $f_\Omega = \mathcal{F}^{-1}F_\Omega$, $F_\Omega = F\mathbb{I}_{[-\Omega, \Omega]}$, $F = \mathcal{F}f$.
- (ii) *The function f_Ω belongs to $L_2^{BL, \Omega}(\mathbf{R})$, and, for $\tau = \rho\pi/\Omega$, satisfies assumptions of Theorem 1. For this function, for any $\varepsilon > 0$ there exists $\hat{f} \in L_2^{BL, \Omega}(\mathbf{R})$ such that $\sup_{t \in \mathbf{R}} |f_\Omega(t) - \hat{f}(t)| \leq \varepsilon$ and that \hat{f} is uniquely defined by the values $\{\hat{f}(\theta_k)\}_{k \leq s}$ for an equidistant sequence of sampling points $\theta_k = k\Delta$, $k \in \mathbb{Z}$, for any $s \in \mathbb{Z}$.*

3 Proofs

Proposition 1 *For any $x \in \ell_2^{BL}(-\infty, s)$, there exists an unique $X \in \cup_{\mathcal{W}} \mathbb{L}^W(\mathbb{T})$ such that $x(k) = (\mathcal{Z}^{-1}X)(k)$ for $k \leq s$.*

By Proposition 1, the future $\{x(k)\}_{k > s}$ of a band-limited process $x = \mathcal{Z}^{-1}X$, $X \in \mathbb{L}^W(\mathbb{T})$, is uniquely defined by its history $\{x(k)\}_{k \leq s}$. This statement represent a reformulation in the deterministic setting of the classical Szegő-Kolmogorov Theorem for stationary Gaussian processes [9, 15, 16, 20].

Proof of Proposition 1. The proof follows from predictability results for band-limited discrete time processes obtained in [2, 3]. For completeness, we will provide a direct and independent proof. (This proof can be found in [4]). Let $D \triangleq \{z \in \mathbf{C} : |z| < 1\}$. It suffices to prove that if $x(\cdot) \in \ell_2^{BL}$ is such that $x(k) = 0$ for $k \leq s$, then either $x(k) = 0$ for $k > s$ or $x \notin \ell_2^{BL}$. If $x(k) = 0$ for $k > s$, then $X = \mathcal{Z}x = z^s Y(z)$, where $Y \in H^2(D^c)$. Hence, by the property of the Hardy space, $Y \notin \cup_{W \in (0, \pi)} \mathbb{L}^W(\mathbb{T})$; see e.g. Theorem 17.18 from [13]. This completes the proof of Proposition 1. \square

Proof of Lemma 1

The result of the lemma is known [18]. We provide a different proof since we will use this proof for the proof of Theorem 1.

Consider a sequence of samples

$$x(k) = f(t_k) = \frac{1}{2\pi} \int_{-\Omega}^{\Omega} F(i\omega) e^{i\omega t_k} d\omega, \quad k = 0, \pm 1, \pm 2, \dots$$

Since $t_k = k\tau$, we have that

$$x(k) = \frac{1}{2\pi\tau} \int_{-\tau\Omega}^{\tau\Omega} F(i\nu/\tau) e^{i\nu k} d\nu = \frac{1}{2\pi} \int_{-\tau\Omega}^{\tau\Omega} G(e^{i\nu}) e^{i\nu k} d\nu.$$

The function G here is such that $G(e^{i\nu}) = \tau^{-1} F(i\nu/\tau)$ for $\nu \in (-\tau\Omega, \tau\Omega)$; we have used a change of variables $\nu = \omega\tau$. Since $F(i\nu/\tau) \in L_2(i\mathbf{R})$, it follows that $G(e^{i\nu}) \in L_2(\mathbb{T})$. The two-sided sequence $\{x(k)\}_{k \in \mathbb{Z}}$ represents the sequence of Fourier coefficients of G and defines uniquely G as well as F and f ; this gives the statement of the Nyquist-Shannon-Kotelnikov Theorem. Further, if $\tau < \pi/\Omega$ then $x \in \ell_2^{BL}$.

In this case, Proposition 1 implies that a sequence from ℓ_2^{BL} is uniquely defined by its trace on the set $\{k \leq 0\}$. It follows that the function f is uniquely defined by the sequence $\{x(k)\}_{k \leq 0} = \{f(t_k)\}_{k \leq 0}$. This completes the proof of Lemma 1. \square

Proof of Theorem 1. It suffices to proof the theorem for $s = 0$ only; the extension on $s \neq 0$ is straightforward.

Let \mathcal{H} be the set of all $h \in \ell_\infty$ such that $h = \mathcal{Z}^{-1}H$ for some $H \in H^\infty(D^c)$. For these h , we have that $h(k) = 0$ if $k < 0$.

Proposition 2 *For any $n > 0$, $q \in \{0, 1, \dots, m-1\}$, and $\varepsilon > 0$, there exists $\hat{h} \in \mathcal{H}$ such that the following holds:*

(i)

$$\hat{h}(k) = 0 \quad \text{if either} \quad (k+n)/m \notin \mathbb{Z} \quad \text{or} \quad k < mn - n. \quad (3)$$

(ii) *For any $x \in \mathcal{V}(\delta, m)$,*

$$\sup_{k \in \mathbb{Z}} |x(k+n) - \hat{y}(k)| \leq \varepsilon, \quad (4)$$

where the process \hat{y} is the output of a linear predictor defined by the kernels \hat{h} as

$$\hat{y}(k) \triangleq \sum_{p=-\infty}^k \hat{h}(k-p)x(p). \quad (5)$$

Remark 4 By (3),(5), an estimate $\hat{y}(km)$ of $x(km+n)$ is constructed using the observations $\{x(km+n-qm)\}_{q \geq n, q \in \mathbb{Z}}$. This can be seen from representation of convolution (5) as

$$y(km) = \sum_{j \in \mathbb{Z}, j \geq n} \hat{h}(jm-n)x(km-jm+n).$$

Proof of Proposition 2. Let

$$V(z) \triangleq 1 - \exp \left[-\frac{\gamma}{z+\alpha} \right], \quad (6)$$

where $\alpha = 1 - \gamma^{-r}$ and where $r > 0$ and $\gamma > 0$ are parameters. This function V was introduced in [2]. (In the notations from [2], $r = 2\mu/(q-1)$, where $\mu > 1$, $q > 1$ are the parameters).

Let $W(\alpha) = \arccos(-\alpha)$, let $D_+(\alpha) = (-W(\alpha), W(\alpha))$, and let $D(\alpha) \triangleq [-\pi, \pi] \setminus D_+(\alpha)$. We have that $\cos(W(\alpha)) + \alpha = 0$, $\cos(\omega) + \alpha > 0$ for $\omega \in D_+(\alpha)$, and $\cos(\omega) + \alpha < 0$ for $\omega \in D(\alpha)$.

Note that $\alpha = \alpha(\gamma) \rightarrow 1$ as $\gamma \rightarrow +\infty$.

It was shown in [2] that the following holds:

- (i) $V(z) \in H^\infty(D^c)$ and $zV(z) \in H^\infty(D^c)$.
- (ii) $V(e^{i\omega}) \rightarrow 1$ for all $\omega \in (-\pi, \pi)$ as $\gamma \rightarrow +\infty$.
- (iii) If $\omega \in D_+(\alpha)$ then $\operatorname{Re} \left(\frac{\gamma}{e^{i\omega} + \alpha} \right) > 0$ and $|V(e^{i\omega}) - 1| \leq 1$.

The definitions imply that there exists $\gamma_0 > 0$ such that for any $\gamma \geq \gamma_0$ and for V selected with $\alpha = \alpha(\gamma)$ we have $\sup_{\omega \in (-\pi, \pi] \setminus J_\delta} |V(e^{i\omega}) - 1| \leq 1$.

We will prove that the predicting can be ensured by kernels $\hat{h} = \mathcal{Z}^{-1} \hat{H}$ represented as

$$\hat{H}(z) \triangleq z^n V(z^m)^n, \quad (7)$$

This predictor produces the process $\hat{y}(k)$ approximating $y(k) = x(k+1)$ as $\gamma \rightarrow +\infty$ for all inputs $x \in \mathcal{V}(\delta, m)$.

Let

$$Q(\alpha) = \bigcup_{k=0}^{m-1} \left(\frac{W(\alpha) + 2\pi k}{m}, \frac{2\pi - W(\alpha) + 2\pi k}{m} \right), \quad Q_+(\alpha) = [-\pi, \pi] \setminus Q(\alpha).$$

From the properties of V , it follows that the following holds.

- (i) $V(z^m) \in H^\infty(D^c)$ and $\hat{H}(z) \triangleq zV(z^m) \in H^\infty(D^c)$.
- (ii) $V(e^{i\omega m}) \rightarrow 1$ for all $\omega \in (-\pi, \pi] \setminus \{\tau s_{k,m}\}_{k=0}^{m-1}$ as $\gamma \rightarrow +\infty$.

(iii) If $\omega \in Q_+(\alpha)$ then $\operatorname{Re} \left(\frac{\gamma}{e^{i\omega m} + \alpha} \right) > 0$ and $|V(e^{i\omega m}) - 1| \leq 1$.

By the choice of V , it follows that $|V(z)| \rightarrow 0$ as $|z| \rightarrow +\infty$. Hence $v(0) = 0$ for $v = \mathcal{Z}^{-1}V$. Hence $V(z^m) = z^{-m}v(1) + z^{-2m}v(2) + z^{-3m}v(3)\dots$. Hence $\widehat{H}(z)$ is such that $\widehat{h} = \mathcal{Z}^{-1}\widehat{H}$ belongs to the class \mathcal{H} and that (3) holds.

It can be noted that \widehat{h} is real valued, since $\widehat{H}(\bar{z}) = \overline{\widehat{H}(z)}$.

Figures 1 and 2 show examples of the shape of error curves for approximation of the forward one step shift operator. More precisely, they show the shape of $|\widehat{H}(e^{i\omega}) - e^{i\omega n}|$ for the transfer function (7) with $n = 1$, and the shape of the corresponding predicting kernel \widehat{h} with some selected parameters.

Suppose that we are given $x \in \mathcal{V}(\delta, m)$, $X \triangleq \mathcal{Z}x$, $Y(z) = zX(z)$. Let $\widehat{Y} \triangleq \mathcal{Z}\widehat{y} = \widehat{H}X$.

Let B be the unit ball in ℓ_2 . Let us show that

$$\sup_{k \in \mathbb{Z}} |x(k+n) - \widehat{y}(k)| \rightarrow 0 \quad \text{as } \gamma \rightarrow +\infty \quad \text{uniformly over } x \in \mathcal{V}(\delta, m) \cap B. \quad (8)$$

Let $y(t) \triangleq x(t+n)$ and $Y = \mathcal{Z}y$. We have that $\|Y(e^{i\omega}) - \widehat{Y}(e^{i\omega})\|_{L_1(-\pi, \pi)} = I_1 + I_2$, where

$$I_1 = \int_{Q(\alpha)} |Y(e^{i\omega}) - \widehat{Y}(e^{i\omega})| d\omega, \quad I_2 = \int_{Q_+(\alpha)} |Y(e^{i\omega}) - \widehat{Y}(e^{i\omega})| d\omega.$$

By the definitions, there exists $\gamma_0 > 0$ such that, for all $\gamma > \gamma_0$, we have that

$$Q(\alpha) \subset I_{\delta, m}, \quad I_1 = 0. \quad (9)$$

This means that $I_1 \rightarrow 0$ as $\gamma \rightarrow +\infty$ uniformly over $x \in \mathcal{V}(\delta, m) \cap B$.

Let us estimate I_2 . By the known properties of V , we have that $|V(e^{i\omega m}) - 1| \leq 1$ for all $\omega \in Q_+(\alpha)$. We have that

$$\begin{aligned} I_2 &= \int_{Q(\alpha)} |(e^{i\omega n} - H(e^{i\omega}))X(e^{i\omega})| d\omega \leq \int_{Q(\alpha)} |e^{i\omega n}(1 - V(e^{i\omega m})^n)X(e^{i\omega})| d\omega \\ &\leq \|1 - V(e^{i\omega m})^n\|_{L_2(Q_+(\alpha))} \|X(e^{i\omega})\|_{L_2(-\pi, \pi)}. \end{aligned}$$

We have that $\mathbb{I}_{Q_+(\alpha)}(\omega)|1 - V(e^{i\omega m})^n| \rightarrow 0$ a.e. as $\gamma \rightarrow +\infty$, where \mathbb{I} is the indicator function. We have that

$$\mathbb{I}_{Q_+(\alpha)}(\omega)|1 - V(e^{i\omega m})^n| \leq 2^n.$$

From Lebesgue Dominance Theorem, it follows that $\|1 - V(e^{i\omega m})^n\|_{L_2(Q_+(\alpha))} \rightarrow 0$ as $\gamma \rightarrow +\infty$. It follows that $I_1 + I_2 \rightarrow 0$ uniformly over $x \in \mathcal{V}(\delta, m) \cap B$. Hence (8) holds and

$$\sup_{k \in \mathbb{Z}} |x(k+n) - \widehat{y}(k)| \rightarrow 0 \quad \text{as } \gamma \rightarrow +\infty \quad \text{uniformly over } x \in \mathcal{V}(\delta, m) \cap B.$$

Hence the predicting kernels $\hat{h}(\cdot) = \mathcal{Z}^{-1}\hat{H}$ are such as required. This completes the proof of Proposition 2. \square

We now are in the position to complete the proof of Theorem 1. It suffices to prove that if x is such that $x(km + n) = 0$ for $k \leq s$, then $x(km + n) = 0$ for $k > q$ for all $q \in \mathbb{Z}$. By the predictability established above for a process $x \in \mathcal{V}(\delta, m)$ such that $x(km + n) = 0$ for $k \leq s$, it follows that $x(km + m + n) = 0$; we obtain this by letting $\varepsilon \rightarrow 0$ in (4), i.e. letting $\gamma \rightarrow +\infty$ in (7). Similarly, we obtain that $x(km + 2m + q) = 0$. Repeating this procedure n , we obtain that $x(km + n) = 0$ for all $k \in \mathbb{Z}$. This completes the proof of Theorem 1. \square

Proof of Theorem 2. Let $d \in \{0, 1, \dots, m-1\}$ be selected, and let

$$\mu(d) = 2^d m, \quad s_{\mu(d),k} = \frac{2\pi k - \pi}{\mu(d)\tau}, \quad d = 0, \dots, m-1, \quad k = 0, 1, \dots, \mu(d) - 1.$$

For $\delta > 0$, let

$$I_{\delta, \mu(d)} = \{\omega \in \mathbf{R} : \min_{k=0,1,\dots,\mu(d)-1} |\omega - s_{\mu(d),k}| \leq \delta\}.$$

Let us show that, for small enough $\delta > 0$, the sets $I_{\delta, \mu(d)}$ are disjoint for different $d \in \{0, \dots, m-1\}$. It suffices to show that $s_{\mu(d_1),k} \neq s_{\mu(d_2),l}$ if $d_1 \neq d_2$ for all $k, l \in \mathbb{Z}$. Suppose that $s_{\mu(d_1),k} = s_{\mu(d_2),l}$ for some $k, l \in \mathbb{Z}$ for $d_2 = d_1 + r$, for some $d_1, d_2 \in \{0, 1, \dots, m-1\}$ such that $r \triangleq d_2 - d_1 > 0$. In this case, the definitions imply that

$$\frac{2k-1}{2^{d_1}} = \frac{2l-1}{2^{d_2}}.$$

This means that $2^r(2k-1) = 2l-1$, and, therefore the number $2^r(2k-1)$ is odd. This is impossible since we had assumed that $r > 0$. Hence the sets $I_{\delta, \mu(d)}$ are disjoint for different $d \in \{0, \dots, m-1\}$ for small $\delta > 0$. Without a loss of generality, we assume that δ used below have these properties.

Consider auxiliary processes $x_d \in \ell_2$, defined by (2) for $d = 0, 1, \dots, m-1$. In particular, $x_0 = 0$.

Let $Y_d \triangleq X_0 - X_d$, where $X_d = \mathcal{Z}x_d$, $d = 0, 1, \dots, d$. Since $x_d(k) = x_0(k)$ for $k \leq 0$, it follows that $y_d(k) = 0$ for $k \leq 0$ for $y_d = \mathcal{Z}^{-1}Y_d$, $d = 1, 2, \dots, m-1$; in addition, $Y_0 \equiv 0$ and $y_0 \equiv 0$. Further, let

$$\hat{X}_0(e^{i\omega}) \triangleq \hat{X}_0(e^{i\omega}) \mathbb{I}_{\{\omega \notin \bigcup_{d=1}^{m-1} J_{\delta, \mu(d)}\}} + \sum_{d=1}^{m-1} Y_d(e^{i\omega}) \mathbb{I}_{\{\omega \in J_{\delta, \mu(d)}\}}.$$

Let $\hat{X}_d \triangleq \hat{X}_0 - Y_d$ for $d = 1, \dots, m-1$. By the definitions, it follows that $\hat{X}_d(e^{i\omega}) = 0$ for $\omega \in J_{\delta, \mu(d)}$, $d = 0, 1, \dots, m-1$. Hence $\hat{x}_d \triangleq \mathcal{Z}^{-1}\hat{X}_d \in \mathcal{V}(\delta, \mu(d))$ for $d = 0, 1, \dots, m-1$. It follows that $x = x_0 \in \mathcal{U}(\delta, m)$. In addition, $\hat{x}_d(k) = \hat{x}_0(k)$, for $k \leq 0$ and $d = 1, 2, \dots, m-1$. Clearly, $\|\hat{x}_0 - x_0\|_{\ell_2} \rightarrow 0$ as $\delta \rightarrow 0$. This completes the proof of Theorem 2. \square

Proof of Theorem 3. It suffices to consider $s = 0$ only. Let $\hat{x} \in \ell_2$. Consider again auxiliary processes $x_d \in \ell_2$, defined by (2) for $d = 0, 1, \dots, m - 1$. By Theorem 1, the paths $\{\hat{x}_d(mk)\}_{k \geq 1} = \{\hat{x}_0(mk - d)\}_{k \geq 1}$ and $\{\hat{x}_d(mk)\}_{k \leq 0} = \{\hat{x}_0(mk)\}_{k \leq 0}$ are uniquely defined by the paths $\{\hat{x}_d(mk)\}_{k \leq s} = \{\hat{x}_0(mk)\}_{k \leq s}$. The same proposition applied backward in time implies that the paths $\{\hat{x}_0(mk - d)\}_{k \leq 0}$ are uniquely defined by the paths $\{\hat{x}_0(mk - d)\}_{k \geq 1}$ (see Remark 3 above). This completes the proof of Theorem 3. \square

Proof of Theorem 4. Let $x(k) = f(t_k)$ for $k \in \mathbb{Z}$. By Theorem 2, for any $\varepsilon > 0$, there exist $\delta = \delta(\varepsilon) > 0$ and $\hat{x} \in U(\delta, m)$ such that $\|\hat{x} - x_0\|_{\ell_2} \leq \varepsilon$. Further, there exists a unique function $\hat{f} \in L_2^{BL, \Omega}(\mathbf{R})$ such that $\hat{f}(t_k) = \hat{x}(k)$ for all $k \in \mathbb{Z}$. Let $\hat{F} = \mathcal{F}\hat{f}$. It follows that $\|\hat{F}(i\cdot) - F(i\cdot)\|_{L_2(\mathbf{R})} \rightarrow 0$ as $\varepsilon \rightarrow 0$, where $\hat{F} = \mathcal{F}\hat{f}$. Since $F(i\omega) = 0$ and $\hat{F}(i\omega) = 0$ if $|\omega| > \Omega$, it follows that $\|\hat{F}(i\cdot) - F(i\cdot)\|_{L_1(\mathbf{R})} \rightarrow 0$ as $\varepsilon \rightarrow 0$. Hence $\|\hat{f} - f\|_{L_p(\mathbf{R})} \rightarrow 0$ as $\varepsilon \rightarrow 0$ for $p = 2, +\infty$. This completes the proof of Theorem 4. \square

Proof of Corollary 1. We have that

$$\begin{aligned} \sup_{t \in \mathbf{R}} |f(t) - f_\Omega(t)| &= \frac{1}{2\pi} \int_{-\infty}^{\infty} |F(i\omega) - F_\Omega(i\omega)| d\omega \\ &= \frac{1}{2\pi} \int_{\mathbf{R} \setminus [-\Omega, \Omega]} |F(i\omega)| d\omega \rightarrow 0 \quad \text{as } \Omega \rightarrow +\infty, m \rightarrow +\infty. \end{aligned}$$

Then statement (i) follows. The function f_Ω has the same properties as the function f in Theorem 3. This completes the proof of Corollary 1. \square

4 On numerical implementation

To apply the classical Nyquist-Shannon-Kotelnikov Theorem for the data recovery, one has to restore the Fourier transform $\hat{F} = \mathcal{F}\hat{f}$ from the two-sided sampling series $\{\hat{f}(t_k)\}_{k \in \mathbb{Z}}$. This procedure is relatively straightforward. Theorem 3 allows to bypass, in a certain sense, the restriction on the sampling rate defined by the critical Nyquist rate. The aims of the present paper are limited by the theoretical aspects of possibility of recovering functions from decimated samples rather than numerical methods. Admittedly, this is only the very first step in solution of the problem; numerical implementation to data compression and recovery using the scheme in the proof above is numerically challenging and there are many open questions. So far, this possibility is rather theoretical, since the presence of a noise in the data or in the measurements can cause a significant error. Nevertheless, the proof of the main result is based on a construction of certain recovering algorithm. Let us discuss applicability of this algorithm for numerical implementation. The steps leading to this algorithm can be summarized as follows.

An algorithm of recovery of $\hat{f} \in \mathcal{U}(\delta, m)$ from a decimated sample

The algorithm used in the proof of Theorem 1 requires to restore Z-transform $G(e^{i\nu}) = \hat{F}(i\omega/\tau)$ from sparse subsequences using predicting algorithms described in Proposition 2. Assume that one wishes to apply the algorithm implied by Theorem 1 for recovering of $\hat{f} \in \mathcal{U}(\delta, m)$ from the sample $\{\hat{f}(t_{mk})\}_{k \leq 0}$ under the assumptions of Theorem 1 with a fixed δ . Formally, the algorithm implied by the proof of this theorem requires the following steps:

- (A1) For any $k \geq 1$, $d = 0, 1, \dots, m-1$, estimate $\hat{x}_0(km-d) = \hat{x}_d(km)$ from $\hat{x}_0(km)|_{k \leq 0} = \hat{x}_d(km)|_{k \leq 0}$ using (5)-(7), where $\hat{x}(k) = \hat{f}(t_k)$, and where $\hat{x}_d = \mathcal{M}_d x$ are formed as in (2). This can be done with an arbitrarily small error, with selection of γ such that (4) holds for \hat{h} constructed as described above with a sufficiently small $\varepsilon > 0$.
- (A2) Using an anticausal modification of (4) applied backward, estimate $x_0(km-d)|_{k \leq 0}$ from $\hat{x}_0(km-d)|_{k \geq 1}$ for $d = 1, \dots, m-1$.
- (A3) Accept the values $\hat{x}_0(k)$ as estimates of the values $\hat{f}(t_k)$.
- (A4) Restore \hat{f} from the complete sample $\{\hat{f}(t_k)\}_{k \in \mathbb{Z}}$.

Let us list some difficulties arising for implementation of these steps. First, it can be noted that the choice of ε in (4) controls the size of the error for given that the complete sequences $x = \{x(k)\}_{k \in \mathbb{Z}} = \{f_\delta(t_k)\}_{k \in \mathbb{Z}}$ are normalized such that $\|x\|_{\ell_2} \leq 1$. However, the complete sequences are unknown a priori and have to be calculated from a subsample. If the norm $\|x\|_{\ell_2}$ of the calculated x will be larger than one, then the error may exceed ε . Step (A1) is numerically difficult but still feasible, given that some recovering error is tolerable.

However, numerical implementation of Step (A2) of this algorithm would require solution of ill-posed inverse problems. It can be seen from the following. The algorithm of recovering of the complete sampling sequences $\{x(k)\}_{k \in \mathbb{Z}} = \{\hat{f}(t_k)\}_{k \in \mathbb{Z}}$ from a decimated sequence uses the n -step forward linear predictor defined by the transfer functions $\hat{H}(e^{i\omega})$ given by (7) that approximate the function $e^{i\omega n}$ representing the forward one step shift in the time domain as $\gamma \rightarrow +\infty$; the values $|\hat{H}(e^{i\omega}) - e^{i\omega n}|$ are small for $\omega \notin Q(\alpha)$. However, the errors $|\hat{H}(e^{i\omega}) - e^{i\omega n}|$ for $\omega \in Q(\alpha)$ rise sharply as either $n \rightarrow +\infty$ or $\text{mes } Q(\alpha) \rightarrow 0$, i.e. if $\varepsilon \rightarrow 0$ or $\gamma \rightarrow +\infty$ in Proposition 2; this can be seen on Figures 1 and 2, where it was assumed that $n = 1$. This means that the presence of a noise, i.e. $\hat{X}_d(e^{i\omega}) \neq 0$ for $\omega \in J_{\delta, \mu(d)}$, can imply a significant error for large γ or n . This means that one cannot guarantee that the errors of recovering $\hat{x}(n)$ is bounded in $n > 0$. The presence of these errors makes impossible to ensure any boundaries for the error on step (A2), i.e. for application of anticausal modification of (4) applied backward for estimation of $x_0(km-d)|_{k \leq 0}$ from $\hat{x}_0(km-d)|_{k \geq 1}$. Therefore, step (A2) requires

solution of a ill-posed problem. A solution is still possible based on methods of a well developed theory of inverse and ill-posed problems; however, the error can be significant.

It can be noted that solution of an ill-posed problem is not required for recovering $\hat{f}(t_n)$ for $n > 0$ from the sample $\{\hat{f}(t_{mk})\}_{k \in \mathbb{Z}, k \leq 0}$, for any given $n > 0$ (this is covered by Step (A1) mentioned above).

Let us show that this task features some robustness if $\delta > 0$ is fixed or separated from zero.

Assume that the parameters (γ, r) of V in (7) are selected such that (4) holds with some $\varepsilon > 0$. Suppose that the kernels \hat{h} defined by (7) are applied to a sequence with a noise contamination. Let us consider an input sequence $x \in \ell_2$ such that $x = x_0 + \eta$, where $x_0 \in \mathcal{V}(\delta, m)$, and where $\eta \in \ell_2$ represents a noise. Let $X = \mathcal{Z}x$, $X_0 = \mathcal{Z}x_0$, and $N = \mathcal{Z}\eta$. We assume that $\|N(e^{i\omega})\|_{L_2(-\pi, \pi)} = \sigma$; the parameter $\sigma \geq 0$ represents the intensity of the noise.

In the proof of Theorem 1, we found that, for an arbitrarily small $\varepsilon > 0$, there exists a predicting kernel $\hat{h} \in \mathcal{H}$ such that

$$\int_{-\pi}^{\pi} |(\hat{H}(e^{i\omega}) - e^{i\omega n})X_0(e^{i\omega})| d\omega \leq 2\pi\varepsilon \quad \forall x_0 \in \mathcal{V},$$

where $\hat{H} = \mathcal{Z}\hat{h}$. This kernel is such that $\hat{y}_0 = \hat{h} \circ x_0$ approximated the process $x_0^+(t) \triangleq x_0(t+1)$ such that

$$\|\hat{y}_0 - x_0^+\|_{\ell_\infty} \leq \varepsilon.$$

Let us estimate the prediction error for the case where $\sigma > 0$. For $\hat{y} = \hat{h} \circ x$ and $x^+(t) \triangleq x(t+n)$, we have that

$$\|\hat{y} - x^+\|_{\ell_\infty} \leq E_0 + E_\eta,$$

where

$$\begin{aligned} E_0 &= \frac{1}{2\pi} \|(\hat{H}(e^{i\omega}) - e^{i\omega n})X_0(e^{i\omega})\|_{L_1(-\pi, \pi)} \leq \varepsilon, \\ E_\eta &= \frac{1}{2\pi} \|(\hat{H}(e^{i\omega}) - e^{i\omega n})N(e^{i\omega})\|_{L_1(-\pi, \pi)}. \end{aligned}$$

It follows that

$$\|\hat{y} - x^+\|_{\ell_\infty} \leq \varepsilon + \sigma(\kappa + 1), \tag{10}$$

where

$$\kappa = \sup_{\omega \in [-\pi, \pi]} |\hat{H}(e^{i\omega})|.$$

Therefore, it can be concluded that the estimate of $x(n)$ with a given (γ, r) is robust with respect to noise contamination. However, we have that

$$\kappa \rightarrow +\infty \quad \text{as} \quad \gamma \rightarrow +\infty. \quad (11)$$

This implies that error (10) is increasing as $\varepsilon \rightarrow 0$ for any given $\sigma > 0$. This happens when the predictor is targeting too small a size of the error for the sequences from $\mathcal{V}(\delta, m)$, i.e. under the assumption that $\sigma = 0$.

Remark 5 *The robustness established above ensures that there is some robustness with respect to input data truncation. To see this, it suffices to apply the reasons given above to $\eta(k) = -x_0(k)\mathbb{I}_{\{k < -N\}}$ for some $N > 0$, then $x(k) = x_0(k)\mathbb{I}_{\{k > -N\}}$. For a large $N > 0$, the norm $\|\eta\|_{\ell_2}$ is small for $x \in \ell_2$.*

Some examples of numerical experiments for related predicting algorithms can be found in [5] (for the case where $m = n = 1$, in the notations of the present papers).

We leave detailed investigation of possibilities for numerical implementation and robustness for the future research.

5 Discussion and future developments

- (i) It could be interesting to find non-equidistant infinite sets that can be redundant for recoverability of the underlying function. In particular, it could be interesting to investigate if recovery of f suggested in Theorem 1 is robust with respect to errors in location of the sampling points t_k .
- (ii) It is unclear if our approach based on predictability of discrete time processes is applicable to processes defined on multidimensional lattices. It could be interesting to extend this approach on functions $f : \mathbf{R}^2 \rightarrow \mathbf{R}$, using the setting from [12].
- (iii) It can be noted that the choice of predicting kernels presented in the proofs above is not unique. For example, we could use a predicting algorithm from [3] instead of the the predicting algorithm based on [2] that was used in the present paper.
- (iv) Since we used a predicting algorithm [2] that does not require that the spectrum of an underlying process is actually vanishing on an arc of \mathbb{T} , we can relax conditions of Theorem 1. Instead of the condition that the spectrum vanishes on open sets $J_{\delta, m}$, we can require that the spectrum vanishes only at the middle points of the intervals forming $J_{\delta, m}$; however, the rate of vanishing has to be sufficient, similarly to [2].

- (v) It can be noted that the definition of $\mathcal{U}(\delta, m)$ allows many acceptable modifications. In particular, the proofs can be extended on the case where x_d are defined such that there exists $\theta \geq m$ such that $x_d(k) = x(k - d)$ for $k > \theta$, without any restrictions on $\{x_d(k)\}_{k=1, \dots, \theta}$.

Acknowledgment

This work was supported by ARC grant of Australia DP120100928 to the author.

References

- [1] T. Cai, G. Xu, and J. Zhang. (2009), On recovery of sparse signals via ℓ_1 minimization, *IEEE Trans. Inf. Theory*, vol. 55, no. 7, pp. 3388-3397.
- [2] Dokuchaev, N. (2012). Predictors for discrete time processes with energy decay on higher frequencies. *IEEE Transactions on Signal Processing* **60**, No. 11, 6027-6030.
- [3] Dokuchaev, N. (2012). On predictors for band-limited and high-frequency time series. *Signal Processing* **92**, iss. 10, 2571-2575.
- [4] Dokuchaev, N. (2012). Causal band-limited approximation and forecasting for discrete time processes. arXiv 1208.3278.
- [5] Dokuchaev, N. (2016). Near-ideal causal smoothing filters for the real sequences. *Signal Processing* **118**, iss. 1, pp. 285-293.
- [6] Ferreira P. G. S. G.. (1992). Incomplete sampling series and the recovery of missing samples from oversampled bandlimited signals. *IEEE Trans. Signal Processing* **40**, iss. 1, 225-227.
- [7] Ferreira P. G. S. G.. (1995). Sampling Series With An Infinite Number Of Unknown Samples. In: *SampTA'95, 1995 Workshop on Sampling Theory and Applications*, 268-271.
- [8] Jerri, A. (1977). The Shannon sampling theorem - its various extensions and applications: A tutorial review. *Proc. IEEE* **65**, 11, 1565–1596.
- [9] Kolmogorov, A.N. (1941). Interpolation and extrapolation of stationary stochastic series. *Izv. Akad. Nauk SSSR Ser. Mat.*, 5:1, 3–14.
- [10] Kotelnikov, V.A. (1933). On the carrying capacity of the ether and wire in telecommunications. *Material for the First All-Union Conference on Questions of Communication*, Izd. Red. Upr. Svyazi RKKA, Moscow, 1933.

- [11] Nyquist, H. (1928). Certain topics in telegraph transmission theory, *Trans. AIEE*, Trans., vol. 47, pp. 617-644.
- [12] Petersen, D.P. and Middleton D. (1962). Sampling and reconstruction of wave-number-limited functions in N-dimensional Euclidean spaces. *Information and Control*, vol. 5, pp. 279-323.
- [13] Rudin, W. *Real and Complex Analysis*. 3rd ed. Boston: McGraw-Hill, 1987.
- [14] Shannon, C.E. (1949). Communications in the presence of noise, *Proc. Institute of Radio Engineers*, vol. 37, no.1, pp. 1021.
- [15] Szegő, G. (1920). Beiträge zur Theorie der Toeplitzschen Formen. *Math. Z.* 6, 167–202.
- [16] Szegő, G. (1921). Beiträge zur Theorie der Toeplitzschen Formen, II. *Math. Z.* 9, 167-190.
- [17] Unser, M. (2000). Sampling 50 years after Shannon, *Proceedings of the IEEE*, vol. 88, pp. 569-587.,
- [18] Vaidyanathan P. P. (1987). On predicting a band-limited signal based on past sample values, in *Proceedings of the IEEE*, vol. 75, no. 8, pp. 1125-1127.
- [19] Vaidyanathan, P.P. (2001). Generalizations of the Sampling Theorem: Seven Decades After Nyquist. *IEEE Transactions on circuits and systems I: fundamental theory and applications*, v. 48, NO. 9,
- [20] Verblunsky, S. (1936). On positive harmonic functions (second paper). *Proc. London Math. Soc.* 40, 290–320.
- [21] Whittaker, E.T. (1915). On the Functions Which are Represented by the Expansions of the Interpolation Theory. *Proc. Royal Soc. Edinburgh, Sec. A*, vol.35, pp. 181-194.
- [22] Zayed A. (1993). *Advances in Shannon's Sampling Theory*. Boca Raton, CRC Press, N.Y, London, Tokyo.

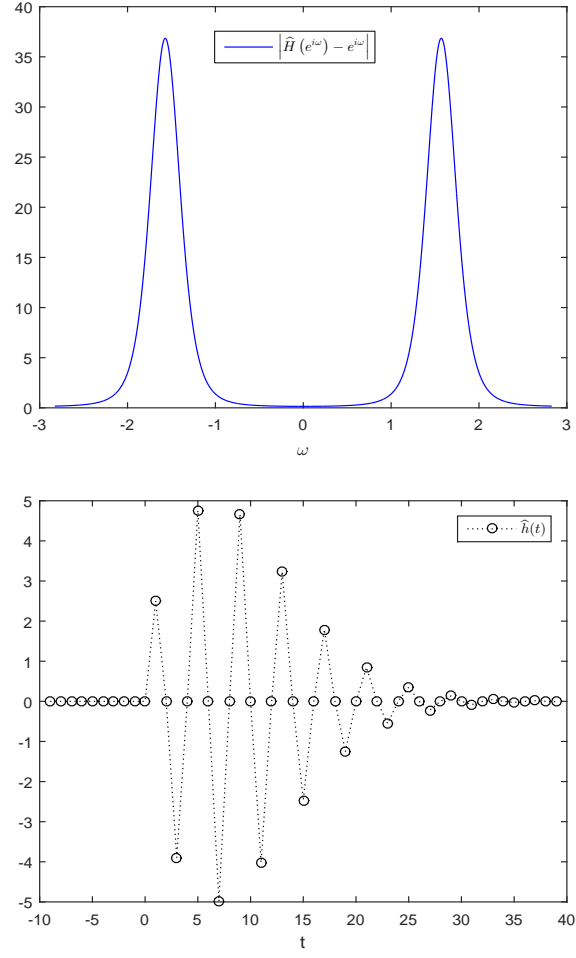


Figure 1: Approximation of the one-step forward shift operator: the values $|\hat{H}(e^{i\omega}) - e^{i\omega}|$ for the transfer function of the predictor (7) and the values of the corresponding kernel \hat{h} with $\gamma = 2.5$, $r = 0.4$, $m = 2$.

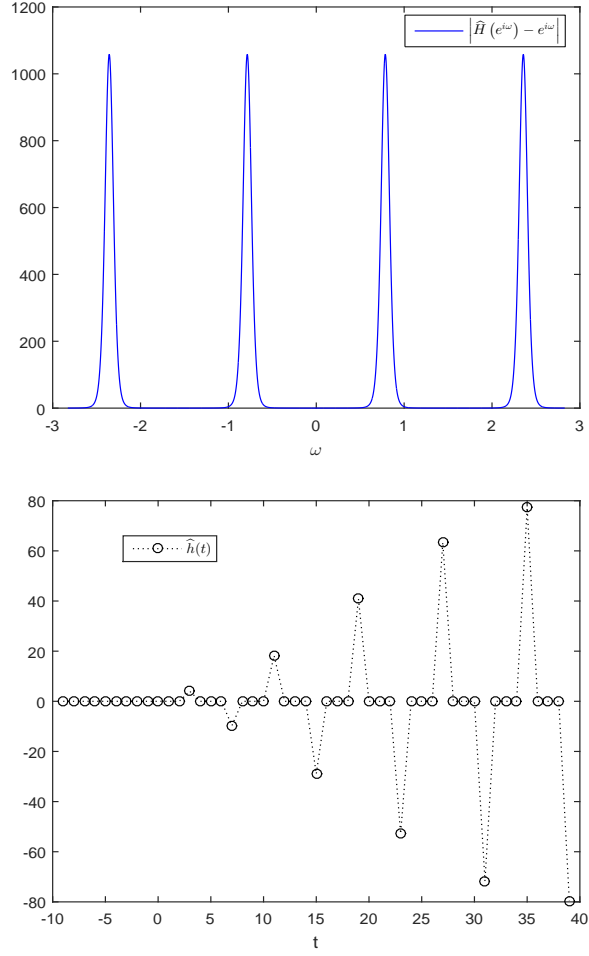


Figure 2: Approximation of the one-step forward shift operator: the values $|\hat{H}(e^{i\omega}) - e^{i\omega}|$ for the transfer function of the predictor (7) and the values of the corresponding kernel \hat{h} with $\gamma = 4$, $r = 0.4$, $m = 4$.