

BACKSTEPPING DESIGN FOR INCREMENTAL STABILITY OF STOCHASTIC HAMILTONIAN SYSTEMS WITH JUMPS

PUSHPAK JAGTAP AND MAJID ZAMANI

ABSTRACT. Incremental stability is a property of dynamical systems ensuring the uniform asymptotic stability of each trajectory rather than a fixed equilibrium point or trajectory. Here, we introduce a notion of incremental stability for stochastic control systems and provide its description in terms of existence of a notion of so-called incremental Lyapunov functions. Moreover, we provide a backstepping controller design scheme providing controllers along with corresponding incremental Lyapunov functions rendering a class of stochastic control systems, namely, stochastic Hamiltonian systems with jumps, incrementally stable. To illustrate the effectiveness of the proposed approach, we design a controller making a spring pendulum system in a noisy environment incrementally stable.

1. INTRODUCTION

The notion of incremental stability focuses on the convergence of trajectories with respect to each other rather than with respect to an equilibrium point or a fixed trajectory. This notion of stability has gained significant attention in recent years due to its potential applications in the study of nonlinear systems. Examples of such applications include synchronization of cyclic feedback systems [HSSG12]; construction of symbolic models [PGT08], [MZ12]; modeling of nonlinear analog circuits [BML⁺10]; and synchronization of interconnected oscillators [SS07].

In the past few years, there have been several results characterizing the notion of incremental stability for non-probabilistic dynamical systems using notions of so-called incremental Lyapunov functions and contraction metric. The interested readers may consult the results in [Ang02, PWN06, LS98, ZT11, ZvdWM13, and references therein] for more detailed information about different characterizations of incremental stability. Furthermore, there have been several results on the construction of state feedback controllers enforcing a class of non-probabilistic control systems incrementally stable. Examples include results on smooth strict-feedback form systems [ZT11] and a class of (not-necessarily smooth) control systems [ZvdWM13].

In recent years, similar notions of incremental stability have been introduced for different classes of stochastic systems including stochastic control systems [ZMEM⁺14], stochastic switched systems [ZAG15], randomly switched stochastic systems [ZA14], and their descriptions using some notions of incremental Lyapunov functions. In addition, there have been several results in the literature studying incremental stability of stochastic systems using a notion of contraction metric. Examples include the results on stochastic dynamical systems [PTS09] and a class of stochastic hybrid systems [ZCA13].

There exists a plethora of results for designing state feedback controllers enforcing some classes of stochastic systems stable with respect to an equilibrium point or a fixed trajectory. Examples include the results based on backstepping and inverse optimality [DK99], on strict-feedback form stochastic systems [KYMY13], based on passivity for stochastic port-Hamiltonian systems [SF13], on a backstepping approach for stochastic Hamiltonian systems [WCS12], on input-to-state stability of stochastic retarded systems [HM09], and finally on stabilization of jump stochastic systems [LLN12]. Unfortunately, to the best of our knowledge, there is no work available in the literature on the synthesis of state feedback controllers rendering a class of nonlinear stochastic systems incrementally stable. This is unfortunate because, based on our motivation from symbolic control, incremental stability is a key property enabling the construction of bisimilar finite abstractions

of continuous-time stochastic systems [ZMEM⁺14, ZAG15, ZA14, ZTA16] and, hence, automated controller synthesis methodologies for this class of systems.

The main objective of this work is to propose, for the first time, a state feedback design scheme providing controllers enforcing a class of stochastic systems incrementally stable. The paper is divided in two major parts. In the first part, we introduce a coordinate invariant notion of incremental stability for stochastic control systems with jumps and provide its description in terms of existence of a notion of so-called incremental Lyapunov functions. In the second part, we provide a feedback controller design approach based on backstepping scheme providing controllers together with the corresponding incremental Lyapunov functions enforcing a class of stochastic control systems, namely, stochastic Hamiltonian systems with jumps, incrementally stable. Further, we illustrate the effectiveness of the proposed results by designing a state feedback controller making a spring pendulum subject to stochastically vibrating ceiling with jumps incrementally stable.

2. STOCHASTIC CONTROL SYSTEMS

2.1. Notations. The symbols \mathbb{R} , \mathbb{R}^+ , and \mathbb{R}_0^+ denote the set of real, positive, and non-negative real numbers, respectively. We use $\mathbb{R}^{n \times m}$ to denote a vector space of real matrices with n rows and m columns. The identity matrix in $\mathbb{R}^{n \times n}$ is denoted by I_n and zero matrix in $\mathbb{R}^{n \times m}$ is denoted by $0_{n \times m}$. The $e_i \in \mathbb{R}^n$ denotes the vector whose all elements are zero, except the i^{th} element, which is one. Given a vector $x \in \mathbb{R}^n$, we denote by x_i the i -th element of x , and by $\|x\|$ the Euclidean norm of x . Given a matrix $A \in \mathbb{R}^{n \times m}$, A^T represents transpose of matrix A and $\|A\|_F$ represents the Frobenius norm of A defined as $\|A\|_F = \sqrt{\text{Tr}(AA^T)}$, where $\text{Tr}(\cdot)$ denotes the trace of a square matrix. For all $x_i \in \mathbb{R}^{n_i}$, $[x_1; x_2; \dots; x_N]$ represents a vector in \mathbb{R}^n where $n = \sum_{i=1}^N n_i$. The symbol $A \otimes B$ represents the Kronecker product of matrices A and B . The diagonal set $\Delta \subset \mathbb{R}^{2n}$ is defined as $\Delta = \{(x, x) | x \in \mathbb{R}^n\}$. A continuous function $\gamma : \mathbb{R}_0^+ \rightarrow \mathbb{R}_0^+$ belongs to class \mathcal{K} if it is strictly increasing and $\gamma(0) = 0$; it belongs to class \mathcal{K}_∞ if $\gamma \in \mathcal{K}$ and $\gamma(r) \rightarrow \infty$ as $r \rightarrow \infty$. A continuous function $\beta : \mathbb{R}_0^+ \times \mathbb{R}_0^+ \rightarrow \mathbb{R}_0^+$ belongs to class \mathcal{KL} if for each fixed s , the map $\beta(r, s)$ belongs to \mathcal{K} with respect to r and, for each fixed $r \neq 0$, the map $\beta(r, s)$ is decreasing with respect to s and $\beta(r, s) \rightarrow 0$ as $s \rightarrow \infty$. For any $x, y, z \in \mathbb{R}^n$, a function $\mathbf{d} : \mathbb{R}^n \times \mathbb{R}^n \rightarrow \mathbb{R}_0^+$ is a metric on \mathbb{R}^n if the following conditions hold: (i) $\mathbf{d}(x, y) = 0$ if and only if $x = y$; (ii) $\mathbf{d}(x, y) = \mathbf{d}(y, x)$; and (iii) $\mathbf{d}(x, z) \leq \mathbf{d}(x, y) + \mathbf{d}(y, z)$. Given a measurable function $f : \mathbb{R}_0^+ \rightarrow \mathbb{R}^n$, the (essential) supremum of f is denoted by $\|f\|_\infty$; we recall that $\|f\|_\infty := (\text{ess})\sup\{\|f(t)\|, t \geq 0\}$.

2.2. Stochastic control systems. Let the triplet $(\Omega, \mathcal{F}, \mathbb{P})$ denote a probability space with a sample space Ω , filtration \mathcal{F} , and the probability measure \mathbb{P} . The filtration $\mathbb{F} = (\mathcal{F}_s)_{s \geq 0}$ satisfies the usual conditions of right continuity and completeness [Øks02]. Let $(W_s)_{s \geq 0}$ be an r -dimensional \mathbb{F} -Brownian motion and $(P_s)_{s \geq 0}$ be an \tilde{r} -dimensional \mathbb{F} -Poisson process. We assume that the Poisson process and the Brownian motion are independent of each other. The Poisson process $P_s := [P_s^1; \dots; P_s^{\tilde{r}}]$ models \tilde{r} kinds of events whose occurrences are assumed to be independent of each other.

Definition 2.1. A stochastic control system is a tuple $\Sigma_s = (\mathbb{R}^n, \mathbb{R}^m, \mathcal{U}, f, \sigma, \rho)$, where:

- \mathbb{R}^n is the state space;
- \mathbb{R}^m is the input space;
- \mathcal{U} is a subset of the set of all \mathbb{F} -progressively measurable processes with values in \mathbb{R}^m ; see [KS91, Def. 1.11];
- $f : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}^n$ satisfies the following Lipschitz assumption: there exist constants $L_x, L_u \in \mathbb{R}^+$ such that: $\|f(x, u) - f(x', u')\| \leq L_x \|x - x'\| + L_u \|u - u'\| \forall x, x' \in \mathbb{R}^n$ and $\forall u, u' \in \mathbb{R}^m$;
- $\sigma : \mathbb{R}^n \rightarrow \mathbb{R}^{n \times r}$ satisfies the following Lipschitz assumption: there exists a constant $L_\sigma \in \mathbb{R}_0^+$ such that: $\|\sigma(x) - \sigma(x')\| \leq L_\sigma \|x - x'\| \forall x, x' \in \mathbb{R}^n$;
- $\rho : \mathbb{R}^n \rightarrow \mathbb{R}^{n \times \tilde{r}}$ satisfies the following Lipschitz assumption: there exists a constant $L_\rho \in \mathbb{R}_0^+$ such that: $\|\rho(x) - \rho(x')\| \leq L_\rho \|x - x'\| \forall x, x' \in \mathbb{R}^n$.

A stochastic process $\xi : \Omega \times \mathbb{R}_0^+ \rightarrow \mathbb{R}^n$ is said to be a *solution process* of Σ_s if there exists $v \in \mathcal{U}$ satisfying

$$(2.1) \quad d\xi = f(\xi, v) dt + \sigma(\xi) dW_t + \rho(\xi) dP_t,$$

\mathbb{P} -almost surely (\mathbb{P} -a.s.), where $f(\cdot)$, $\sigma(\cdot)$, and $\rho(\cdot)$ are the drift, diffusion, and reset terms, respectively. We emphasize that postulated assumptions on f , σ , and ρ ensure the existence and uniqueness of the solution process [OS05]. Throughout the paper, we use the notation $\xi_{av}(t)$ to denote the value of a solution process at time $t \in \mathbb{R}_0^+$ under the input signal v and with initial condition $\xi_{av}(0) = a$ \mathbb{P} -a.s., in which a is a random variable that is measurable in \mathcal{F}_0 . Here, we assume that the Poisson processes P_s^i , for any $i \in \{1, \dots, \bar{r}\}$, have the constant rates of λ_i .

2.3. Incremental stability for stochastic control systems. This subsection introduces a coordinate invariant notion of incremental input-to-state stability for stochastic control systems. The stability notion discussed here is the generalization of the ones defined in [ZvdWM13], [ZT11] for non-probabilistic control systems.

Definition 2.2. *A stochastic control system Σ_s is incrementally input-to-state stable (δ_{\exists} -ISS- M_k) in the k^{th} moment, where $k \geq 1$, if there exist a metric \mathbf{d} , a \mathcal{KL} function β , and a \mathcal{K}_{∞} function γ such that for any $t \in \mathbb{R}_0^+$, any \mathbb{R}^n -valued random variables a and a' that are measurable in \mathcal{F}_0 , and any $v, v' \in \mathcal{U}$, the following condition is satisfied:*

$$(2.2) \quad \mathbb{E}[(\mathbf{d}(\xi_{av}(t), \xi_{a'v'}(t)))^k] \leq \beta(\mathbb{E}[(\mathbf{d}(a, a'))^k], t) + \gamma(\mathbb{E}[\|v - v'\|_{\infty}^k]).$$

Remark 2.3. *Note that if one uses the natural Euclidean metric rather than a general metric \mathbf{d} in Definition 2.2, the notion reduces to the one defined in [ZMEM⁺14, Definition 3.1] which is not invariant under changes of coordinates. Observe that changes of coordinates are one of the main tools used in the backstepping design scheme including the one proposed in this paper.*

One can describe δ_{\exists} -ISS- M_k in terms of existence of δ_{\exists} -ISS- M_k Lyapunov functions as defined next.

Definition 2.4. *Consider a stochastic control system Σ_s and a continuous function $V : \mathbb{R}^n \times \mathbb{R}^n \rightarrow \mathbb{R}_0^+$ that is twice continuously differentiable on $\mathbb{R}^n \times \mathbb{R}^n \setminus \Delta$. The function V is called a δ_{\exists} -ISS- M_k Lyapunov function for Σ_s , if it has polynomial growth rate and there exist a metric \mathbf{d} , \mathcal{K}_{∞} functions $\underline{\alpha}, \bar{\alpha}$, φ , and a constant $\kappa \in \mathbb{R}^+$, such that:*

- (i) $\underline{\alpha}$ (resp. $\bar{\alpha}$ and φ) is a convex (resp. concave) function;
- (ii) $\forall x, x' \in \mathbb{R}^n$, $\underline{\alpha}((\mathbf{d}(x, x'))^k) \leq V(x, x') \leq \bar{\alpha}((\mathbf{d}(x, x'))^k)$;
- (iii) $\forall x, x' \in \mathbb{R}^n$, $x \neq x'$, and $\forall u, u' \in \mathbb{R}^m$,

$$\begin{aligned} \mathcal{L}V(x, x') &:= \begin{bmatrix} \partial_x V(x, x') & \partial_{x'} V(x, x') \end{bmatrix} \begin{bmatrix} f(x, u) \\ f(x', u') \end{bmatrix} + \frac{1}{2} \text{Tr} \left(\begin{bmatrix} \sigma(x) \\ \sigma(x') \end{bmatrix} \begin{bmatrix} \sigma^T(x) & \sigma^T(x') \end{bmatrix} \begin{bmatrix} \partial_{x,x} V & \partial_{x,x'} V \\ \partial_{x',x} V & \partial_{x',x'} V \end{bmatrix} \right) \\ &\quad + \sum_{i=1}^{\bar{r}} \lambda_i (V(x + \rho(x)e_i, x' + \rho(x')e_i) - V(x, x')) \\ &\leq -\kappa V(x, x') + \varphi(\|u - u'\|^k), \end{aligned}$$

where \mathcal{L} is the infinitesimal generator of the stochastic process ξ in (2.1) acting on function V [JP09, equation (23)] and the symbols ∂_x and $\partial_{x,x'}$ represents first and second-order partial derivatives with respect to x and x' , respectively. The following theorem describes δ_{\exists} -ISS- M_k in terms of existence of δ_{\exists} -ISS- M_k Lyapunov functions.

Theorem 2.5. *A stochastic control system Σ_s is δ_{\exists} -ISS- M_k if it admits a δ_{\exists} -ISS- M_k Lyapunov function.*

The proof is similar to the one of Theorem 3.3 in [ZMEM⁺14] and is omitted due to lack of space.

Proof. For any time instance $t \geq 0$, any $v, v' \in \mathcal{U}$, and any random variable a and a' that are \mathcal{F}_0 -measurable, one obtains

$$\begin{aligned} \mathbb{E}[V(\xi_{av}(t), \xi_{a'v'}(t))] &= \mathbb{E}\left[V(\xi_{av}(0), \xi_{a'v'}(0)) + \int_0^t \mathcal{L}V(\xi_{av}(s), \xi_{a'v'}(s)) \, ds\right] \\ &\leq \mathbb{E}[V(\xi_{av}(0), \xi_{a'v'}(0))] + \mathbb{E}\left[\int_0^t (-\kappa V(\xi_{av}(s), \xi_{a'v'}(s)) + \varphi(\|v(s) - v'(s)\|^k)) \, ds\right] \\ &\leq \mathbb{E}[V(\xi_{av}(0), \xi_{a'v'}(0))] + \int_0^t \left(-\kappa \mathbb{E}[V(\xi_{av}(s), \xi_{a'v'}(s))] + \mathbb{E}[\varphi(\|v - v'\|_\infty^k)]\right) \, ds, \end{aligned}$$

where the first equality is an application of the Itô's formula for jump diffusions thanks to the polynomial rate of the function V [ØS05, Theorem 1.24] and the first inequality is because of condition iii) in Definition 2.4. By virtue of Gronwall's inequality, one obtains

$$(2.3) \quad \mathbb{E}[V(\xi_{av}(t), \xi_{a'v'}(t))] \leq \mathbb{E}[V(a, a')]e^{-\kappa t} + \frac{1}{\kappa} \mathbb{E}[\varphi(\|v - v'\|_\infty^k)] \leq \mathbb{E}[V(a, a')]e^{-\kappa t} + \frac{1}{\kappa} \varphi(\mathbb{E}[\|v - v'\|_\infty^k]),$$

where the last inequality follows from Jensen's inequality due to the concavity assumption on the function φ [Øks02, p. 310]. In view of Jensen's inequality, inequality (2.3), the convexity of $\underline{\alpha}$, the concavity of $\bar{\alpha}$, and condition ii) in Definition 2.4, we have the following chain of inequalities

$$\begin{aligned} \underline{\alpha}(\mathbb{E}[(\mathbf{d}(\xi_{av}(t), \xi_{a'v'}(t)))^k]) &\leq \mathbb{E}[\underline{\alpha}((\mathbf{d}(\xi_{av}(t), \xi_{a'v'}(t)))^k)] \leq \mathbb{E}[V(\xi_{av}(t), \xi_{a'v'}(t))] \\ &\leq \mathbb{E}[V(a, a')]e^{-\kappa t} + \frac{1}{\kappa} \varphi(\mathbb{E}[\|v - v'\|_\infty^k]) \leq \mathbb{E}[\bar{\alpha}((\mathbf{d}(a, a'))^k)]e^{-\kappa t} + \frac{1}{\kappa} \varphi(\mathbb{E}[\|v - v'\|_\infty^k]) \\ &\leq \bar{\alpha}(\mathbb{E}[(\mathbf{d}(a, a'))^k])e^{-\kappa t} + \frac{1}{\kappa} \varphi(\mathbb{E}[\|v - v'\|_\infty^k]), \end{aligned}$$

which in conjunction with the fact that $\underline{\alpha} \in \mathcal{K}_\infty$ leads to

$$\begin{aligned} \mathbb{E}[(\mathbf{d}(\xi_{av}(t), \xi_{a'v'}(t)))^k] &\leq \underline{\alpha}^{-1}\left(\bar{\alpha}(\mathbb{E}[(\mathbf{d}(a, a'))^k])e^{-\kappa t} + \frac{1}{\kappa} \varphi(\mathbb{E}[\|v - v'\|_\infty^k])\right) \\ &\leq \underline{\alpha}^{-1}\left(2\bar{\alpha}(\mathbb{E}[(\mathbf{d}(a, a'))^k])e^{-\kappa t} + \frac{2}{\kappa} \varphi(\mathbb{E}[\|v - v'\|_\infty^k])\right). \end{aligned}$$

Therefore, by introducing functions β and γ as

$$(2.4) \quad \beta(y, t) := \underline{\alpha}^{-1}(2\bar{\alpha}(y)e^{-\kappa t}), \quad \gamma(y) := \underline{\alpha}^{-1}\left(\frac{2}{\kappa} \varphi(y)\right),$$

for any $y, t \in \mathbb{R}_0^+$, inequality (2.2) is satisfied. Note that if $\underline{\alpha}^{-1}$ satisfies the triangle inequality (i.e., $\underline{\alpha}^{-1}(a+b) \leq \underline{\alpha}^{-1}(a) + \underline{\alpha}^{-1}(b)$), one can remove the coefficients 2 in the expressions of β and γ in (2.4) to get a less conservative upper bound in (2.2). \square

3. BACKSTEPPING DESIGN PROCEDURE

This section contains the main contribution of the paper. Here, we propose a backstepping control design scheme for a class of stochastic control systems, namely, stochastic Hamiltonian systems with jumps. The proposed methodology provides controllers rendering the closed loop system δ_{\exists} -ISS- M_k . A stochastic Hamiltonian system with jumps is a stochastic control system $\Sigma = (\mathbb{R}^{2n}, \mathbb{R}^n, \mathcal{U}, f, \sigma, \rho)$ described by stochastic differential equations

$$(3.1) \quad \Sigma : \begin{cases} d\mathbf{q} = \partial_p H(\mathbf{q}, \mathbf{p}) \, dt, \\ d\mathbf{p} = \left(-\partial_q H(\mathbf{q}, \mathbf{p}) + b(\mathbf{q}, \mathbf{p}) + G(\mathbf{q})v\right) \, dt + \sigma(\mathbf{q}) \, dW_t + \rho(\mathbf{q}) \, dP_t, \end{cases}$$

where $q = \mathbf{q}(\omega, t) \in \mathbb{R}^n$, $\forall t \in \mathbb{R}_0^+$ and $\forall \omega \in \Omega$, is a generalized coordinate vector of n -degree-of-freedom system; $p = \mathbf{p}(\omega, t) \in \mathbb{R}^n$, $\forall t \in \mathbb{R}_0^+$ and $\forall \omega \in \Omega$, represents a vector of generalized momenta and defined as $\mathbf{p} \, dt = M(\mathbf{q}) \, d\mathbf{q}$, where $M(q)$ is a symmetric, nonsingular, and positive definite inertia matrix; $b(q, p)$ is a smooth damping term; $G(q)v$ is the control force caused by $G(q)$, a nonsingular smooth square matrix,

and by control input v acting on the system; $\sigma(q)$ is the diffusion term; $\rho(q)$ is the reset term capturing the magnitude of jumps; and $\partial_q H$ and $\partial_p H$ represent first order partial derivative of function H with respect to q and p , respectively, where H is a continuously differentiable Hamiltonian function represented in terms of total energy of the system as the following

$$(3.2) \quad H(q, p) = \frac{1}{2} p^T M^{-1}(q) p + \Xi(q),$$

where $\Xi(q)$ represents potential energy of the system. By substituting (3.2) into (3.1), the dynamics of Σ can be rewritten as

$$(3.3) \quad \Sigma : \begin{cases} d\mathbf{q} = M^{-1}(\mathbf{q}) \mathbf{p} dt, \\ d\mathbf{p} = \left(\eta(\mathbf{q}, \mathbf{p}) + G(\mathbf{q}) v \right) dt + \sigma(\mathbf{q}) dW_t + \rho(\mathbf{q}) dP_t, \end{cases}$$

where $\eta(\mathbf{q}, \mathbf{p}) = -\partial_q H(\mathbf{q}, \mathbf{p}) + b(\mathbf{q}, \mathbf{p})$.

Remark 3.1. Note that the dynamic considered in (3.3) is the generalization of the ones given in [WCS12] and [Iwa16]. It extends the former by including the jump term and the latter by adding the diffusion term and representing more general stochastic Hamiltonian systems.

As we already emphasized after Definition 2.1, in order to ensure the existence and uniqueness of the solution process of Σ in (3.3), one requires a Lipschitz assumption on the drift term which implies:

$$(3.4) \quad \|M^{-1}(q)p - M^{-1}(q')p'\| \leq L_1 \|q - q'\| + L_2 \|p - p'\|,$$

for some $L_1, L_2 \in \mathbb{R}^+$ and any $q, q', p, p' \in \mathbb{R}^n$.

We can now state the main result of the paper on the backstepping controller design scheme providing controllers rendering the considered class of stochastic control systems δ_{\exists} -ISS- M_k for any $k \geq 2$.

Theorem 3.2. Consider the stochastic control system Σ of the form (3.3). The state feedback control law

$$(3.5) \quad v = G^{-1}(\mathbf{q}) \left(-\eta(\mathbf{q}, \mathbf{p}) + \kappa_1 \frac{dM(\mathbf{q})}{dt} \mathbf{q} - \kappa_1^2 M(\mathbf{q}) \mathbf{q} - \left(\lambda \frac{(2^{k-1} - 1)}{k} + \frac{L_2}{s_1 \varepsilon_1^{s_1}} + \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2s_2 \varepsilon_2^{s_2}} \right) (\mathbf{p} + \kappa_1 M(\mathbf{q}) \mathbf{q}) + \hat{v} \right),$$

renders the closed-loop stochastic control system Σ δ_{\exists} -ISS- M_k for $k > 2$ with respect to the input \hat{v} , for all

$$\kappa_1 > L_1 + \frac{\max\{L_2, 1\} \varepsilon_1^{r_1}}{r_1} + \frac{\min\{n, r\} L_\sigma^2 \varepsilon_2^{r_2} (k-1)}{2r_2} + \frac{2^{k-1} L_\rho^k \lambda}{k},$$

where $r_1 = \frac{k}{k-1}$, $s_1 = k$, $r_2 = \frac{k}{k-2}$, $s_2 = \frac{k}{2}$, ε_1 and ε_2 are positive constants which can be chosen arbitrarily, $\lambda = \sum_{i=1}^{\tilde{r}} \lambda_i$, and L_1, L_2, L_σ , and L_ρ are the Lipschitz constants introduced in (3.4) and Definition 2.1, respectively.

Note that the term $\frac{dM(\mathbf{q})}{dt}$ in the control law (3.5) can be computed by using the definition of derivative of matrix [WCS12] as

$$\frac{dM(\mathbf{q})}{dt} = \frac{\partial M(\mathbf{q})}{\partial q^T} \times \left(\frac{d\mathbf{q}}{dt} \otimes I_n \right) = \frac{\partial M(\mathbf{q})}{\partial q^T} \times (M^{-1}(\mathbf{q}) \mathbf{p} \otimes I_n),$$

where $\frac{\partial M(\mathbf{q})}{\partial q^T} := \left[\frac{\partial M(\mathbf{q})}{\partial q_1} \quad \frac{\partial M(\mathbf{q})}{\partial q_2} \quad \dots \quad \frac{\partial M(\mathbf{q})}{\partial q_n} \right]_{n \times n^2}$.

Proof. Consider a coordinate transformation as

$$(3.6) \quad \zeta = \psi(\xi) = \begin{bmatrix} \zeta_1 \\ \zeta_2 \end{bmatrix} = \begin{bmatrix} \mathbf{q} \\ \mathbf{p} - \alpha(\mathbf{q}) \end{bmatrix},$$

where $\xi = [\mathbf{q}^T \mathbf{p}^T]^T$ and $\alpha(\mathbf{q}) = -\kappa_1 M(\mathbf{q})\mathbf{q}$ for some $\kappa_1 > 0$. The dynamics of the stochastic control system Σ in (3.3) after the change of coordinates can be written by using Ito's differentiation [Øks02] as

$$(3.7) \quad \hat{\Sigma} : \begin{cases} d\zeta_1 = M^{-1}(\zeta_1)(\zeta_2 + \alpha(\zeta_1)) dt, \\ d\zeta_2 = \left(\eta(\zeta_1, \zeta_2 + \alpha(\zeta_1)) + G(\zeta_1)v + \kappa_1 \frac{dM(\zeta_1)}{dt} \zeta_1 + \kappa_1(\zeta_2 + \alpha(\zeta_1)) \right) dt \\ \quad + \sigma(\zeta_1) dW_t + \rho(\zeta_1) dP_t. \end{cases}$$

Now consider a candidate Lyapunov function $V_1(z_1, z'_1)$, $\forall z_1, z'_1 \in \mathbb{R}^n$, for the ζ_1 -subsystem as follows

$$V_1(z_1, z'_1) = \frac{1}{k} \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}}.$$

The corresponding infinitesimal generator along ζ_1 -subsystem is given by

$$\begin{aligned} \mathcal{L}V_1(z_1, z'_1) &= (z_1 - z'_1)^T \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}-1} \\ &\quad \left[(M^{-1}(z_1)z_2 - M^{-1}(z'_1)z'_2) + (M^{-1}(z_1)\alpha(z_1) - M^{-1}(z'_1)\alpha(z'_1)) \right]. \end{aligned}$$

Now by using the definition of $\alpha(z_1)$, consistency of norm, and (3.4), the infinitesimal generator reduces to

$$(3.8) \quad \mathcal{L}V_1(z_1, z'_1) \leq (L_1 - \kappa_1) \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} + L_2 \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}-1} \|z_1 - z'_1\| \|z_2 - z'_2\|.$$

To handle the second term, we use Young's inequality [KKK95] as

$$(3.9) \quad ab \leq \frac{\varepsilon^r}{r} |a|^r + \frac{1}{s\varepsilon^s} |b|^s,$$

where $\varepsilon > 0$, constants $r, s > 1$ satisfying condition $(r-1)(s-1) = 1$, and $a, b \in \mathbb{R}$. Now by using the consistency of norms and applying Young's inequality (3.9), we can reduce the second term in (3.8) to

$$(3.10) \quad \begin{aligned} L_2 \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}-1} \|z_1 - z'_1\| \|z_2 - z'_2\| &= L_2 \|z_1 - z'_1\|^{k-1} \|z_2 - z'_2\| \\ &\leq \frac{L_2 \varepsilon_1^{r_1}}{r_1} \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} + \frac{L_2}{s_1 \varepsilon_1^{s_1}} \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}}, \end{aligned}$$

where, $r_1 = \frac{k}{k-1}$, $s_1 = k$, and ε_1 is any positive constant. After substituting inequality (3.10) in (3.8), one obtains

$$(3.11) \quad \mathcal{L}V_1(z_1, z'_1) \leq \left(L_1 + \frac{L_2 \varepsilon_1^{r_1}}{r_1} - \kappa_1 \right) \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} + \frac{L_2}{s_1 \varepsilon_1^{s_1}} \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}}.$$

One can readily verify that V_1 is a δ_{\exists} -ISS- M_k function for ζ_1 -subsystem with respect to z_2 as the input provided that $L_1 + \frac{L_2 \varepsilon_1^{r_1}}{r_1} - \kappa_1 < 0$. Function V_1 satisfies the conditions in Definition 2.4 with $\underline{\alpha}(y) = \bar{\alpha}(y) = \frac{1}{k}y$, \mathbf{d} is the natural Euclidean matrix, $\kappa = k(\kappa_1 - L_1 - \frac{L_2 \varepsilon_1^{r_1}}{r_1})$, and $\varphi(y) = \frac{L_2}{s_1 \varepsilon_1^{s_1}} y$, for any $y \in \mathbb{R}_0^+$.

Now consider a Lyapunov function $V_2(z_2, z'_2)$, $\forall z_2, z'_2 \in \mathbb{R}^n$, for the ζ_2 -subsystem as

$$V_2(z_2, z'_2) = \frac{1}{k} \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}}.$$

The respective infinitesimal generator is given by

$$\begin{aligned}
 \mathcal{L}V_2(z_2, z'_2) &= (z_2 - z'_2)^T \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}-1} \\
 &\quad \left[\left(Gu + \eta + \kappa_1 \frac{dM}{dt} z_1 + \kappa_1 (z_2 - \kappa_1 M z_1) \right) - \left(G' u' + \eta' + \kappa_1 \frac{dM'}{dt} z'_1 + \kappa_1 (z'_2 - \kappa_1 M' z'_1) \right) \right] \\
 &\quad + \frac{1}{2} \text{Tr} \left((\sigma(z_1) - \sigma(z'_1)) (\sigma(z_1) - \sigma(z'_1))^T \partial_{z_2 z_2} V_2(z_2, z'_2) \right) \\
 &\quad + \frac{1}{k} \sum_{i=1}^{\tilde{r}} \lambda_i \left(((z_2 + \rho(z_1) e_i) - (z'_2 + \rho(z'_1) e_i))^T ((z_2 + \rho(z_1) e_i) - (z'_2 + \rho(z'_1) e_i)) \right)^{\frac{k}{2}} \\
 (3.12) \quad &\quad - \frac{1}{k} \sum_{i=1}^{\tilde{r}} \lambda_i \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}},
 \end{aligned}$$

where $G = G(z_1)$, $\eta = \eta(z_1, z_2 + \alpha(z_1))$, $M = M(z_1)$, $G' = G(z'_1)$, $\eta' = \eta(z'_1, z'_2 + \alpha(z'_1))$, and $M' = M(z'_1)$. The same abbreviation will be used in the rest of the proof. The first term can be simply handled by selecting proper control input u and the second term can be reduced using consistency of norm, Lipschitz assumption on the diffusion term $\sigma(\cdot)$ and the Young's inequality as follows

$$\begin{aligned}
 &\frac{1}{2} \text{Tr} \left((\sigma(z_1) - \sigma(z'_1)) (\sigma(z_1) - \sigma(z'_1))^T \partial_{z_2 z_2} V_2(z_2, z'_2) \right) \\
 &= \frac{1}{2} \text{Tr} \left((\sigma(z_1) - \sigma(z'_1)) (\sigma(z_1) - \sigma(z'_1))^T \left[\left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}-1} I_n \right. \right. \\
 &\quad \left. \left. + (k-2)(z_2 - z'_2)(z_2 - z'_2)^T \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}-2} \right] \right) \\
 &\leq \frac{k-1}{2} \|\sigma(z_1) - \sigma(z'_1)\|_F^2 \|z_2 - z'_2\|^{k-2} \leq \frac{\min\{n, r\}(k-1)}{2} \|\sigma(z_1) - \sigma(z'_1)\|^2 \|z_2 - z'_2\|^{k-2} \\
 &\leq \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2} \|z_1 - z'_1\|^2 \|z_2 - z'_2\|^{k-2} \\
 (3.13) \quad &\leq \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2} \left[\frac{\varepsilon_2^{r_2}}{r_2} \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} + \frac{1}{s_2 \varepsilon_2^{s_2}} \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}} \right],
 \end{aligned}$$

where $s_2 = \frac{k}{k-2}$, $r_2 = \frac{k}{2}$, and ε_2 is any positive constant. With the help of Jensen's inequality for convex functions [AS03] and of Lipschitz assumption on the reset term $\rho(\cdot)$ (cf. Definition 2.1), the third term in (3.12) can be reduced as

$$\begin{aligned}
 &\frac{1}{k} \sum_{i=1}^{\tilde{r}} \lambda_i \left[\left\| (z_2 - z'_2) + (\rho(z_1) e_i - \rho(z'_1) e_i) \right\|^k - \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}} \right] \\
 &\leq \frac{1}{k} \sum_{i=1}^{\tilde{r}} \lambda_i \left[2^{k-1} \|z_2 - z'_2\|^k + 2^{k-1} L_\rho^k \|z_1 - z'_1\|^k - \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}} \right] \\
 (3.14) \quad &\leq \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}} \frac{(2^{k-1} - 1) \lambda}{k} + \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} \frac{2^{k-1} L_\rho^k \lambda}{k},
 \end{aligned}$$

where $\lambda = \sum_{i=1}^{\bar{r}} \lambda_i$. Finally, the infinitesimal generator (3.12) corresponding to $V_2(z_2, z'_2)$ can be reduced with the help of (3.13) and (3.14) to

$$\begin{aligned}
\mathcal{L}V_2(z_2, z'_2) &\leq \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} \left(\frac{\min\{n, r\} L_\sigma^2 \varepsilon_2^{r_2} (k-1)}{2r_2} + \frac{2^{k-1} L_\rho^k \lambda}{k} \right) \\
&\quad + (z_2 - z'_2)^T \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}-1} \\
&\quad \left[\left(Gu + \eta + \kappa_1 \frac{dM}{dt} z_1 + \kappa_1 (z_2 - \kappa_1 M z_1) + \left(\frac{(2^{k-1}-1)\lambda}{k} + \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2s_2 \varepsilon_2^{s_2}} \right) z_2 \right) \right. \\
(3.15) \quad &\quad \left. - \left(G' u' + \eta' + \kappa_1 \frac{dM'}{dt} z'_1 + \kappa_1 (z'_2 - \kappa_1 M' z'_1) + \left(\frac{(2^{k-1}-1)\lambda}{k} + \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2s_2 \varepsilon_2^{s_2}} \right) z'_2 \right) \right].
\end{aligned}$$

Now consider the Lyapunov function V for the overall system (3.7) as $V(z, z') = V_1(z_1, z'_1) + V_2(z_2, z'_2)$ and the respective infinitesimal generator can be obtained by using (3.11) and (3.15) as

$$\begin{aligned}
\mathcal{L}V(z, z') &\leq \left(L_1 + \frac{L_2 \varepsilon_1^{r_1}}{r_1} + \frac{\min\{n, r\} L_\sigma^2 \varepsilon_2^{r_2} (k-1)}{2r_2} + \frac{2^{k-1} L_\rho^k \lambda}{k} - \kappa_1 \right) \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} \\
&\quad + (z_2 - z'_2)^T \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}-1} \\
(3.16) \quad &\quad \left[\left(Gu + \eta + \kappa_1 \frac{dM}{dt} z_1 + \kappa_1 (z_2 - \kappa_1 M z_1) + \left(\frac{(2^{k-1}-1)\lambda}{k} + \frac{L_2}{s_1 \varepsilon_1^{s_1}} + \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2s_2 \varepsilon_2^{s_2}} \right) z_2 \right) - \right. \\
&\quad \left. \left(G' u' + \eta' + \kappa_1 \frac{dM'}{dt} z'_1 + \kappa_1 (z'_2 - \kappa_1 M' z'_1) + \left(\frac{(2^{k-1}-1)\lambda}{k} + \frac{L_2}{s_1 \varepsilon_1^{s_1}} + \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2s_2 \varepsilon_2^{s_2}} \right) z'_2 \right) \right].
\end{aligned}$$

If we choose the state feedback control law $u(z_1, z_2)$ as

$$\begin{aligned}
u(z_1, z_2) &= G^{-1} \left(-\eta - \kappa_1 \frac{dM}{dt} z_1 + \kappa_1^2 M z_1 \right. \\
&\quad \left. - \left(2\kappa_1 + \frac{(2^{k-1}-1)\lambda}{k} + \frac{L_2}{s_1 \varepsilon_1^{s_1}} + \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2s_2 \varepsilon_2^{s_2}} \right) z_2 + \hat{u} \right),
\end{aligned}$$

where \hat{u} is a new control input with respect to which the closed-loop system will be shown to be δ_3 -ISS- M_k . After using $u(z_1, z_2)$, the inequality (3.16) reduces to

$$\begin{aligned}
\mathcal{L}V(z, z') &\leq - \left(\kappa_1 - \left(L_1 + \frac{L_2 \varepsilon_1^{r_1}}{r_1} + \frac{\min\{n, r\} L_\sigma^2 \varepsilon_2^{r_2} (k-1)}{2r_2} + \frac{2^{k-1} L_\rho^k \lambda}{k} \right) \right) \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} \\
(3.17) \quad &\quad - \kappa_1 \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}} + (z_2 - z'_2)^T \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}-1} (\hat{u} - \hat{u}').
\end{aligned}$$

Now the third term can further be reduced by applying Young's inequality to

$$\begin{aligned}
(z_2 - z'_2)^T \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}-1} (\hat{u} - \hat{u}') &\leq \|z_2 - z_2'\|^{k-1} \|\hat{u} - \hat{u}'\| \\
(3.18) \quad &\leq \frac{\varepsilon_1^{r_1}}{r_1} \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}} + \frac{1}{s_1 \varepsilon_1^{s_1}} \|\hat{u} - \hat{u}'\|^k,
\end{aligned}$$

where the parameters ε_1, s_1 and r_1 are the same as the ones in (3.10). Using (3.18), inequality (3.17) reduces to

$$(3.19) \quad \mathcal{L}V(z, z') \leq -c_1 \left((z_1 - z'_1)^T (z_1 - z'_1) \right)^{\frac{k}{2}} - c_2 \left((z_2 - z'_2)^T (z_2 - z'_2) \right)^{\frac{k}{2}} + c_3 \|\hat{u} - \hat{u}'\|^k,$$

where $c_1 = \left(\kappa_1 - \left(L_1 + \frac{L_2 \varepsilon_1^{r_1}}{r_1} + \frac{\min\{n, r\} L_\sigma^2 \varepsilon_2^{r_2} (k-1)}{2r_2} + \frac{2^{k-1} L_\rho^k \lambda}{k} \right) \right)$, $c_2 = \left(\kappa_1 - \frac{\varepsilon_1^{r_1}}{r_1} \right)$, $c_3 = \frac{1}{s_1 \varepsilon_1^{s_1}}$, all required to be positive. By choosing the design parameter κ_1 as

$$\kappa_1 > L_1 + \frac{\max\{L_2, 1\} \varepsilon_1^{r_1}}{r_1} + \frac{\min\{n, r\} L_\sigma^2 \varepsilon_2^{r_2} (k-1)}{2r_2} + \frac{2^{k-1} L_\rho^k \lambda}{k},$$

one obtains $c_1, c_2, c_3 > 0$.

If $\kappa = \min\{kc_1, kc_2\}$, the inequality (3.19) can further be reduced to

$$(3.20) \quad \mathcal{L}V \leq -\kappa V(z, z') + \varphi(\|\hat{u} - \hat{u}'\|^k),$$

where $\varphi(y) = c_3 y, \forall y \in \mathbb{R}_0^+$, which satisfies condition (iii) of Definition 2.4. One can readily verify that conditions (i) and (ii) in Definition 2.4 are satisfied by defining metric \mathbf{d} as the natural Euclidean one, and defining $\underline{\alpha}(y) = \frac{1}{2^{\frac{k}{2}-1}k}y$, and $\bar{\alpha}(y) = \frac{1}{k}y, \forall y \in \mathbb{R}_0^+$. Now with the help of Theorem 2.5, one obtains

$$(3.21) \quad \mathbb{E}[\|\zeta_{z\hat{v}}(t) - \zeta_{z'\hat{v}'}(t)\|^k] \leq \beta(\mathbb{E}[\|z - z'\|^k], t) + \gamma(\mathbb{E}[\|\hat{v} - \hat{v}'\|_\infty^k]),$$

where $\zeta_{z\hat{v}}(t)$ denotes the value of the solution process of $\hat{\Sigma}$ in (3.7) at time $t \in \mathbb{R}_0^+$ under the input signal \hat{v} and from the initial condition $\zeta_{z\hat{v}}(0) = z$ \mathbb{P} -a.s. The \mathcal{KL} function β , and the \mathcal{K}_∞ function γ can be defined as

$$(3.22) \quad \beta(y, t) = \underline{\alpha}^{-1}(\bar{\alpha}(y)e^{-\kappa t}) = 2^{\frac{k}{2}-1}e^{-\kappa t}y, \quad \gamma(y) = \underline{\alpha}^{-1}\left(\frac{\varphi(y)}{\kappa}\right) = \frac{2^{\frac{k}{2}-1}k}{\kappa}c_3y,$$

for all $y \in \mathbb{R}_0^+$. Now by applying the change of coordinate $\zeta = \psi(\xi)$, where $\xi = [q^T \ p^T]^T$, the control law v reduces to

$$(3.23) \quad v = G^{-1}(\mathbf{q}) \left(-\eta(\mathbf{q}, \mathbf{p}) + \kappa_1 \frac{dM(\mathbf{q})}{dt} \mathbf{q} - \kappa_1^2 M(\mathbf{q}) \mathbf{q} - \left(\frac{(2^{k-1}-1)\lambda}{k} + \frac{L_2}{s_1 \varepsilon_1^{s_1}} + \frac{\min\{n, r\} L_\sigma^2 (k-1)}{2s_2 \varepsilon_2^{s_2}} \right) (\mathbf{p} + \kappa_1 M(\mathbf{q}) \mathbf{q}) + \hat{v} \right),$$

and (3.21) can be rewritten as

$$(3.24) \quad \mathbb{E}[\|\psi(\xi_{x\hat{v}}(t)) - \psi(\xi_{x'\hat{v}'}(t))\|^k] \leq \beta(\mathbb{E}[\|\psi(x) - \psi(x')\|^k], t) + \gamma(\mathbb{E}[\|\hat{v} - \hat{v}'\|_\infty^k]),$$

where $x = [q^T \ p^T]^T$. By defining a metric¹ $\mathbf{d}(x, x') = \|\psi(x) - \psi(x')\|$, we can rewrite (3.24) as

$$(3.25) \quad \mathbb{E}[(\mathbf{d}(\xi_{x\hat{v}}(t), \xi_{x'\hat{v}'}(t)))^k] \leq \beta(\mathbb{E}[(\mathbf{d}(x, x'))^k], t) + \gamma(\mathbb{E}[\|\hat{v} - \hat{v}'\|_\infty^k]),$$

which satisfies condition (2.2) for original Σ . Hence, Σ in (3.3) equipped with the feedback control law (3.23) is δ_{\exists} -ISS- M_k for any $k > 2$. \square

The next corollary provides the same results as the ones in Theorem 3.2 but for $k = 2$.

Corollary 3.3. *Consider the stochastic control system Σ in (3.3). The state feedback control law*

$$v = G^{-1}(\mathbf{q}) \left(-\eta(\mathbf{q}, \mathbf{p}) - \kappa_1 \frac{dM(\mathbf{q})}{dt} \mathbf{q} + \kappa_1^2 M(\mathbf{q}) \mathbf{q} - \left(2\kappa_1 + \frac{\lambda}{2} + \frac{L_2}{2\varepsilon_1^2} \right) (\mathbf{p} + \kappa_1 M(\mathbf{q}) \mathbf{q}) + \hat{v} \right),$$

renders the closed-loop stochastic control system δ_{\exists} -ISS- M_2 with respect to input \hat{v} , for all

$$\kappa_1 > L_1 + \frac{\max\{L_2, 1\} \varepsilon_1^2}{2} + \frac{\min\{n, r\} L_\sigma^2}{2} + L_\rho^2 \lambda,$$

where ε_1 is any positive constant which can be chosen arbitrarily, and L_1, L_2, L_σ , and L_ρ are the Lipschitz constants introduced in (3.4) and Definition 2.1, respectively.

Proof. The corollary is a particular case of Theorem 3.2. The proof is almost similar to that of Theorem 3.2 by substituting $k = 2$. The only difference will appear while handling the trace term (3.13) in ζ_2 -subsystem which is now given by

$$\begin{aligned} & \frac{1}{2} \text{Tr} \left((\sigma(z_1) - \sigma(z'_1)) (\sigma(z_1) - \sigma(z'_1))^T \partial_{z_2 z_2} V_2(z_2, z'_2) \right) \\ & \leq \frac{1}{2} \text{Tr} \left((\sigma(z_1) - \sigma(z'_1)) (\sigma(z_1) - \sigma(z'_1))^T \right) \leq \frac{\min\{n, r\} L_\sigma^2}{2} (z_1 - z'_1)^T (z_1 - z'_1). \end{aligned}$$

The rest of the proof follows similarly the one of Theorem 2.5. \square

¹Since ψ is a bijective function, \mathbf{d} satisfies all the requirements of a metric.

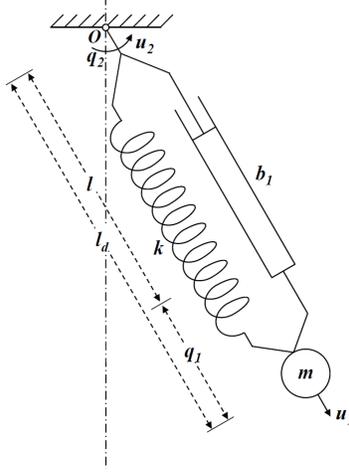


FIGURE 1. Controlled spring pendulum

Remark 3.4. Assume that for all $x, x' \in \mathbb{R}^n$, the change of coordinate map ψ in (3.6) satisfies

$$\underline{\chi}(\|x - x'\|^k) \leq \|\psi(x) - \psi(x')\|^k \leq \bar{\chi}(\|x - x'\|^k),$$

for some \mathcal{K}_∞ convex function $\underline{\chi}$ and \mathcal{K}_∞ concave function $\bar{\chi}$. Then, inequality (3.25) for the original system Σ reduces to

$$\mathbb{E}[\|\xi_{x\hat{v}}(t) - \xi_{x'\hat{v}'}(t)\|^k] \leq \hat{\beta}(\mathbb{E}[\|x - x'\|^k], t) + \hat{\gamma}(\mathbb{E}[\|\hat{v} - \hat{v}'\|_\infty^k]),$$

for the \mathcal{KL} function $\hat{\beta}(y, t) = \underline{\chi}^{-1}(2\beta(\bar{\chi}(y), t))$ and the \mathcal{K}_∞ function $\hat{\gamma}(y) = \underline{\chi}^{-1}(2\gamma(y))$, for any $y, t \in \mathbb{R}_0^+$. Note that if $\underline{\chi}^{-1}$ satisfies the triangle inequality (i.e., $\underline{\chi}^{-1}(a + b) \leq \underline{\chi}^{-1}(a) + \underline{\chi}^{-1}(b)$), one can remove the coefficients 2 in the expressions of $\hat{\beta}$ and $\hat{\gamma}$. Particularly, if the inertia matrix (M) is constant, one has

$$\left\| \begin{bmatrix} q - q' \\ (p + \kappa_1 M q) - (p' + \kappa_1 M q') \end{bmatrix} \right\| = \left\| A \begin{bmatrix} q - q' \\ p - p' \end{bmatrix} \right\| = \|A(x - x')\|,$$

where A is a constant matrix given by

$$A = \begin{bmatrix} I_n & 0_n \\ \kappa_1 M & I_n \end{bmatrix}.$$

Therefore, one obtains

$$(\lambda_{\min}(A^T A))^{\frac{k}{2}} \|x - x'\|^k \leq \|\psi(x) - \psi(x')\|^k = \|A(x - x')\|^k \leq (\lambda_{\max}(A^T A))^{\frac{k}{2}} \|x - x'\|^k,$$

where $\lambda_{\min}(A^T A)$ and $\lambda_{\max}(A^T A)$ denote minimum and maximum eigenvalues of $A^T A$, respectively.

4. CASE STUDY

To verify the efficacy of the control design framework proposed in this paper, we illustrate the results on a spring pendulum attached to stochastically vibrating ceiling and subject to random jumps such as sudden jerks due to interaction with environmental disturbances. The nonlinear dynamics of the considered system is borrowed from [WCS12], now affected by jumps and schematically shown in Figure 1. Let us define the generalized coordinate vector as $\mathbf{q} = [q_1 \ q_2]^T$, where q_1 represents change of arm length as a difference between the dynamic length (l_d) and static length (l) of a spring pendulum; and q_2 is the angle of pendulum with vertical axis. The corresponding generalized momenta vector is given by $\mathbf{p} = [m \frac{dq_1}{dt} \ m(l + q_1)^2 \frac{dq_2}{dt}]^T$, where m is the mass of the ball, which gives the inertia matrix $M(q)$ as

$$(4.1) \quad M(q) = \begin{bmatrix} m & 0 \\ 0 & m(l + q_1)^2 \end{bmatrix}.$$

The Hamiltonian function $H(q, p)$ is given by the total energy of the system as

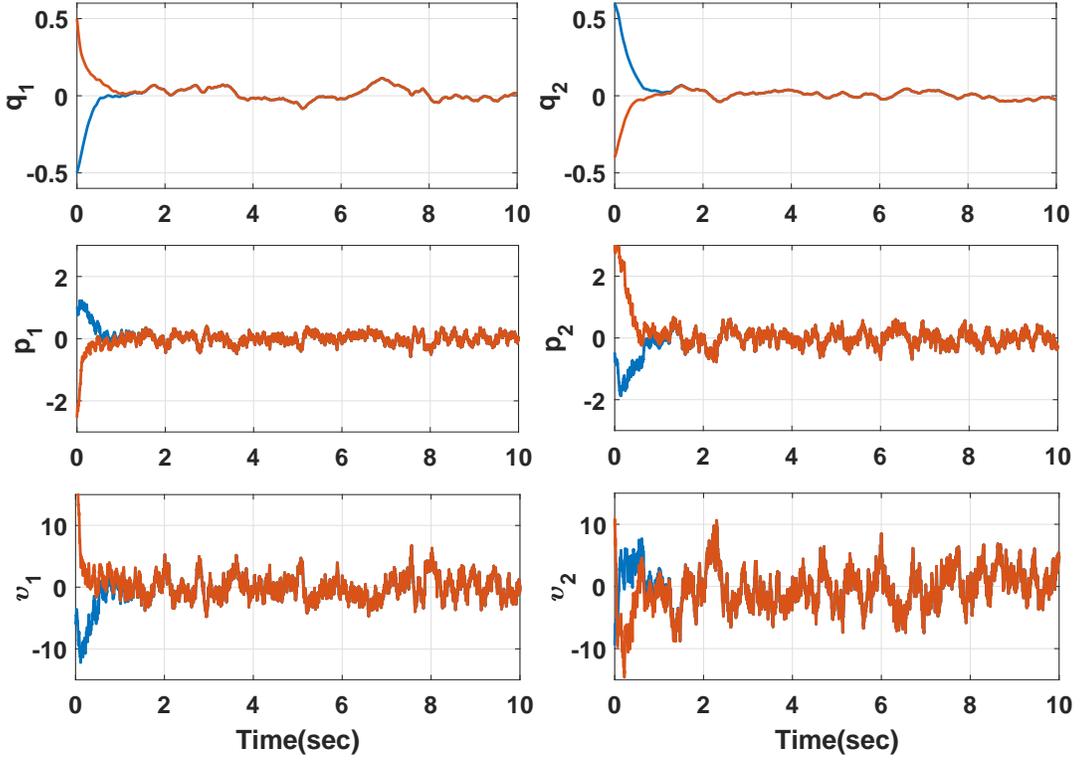


FIGURE 2. Two trajectories q (top two plots), two trajectories p (middle two plots) started from two different initial conditions $[q; p] = [0.5; -0.4; -2.5; 3]$ and $[q'; p'] = [-0.5; 0.6; 1; -0.5]$, and the two corresponding input trajectories v_1 and v_2 (bottom two plots)

$$H(q, p) = \frac{p_1^2}{2m} + \frac{p_2^2}{2m(l+q_1)^2} + \frac{k_s q_1^2}{2} + mg(l+q_1)(1 - \cos q_2),$$

where k_s is an elasticity coefficient of spring and g is the acceleration due to gravity. Now $\eta(q, p) = -\frac{\partial H}{\partial q}(q, p) + b(q, p)$ can be calculated as

$$(4.2) \quad \eta(q, p) = \begin{bmatrix} \frac{p_2^2}{m(l+q_1)^3} - k_s q_1 - mg(1 - \cos q_2) \\ -mg(l+q_1) \sin q_2 \end{bmatrix} + \begin{bmatrix} -\frac{b_1 p_1}{m} \\ -\frac{b_2 p_2}{m} \end{bmatrix},$$

where b_1 is a damping coefficient of piston and b_2 is an air damping coefficient. By considering a 2-dimensional Brownian motion, the diffusion function $\sigma(q)$ can be determined with the help of notion of relative kinematics by considering point O in Figure 1 stochastically vibrating [WCS12] which is given by

$$\sigma(q) = \begin{bmatrix} -m \sin q_2 & m \cos q_2 \\ -m(l+q_1) \cos q_2 & -m(l+q_1) \sin q_2 \end{bmatrix}.$$

To introduce abrupt jumps in the system, we consider a one dimensional Poisson process with the rate $\lambda = 1$ and linear reset function $\rho(q) = q$. The term $\frac{dM(q)}{dt}$ can be obtained as

$$(4.3) \quad \frac{dM(q)}{dt} = \frac{\partial M(q)}{\partial q^T} \times \left(\frac{dq}{dt} \otimes I_2 \right) = \begin{bmatrix} 0 & 0 \\ 0 & \frac{2(1+q_1)p_1}{m} \end{bmatrix}.$$

As control input $v = [v_1 \ v_2]^T$ itself acting on the mass, one gets $G(q) = I_2$. Now with the help of (4.1), (4.2),

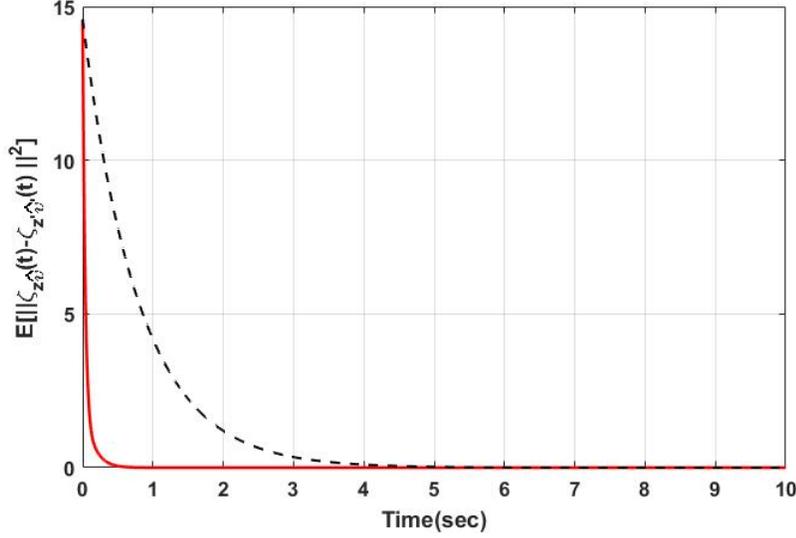


FIGURE 3. The average value of the squared distance of two trajectories of $\hat{\Sigma}$ started from two different initial conditions $z = [0.5; -0.4; -0.9; -2.12]$ and $z' = [-0.5; 0.6; -0.6; 1.42]$. The black dotted curve indicates corresponding bound given by (4.4).

(4.3), Theorem 3.2, and fixing $k = 2$, we can obtain the final state feedback control input v for the considered system as follows

$$\begin{aligned}
v_1(\mathbf{q}, \mathbf{p}) &= -\frac{\mathbf{p}_2^2}{m(l + \mathbf{q}_1)^3} + k_s \mathbf{q}_1 + mg(1 - \cos \mathbf{q}_2) + \frac{b_1 \mathbf{p}_1}{m} - \kappa_1 \left(\kappa_1 + \frac{\lambda}{2} + \frac{L_2}{2\varepsilon_1^2} \right) m \mathbf{q}_1 \\
&\quad - \left(2\kappa_1 + \frac{\lambda}{2} + \frac{L_2}{2\varepsilon_1^2} \right) \mathbf{p}_1 + \hat{v}_1, \\
v_2(\mathbf{q}, \mathbf{p}) &= mg(l + \mathbf{q}_1) \sin \mathbf{q}_2 + \frac{b_2 \mathbf{p}_2}{m} + \frac{2\kappa_1(1 + \mathbf{q}_1) \mathbf{p}_1 \mathbf{q}_2}{m} - \kappa_1 \left(\kappa_1 + \frac{\lambda}{2} + \frac{L_2}{2\varepsilon_1^2} \right) m \mathbf{q}_2 (l + \mathbf{q}_1)^2 \\
&\quad - \left(2\kappa_1 + \frac{\lambda}{2} + \frac{L_2}{2\varepsilon_1^2} \right) \mathbf{p}_2 + \hat{v}_2,
\end{aligned}$$

rendering the closed-loop system δ_{\exists} -ISS- M_2 with respect to input $[\hat{v}_1 \ \hat{v}_2]^T$ for any arbitrarily chosen $\varepsilon_1 > 0$ and appropriately chosen κ_1 . For the simulation purpose, we consider system parameters as $m = 0.8$, $l = 1.5$, $g = 9.8$, $k_s = 15$, $b_1 = 1$, and $b_2 = 1$; all the constants and the variables are considered in SI units; the Lipschitz constants are computed as $L_1 = 1$, $L_2 = 2$, $L_\sigma = 1$, and $L_\rho = 1$, and the design parameters are chosen as $\varepsilon_1 = 0.5$ and $\kappa_1 = 4$. We choose inputs $\hat{v}_1(t) = \hat{v}_2(t) = 0.5 \sin t$. Figure 2 shows the evolution of the closed-loop trajectories \mathbf{q} and \mathbf{p} in presence of Brownian noise and Poisson jumps started from two different initial conditions $[q; p] = [0.5; -0.4; -2.5; 3]$ and $[q'; p'] = [-0.5; 0.6; 1; -0.5]$ and the evolution of the corresponding input trajectories v_1 and v_2 . Figure 2 shows that indeed, by virtue of the δ_{\exists} -ISS- M_2 property, both trajectories converge to each other. To verify the bound on $\mathbb{E}[\|\zeta_{z\hat{v}}(t) - \zeta_{z'\hat{v}}(t)\|^2]$ as given in (3.21), we simulated the closed-loop system for 5000 realizations, two fixed initial conditions, and the same input for both trajectories (i.e $\hat{v} = \hat{v}'$). The inequality (3.21) reduces to

$$(4.4) \quad \mathbb{E}[\|\zeta_{z\hat{v}}(t) - \zeta_{z'\hat{v}}(t)\|^2] \leq \beta(\|z - z'\|^2, t),$$

where the \mathcal{KL} function β is given in (3.22) and computed as $\beta(y, t) = e^{-\kappa t} y$ with $\kappa = 1.25$. The average value of the squared distance of two trajectories of $\hat{\Sigma}$ started from two different initial conditions $z = [0.5; -0.4; -0.9; -2.12]$ and $z' = [-0.5; 0.6; -0.6; 1.42]$ together with computed theoretical bound are

shown in Figure 3. One can readily verify that the simulated distance is always lower than the computed theoretical one in (4.4).

5. CONCLUSION

We introduced a coordinate invariant notion of incremental input-to-state stability for stochastic control systems with jumps and provided its description in terms of existence of a notion of so-called incremental Lyapunov functions. Furthermore, a backstepping controller design scheme was proposed for a class of nonlinear stochastic Hamiltonian systems with jumps. The design scheme provides controllers rendering the close-loop systems δ_{\exists} -ISS- M_k . Finally, we illustrated the effectiveness of the results on a nonlinear stochastic Hamiltonian system.

REFERENCES

- [Ang02] D. Angeli. A Lyapunov approach to incremental stability properties. *IEEE Transactions on Automatic Control*, 47(3):410–421, March 2002.
- [AS03] J. S. Aujla and F. C. Silva. Weak majorization inequalities and convex functions. *Linear Algebra and Its Applications*, 369:217–233, August 2003.
- [BML⁺10] B. N. Bond, Z. Mahmood, Y. Li, R. Sredojevic, A. Megretski, V. Stojanovi, Y. Avniel, and L. Daniel. Compact modeling of nonlinear analog circuits using system identification via semidefinite programming and incremental stability certification. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 29(8):1149–1162, August 2010.
- [DK99] H. Deng and M. Krstic. Output-feedback stochastic nonlinear stabilization. *IEEE Transactions on Automatic Control*, 44(2):328–333, February 1999.
- [HM09] L. Huang and X. Mao. On input-to-state stability of stochastic retarded systems with Markovian switching. *IEEE Transactions on Automatic Control*, 54(8):1898–1902, August 2009.
- [HSSG12] A. Hamadeh, G. B. Stan, R. Sepulchre, and J. Goncalves. Global state synchronization in networks of cyclic feedback systems. *IEEE Transactions on Automatic Control*, 57(2):478–483, February 2012.
- [Iwa16] R. Iwankiewicz. Dynamic response of mechanical systems to impulse process stochastic excitations: Markov approach. In *Journal of Physics: Conference Series*, volume 721, pages 12010–12024. IOP Publishing, 2016.
- [JP09] A. A. Julius and G. J. Pappas. Approximations of stochastic hybrid systems. *IEEE Transaction on Automatic Control*, 54(6):1193–1203, June 2009.
- [KKK95] M. Krstic, P. V. Kokotovic, and I. Kanellakopoulos. *Nonlinear and adaptive control design*. John Wiley & Sons, Inc., 1995.
- [KS91] I. Karatzas and S. E. Shreve. *Brownian Motion and Stochastic Calculus*, volume 113 of *Graduate Texts in Mathematics*. Springer-Verlag, New York, 2nd edition, 1991.
- [KYMY13] S. Khoo, J. Yin, Z. Man, and X. Yu. Finite-time stabilization of stochastic nonlinear systems in strict-feedback form. *Automatica*, 49(5):1403–1410, May 2013.
- [LLN12] Z. Lin, J. Liu, and Y. Niu. Dissipative control of non-linear stochastic systems with Poisson jumps and Markovian switchings. *IET Control Theory Applications*, 6(15):2367–2374, October 2012.
- [LS98] W. Lohmiller and J. J. Slotine. On contraction analysis for non-linear systems. *Automatica*, 34(6):683 – 696, 1998.
- [MZ12] R. Majumdar and M. Zamani. Approximately bisimilar symbolic models for digital control systems. In P. Madhusudan and Sanjit A. Seshia, editors, *Computer Aided Verification*, volume 7358 of *Lecture Notes in Computer Science (LNCS)*, pages 362–377. Springer Berlin Heidelberg, July 2012.
- [Øks02] B. Øksendal. *Stochastic differential equations: An introduction with applications*. Springer, 5th edition, November 2002.
- [ØS05] B. Øksendal and A. Sulem. *Applied Stochastic Control of Jump Diffusions*. Universitext. Springer-Verlag, Berlin, 2005.
- [PGT08] G. Pola, A. Girard, and P. Tabuada. Approximately bisimilar symbolic models for nonlinear control systems. *Automatica*, 44(10):2508–2516, October 2008.
- [PTS09] Q. C. Pham, N. Tabareau, and J. J. Slotine. A contraction theory approach to stochastic incremental stability. *IEEE Transactions on Automatic Control*, 54(4):816–820, April 2009.
- [PWN06] A. V. Pavlov, N. Wouw, and H. Nijmeijer. *Uniform output regulation of nonlinear systems: A convergent dynamics approach*. Springer Science & Business Media, 2006.
- [SF13] S. Satoh and K. Fujimoto. Passivity based control of stochastic port-Hamiltonian systems. *IEEE Transactions on Automatic Control*, 58(5):1139–1153, May 2013.
- [SS07] G. B. Stan and R. Sepulchre. Analysis of interconnected oscillators by dissipativity theory. *IEEE Transactions on Automatic Control*, 52(2):256–270, February 2007.

- [WCS12] Z. Wu, M. Cui, and P. Shi. Backstepping control in vector form for stochastic Hamiltonian systems. *SIAM Journal on Control and Optimization*, 50(2):925–942, April 2012.
- [ZA14] M. Zamani and A. Abate. Approximately bisimilar symbolic models for randomly switched stochastic systems. *Systems & Control Letters*, 69:38–46, July 2014.
- [ZAG15] M. Zamani, A. Abate, and A. Girard. Symbolic models for stochastic switched systems: A discretization and a discretization-free approach. *Automatica*, 55:183–196, May 2015.
- [ZCA13] B. G. Zhang, L. Chen, and K. Aihara. Incremental stability analysis of stochastic hybrid systems. *Nonlinear Analysis: Real World Applications*, 14(2):1225–1234, April 2013.
- [ZMEM⁺14] M. Zamani, P. M. Esfahani, R. Majumdar, A. Abate, and J. Lygeros. Symbolic control of stochastic systems via approximately bisimilar finite abstractions. *IEEE Transactions on Automatic Control*, 59(12):3135–3150, December 2014.
- [ZT11] M. Zamani and P. Tabuada. Backstepping design for incremental stability. *IEEE Transactions on Automatic Control*, 56(9):2184–2189, September 2011.
- [ZTA16] Majid Zamani, Ilya Tkachev, and Alessandro Abate. Towards scalable synthesis of stochastic control systems. *Discrete Event Dynamic Systems*, pages 1–29, 2016.
- [ZvdWM13] M. Zamani, N. van de Wouw, and R. Majumdar. Backstepping controller synthesis and characterizations of incremental stability. *Systems & Control Letters*, 62(10):949–962, October 2013.

¹DEPARTMENT OF ELECTRICAL AND COMPUTER ENGINEERING, TECHNICAL UNIVERSITY OF MUNICH, D-80290 MUNICH, GERMANY.

E-mail address: {pushpak.jagtap,zamani}@tum.de

URL: <http://www.hcs.ei.tum.de>