

A Joint Optimization of Operational Cost and Performance Interference in Cloud Data Centers

Xibo Jin, Fa Zhang, Lin Wang, Songlin Hu, Biyu Zhou and Zhiyong Liu

Institute of Computing Technology, Chinese Academy of Sciences

University of Chinese Academy of Sciences, Beijing, China

Email: {jinxibo, zhangfa, wangling, husonglin, zhoubiyu, zylu}@ict.ac.cn

Abstract—Virtual machine (VM) scheduling is an important technique to efficiently operate the computing resources in a data center. Previous work has mainly focused on consolidating VMs to improve resource utilization and thus to optimize energy consumption. However, the interference between collocated VMs is usually ignored, which can result in very worse performance degradation to the applications running in those VMs due to the contention of the shared resources. Based on this observation, we aim at designing efficient VM assignment and scheduling strategies where we consider optimizing both the operational cost of the data center and the performance degradation of running applications and then, we propose a general model which captures the inherent tradeoff between the two contradictory objectives. We present offline and online solutions for this problem by exploiting the spatial and temporal information of VMs where VM scheduling is done by jointly consider the combinations and the life-cycle overlapping of the VMs. Evaluation results show that the proposed methods can generate efficient schedules for VMs, achieving low operational cost while significantly reducing the performance degradation of applications in cloud data centers.

I. INTRODUCTION

Cloud computing has become a promising choice for modern computing platforms and will most likely continue to be the dominant service model in the future. The foundation of cloud computing is founded by taking advantage of virtualization technologies such as VMware [1] and Xen [2] to encapsulate applications into virtual machines (VMs) and allow independent applications to execute on the same physical server simultaneously. Furthermore, cloud computing affords users to obtain, configure, and deploy cloud services themselves using cloud service catalogues, without requiring the assistance of IT (Infrastructure Technology) [3]. The feasibility of VM consolidation and on-demand resource allocation offers an opportunity for cloud operators to multiplex resources among users and thus improve the operational cost, e.g., reducing the energy consumption.

However, although it brings better utilization to the cloud system, such kind of resource multiplexing is not always beneficial. When VMs are consolidated together, the performance interference between the VMs brought by the contention of shared resources such as last-level-cache, memory bus, network and disk bandwidth can not be ignored [4], [5], [6], [7], [8], [9]. As compared to running in a dedicated server, a VM has to compete on the shared resources with other VMs that collocated with it and

thus the performance will be degraded even with the same resource reservation. While previous work is focused on analysis on application-level interference in single servers, we aim to study the assignment and scheduling of VMs to physical servers, mitigating the performance interference while optimizing the operational cost. We tackle this combinatorial problem of joint optimization by leveraging the specific structures of VM collocation.

A. Performance Interference inside a Cloud Data Center

It is necessary to provide efficient management of performance interference in order to guarantee the quality of service for tenants in a cloud data center. In general, the performance interference between VMs can be affected by the following two factors.

VM combination. Recent researches have analysed the resource contention for possible VM combinations and suggested to collocate those VMs that have less competition between shared resources [4], [5], [6], [7], [8], [9]. In order to quantify the overall performance interference between collocated VMs, we evaluated the performance degradation of VMs using SPECcpu 2006 benchmark [10] where we assume each application executes in a virtual machine and runs on a physical core. We define the *Performance Degradation Ratio* (PDR) of a VM as the increment of running time divided by the time used for the VM to be executed in a dedicated server. The statistical results are demonstrated in Table I. As can be seen from the table, the PDR of 429.mcf when being collocated with 470.1bm is 62.08% while it is 11.90% when being collocated with 403.gcc. This reveals that different VM combinations lead to variable level of performance interference. As a result, VM placement can be done in an intelligent way such that the performance interference between VMs is minimized. Another observation is that the PDRs of VMs become larger with the increase of number of collocated VMs. For example, in Table I, the PDRs of 470.1bm and 403.gcc are 10.06% and 44.53% respectively, while these values increase up to 16.29% and 67.55% when a third VM for 429.mcf is launched simultaneously on the same physical server.

Life-cycle overlapping. It is a challenging problem to take into account the life cycles of VMs. On the one hand, overlapping the execution of VMs can improve the resource

TABLE I: Running times (and stretches in percentile) of applications (VMs) collocated in the same physical server. (For example, the 1st row means each application runs on a dedicated server and, the 3rd row means 403.gcc and 429.mcf collocate in a server, et al.)

	401.bzip2	403.gcc	429.mcf	453.povray	470.lbm
401.bzip2/403.gcc/429.mcf/453.povray/470.lbm	498	265	269	186	318
401.bzip2 + 470.lbm	642 (28.92)	–	–	–	358 (12.58)
403.gcc + 429.mcf	–	299 (12.83)	301 (11.90)	–	–
429.mcf + 470.lbm	–	–	436 (62.08)	–	366 (15.09)
403.gcc + 453.povray	–	270 (1.89)	–	193 (3.76)	–
453.povray + 470.lbm	–	–	–	201 (8.06)	326 (2.52)
403.gcc + 470.lbm	–	383 (44.53)	–	–	350 (10.06)
403.gcc + 429.mcf + 470.lbm	–	444 (67.55)	487 (81.04)	–	407 (16.29)
401.bzip2 + 429.mcf + 470.lbm	725 (45.58)	–	482 (79.18)	–	404 (27.04)
401.bzip2 + 403.gcc + 429.mcf + 470.lbm	778 (56.22)	495 (86.79)	538 (100.00)	–	466 (46.54)

TABLE II: Running times (and stretches in percentile) of applications (VMs) collocated in the same physical server with different overlap times. (For example, the 1st grid means 429.mcf and 403.gcc collocate in a physical server with different overlap times. I.e., +60 means that 403.gcc starts after 429.mcf has run 60 unit times.)

Apps	0	+60	+120	+180
429.mcf	301 (11.90)	294 (9.29)	283 (5.20)	277 (2.97)
403.gcc	299 (12.83)	292 (10.19)	286 (7.92)	278 (4.91)
470.lbm	404 (27.04)	377 (18.55)	354 (11.32)	336 (5.66)
429.mcf	482 (79.18)	440 (63.57)	401 (49.07)	360 (33.83)
401.bzip2	725 (45.58)	643 (29.12)	578 (16.06)	523 (5.02)
470.lbm	466 (46.54)	407 (27.99)	357 (12.26)	337 (5.97)
429.mcf	538 (100.0)	476 (76.95)	418 (55.39)	365 (35.69)
403.gcc	495 (86.79)	424 (60.00)	353 (33.21)	293 (10.57)
401.bzip2	778 (56.22)	658 (32.13)	550 (10.44)	510 (2.41)

utilization of the system and thus reduce the marginal cost.¹ On the other hand, due to performance interference, reducing the overlap of the executions of VMs can mitigate performance degradation thus shortening the completion times of VMs. This can be verified by the results shown in Table II. For example, when collocated with 470.lbm, 429.mcf, and 401.bzip2, 403.gcc receives a considerable reduction on PDR from 86.79% to 10.57% with the lessening of the execution overlaps. As a consequence of performance interference, the neglect of life-cycle overlapping can result in more serious problems such as resource-reservation violation brought by the stretch on the execution duration of VMs. Moreover, the performance of some VMs will become unacceptably worse when the execution is always overlapped with other mutual-interference VMs and therefore, their performance is degraded all the time by collocated VMs.

B. Tradeoff between Operational Cost and Performance Interference

In general, operational cost refers to the daily expenditure caused by the operation of a cloud computing system,

¹This refers to the static cost irrespective of the load of server incurred by always-on components such as idle-energy.

including electricity cost and system maintenance expenses. Among them, the electricity cost takes a dominant proportion [11], [12]. As a consequence, achieving energy efficiency on servers can result in significant reduction on the operational cost of a data center. For this reason, we will use the term *energy consumption* to refer to operational cost. Throughout the paper, we use both terms interchangeably. There has been a large body of work focused on improving the energy efficiency of single servers, such as Dynamic Voltage Frequency Scaling (DVFS) and powering down [13]. Based on the two fundamental mechanisms, researches have investigated to reduce the energy consumption of a cloud system using virtualization techniques such as VM consolidation to improve hardware utilization. However, while these methods can help reach the goal of energy conservation elegantly, very little attention has been paid on the accompanying side-effect, i.e., performance interference. Moreover, to the best of our knowledge, a quantitative analysis on the tradeoff between energy consumption and performance interference is almost completely missing in the literature, which is highly desired by cloud operators.

We study the VM assignment and scheduling problem for arbitrating between energy consumption and performance interference, i.e., reducing energy consumption while maintaining low performance degradation for VMs. On the one hand, ideally, the energy consumption is minimized when a minimum number of servers is used. This can be done by consolidating VMs and then turning idle servers into some power-saving mode (sleeping or power-off). The set of active servers is managed dynamically according to the workload. Consequently, the energy consumed by under-utilized servers can be saved, as well as the corresponding cost incurred by power delivery and cooling infrastructure.

On the other hand, VM consolidation can result in undesirable performance interference between VMs because of the contention in shared resources. This performance interference can stretch the execution durations of VMs to a large extent, which may bring unacceptable performance loss to user applications (and further result in Service-Level-Agreement violation). A simple example is illustrated in Fig. 1. It can be observed that the assignment shown in the right-side figure is better than the one shown on

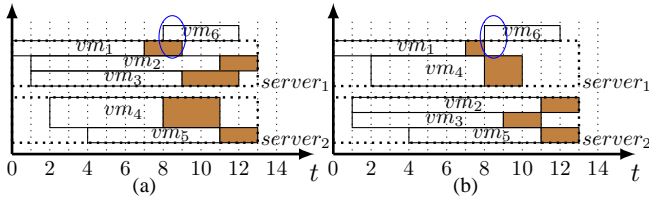


Fig. 1: Two ways of VM allocation. Assume the two servers have the same resource capacity of $\{1\}$ unit and each VM from $\{vm_1, vm_2, vm_3, vm_5, vm_6\}$ demands $\{\frac{1}{3}\}$ unit while vm_4 requires $\{\frac{2}{3}\}$ unit. The rectangles in color represent the stretch of execution time due to resource contention, which represent the same mean in the following figures. (a): An inappropriate scheduling, (b): A better scheduling.

the left in terms of two aspects: *i*) the performance of most VMs such as vm_4 is less degraded and *ii*) the real-time accommodation of vm_6 becomes possible. (As shown in the part of the ellipses.) This also reveals that the two factors, VM combination and life-cycle overlapping, are coupled and mutually affected. Therefore, in order to arbitrate between energy consumption and performance interference, it is necessary to provide a careful design of VM consolidation where VMs are allocated with appropriate combinations and collocated VMs are scheduled with the the most favourable life-cycle overlapping.

C. Overview of the Paper

In this work, we seek to find out efficient solutions for reducing the energy consumption while minimizing the performance interference among VMs. Our main contributions are summarized in the following three aspects:

- 1) We characterize the energy consumption and the performance interference in a unified model and formally formulate the challenge of VM assignment and scheduling into an optimization problem. We also prove the NP-Completeness of the problem;
- 2) We propose efficient algorithms for offline VM assignment and scheduling, assuming all information is known a priori;
- 3) We extend the offline algorithms to the case with dynamic VM arrival. Using information such as resource reservation, these algorithms can further be improved. We also provide a distributed implementation of the algorithms for large-scale data centers; and
- 4) We evaluate the efficiency of the proposed algorithms through comprehensive simulations, showing that the proposed solution can achieve desirable arbitration between energy consumption and performance interference.

The rest of this paper is organized as follows. In Section II, we summarize the related works relevant to ours. Section III shows the modelling of the problem. Section IV provides our algorithms for VM assignment and scheduling where both offline and online cases are considered, while distributed solution is also provided. Section V validates the

performance of the algorithms by extensive simulations. We finally conclude the paper in Section VI.

II. RELATE WORK

With the cloud computing being used more and more widely, researchers have conducted studies on executing traditional applications (e.g., HPC and scientific computing) in cloud environments. This section summarizes the research efforts on VM assignment and scheduling that is relevant to our work in terms of operational energy management and application performance interference in data centers.

Energy consumption management. It is known that the most efficient way to reduce the energy consumption is consolidating the applications (VMs) into a set of active servers, such that the utilization of the data center is kept at a high level. An early research [14] extended virtualization solutions to support rich and effective policies for active power management which had not been done before. They integrated “hard” and “soft” power states to provide high power savings, and showed that substantial benefits could be derived from coordination of online methods for server consolidation with their proposed management techniques. Kusic *et al.* [15] considered the problem of consolidating services onto a smaller number of computing resources. They implemented a dynamic resource provisioning framework for virtualized server environments, which was tackled as one of sequential optimization and solved using a lookahead control scheme. Beloglazov *et al.* [16] investigated scheduling algorithms that consolidate VMs onto the minimum number of servers. They proposed a policy as known as Modified Best Fit Decreasing (MBFD), for energy-efficient management of cloud computing environments. There is another representative work [17], in which the authors investigated the energy-saving problem by dynamically “right-sizing” the data center in both offline and online cases. Liu *et al.* [18] studied the problem of arbitrating the power-performance tradeoff in clouds. They provided a probabilistic framework where online decisions are made on request admission control, routing, and VM allocation.

Therefore, these works are totally different from our work as they only focus on optimizing energy consumption while guaranteeing some other metrics, such as throughput. In our approach, the performance interference is an important objective for scheduling.

Performance interference optimization. Several works [4], [5], [6], [7], [8], [9], [19] have take into account the performance interference when exploiting the virtual machine consolidation to improve resource utilization. Govindan *et al.* [4] presented a technique for predicting performance interference due to processor cache sharing. They showed that their technique can be used to achieve the most efficient consolidation as the prediction of the performance degradation for any possible application placement only use a linear number of measurements. Chiang *et al.* [5] considered the problem of interference-aware scheduling

for data-intensive applications in virtualized environment. They presented a task and resource allocation control framework, which can mitigate the interference effects from concurrent data-intensive applications and improve the overall system performance. Mars *et al.* [6] presented a characterization methodology, named “Bubble-Up”, which enables the accurate prediction of the performance degradation that results from contention for shared resources in memory subsystem. They showed their methodology could predict the performance interference between collocated applications with an accuracy within 1% to 2% of the actual performance degradation. Roytman *et al.* [7] proposed a system that consolidates virtual machines to minimize the unused resources, and guarantees that the performance degradation is within a tunable bound. Their system employed a method for suitable VM combinations which was proved to perform closely to the optimal, and the system included another technique that maximizes performance while not leaving any resource unused. Kim *et al.* [8] suggested a performance model that considers interferences in the shared last-level cache and memory bus. They claimed that the model could be used to estimate the performance degradation among applications. Based on the interference model they also presented a virtual machine consolidation method. Verboven *et al.* [9] addressed the performance degradation prediction models and proposed a novel approach using both the classification and regression capabilities of support vector machines. A latest survey [19] gave the state of the art of some of these solutions for managing the performance overhead in different cloud scenarios.

Compared with these previous works considering performance interference optimization, our model provides a unified characterization of both the energy consumption and the performance interference and our solution for VM assignment and scheduling considers both VM combination and life-cycle overlapping. We explore the tradeoff between the performance degradation overhead of VMs and resource provision of cloud data centers on a high level, which is raised as an open research issue in [20]. Moreover, our work can be regarded as a complement to previous works in terms of that the solutions provided by them can be integrated into our optimization framework to reduce the overall cost of a cloud system.

III. MODEL AND PROBLEM DESCRIPTION

In this section we describe the model and formulate an optimization problem of VMs scheduling that aims at arbitrating between energy consumption cost and performance degradation penalty.

A. Resource Allocation and Energy Cost

We model cloud data center as an undirected graph and denote it by $G = (\mathcal{M}, \mathcal{L})$, where \mathcal{M} ($|\mathcal{M}| = M$) is the set of physical servers and \mathcal{L} is the set of physical links between servers. Each server $server_i \in \mathcal{M}$ is associated with s type of resources, e.g., CPU, memory, and storage

space *et al.* The resources of $server_i$ are available in $\mathbf{R}_i = \{C_{ik}\}$ ($k = 1, 2, \dots, s$) units, respectively.

Recent studies [15], [21] have shown that the power consumption $P[u(t)]$ and the CPU utilization $u(t)$ of a server has a linear relationship

$$P[u(t)] = P_{idle} + (P_{peak} - P_{idle}) * u(t), \quad (1)$$

The P_{idle} and P_{peak} represent the power consumption by a server at the CPU utilization of 0% and 100%, respectively. Obviously, the energy consumption of a server is its power integrated over duration time, i.e., $\int_t P[u(t)] dt$.

B. Virtual Machine Request and Interference

Cloud computing provides users with scalable, elastic and on-demand resources. Users submit their VM requests to cloud data center scheduler. Each VM request vm_j is specified by an instance vector $\mathbf{I}_j = [a_j, p_j, \mathbf{R}_j]$, where a_j is the arrival time, and p_j is the work of processing time when vm_j runs alone. Note that the VMs should start at the arrival time. The capacity vector $\mathbf{R}_j = \{R_{jk}\}$ ($k = 1, 2, \dots, s$) represents the resources that vm_j requires for processing its work. For example, an instance type of VM in Amazon EC2 [22] specifies its resource capacity {CPU:2 vcpu/8 EC2 units, memory:7GB, storage:1680GB}.

For each pair of vm_j and $vm_{j'}$, it defines the degradation factor $d_{jj'} \geq 0$ as the percentage increase in the execution time of vm_j when they run concurrently on the same server. It is assumed that the performance degradation factor $d_{jj'}$ between each pair of VMs, when allocating together, is known from existing methods [4], [6], [7], [9], [23], and we focus on the virtual machine scheduling given these factors. Note that $d_{jj'}$ may not equal to $d_{j'j}$ as two VMs will experience different degradation suffering from each other. It is also noted that adding VMs to the server to concurrently run with exist VMs will not reduce the degradation of previous VMs [7]. It defines the degradation factor $d_{j\mathcal{J}}$ of vm_j when it concurrently runs with a set \mathcal{J} of VMs. Without loss of generality, it defines the $d_{j\mathcal{J}}$ as

$$d_{j\mathcal{J}} = \Pi_{j' \in \mathcal{J}} (1 + d_{jj'}) - 1. \quad (2)$$

This model is used to instead of $\sum_{j' \in \mathcal{J}} d_{jj'}$ as it is reasonable to give more severe penalty for performance degradation additive. Then the degradation factor is used to transform the processing time work. I.e., when vm_j concurrently runs with a set \mathcal{J} of VMs for duration time \tilde{p}_j , it finishes $\frac{1}{1+d_{j\mathcal{J}}} \tilde{p}_j$ work of processing time. To illustrate the behaviour of this interference model between VMs consider the example of Fig. 2. During the first 2 unit time, vm_1 is collocated with vm_2 . Each of them processes 1 unit of work because $\frac{2}{1+d_{12}} = \frac{2}{1+d_{21}} = 1$. In the next 2 unit time, as the vm_3 joins in, all of them process 0.5 unit of work because $\frac{2}{(1+d_{12})(1+d_{13})} = \frac{2}{(1+d_{21})(1+d_{23})} = \frac{2}{(1+d_{31})(1+d_{32})} = 0.5$. From the time 4 to 6, it is the same as time 2 to 4, they process 0.5 unit of work. vm_2 leaves the server at time 6 when it finishes its processing work. From time 6 to 8, vm_1 and vm_3 process 1 unit of work. vm_3 leaves at time 8 as it finishes its processing work. At last, vm_1 will process 1

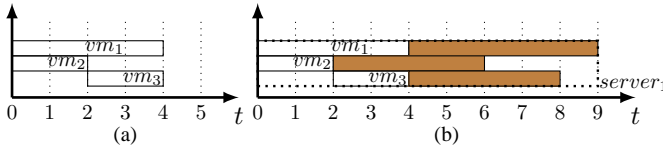


Fig. 2: The execution of VM Instances collocation in a server. Assume the server has resource capacity of $\{1\}$ unit. Each VM from $\{vm_1, vm_2, vm_3\}$ demands $\{\frac{1}{3}\}$ unit and the processing times for the three VMs are given by $p_1 = 4$, $p_2 = 2$, and $p_3 = 2$. The performance degradation factors among them are all $\{d_{..}\} = 1$. (a): VM Instance configuration. (b): Running in a server.

more unit time to finish its work if it runs alone or the server is assigned VMs that do not cause performance degradation to vm_1 .

C. Scheduling Problem Description

There are two issues need to be concerned about the allocation of virtual machines. Cloud infrastructure providers offer some specific kinds of VMs, which tend to reserve resources, such as CPU, memory and storage space. They pursue to reduce the operational cost, i.e., minimize energy consumption or capacity cost. On the other side, cloud users seek to reduce the running time of their requests. In this way, they can save bills for the rented resources.

In our scheduling, time is divided into discrete periods, $t = 1, 2, \dots, T$. For example, the interval τ can be one or five minute(s). The binary decision variable $x_{ij}(t)$ indicates whether vm_j is allocated to $server_i$ at the time slot t . It defines $c_i(t)$ as the energy consumption cost of $server_i$ running during time slot t , i.e., $c_i(t) = P[u(t)]\tau$. Thus, the total operational cost during time slot t is the sum of all running servers, which is calculated as

$$C_i(t) = \sum_i c_i(t), \quad (3)$$

Let $Q(t)$ denote the set of VMs that run at time slot t . Define $D(t)$ as the set of VMs that complete their execution and leave at the time slot t . Hence, the execution time t_j of vm_j ($j \in D(t)$) is

$$t_j = t - a_j, t_j \geq p_j. \quad (4)$$

The performance degradation penalty is model by a convex function $f(\cdot)$. One natural model for it is $f[(\frac{t_j - p_j}{p_j})^+] = \alpha^{(\frac{t_j - p_j}{p_j})^+} - 1$ ($[x]^+ \equiv \max\{0, x\}$), which penalizes the delay cost from the processing time p_j . Therefore, the VMs scheduling problem is defined as the following optimization:

$$\min \sum_{t=1}^T \sum_{i=1}^M c_i(t) + \beta \sum_{t=1}^T \sum_{j \in D(t)} f[(\frac{t_j - p_j}{p_j})^+] \quad (5)$$

$$s.t. \quad \sum_{j \in Q(t)} x_{ij}(t) R_{jk} \leq R_{ik} \quad \forall i, \forall t, \forall k, \quad (6)$$

$$\sum_{i=1}^M x_{ij}(t) = 1 \quad \forall j, \forall t, \quad (7)$$

$$x_{ij}(t) \leq x_{ij}(t+1) \quad \forall t, j \notin D(t), \quad (8)$$

$$x_{ij}(t) \in \{0, 1\} \quad \forall i, \forall j, \forall t. \quad (9)$$

The objective function (5) minimizes the total operational server costs and performance degradation penalties, and $\beta > 0$ is some constant and represents the relative importance between two objectives. Constraint (6) ensures that the aggregated resource demand of multiple VMs does not exceed a server's capacity for all resource types and at all time slot. Constraint (7) relates to that each VM is allocated to one of the servers at any point in time. Constraint (8) refers to that if a VM has assigned on a server it will not be assigned to other servers. Constraint (9) follows that $x_{ij}(t)$ is set to one if vm_j is allocated to $server_i$ at time slot t . We first give the computational complexity of this problem as following:

Theorem 1. Find an optimal VMs schedule for arbitrating between operational cost and performance degradation penalty is NP-Complete.

Proof: First, we transform the optimization problem to an associated decision problem: given the instance vectors of VMs, the performance degradation factors, and a bound on the sum of energy consumption and performance degradation penalty, is there a schedule such that the bound on sum of cost and penalty is satisfied? Clearly, it belongs to NP, since we can computing and verify in polynomial time that a proposed schedule satisfies the given bound on the sum of operational cost and performance degradation penalty. We next prove that finding an optimal VMs schedule for arbitrating between energy consumption and performance degradation penalty is NP-Complete via the reduction to the 3-Dimensional Matching problem [24], [25].

Consider an instance of 3-Dimensional Matching: Let $A = \{a_1, a_2, \dots, a_q\}$, $B = \{b_1, b_2, \dots, b_q\}$, and $C = \{c_1, c_2, \dots, c_q\}$ be three disjoint sets of q elements each. Let $Z = \{z_1, z_2, \dots, z_{q'}, \dots, z_l\}$ be a set of triples such that each z_i consists of one element from A , one element from B , and one element from C . Is there a subset $Z' \subseteq Z$ such that every element in A , B , and C appears in exactly one triple in Z' ? We construct an instance of VM scheduling problem as follows. Let there be $3q$ VMs and $M_q (\geq q)$ servers. The VMs correspond to the elements in A , B and C . For each $1 \leq i \leq M_q$, $server_i$ has resource vector $\mathbf{R}_i = \{R_{ik}\} = \{1\}$ ($k = 1, 2, \dots, s$). For each $1 \leq j \leq 3q$, vm_j has instance vector $[0, 1, \{\frac{1}{3}\}]$. VMs have no interference with each other in the triples $z_{i'} \in Z'$; otherwise, they have performance degradation factor 1 between each other. The sum of cost and penalty is q . The energy consumption cost of a server is 1 per unit of time slot when it runs at full utilization (Suppose it be 0.5 at idle). The sum of cost and penalty is equal to q if and only if the $3q$ VMs are scheduled

on q servers and do not cause performance degradation. I.e., $\bigcup_{server_i} z_{t'} = A \cup B \cup C$. Thus, there is an optimal VMs schedule if and only if there is a 3-Dimensional matching. It is clear that the above reduction is a pseudo-polynomial reduction. So we can conclude that the problem is NP-Complete by this pseudo-polynomial time reduction to the 3-Dimensional Matching problem which has been proved to be NP-Complete. ■

IV. VIRTUAL MACHINE SCHEDULING DESIGN

As it is a NP-hard combinatorial optimization problem and there is no computationally-efficient solution, we exploit the unique problem structure of VM scheduling in cloud data centers to develop the solutions. We first study a static problem (offline). After then, we develop the solution to the dynamic version of the problem (online).

A. Offline scheduling Design

In this condition, the informations of VMs that will be scheduled are known at the outset. We propose offline algorithms for virtual machine scheduling and analyse the performance.

Bin Packing Variant Algorithm (BPV). From the perspective of single energy consumption criterion optimization, various packing algorithms are become the reserve choices. It is an obvious advantage to reduce the energy consumption when decreasing the number of active servers. So an algorithm derived from First-Fit bin packing is considered. The algorithm keeps the VMs in a list sorted in increasing order of the arrival time. Each VM is allocated to the first possible accommodated server according to the list order. It invokes a server when capacity violation happens. The difference from First Fit algorithm is VMs will depart from the servers when they finish their work and the relevant resources will be recovered.

Minimum Increasing Cost Algorithm (MIC). Another natural algorithm is greedy differential of increasing costs of energy consumption and performance degradation penalty. The VMs are also kept in the increasing order of their arrival time. It would assign the next VM to the server that minimizes the increment of total cost. There would be two choices for the allocation of next VM. The increment of total cost is the sum of energy consumption and performance degradation penalty when the VM is allocated to an active server running with exist VMs. The other choice is a currently unused server with paying for more static energy consumption that supposing the VM process alone.

Theorem 2. Let I_{max} denote the maximum number of VMs that can be simultaneously accommodated by a server. The approximation ratio of MIC algorithm is I_{max} .

Proof: Note that for the minimization problem, an algorithm achieves a δ -approximation factor if for all instances it returns a solution at most δ times the optimal value.

We decompose the power of a $server_i$ at time t into the VMs according to the proportion of their CPU resources. For example, at time t , there are n_t VMs with CPU resource of R_{j1} ($j = 1, \dots, n_t$) (here we set the resource type 1 as the CPU resource) in $server_i$ which has CPU resource C_{i1} . Then vm_j consumes $\frac{R_{j1}P_{idle}}{\sum_{j=1}^{n_t} R_{j1}} + \frac{R_{j1}(P_{peak}-P_{idle})}{C_{i1}}$ power respectively, where the former part corresponds to the proportion of the static power and the later part is the dynamic power this VM consumes. Without loss of generality, We consider the VM vm_j . The power of this VM during its execution time is at least $\frac{R_{j1}P_{idle}}{C_{i1}} + \frac{R_{j1}(P_{peak}-P_{idle})}{C_{i1}}$ because $\sum_{j=1}^{n_t} R_{j1} \leq C_{i1}$. Again, we decompose the total cost of energy consumption and performance degradation penalty to the cost of each VM when it is allocated. According to the MIC algorithm, the cost of inserted vm_j is no more than $[P_{idle} + \frac{R_{j1}(P_{peak}-P_{idle})}{C_{j1}}] * p_j$. So the approximation ratio is

$$\begin{aligned} \frac{cost(MIC)}{cost(OPT)} &\leq \textcircled{1} \frac{\sum_j [P_{idle} + \frac{R_{j1}(P_{peak}-P_{idle})}{C_{j1}}] * p_j}{\sum_j [\frac{R_{j1}P_{idle}}{C_{i1}} + \frac{R_{j1}(P_{peak}-P_{idle})}{C_{i1}}] * p_j} \\ &= \frac{\sum_j P_{idle} * p_j + \sum_j \frac{R_{j1}(P_{peak}-P_{idle})}{C_{j1}} * p_j}{\sum_j \frac{R_{j1}P_{idle}}{C_{i1}} * p_j + \sum_j \frac{R_{j1}(P_{peak}-P_{idle})}{C_{i1}} * p_j} \\ &\leq \textcircled{2} \frac{\sum_j P_{idle} * p_j}{\sum_j \frac{R_{j1}P_{idle}}{C_{i1}} * p_j} \leq \textcircled{3} \frac{\sum_j P_{idle} * p_j}{\sum_j \frac{P_{idle}}{I_{max}} * p_j} = I_{max} \end{aligned}$$

where the second inequality follows from $\sum_j P_{idle} * p_j \geq \sum_j \frac{R_{j1}P_{idle}}{C_{i1}} * p_j$ as $R_{j1} \leq C_{i1}$, and a mathematical inequality $\frac{a+c}{b+c} \leq \frac{a}{b}$ as $a \geq b, c \geq 0$. The third inequality results from $I_{max} * R_{j1} \geq C_{i1}$, i.e., $\frac{R_{j1}P_{idle}}{C_{i1}} \geq \frac{P_{idle}}{I_{max}}$. This concludes the Theorem. ■

Remark: BPV algorithm only considers to accept the next VM, and does not take into account the performance degradation. Both of the above algorithms sort the VMs by their arrival time and depend only on the information that is available to the algorithms at the scheduling time. So they are also online algorithms. Note that when a VM is allocated to a server, there is a need to update duration time of itself and other VMs that are interfered by it.

An observation is that these algorithms do not consider the life cycle overlapping of VMs. For example, there are three VMs to be scheduled, which are configured as Fig. 3. In Fig. 3(a), both of above algorithms cause 2 servers to be active from time 0 to 11 and 1 to 11. A better scheduling (Fig. 3(b)) is that it assigns vm_1 and vm_3 in $server_1$ and vm_2 in $server_2$. Then we can put $server_2$ into power-saving mode or turn-off from time 2 to 11.

Maximum Decreasing Cost Algorithm (MDC). Instead of sorting the VMs by the arrival time, MDC algorithm considers the information of all VMs and works like the clustering algorithm. We pursue the minimum cost of energy consumption and performance degradation penalty

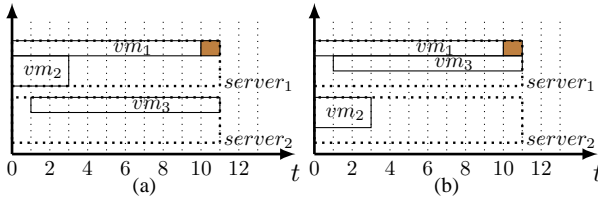


Fig. 3: BPV+MIC and an improved schedule for three VMs. Assume both physical servers have resource capacity of $\{1\}$ unit and vm_1 , vm_2 and vm_3 have resource capacity of $\{\frac{1}{3}\}$, $\{\frac{2}{3}\}$, and $\{\frac{1}{3}\}$ unit respectively. The performance degradation factors among them are $\{d_{12} = d_{13} = 0, d_{21} = d_{31} = 0.1, d_{23} = d_{32} = 0.2\}$ while the processing times for the three VMs are given by $p_1 = 10, p_2 = 3$, and $p_3 = 9$. (a): BPV or MIC scheduling. (b): A better scheduling.

iteratively. Initially, each VM is allocated to a dedicated server. Next, we decide to repeatedly merge servers together by the form of pairs. The process of merging is to collocate the VMs on one server. There is also a need to update duration time of the VMs which cause interference among them. We define the gain function of merging two server, S_u and S_v as the following:

$$Gain(S_u, S_v) = Cost(S_u) + Cost(S_v) - Cost(S_u \cup S_v), \quad (10)$$

where $Cost(\cdot)$ denotes the total cost of the server according to the cost model defined in Section III-C. With regard to the merger which causes the violation of server capacity, we define the gain as negative number. At each step we choose the merger of two servers that results in the maximum decrease in the total cost. The algorithm ends when the merger of any two servers will produce an negative gain. The pseudo-code for MDC algorithm is summarized in *Algorithm. 1*.

Algorithm 1: Maximum Decreasing Cost Algorithm

input : the set of VMs \mathcal{N}
output: the scheduling result of VMs
begin
 Initial Servers $\mathcal{S} = \{S_1 = \{vm_1\}, \dots, S_n = \{vm_n\}\}$;
 $maxGain = \max_{u,v} Gain(S_u, S_v)$;
 while $maxGain \geq 0$ **do**
 MergeServers(S_u, S_v);
 Set $S_u = S_u \cup S_v, \mathcal{S} = \mathcal{S} \setminus S_v$;
 $maxGain = \max_{u,v} Gain(S_u, S_v)$;
 end
 Return the set of servers \mathcal{S} and their accommodated VMs, correspondingly.
end

To illustrate the different behaviour of these three scheduling strategies we present an example in Fig. 4. BPV aggregates the VMs in parts of servers and leaves some servers to be low utilization. MIC is more likely to assign the subsequent VMs to be included by the anterior ones duration its execution when their performance degradation factor is low. As a result, it considers to balance the VMs

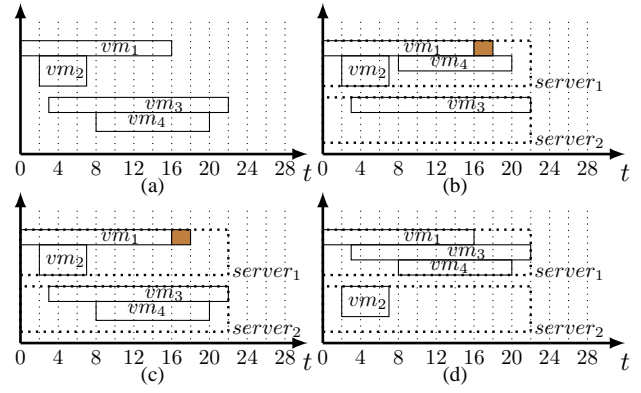


Fig. 4: Four VMs scheduling. Assume each physical server has resource capacity of $\{1\}$ unit. Each VM from $\{vm_1, vm_3, vm_4\}$ demands $\{\frac{1}{3}\}$ unit while vm_2 requires $\{\frac{2}{3}\}$ unit. The processing times for them are given by $p_1 = 16, p_2 = 5, p_3 = 19$, and $p_4 = 12$. The performance degradation factor d_{21} is 0.25, and other factors among them are 0. (a): VM instance. (b): BPV scheduling. (c): MIC scheduling. (d): MDC scheduling.

between the servers. MDC prefers to collocate the VMs that share long life cycle and have low performance degradation factors between them. In summary, these scheduling algorithms have different performances and we will evaluate them in Section V.

B. Online Algorithm for Dynamic Problem

In this section, we introduce the online version of the VM scheduling, in which a sequence \mathcal{N} of VMs arrive over time, where $\mathcal{N} = \{vm_0, vm_1, \dots, vm_j, \dots\}$. Each VM vm_j must be assigned upon its arrival, without information about future VMs $\{vm_{j'} | j' > j\}$. We explore algorithm that schedules each incoming VM by dispatching them to current active servers or a new server that be activated. Recall that BPV and MIC algorithms depend only on the informations that are available to the algorithms when we schedule upon the arrival of a VM vm_j at time t instead of sorting the VMs by their arrival time. They can be modified to support the scheduling in online version, and they are denoted by OBPV and OMIC, respectively. Specially, we derive a competitive ratio for the OMIC algorithm. We say that for the minimization problem, an algorithm is γ -competitive if for all the problem instances, it returns the cost at most γ times the cost of the optimal offline solution. From the Theorem 2, we have the following theorem:

Theorem 3. *The competitive ratio of OMIC algorithm for VM scheduling which aims at arbitrating between operational cost and performance degradation is at most I_{max} , where I_{max} has the same mean of Theorem 2.*

C. Incorporating VM batch arrival and VM reservation

In the previous section, the VMs are consider to arrive one by one and there are no information about the future arriving VMs. In order to match the cloud data centers, we incorporate the following two properties to the scheduling design:

- There are a set \mathcal{N}_t of VMs to be scheduled at time t due to the many users submit their VMs to the cloud data center at the same time.
- There are a set \mathcal{N}_t^f of reserved VMs at time t due to users reserve for lower costs and reserving capacity in the cloud data center.

It defines the time t as scheduling time only when there are some VMs need to be started at this time. According to the definition of the reserved VMs, We have the arrival time relationship $a_j > a'_j, \forall vm_j \in \mathcal{N}_t^f, \forall vm'_j \in \mathcal{N}_t$. In this situation, the problem is transformed to schedule a set of VMs, i.e., $\mathcal{N}_t \cup \mathcal{N}_t^f$, to be allocated on the cloud data center. The difference from the offline scheduling is that at the begin of the scheduling there are some VMs had been allocated on the cloud data center. Consider an example scheduling time $t = 2$ in previous Fig. 4, incoming VM vm_2 and reserved VMs $\{vm_3, vm_4\}$ need to be scheduled at this time. We prefer the scheduling of Fig. 4(d) to Fig. 4(c) as it is known that a server can be put into power-saving mode or shut down only if there are no VMs active on it. Then it causes a problem of which VM first to be scheduled if the OMIC algorithm is used to schedule VM one by one. It defines the alignment ratio of VM to server as following: the ratio of VMs' completion time to server's completion time. An obvious intuition is to allocate the VMs to maximize the alignment ratio if these VMs have weak performance interference, i.e., to align the VMs and their server. Then the points is to allocate the VMs to their best candidate server. Based on the above analysis, we present an algorithm from the servers' perspective. First, it supposes that each VM $vm_j \in (\mathcal{N}_t \cup \mathcal{N}_t^f)$ is allocated on a dedicate virtual server. Each server proposes the profits to other VMs that are allocated on virtual servers. To be specific, it defines the profit metric as the following:

$$Profit_{i,j} = Cost(vm_j) - AddCost(server_i, vm_j), \quad (11)$$

where $Cost(vm_j)$ is the total cost of a server to run vm_j alone, and $AddCost(server_i, vm_j)$ is the increment total cost of run vm_j on $server_i$. When vm_j cannot be allocated on the server $server_i$, the $Profit_{i,j}$ is simply set to negative value. The algorithm allocates the VMs iteratively. In each round, it picks the maximum profit, i.e., $\{\max_{i,j} Profit_{i,j} | Profit_{i,j} \geq 0\}$. Then the vm_j is allocated on $server_i$. The algorithm stops when $\max_{i,j} Profit_{i,j} < 0$. In this situation, it says that the total cost cannot be improved. The VMs are allocated to their current servers. It is summarized in **Algorithm. 2 (IVP)**.

We use an example to explain this plan algorithm, as illustrated in Fig. 5. Assume that at time $t = 2$, there is one active server $server_1$ with vm_1 running on it, and there are one VM vm_2 arriving and two reserved VMs $\{vm_3, vm_4\}$. As $t = 2$ is the scheduling time, the plan algorithm is triggered. First each VM $vm_j \in \{vm_2, vm_3, vm_4\}$ is allocated on a virtual server $server_i \in \{server_2, server_3, server_4\}$, respectively. Then the profit $Profit_{i,j}$ is calculated according to Equation. 11. As $Profit_{1,3}$ is the maximum profit, the algorithm allocates the vm_3 to $server_1$ in the first

Algorithm 2: Incorporating VM Plan Online Algorithm

input : the set of VMs $\{\mathcal{N}_t \cup \mathcal{N}_t^f\}$, current active servers \mathcal{S}_I at time t

output: the scheduling result of VMs

begin

Set virtual servers

$\mathcal{S}_V = \{\mathcal{S}_j = \{vm_j\} | vm_j \in \{\mathcal{N}_t \cup \mathcal{N}_t^f\}\}$;

Set all servers $\mathcal{S} = \mathcal{S}_V \cup \mathcal{S}_I$;

Set $maxProfit = \max_{i,j} Profit_{i,j}, i \in \mathcal{S}$;

while $maxProfit \geq 0$ **do**

The configuration

$Server_i(t) = \arg \max_{i \in \mathcal{S}} Profit_{i,j}$;

Update $server_i$ and Delete vm_j from $\{\mathcal{N}_t \cup \mathcal{N}_t^f\}$;

Set $maxProfit = \max_{i,j} Profit_{i,j}$;

end

Return the plan of VMs.

end

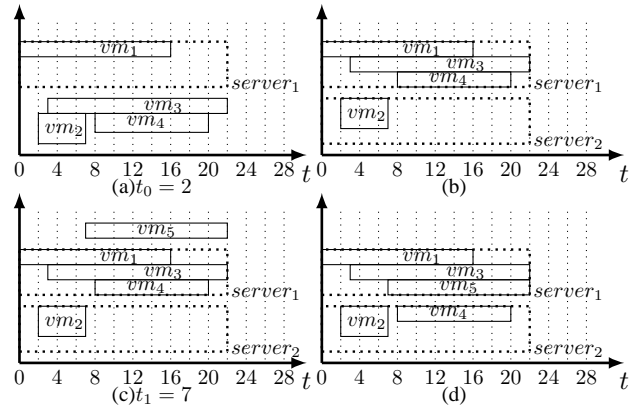


Fig. 5: Incorporating VMs batch arrival and VMs reservation scheduling. Assume each physical server has resource capacity of $\{1\}$ unit. $vm_1, vm_2, vm_3, vm_4, vm_5$ have resource capacity $\{\frac{1}{3}\}, \{\frac{2}{3}\}, \{\frac{1}{3}\}, \{\frac{1}{3}\},$ and $\{\frac{1}{3}\}$ unit respectively. The processing times for them are given by $p_1 = 16, p_2 = 5, p_3 = 19, p_4 = 12,$ and $p_5 = 15$. The performance degradation factor d_{21} is 0.25, and other factors among them are 0. (a): $t = 2$ Initial servers and VMs. (b): $t = 2$ Allocation result. (c): $t = 7$ Initial servers and VMs. (d): $t = 7$ Allocation result.

round. This procedure repeats in the second round, and vm_4 is allocated on $server_1$. At last, it generates an allocation showed in Fig. 5(b). Assume at time $t = 7$, there is one VM vm_5 arriving. So the plan algorithm is triggered, and generates an allocation showed in Fig. 5(d). Note that the allocation of reserved VM vm_4 is changed from $server_1$ to $server_2$.

The time complexity of this algorithm is $O(mn^2)$ where m is the number of servers ($|\mathcal{S}_V \cup \mathcal{S}_I|$) and n is the number of VMs ($|\mathcal{N}_t \cup \mathcal{N}_t^f|$). This is followed from that each server $server_i$ proposes a profit to VM vm_j , and in each round we fix a VM vm_j .

D. Distributed Design towards Data Center Scale

In a large data center, it is time-consuming to gather the detailed information about each server and run the algorithm on a single server. We now propose a distribution scheme, which opposes to the algorithm introduced in the previous section that centralizes the information and picks up the best candidate server. Upon each new VM arriving at the data center, the information of VMs, which are waiting to be allocated, are passed to each active server. Each server $server_i$ maintains the information of VMs. Next, the algorithm proceeds in stages, and synchronizes using a common clock. In the first stage, a single client server $server_i$ proposes profits to the VMs and sends the maximum profit $maxProfit_{i,j}$ of vm_j to the distribution server (dispatcher). The distribution server collects the maximum profits from all client servers and chooses the $max-maxProfit$, i.e., the current maximum benefit from the allocation of $vm_{\hat{j}}$ on $server_{\hat{i}}$. Then the allocation decision of stage o is broadcast to client servers. In the subsequent stages, the client server $server_i$ receives the decision message $\langle \hat{i}, \hat{j} \rangle$ from the distribution server, and proceeds the following two chooses: 1) If the profit of its $(o-1)$ stage is chosen, it fixes the $vm_{\hat{j}}$ on it and removes the $vm_{\hat{j}}$ from the unscheduled VMs. 2) If the profit of its $(o-1)$ stage is not chosen, it justly removes the $vm_{\hat{j}}$ from the unscheduled VMs. The procedure of profit proposing is the same as the previous stage. Assume there are some VMs unscheduled, i.e., they are not benefit from being allocated to the client servers or cannot be allocated to current active servers. We run *Algorithm. 2* to schedule them with the input of these VMs and some current inactive servers. The pseudo-code of this algorithm is summarized in *Algorithm. 3*.

V. PERFORMANCE EVALUATION

In this section, we study the performance of proposed algorithms on several comprehensive VM scheduling problems.

A. Evaluation Setup

Simulation Settings: The simulations are run in a data center that equips physical servers with computing resource of 12 Cores (E.g., *HP ProLiant DL385 G6*). For simplicity, we assume that the servers are homogeneous in the data center and the VMs take up the total resource of their request demand. The configuration of VMs refers to the types of instances available in Amazon EC2 [22]. For example, a type VM, so called *m1.small*, with 1 Core computing units, 1.7 GB memory and 160 GB storage space. As we focus on studying the arbitrating between energy consumption and performance interference degradation, we omit other resource bounds, such as memory, in the simulations. Four different types of VMs are available to be chosen with computing resource of 1 Core, 2 Cores, 4 Cores, 8 Cores, respectively. The simulations are conducted on two different scenarios corresponding to offline and online VMs scheduling. In the offline problem, there is a

Algorithm 3: VM Profit Plan Algorithm

input : the set of VMs $\{\mathcal{N}_t \cup \mathcal{N}_t^f\}$ at time t
output: the allocation results of VMs
DistributionServer :
begin
 Initialized round: Broadcast $\mathcal{J} = \langle \{\mathcal{N}_t \cup \mathcal{N}_t^f\} \rangle$;
foreach round $o = 1, 2, \dots$ **do**
 Receive message $\langle maxProfit_{i,j} \rangle$;
 if $max_{i,j} maxProfit_{i,j} \geq 0$ **then**
 Pick $\langle i, j \rangle = \arg \max_{i,j} maxProfit_{i,j}$;
 Broadcast $\langle i, j \rangle$;
 Update $\mathcal{J} \setminus j$;
 end
end
if $\mathcal{J} \neq \emptyset$ **then**
 Run *Algorithm. 2*, i.e., $IVP(\mathcal{J}, \emptyset)$;
end
 Return the allocation of VMs.
end
ClientServers :
begin
foreach server $server_i$ **in parallel do**
 Receive message \mathcal{O} from *DistributionServer*;
 if $\mathcal{O} = \langle \{\mathcal{N}_t \cup \mathcal{N}_t^f\} \rangle$ **then**
 Save $\mathcal{J} = \mathcal{O}$;
 Set $\mathcal{S}_V = \{ \mathcal{S}_j = \{vm_j\} | vm_j \in \{\mathcal{N}_t \cup \mathcal{N}_t^f\} \}$;
 Set $\mathcal{S} = \mathcal{S}_V \cup \{server_i\}$;
 Set $maxProfit_{i,j} = \max_{i,j} Profit_{i,j}$;
 Send $\langle maxProfit_{i,j} \rangle$ to the *DistributionServer*;
 else if $\mathcal{O} = \langle \hat{i}, \hat{j} \rangle$ **then**
 if $\hat{i} == server_i$ **then**
 Fix \hat{j} on $server_i$ and Update $server_i$;
 end
 Set $\mathcal{S}_V = \{ \mathcal{S}_j = \{vm_j\} | vm_j \in \{\mathcal{J} \setminus \hat{j}\} \}$;
 Set $\mathcal{S} = \mathcal{S}_V \cup \{server_i\}$;
 Set $maxProfit_{i,j} = \max_{i,j} Profit_{i,j}$;
 Send $\langle maxProfit_{i,j} \rangle$ to the *DistributionServer*;
 end
end
end

list of VMs that are waiting to be processed. In the online scenario, the VMs arrive randomly over time.

Compared Baseline Algorithms: To provide benchmarks for our evaluations, we introduce other three algorithms:

- Random Strategy: it is a naive algorithm which randomly schedules the next VM on a physical server as long as the server has enough resource to host the VM.
- Round Robin: it allocates the next VM on physical servers in turn, which is a used scheduling algorithm in Amazon EC2 [22].

- **Minimum Increase Energy:** it assigns the next VM to the server which minimizes the increment of energy consumption. Note that this algorithm is different from MIC, as MIC considers the increment of total cost.

In all of the algorithms, it assumes that a new server will open if the next VM cannot be allocated on current active servers.

Parameters: The power of a server is characterized by the three parameters of Equation. 1. We use HP ProLiant DL385 G6 with a 2 Chips/12 Cores processor. According to the server power consumption parameters, we set $P_{idle} = 120W$ and $P_{busy} = 258W$. The performance degradation cost is characterized by parameters: α and β . The parameter α represents the intensity of performance degradation penalty, and without loss of generality it is set to 15. The tuning parameter β is used for adjusting the energy consumption cost and performance degradation penalty, and also used for representing the weight between two costs.

Performance Metrics: To evaluate the performance of proposed algorithms, we use the following four metrics:

- **Normalized Total Energy Consumption:** It shows the quality of the solution produced by the proposed algorithms in terms of total energy consumption.
- **Normalized Total Performance Degradation Penalty:** This metric represents the penalties of the solution produced by the proposed algorithms in terms of performance degradation cost.
- **Normalized Total Cost:** It is defined as the sum of energy consumption cost and performance degradation penalty.
- **Normalized Worst Degradation Factor:** This indicates the worst performance degradation factor of VMs caused by the scheduling algorithms.

In the offline problem, we also record the total number of used physical servers and the makespan of the VMs.

B. Evaluation of real workload

We first conduct a small-scale experiment to evaluate the performance of the proposed algorithms. The performance degradation ratio is obtained from the statistics of SPECcpu 2006 benchmarks [8]. The properties (such as the arrival time, et.al) of the applications are drawn from a real OpenCloud Hadoop cluster trace [26]. The result is shown on Fig. 6. From the figure it can be seen that the overall cost are reduced apparently. More precisely, the MDC algorithm saves the total cost about 41% compared with the BPV algorithm. This demonstrate the competitive advantages of the proposed algorithms against the methods which do not provide a unified consideration of both the energy consumption and the performance interference.

C. Evaluation of offline Problem Solution

We now go to present our large-scale simulation results on algorithms proposed for offline problem. In this scenario, the computing resource required for a VM is uniformly

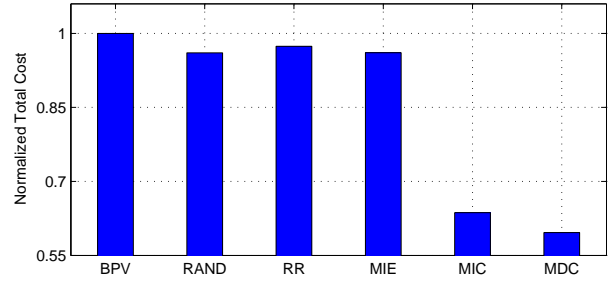


Fig. 6: Performance of algorithms on a real workload. (The result is normalized against BPV.)

chosen from four given types at random. We set each time slot as 1 minute. The duration time of VMs is randomly generated from $[30, 1000]$ and the arrival time of VMs is randomly generated from $[0, 1000]$. The number of VMs varies from 100 to 1000 to emulate the low workload and heavy workload in the data center. It considers two kinds of degradation factors between VMs. One is generated from the normal distribution and the other is generated from the exponential distribution. For each simulation, we run proposed algorithms and compared algorithms using the same list of VMs, and the results of randomized algorithm is the average of running 10 times.

Resource Violation: In the first simulation of this evaluation, we examine the resource violation of algorithms when they do not take into account the performance degradation and do not update the duration time of VMs. In Fig. 7, we show the resource violation of a server scheduled from the BPV algorithm. As we can see the computing resource surpasses the capacity during some periods (E.g., $t = 653$ to $t = 1469$) due to the stretch of VM execution time.

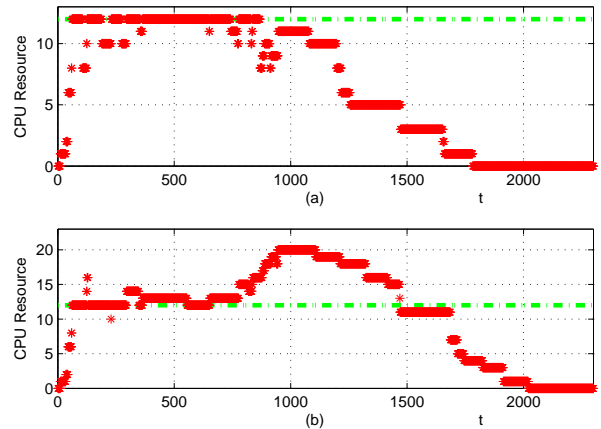


Fig. 7: Resource violation of a server in BPV scheduling. The green dashed line means the CPU capacity of a server, i.e., 12 Cores. (a) CPU Resource used of a server from omitting the performance degradation; (b) The true CPU resource used when it considers the performance degradation stretching the execution time of VMs.

Algorithm Performance Comparison: We now discuss

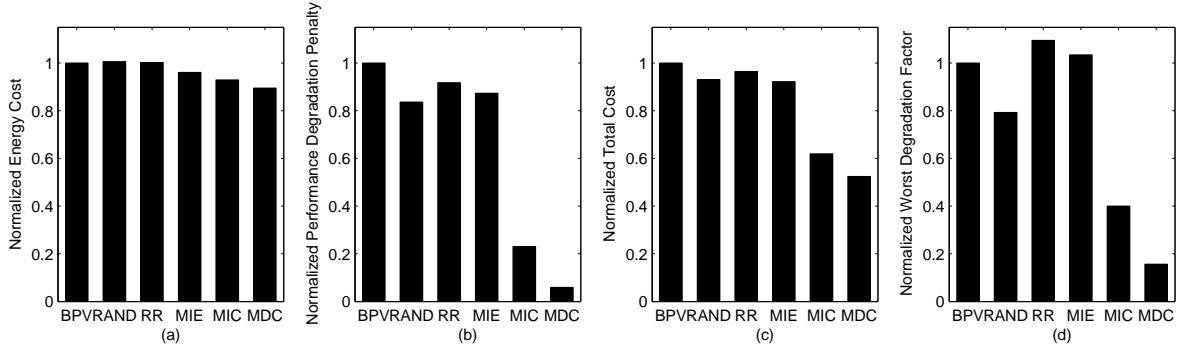


Fig. 8: Performance of algorithms. (a) Normalized energy consumption against BPV; (b) Normalized performance degradation penalty against BPV; (c) Normalized total cost against BPV; (d) Normalized worst performance degradation factor against BPV.

the performance of all above algorithms against the BPV algorithm with respect of four metrics, i.e., normalized energy consumption, performance degradation penalty, total cost and worst performance degradation factor. In this simulation, the degradation factor between VMs is generated from the normal distribution $N(0.0, 0.2)$ ($d_{..} = 0$ if $d_{..} < 0$). The results are depicted in Fig. 8. As we can see, the performance of MDC algorithm is apparently better than other algorithms on reducing the performance degradation penalty. More precisely, the performance degradation penalty of MDC is 6% against BPV, while MIC is 24%. Another observation from Fig. 8 is that MIC and MDC performs much better on worst performance degradation factor, which is important in data center due to SLA requirement. When considering the energy consumption, we find that MIC and MDC also have a slight reduction compared with other algorithms. This is because MIC and MDC reduce the unnecessary execution time due to the performance degradation causing by interference. As a result, MIC and MDC reduce the total cost of energy consumption and performance degradation penalty up to 62% and 52%, respectively. It should be noted, however, the total cost of MDC is reduced 16% when comparing with MIC.

Impact of Performance Degradation Factor: We next investigate the impact of performance degradation factor on proposed algorithms. We keep the number of VMs fixed and execute the above algorithms with five different kinds of degradation factor between VMs. They are generated from the normal distributions $N(0.0, 0.2)$, $N(0.0, 0.4)$, $N(0.0, 0.6)$, $N(0.0, 0.8)$, $N(0.0, 1.0)$, respectively ($d_{..} = 0$ if $d_{..} < 0$). This corresponds to the interference between VMs is more fluctuation when the variance is changed from 0.2 to 1.0. In each normal distribution, we generate 5 groups of degradation factor, and we generate 3 groups of VMs list. The result is the average of the cross simulations, i.e., 15 times. Table III shows how degradation factor affects the total cost. When the performance interference between VMs becomes more intensive, the total cost of BPV, RAND, RR and MIE algorithms become much larger, because they do not take into account the performance degradation penalty when making the scheduling decisions. For MIC and MDC

algorithms, we can see that they lead to a slight total cost increment due to their intelligent scheduling. This rule also holds when we generate degradation factor between VMs from exponential distributions $E(100)$, $E(50)$, $E(20)$, $E(10)$, $E(5)$, $E(2)$, respectively. (The results are listed in Table IV.)

TABLE III: Algorithm performance in different $N(0.0, V)$ degradation factor, and the result is normalized against $V = 0.2$.

Algorithm	0.2	0.4	0.6	0.8	1.0
BPV	1	186.83	>200	>200	>200
RAND	1	1583.17	>2000	>2000	>2000
RR	1	10.60	23.87	>200	>200
MIE	1	2.78	8.87	14.48	188.06
MIC	1	1.0307	1.0333	1.0381	1.0406
MDC	1	1.0304	1.0480	1.0551	1.0567

TABLE IV: Algorithm performance in different $E(\lambda)$ degradation factor, and the result is normalized against $\lambda = 100$.

Algo.	100	50	20	10	5	2
BPV	1	1.0549	1.2728	2.1169	>200	>200
RAND	1	1.0447	1.2130	1.7677	230	>300
RR	1	1.0415	1.1938	1.6070	13.5063	>200
MIE	1	1.0437	1.2089	1.6300	3.6698	263.4512
MIC	1	1.0471	1.1683	1.3006	1.4120	1.5360
MDC	1	1.0383	1.1179	1.2003	1.3072	1.4544

Impact of Workload Density: We compare the proposed algorithms on five data sets: 100, 200, 500, 800 and 1000 VMs, and in each of them the arrival time of VMs is generated from the same range $[0, 1000]$. I.e., the number of data set from 100 to 1000 represents the increment of workload density. The degradation factor between VMs is also generated from the normal distribution $N(0.0, 0.2)$ ($d_{..} = 0$ if $d_{..} < 0$). Fig. 9 presents the results. In all simulations with different intensity, the minimum total cost is achieved by MDC due to its more global view. Moreover, the improvement margin is stable with the increment of workload density. MIC and MDC perform better in more intensive load. This is attributed to the fact that the other

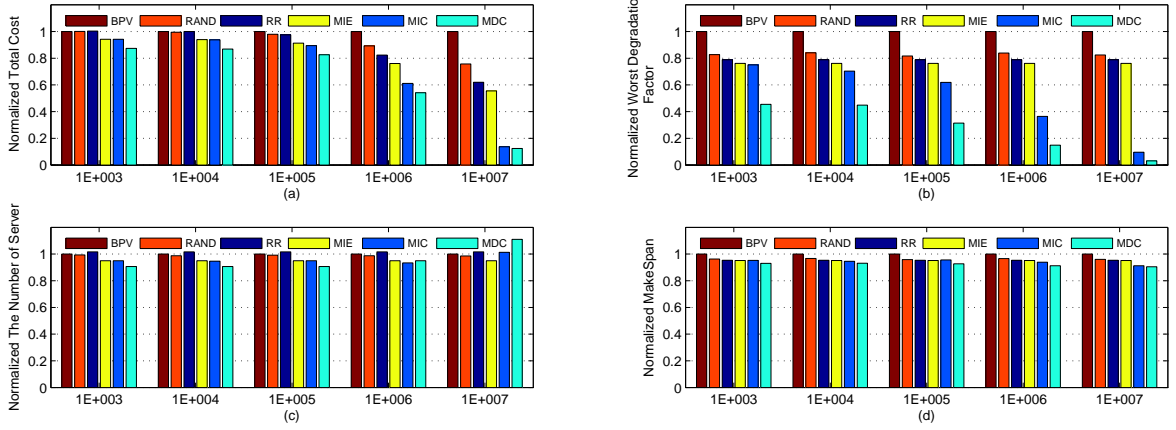


Fig. 10: Impact of different weight β between the operational cost and performance degradation penalty.

four algorithms would lead to more performance degradation when they do not take into account the performance interference in heavy load.

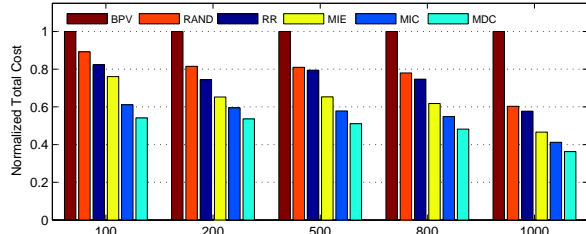


Fig. 9: Impact of different workload density.

Impact of Weight of Performance Degradation Penalty:

As mentioned in the optimization model of Section III-C, the weight β is some constant incorporating the normalization and the relative importance of the performance degradation penalty. Our virtual machine scheduling exploits this weight, and now we study the impact of this weight on the performance of the proposed algorithms. In this simulation, we focus on four metrics: total cost, worst performance degradation factor, the number of servers to be used and makespan. The results are depicted in Fig. 10. The first observation from the Fig. 10 is that as the weight increases, the results of worst performance degradation factor, the number of servers to be used and makespan mainly stay the same in BPV, RAND, RR and MIE. This is because the scheduling of these four algorithms is not influenced by the weight. The results of their total cost increase only because the weight β grows. Another remark is that the worst performance degradation factor reduces quickly in MIC and MDC when the weight surpasses a certain value (In our simulation, e.g., $\beta = 10^6$). However, the number of servers to be used increases a little when we give more weight to performance degradation penalty, which leads to makespan metric reduction. Obviously, the improvement of total cost in MIC and MDC getting more with an increment of the weight.

D. Evaluation of Online Algorithm

We finally present the simulation on our online algorithms in the dynamic environment. It should be noted that the aforementioned algorithms except MDC can be transformed to the online versions, so the corresponding results are also held. We focus on evaluating the performance of *Algorithm. 2* which incorporates the VM batch arrival and VM reservation. In this simulation, we fix the total number of VMs and their performance degradation factors. We adopt different sizes of VMs to be revealed at each scheduling time to represent the VMs with batch arrival and reservation. There are n_r VMs revealed at each scheduling time if the size is n_r . For example, it corresponds to one by one scheduling when the size is 1 (like OMIC), and there are 10 VMs revealed at each scheduling time when the size is 10. We run the algorithm with five randomly generated instances (1#–5#) and one sequentially generated instance (6#) on each size. The result is depicted in Fig. 11. As we can see the performance is better with the the number of size increases, i.e., more information about VMs are revealed due to batch arrival and reservation. In addition, the total cost have a much improvement from the number of size 1 to 2. In summary, the *Algorithm. 2* exploits the properties of VMs scheduling in cloud data centers and obtains a better improvement of the total cost than OMIC algorithm which do not consider these properties.

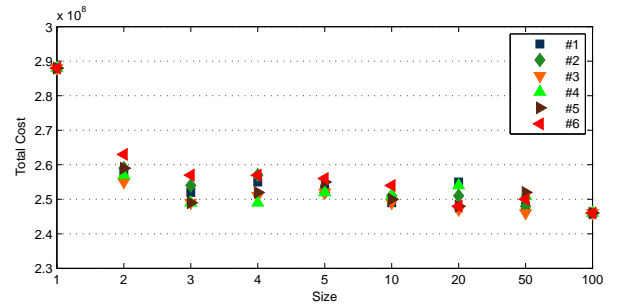


Fig. 11: Total cost of different size n_r of VMs to be revealed at each scheduling time.

VI. CONCLUSION

In this paper, we present virtual machine scheduling for arbitrating between operational cost and performance interference in cloud data centers. While previous works only provide energy consumption management or performance interference optimization separately, we are among the first to build a joint model to capture the inherent tradeoff between the two contradictory objectives. We also develop efficient scheduling algorithms for both offline and online cases and improve them by exploiting some properties in clouds such as resource reservation. We evaluate the performance of the proposed algorithms by a comprehensive set of simulations. Our results confirm that a joint optimization that takes into account both VM combination and life-cycle overlapping can significantly reduce the operational cost, as well as the performance interference in cloud data centers.

REFERENCES

- [1] VMware. <http://www.vmware.com>.
- [2] Xen. <http://xen.org>.
- [3] D. Perera. The real obstacle to federal cloud computing. FiereceGovernmentIT. 2012.
- [4] S. Govindan, J. Liu, A. Kansal and A. Sivasubramaniam. Cuanta: Quantifying effects of shared on-chip resource interference for consolidated virtual machines. In *Proceedings of the 2nd ACM Symposium on Cloud Computing (SOCC'11)*, No.22, 2011.
- [5] R. C. Chiang, and H. H. Huang. TRACON: Interference-aware scheduling of data-intensive applications in virtualized environments. In *Proceedings of the 2011 International Conference for High Performance Computing, Networking, Storage and Analysis (SC'11)*, No.47, 2011.
- [6] J. Mars, L. Tang, R. Hundt, K. Skadron and M. L. Soffa. Bubble-Up: increasing utilization in modern warehouse scale computers via sensible co-locations. In *Proceedings of the 44th Annual IEEE/ACM International Symposium on Microarchitecture (MICRO'11)*, pages 248-259, 2011.
- [7] A. Roytman, A. Kansal, S. Govindan, J. Liu and S. Nath. PACMan: Performance aware virtual machine consolidation. In *Proceedings of the 10th International Conference on Autonomic Computing (ICAC'13)*, 2013.
- [8] S. Kim, H. Eom and H. Y. Yeom. Virtual machine consolidation based on interference modelling. In *Journal of Supercomputing*, 66(3), pages 1489-1506, 2013.
- [9] S. Verboven, K. Vanmechelen and J. Broeckhove. Black box scheduling for resource intensive virtual machine workloads with interference models. In *Journal of Future Generation Computer Systems*, 29(8), pages 1871-1884, 2013.
- [10] SPECcpu2006 Benchmark. <http://www.spec.org/cpu2006/Docs>.
- [11] J. Hamilton. Cooperative expendable micro-slice servers (CEMS): low cost, low power servers for internet-scale services. In *Proceedings of the 4th Biennial Conference on Innovative Data Systems Research (CIDR'09)*, 2009.
- [12] A. Amokrane, M. F. Zhani, R. Langar, R. Boutaba and G. Pujolle. Greenhead: Virtual Data Center Embedding across Distributed Infrastructures. In *IEEE Transactions on Cloud Computing*, 1(1), pages 36-49, 2013.
- [13] S. Albers. Energy-efficient algorithms. In *Communications of the ACM*, 53(5), pages 86-96, 2010.
- [14] R. Nathuji, K. Schwan. VirtualPower: coordinated power management in virtualized enterprise systems. In *Proceedings of twenty-first ACM SIGOPS symposium on Operating systems principles (SOSP'07)*, pages 265-278, 2007.
- [15] D. Kusic, J. O. Kephart, J. E. Hanson, N. Kandasamy and G. Jiang. Power and performance management of virtualized computing environments via lookahead control. *Journal of Cluster Computing*, 12(1), pages 1-15, 2009.
- [16] A. Beloglazov, J. Abawajy, R. Buyya. Energy-aware resource allocation heuristics for efficient management of data centers for cloud computing. In *Journal Future Generation Computing Systems*, 28(5), pages 755-768, 2012.
- [17] M. Lin, A. Wierman, L. Andrew and E. Thereska. Dynamic right-sizing for power-proportional data centers. In *Proceedings of the 30th Annual IEEE International Conference on Computer Communications (INFOCOM'11)*, pages 1098-1106, 2011.
- [18] F. Liu, Z. Zhou, H. Jin, B. Li, B. Li and H. Jiang. On Arbitrating the Power-Performance Tradeoff in SaaS Clouds. In *IEEE Transactions on Parallel and Distributed Systems*, Vol.99, 2013.
- [19] F. Xu, F. Liu, H. Jin and A. V. Vasilakos. Managing performance overhead of virtual machines in cloud computing: a survey, state of the art, and future directions. In *Proceedings of the IEEE*, 102(1), pages 11-31, 2014.
- [20] J. Esch. Prolog to "Managing performance overhead of virtual machines in cloud computing: a survey, state of the art, and future directions". In *Proceedings of the IEEE*, 102(1), pages 7-10, 2014.
- [21] X. Fan, W. Weber and L. A. Barroso. Power provisioning for a warehouse-size computer. In *Proceedings of the 34th Annual International Symposium on Computer Architecture (ISCA'07)*, pages 13-23, 2007.
- [22] Amazon EC2. <http://aws.amazon.com/ec2>.
- [23] Y. Koh, R. Knauerhase, P. Brett, M. Bowman, Z. Wen and C. Pu. An analysis of performance interference effects in virtual environments. In *Proceedings of the IEEE International Symposium on Performance Analysis of Systems and Software (ISPASS'07)*, pages 200-209, 2007.
- [24] M. R. Garey and D. S. Johnson. *Computers and intractability: A guide to the theory of NP-completeness*. W.H. Freeman, New York, 1979.
- [25] J. Leung. *Handbook of scheduling*. CRC Press, Inc., Boca Raton, FL, USA, 2004.
- [26] K. Ren, Y. Kwon, M. Balazinska and B. Howe. Hadoop's adolescence: an analysis of Hadoop usage in scientific workloads. *Journal of VLDB Endowment*, 6(10), pages 853-864, 2013.