

Tuning Free Orthogonal Matching Pursuit

Sreejith Kallummil, Sheetal Kalyani
 Department of Electrical Engineering
 Indian Institute of Technology Madras
 Chennai, India 600036
 {ee12d032,skalyani}@ee.iitm.ac.in

Abstract—Orthogonal matching pursuit (OMP) is a widely used compressive sensing (CS) algorithm for recovering sparse signals in noisy linear regression models. The performance of OMP depends on its stopping criteria (SC). SC for OMP discussed in literature typically assumes knowledge of either the sparsity of the signal to be estimated k_0 or noise variance σ^2 , both of which are unavailable in many practical applications. In this article we develop a modified version of OMP called tuning free OMP or TF-OMP which does not require a SC. TF-OMP is proved to accomplish successful sparse recovery under the usual assumptions on restricted isometry constants (RIC) and mutual coherence of design matrix. TF-OMP is numerically shown to deliver a highly competitive performance in comparison with OMP having *a priori* knowledge of k_0 or σ^2 . Greedy algorithm for robust de-noising (GARD) is an OMP like algorithm proposed for efficient estimation in classical overdetermined linear regression models corrupted by sparse outliers. However, GARD requires the knowledge of inlier noise variance which is difficult to estimate. We also produce a tuning free algorithm (TF-GARD) for efficient estimation in the presence of sparse outliers by extending the operating principle of TF-OMP to GARD. TF-GARD is numerically shown to achieve a performance comparable to that of the existing implementation of GARD.

I. INTRODUCTION

Consider the linear regression model $\mathbf{y} = \mathbf{X}\boldsymbol{\beta} + \mathbf{w}$, where $\mathbf{X} \in \mathbb{R}^{n \times p}$ is a known design matrix, $\mathbf{w}$ is the noise vector and $\mathbf{y}$ is the observation vector. The design matrix is rank deficient in the sense that $\text{rank}(\mathbf{X}) < p$. Further, the columns of $\mathbf{X}$ are normalised to have unit Euclidean (l_2) norm. The vector $\boldsymbol{\beta} \in \mathbb{R}^{n \times p}$ is sparse, i.e., the support of $\boldsymbol{\beta}$ given by $\mathcal{I} = \text{supp}(\boldsymbol{\beta}) = \{k : \beta_k \neq 0\}$ has cardinality $k_0 = |\mathcal{I}| \ll p$. The noise vector $\mathbf{w}$ is assumed to have Gaussian distribution with mean $\mathbf{0}_n$ and covariance $\sigma^2 \mathbf{I}_n$, i.e., $\mathbf{w} \sim \mathcal{N}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$. The signal to noise ratio in this regression model is defined as

$$SNR = \frac{\|\mathbf{X}\boldsymbol{\beta}\|_2^2}{\mathbb{E}(\|\mathbf{w}\|_2^2)} = \frac{\|\mathbf{X}\boldsymbol{\beta}\|_2^2}{n\sigma^2}. \quad (1)$$

Throughout this paper, $\mathbb{E}(\cdot)$ represents the expectation operator and $\|\mathbf{x}\|_q = \left(\sum_{k=1}^p |\beta_k|^q \right)^{\frac{1}{q}}$ represents the l_q norm of $\mathbf{x}$. In this article we consider the following two problems in the context of recovering sparse vectors in underdetermined linear regression models which are of larger interest.

P1). Estimate $\boldsymbol{\beta}$ with the objective of minimizing the mean squared error (MSE) $MSE(\hat{\boldsymbol{\beta}}) = \mathbb{E}(\|\boldsymbol{\beta} - \hat{\boldsymbol{\beta}}\|_2^2)$.

P2). Estimate the support of $\boldsymbol{\beta}$ with the objective of minimizing the probability of support recovery error

$$PE(\hat{\boldsymbol{\beta}}) = \mathbb{P}(\hat{\mathcal{I}} \neq \mathcal{I}), \text{ where } \hat{\mathcal{I}} = \text{supp}(\hat{\boldsymbol{\beta}}).$$

These problems are common in signal processing applications like sparse channel estimation [1], direction of arrival estimation [2], multi user detection [3] etc. Typical machine learning applications include sparse subspace clustering [4], sparse representation classification [5] etc. In signal processing community these problems are discussed under the compressive sensing (CS) paradigm [6]. A number of algorithms like least absolute shrinkage and selection operator (LASSO) [7], [8], Dantzig selector (DS) [9], subspace pursuit (SP) [10], compressive sampling matching pursuit (CoSaMP) [11], sparse Bayesian learning (SBL) [12], orthogonal matching pursuit (OMP) [13]–[19] etc. are proposed to solve the above mentioned problems. However, for optimal performance of these algorithms, a number of tuning parameters (also called hyper parameters) need to be fixed. For example, the value of λ in LASSO estimate

$$\hat{\boldsymbol{\beta}} = \arg \min_{\mathbf{b}} \frac{1}{2} \|\mathbf{y} - \mathbf{X}\mathbf{b}\|_2^2 + \lambda \|\mathbf{b}\|_1 \quad (2)$$

has to be tuned appropriately. Indeed, when the noise is Gaussian a value $\lambda = O(\sigma\sqrt{2\log(p)})$ is known to be optimal in terms of MSE performance [8]. Likewise, a value of $\lambda \propto \sigma^{1-\alpha}$ with $0 < \alpha < 1$ is known to deliver $PE \rightarrow 0$ as $\sigma^2 \rightarrow 0$ under some regularity conditions [20]. Likewise, for the optimal performance of DS, one needs to have knowledge of σ^2 [9]. However, unlike the case of overdetermined linear regression models where one can readily estimate σ^2 using the maximum likelihood (ML) estimator, estimating σ^2 in underdetermined linear regression models is extremely difficult [21]. This means that the optimal performance using LASSO and DS in many practical applications involving Gaussian noise¹ is not possible. Even if the noise variance is known, an amount of subjectivity is involved in fixing the tuning parameters. SBL on the other hand involves a non convex optimization problem which is solved using the expectation maximization (EM) algorithm and hence the solution depends on the initialization values of EM algorithm. Likewise, algorithms like CoSaMP, SP etc. require *a priori* knowledge of sparsity level k_0 which is rarely available. OMP, which is the focus of this article, requires either the knowledge of k_0 or the knowledge of σ^2 for

¹Apart from the Gaussian noise model considered in this paper, two other noise models popular in literature are l_2 bounded noise ($\|\mathbf{w}\|_2 < \epsilon_2$) and l_∞ bounded noise ($\|\mathbf{w}\|_\infty < \epsilon_\infty$). The optimal performance of aforementioned algorithms in these models requires the knowledge of parameters ϵ_2 and ϵ_∞ which are also difficult to estimate.

optimal performance. Hence, in many practical applications, the statistician is forced to choose ad hoc values of tuning parameters for which no performance guarantees are available. A popular alternative is based on techniques like cross validation which can deliver reasonably good performance at the expense of significantly high computational complexity [21]–[23]. Further, cross validation is also known to be ineffective for support recovery problems [23].

A. Tuning parameter free sparse recovery.

The literature on tuning parameter free sparse recovery procedure is new in comparison with the literature on sparse recovery algorithms like OMP, LASSO, DS etc. A seminal contribution in this field is the square root LASSO [24] algorithm which estimate β by

$$\hat{\beta} = \arg \min_{\mathbf{b}} \|\mathbf{y} - \mathbf{X}\mathbf{b}\|_2 + \lambda \|\mathbf{b}\|_1 \quad (3)$$

For optimal MSE performance λ can be set independent of σ^2 thereby overcoming a major drawback of LASSO. However, the choice of λ is still subjective with little guidelines. The high SNR behaviour of PE for square root LASSO is not reported in the literature. Another interesting development in this area is the development of sparse iterative covariance-based estimation, popularly called as SPICE [25]. SPICE is a convex optimization based algorithm that is completely devoid of any hyper parameters. The relationship between SPICE and techniques like LAD-LASSO, square root LASSO and LASSO are derived in [26], [27]. Another tuning parameter free algorithm called LIKES which is closely related to SPICE is proposed in [28]. Another interesting contribution in this area is the derivation of analytical properties of the non negative least squares (NNLS) estimator

$$\hat{\beta} = \arg \min_{\mathbf{b} \geq \mathbf{0}_p} \|\mathbf{y} - \mathbf{X}\mathbf{b}\|_2^2 \quad (4)$$

in [29] which points to the superior performance of NNLS in terms of MSE. However, the NNLS estimate is applicable only to the cases where the sign pattern of β is known *a priori*. Existing literature on tuning free sparse recovery has many disadvantages. In particular, all these techniques are computationally complex in comparison with simple algorithms like OMP, CoSaMP etc. Notwithstanding the connections established between algorithms like SPICE and LASSO, the performance guarantees of SPICE are not well established.

B. Robust regression in the presence of sparse outliers.

In addition to the recovery of sparse signals in underdetermined linear regression models (which is the main focus of this article), we also consider a regression model widely popular in robust statistics called sparse outlier model. Here we consider the regression model

$$\mathbf{y} = \mathbf{X}\beta + \mathbf{w} + \mathbf{g}, \quad (5)$$

where $\mathbf{X} \in \mathbb{R}^{n \times p}$ is a full rank design matrix with $n > p$ or $n \gg p$, regression vector β may or may not be sparse and inlier noise $\mathbf{w} \sim \mathcal{N}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$. The outlier noise $\mathbf{g}$ represents

the large errors in the regression equation that are not modelled by the inlier noise distribution. In many cases of practical interest, $\mathbf{g}$ is modelled as sparse, i.e., $n_{out} = |\text{supp}(\mathbf{g})| \ll n$. However, the non zero entries in $\mathbf{g}$ can take large values, i.e., $\|\mathbf{g}\|_\infty$ can be potentially high. Algorithms from robust statistics like Hubers' M-est [30] were used to solve this problem. Recently, a number of algorithms that utilizes the sparse nature of $\mathbf{g}$ like the convex optimization based [31], [32], SBL based [33], OMP based greedy algorithm for robust de-noising (GARD) [34] etc. are shown to estimate β more efficiently than the robust statistics based techniques. Just like the case of sparse regression, algorithms proposed for robust estimation in the presence of sparse outliers also require tuning parameters that are subjective and dependent on inlier noise variance σ^2 (which is difficult to estimate).

C. Contribution of this article.

This article makes the following contributions to the CS literature. We propose a novel way of using the popular OMP called tuning free OMP (TF-OMP) which does not require *a priori* knowledge of sparsity level k_0 or noise variance σ^2 and is completely devoid of any tuning parameters. We analytically establish that the TF-OMP can recover the true support $\mathcal{I}$ in l_2 bounded noise ($\|\mathbf{w}\|_2 \leq \epsilon_2$) if the matrix $\mathbf{X}$ satisfy either exact recovery condition (ERC) [13], mutual incoherence condition (MIC) [14] or the restricted isometry condition in [35] and the minimum non zero value $\beta_{min} = \min_{k \in \mathcal{I}} |\beta_k|$ is large enough. It is important to note that the conditions imposed on design matrix $\mathbf{X}$ for successful support recovery using TF-OMP is no more stringent than the results available [14], [15], [35] in literature for OMP with *a priori* knowledge of k_0 or noise variance σ^2 . Under the same set of conditions on matrix $\mathbf{X}$, TF-OMP is shown to achieve high SNR consistency [20], [36], [37] in Gaussian noise, i.e., $PE \rightarrow 0$ as $\sigma^2 \rightarrow 0$. This is the first time a tuning free CS algorithm is shown to achieve high SNR consistency. As mentioned before, GARD for estimation in the presence of sparse outliers is closely related to OMP. We extend the operating principle behind TF-OMP to GARD and develop a modified version of GARD called TF-GARD which is devoid of tuning parameters and does not require the knowledge of inlier noise variance σ^2 . Both proposed algorithms, viz. TF-OMP and TF-GARD are numerically shown to achieve highly competitive performance in comparison with a broad class of existing algorithms over a number of experiments.

D. Notations used.

$\text{col}(\mathbf{X})$ the column space of $\mathbf{X}$. $\mathbf{X}^T$ is the transpose and $\mathbf{X}^\dagger = (\mathbf{X}^T \mathbf{X})^{-1} \mathbf{X}^T$ is the Moore-Penrose pseudo inverse of $\mathbf{X}$ (if $\mathbf{X}$ has full column rank). $\mathbf{P}_\mathbf{X} = \mathbf{X} \mathbf{X}^\dagger$ is the projection matrix onto $\text{col}(\mathbf{X})$. $\mathbf{X}_\mathcal{J}$ denotes the sub-matrix of $\mathbf{X}$ formed using the columns indexed by $\mathcal{J}$. $\mathbf{X}_{i,j}$ is the $[i, j]^{th}$ entry of $\mathbf{X}$. If $\mathbf{X}$ is clear from the context, we use the shorthand $\mathbf{P}_\mathcal{J}$ for $\mathbf{P}_{\mathbf{X}_\mathcal{J}}$. Both $\mathbf{a}_\mathcal{J}$ and $\mathbf{a}(\mathcal{J})$ denotes the entries of $\mathbf{a}$ indexed by $\mathcal{J}$. χ_j^2 is a central chi square distribution with j degrees of freedom (d.o.f). $\mathcal{CN}(\mathbf{u}, \mathbf{C})$ is a complex Gaussian R.V with mean $\mathbf{u}$ and covariance matrix $\mathbf{C}$. $\mathbf{a} \sim \mathbf{b}$ implies that

Step 1:- Initialize the residual $\mathbf{r}^{(0)} = \mathbf{y}$. $\hat{\beta} = \mathbf{0}_p$, Support estimate $\mathcal{J}^0 = \phi$, Iteration counter $k = 1$;
Step 2:- Find the column most correlated with the current residual $\mathbf{r}^{(k-1)}$, i.e., $t_k = \arg \max_{t \in \{1, \dots, p\}} \mathbf{X}_t^T \mathbf{r}^{(k-1)} $.
Step 3:- Update support estimate: $\mathcal{J}^k = \mathcal{J}^{k-1} \cup t_k$.
Step 4:- Estimate β using current support: $\hat{\beta}(\mathcal{J}^k) = \mathbf{X}_{\mathcal{J}^k}^\dagger \mathbf{y}$.
Step 5:- Update residual: $\mathbf{r}^{(k)} = \mathbf{y} - \mathbf{X}\hat{\beta} = (\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{y}$.
Step 6:- Increment k . $k \leftarrow k + 1$.
Step 7:- Repeat Steps 2-6, until stopping condition (SC) is met.
Output:- $\hat{\mathcal{X}} = \mathcal{J}^k$ and $\hat{\beta}$.

TABLE I: Orthogonal Matching Pursuit

$\mathbf{a}$ and $\mathbf{b}$ are identically distributed. $\|\mathbf{A}\|_{m,l} = \max_{\|\mathbf{x}\|_m=1} \|\mathbf{A}\mathbf{x}\|_l$ is the $(m,l)^{th}$ matrix norm. $[p]$ denotes the set $\{1, \dots, p\}$. $\lfloor x \rfloor$ denotes the floor function. ϕ represents the null set. For any two index sets $\mathcal{J}_1$ and $\mathcal{J}_2$, the set difference $\mathcal{J}_1/\mathcal{J}_2 = \{j : j \in \mathcal{J}_1 \text{ and } j \notin \mathcal{J}_2\}$. For any index set $\mathcal{J} \subseteq [p]$, $\mathcal{J}^c$ denotes the complement of $\mathcal{J}$ with respect to $[p]$. $f(n) = O(g(n))$ iff $\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} < \infty$.

E. Organization of this article:-

Section II discuss existing literature on OMP. Section III present TF-OMP. Section IV presents the performance guarantees for TF-OMP. Section V discuss TF-GARD algorithm. Section VI presents the numerical simulations.

II. OMP: PRIOR ART

The proposed tuning parameter free sparse recovery algorithm is based on OMP. OMP is a greedy procedure to perform sparsity constrained least square minimization. OMP starts with a null model and add columns to current support that is most correlated with the current residual. An algorithmic description of OMP is given in TABLE I. The performance of OMP is determined by the properties of the measurement matrix $\mathbf{X}$, ambient SNR, sparsity of β (k_0) and stopping condition (SC). We first describe the properties of $\mathbf{X}$ that are conducive for sparse recovery using OMP.

A. Qualifiers for design matrix $\mathbf{X}$.

When $n < p$, the linear equation $\mathbf{y} = \mathbf{X}\beta$ has infinitely many possible solutions. Hence the support recovery problem is ill-posed even in the noiseless case. To uniquely recover the k_0 -sparse vector β , the measurement matrix $\mathbf{X}$ has to satisfy certain well known regularity conditions. A plethora of sufficient conditions including restricted isometry property (RIP) [6], [15], mutual incoherence condition (MIC) [7], [14], exact recovery condition (ERC) [7], [13] etc. are discussed in the literature. We first describe the ERC.

Definition 1:- A matrix $\mathbf{X}$ and a vector β with support $\mathcal{I}$ satisfy ERC if the exact recovery coefficient $\text{erc}(\mathbf{X}, \mathcal{I}) = \max_{j \notin \mathcal{I}} \|\mathbf{X}_{\mathcal{I}}^\dagger \mathbf{X}_j\|_1$ satisfies $\text{erc}(\mathbf{X}, \mathcal{I}) < 1$.

It is known that ERC is a sufficient and worst case necessary condition for accurately recovering $\mathcal{I}$ from $\mathbf{y} = \mathbf{X}\beta$ using OMP [13]. The same condition with appropriate scaling of $\beta_{\min}$ is sufficient for recovery in regression models with noise [14]. Since ERC involves the unknown support $\mathcal{I}$, it is impossible to check ERC in practice. Another important metric used for qualifying $\mathbf{X}$ is the restricted isometry constant (RIC). RIC of order k denoted by δ_k is defined as the smallest value of $0 \leq \delta \leq 1$ that satisfies

$$(1 - \delta)\|\mathbf{b}\|_2^2 \leq \|\mathbf{X}\mathbf{b}\|_2^2 \leq (1 + \delta)\|\mathbf{b}\|_2^2 \quad (6)$$

for all k -sparse $\mathbf{b} \in \mathbb{R}^p$. OMP can recover a k_0 sparse signal β in the first k_0 iterations if $\delta_{k_0+1} < \frac{1}{\sqrt{k_0+1}}$ [15], [35], [38]. In the absence of noise, OMP can recover a k_0 sparse β in $[3.8k_0]$ iterations if $\delta_{[3.8k_0]} < 2 \times 10^{-5}$ [18]. Likewise, it is possible to recover β in $30k_0$ iterations if $\delta_{31k_0} < \frac{1}{2}$ [18]. It is well known that the computation of RIC is NP-hard. Hence, mutual coherence, a quantity that can be estimated easily is widely popular. For a matrix $\mathbf{X}$ with unit l_2 norm columns, the mutual coherence is defined as the maximum pair wise column correlation, i.e.,

$$\mu_{\mathbf{X}} = \max_{i \neq j} |\mathbf{X}_i^T \mathbf{X}_j| \quad (7)$$

If $\mu_{\mathbf{X}} < \frac{1}{2k_0-1}$, then for all k_0 -sparse vector β , $\text{erc}(\mathbf{X}, \mathcal{I})$ can be bounded as $\text{erc}(\mathbf{X}, \mathcal{I}) < \frac{k_0 \mu_{\mathbf{X}}}{1 - (k_0-1)\mu_{\mathbf{X}}} < 1$ [13]. Hence, $\mu_{\mathbf{X}} < \frac{1}{2k_0-1}$ is a sufficient condition for both noiseless and noisy sparse recovery using OMP. It is also shown that $\mu_{\mathbf{X}} < \frac{1}{2k_0-1}$ is a worst case necessary condition for sparse recovery.

B. Stopping conditions for OMP

Most of the theoretical properties of OMP are derived assuming either the absence of noise [13], [16], [18] or the *a priori* knowledge of k_0 [15]. In this case OMP iterations are terminated once $k = k_0$ or $\|\mathbf{r}^{(k)}\|_2 = 0$. When k_0 is not available which is typically the case, one has to rely on stopping conditions based on the properties of residual $\mathbf{r}^{(k)}$. For example, OMP can be stopped if $\|\mathbf{r}^{(k)}\|_2 < \sigma \sqrt{n + 2\sqrt{n \log(n)}}$ [14], [35] or $\|\mathbf{X}^T \mathbf{r}^{(k)}\|_\infty < \sigma \sqrt{2 \log(p)}$ [14]. Likewise, [39] suggested a SC based on the residual difference $\mathbf{r}^{(k)} - \mathbf{r}^{(k-1)}$. The necessary and sufficient conditions for high SNR consistency ($PE \rightarrow 0$ as $\sigma^2 \rightarrow 0$) of OMP with residual based SC is derived in [20]. A generalized likelihood ratio based stopping rule is developed in [40]. In addition to the subjectivity involved in the choice of SC, all the above mentioned SC requires the knowledge of σ^2 . As explained before, estimating σ^2 in underdetermined regression models is extremely difficult. In the following, we use the shorthand OMP(k_0) for OMP with *a priori* knowledge of k_0 and OMP(σ^2) for OMP with SC based on *a priori* knowledge of σ^2 . In the next section, we develop TF-OMP, an OMP based procedure which does not require the knowledge of either k_0 or σ^2 for good performance.

III. TUNING FREE ORTHOGONAL MATCHING PURSUIT.

In this section, we present the proposed TF-OMP algorithm. This algorithm is based on the statistic $t(k) = \frac{\|\mathbf{r}^{(k)}\|_2^2}{\|\mathbf{r}^{(k-1)}\|_2^2}$, where $\mathbf{r}^{(k)} = (\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{y}$ is the residual in the k^{th} iteration of OMP. Using the property $\mathbf{P}_{\mathcal{J}^k}\mathbf{P}_{\mathcal{J}^{k-1}}\mathbf{y} = \mathbf{P}_{\mathcal{J}^{k-1}}\mathbf{P}_{\mathcal{J}^k}\mathbf{y} = \mathbf{P}_{\mathcal{J}^{k-1}}\mathbf{y}$ of projection matrices [36], we have $(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})(\mathbf{P}_{\mathcal{J}^k} - \mathbf{P}_{\mathcal{J}^{k-1}}) = \mathbf{O}_n$, where $\mathbf{O}_n$ is the $n \times n$ zero matrix. This implies that $\|(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^{k-1}})\mathbf{y}\|_2^2 = \|(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{y}\|_2^2 + \|(\mathbf{P}_{\mathcal{J}^k} - \mathbf{P}_{\mathcal{J}^{k-1}})\mathbf{y}\|_2^2$. Hence, $t(k)$ can be rewritten as

$$t(k) = \frac{\|(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{y}\|_2^2}{\|(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{y}\|_2^2 + \|(\mathbf{P}_{\mathcal{J}^k} - \mathbf{P}_{\mathcal{J}^{k-1}})\mathbf{y}\|_2^2} \quad (8)$$

Since the residual norms are non decreasing, i.e., $\|\mathbf{r}^{(k+1)}\|_2 \leq \|\mathbf{r}^{(k)}\|_2$, we always have $0 \leq t(k) \leq 1$. This statistic exhibits an interesting behaviour which is the core of our proposed technique, i.e., TF-OMP. Consider running OMP for a number of iterations $k_{max} > k_0$ such that neither the matrices $\{\mathbf{X}_{\mathcal{J}^k}\}_{k=1}^{k_{max}}$ are rank deficient nor the residuals $\{\mathbf{r}^{(k)}\}_{k=0}^{k_{max}}$ are zero. Then $t(k)$ varies in the following manner for $1 \leq k \leq k_{max}$.

Case 1:- When $\mathcal{J}^k \subset \mathcal{I}$:- Then both $(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{y}$ and $(\mathbf{P}_{\mathcal{J}^k} - \mathbf{P}_{\mathcal{J}^{k-1}})\mathbf{y}$ contains contributions from signal $\mathbf{X}\beta$ and noise $\mathbf{w}$. Since both numerator and denominator contains noise and signal terms, it is less likely that $t(k)$ takes very low values.

Case 2) When $\mathcal{J}^k \supseteq \mathcal{I}$ for the first time:- In this case $(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{X}\beta = \mathbf{0}_n$ and $(\mathbf{P}_{\mathcal{J}^k} - \mathbf{P}_{\mathcal{J}^{k-1}})\mathbf{X}\beta \neq \mathbf{0}_n$. Hence, numerator has contribution only from the noise $\mathbf{w}$, whereas, denominator has contributions from both noise and signal $\mathbf{X}\beta$. Hence, if signal strength is sufficiently high or noise level is low, $t(k)$ will take very low values.

Case 3:- When $\mathcal{J}^k \supset \mathcal{I}$:- In this case both $(\mathbf{I}_n - \mathbf{P}_{\mathcal{J}^k})\mathbf{X}\beta = \mathbf{0}_n$ and $(\mathbf{P}_{\mathcal{J}^k} - \mathbf{P}_{\mathcal{J}^{k-1}})\mathbf{X}\beta = \mathbf{0}_n$. This means that both numerator and denominator consists only of noise terms and hence the ratio $t(k)$ will not take very small value even if noise variance is very low.

To summarize, as SNR improves, the minimal value of $t(k)$ for $1 \leq k \leq k_{max}$ will corresponds to that value of k such that $\mathcal{I} \subseteq \mathcal{J}^k$ for the first time with a very high probability. This point is illustrated in Fig.1 where a typical realization of the quantity $t(k)$ is plotted for a matrix signal pair $(\mathbf{X}, \beta)$ satisfying ERC. The signal β has non zero values ± 1 and $k_0 = 3$. At both SNR=10 dB and SNR=30 dB, the minimum value is attained at $k = 3$ which is also the first time $\mathcal{I} \subseteq \mathcal{J}^k$. Further, the dip in the value of $t(k)$ at $k = 3$ becomes more and more pronounced as SNR increases. This motivate the TF-OMP algorithm given in TABLE II which try to estimate $\mathcal{I}$ by utilizing the sudden dip in $t(k)$. We now make the following observations about TF-OMP.

Remark 1. It is important to note that the TF-OMP is designed to post facto estimate k_f , the first k such that $\mathcal{I} \subseteq \mathcal{J}^k$ from a sequence of $t(k)$ related to OMP. Note that k_f will correspond to k_0 only when the first k_0 iterations are accurate, i.e., at each of the first k_0 iterations, indices belonging to $\mathcal{I}$ are selected by OMP. Only in that situation will the objective

Input:- Observation $\mathbf{y}$, design matrix $\mathbf{X}$.

Step 1:- Run OMP for k_{max} iterations.

Step 2:- Estimate $k^* = \arg \min_{1 \leq k \leq k_{max}-1} t(k)$.

Step 3:- Estimate support as $\hat{\mathcal{I}} = \mathcal{J}^{k_{max}}(1 : k^*)$.

Estimate β as $\hat{\beta}(\hat{\mathcal{I}}) = \mathbf{X}_{\hat{\mathcal{I}}}^\dagger \mathbf{y}$ and $\hat{\beta}(\hat{\mathcal{I}}^C) = \mathbf{0}_{p-k^*}$.

Output:- Support estimate $\hat{\mathcal{I}}$ and signal estimate $\hat{\beta}$.

TABLE II: Tuning free orthogonal matching pursuit

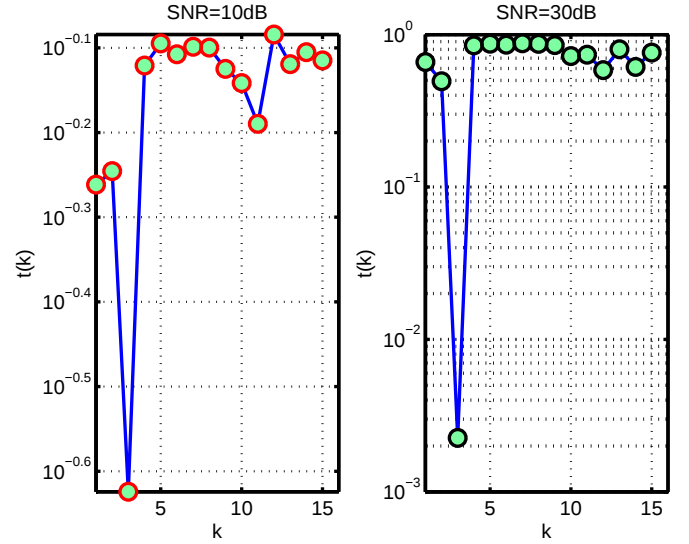


Fig. 1: Variation of $t(k)$ vs k for the 32×64 matrix $\mathbf{X} = [\mathbf{I}_n, \mathbf{H}_n]$ described in Section VI when $k_0 = 3$.

of exact support recovery matches the objective of TF-OMP. When conditions like RIC, MIC, ERC etc. are satisfied and SNR is high, it is established in [14], [15], [35] that the first k_0 iterations are correct with a high probability. Under such circumstances, TF-OMP is trying to estimate $\mathcal{I}$ directly.

Remark 2. Next consider the situation where $k_0 \neq k_f$, i.e., the first k_0 iterations are not accurate. This situation happens in coherent design matrices at all SNR and incoherent dictionaries at low SNR. In this situation, all versions of OMP including OMP(k_0) fail to deliver accurate support recovery. Indeed, OMP(k_0) results in missed discoveries (i.e., failure to include non zero entries of β in $\hat{\mathcal{I}}$) which cause flooring of MSE as SNR improves. TF-OMP has a qualitatively different behaviour. Since TF-OMP is trying to estimate k_f , it will produce a support estimate $\hat{\mathcal{I}} \supset \mathcal{I}$ provided that $\exists k_f > k_0$ that satisfies $\mathcal{I} \subset \mathcal{J}^{k_f}$. Such delayed recovery happens quite often in coherent dictionaries [18]. In other words, TF-OMP has a lesser tendency to have missed discoveries, rather it suffers from false discoveries (including non significant indices in $\hat{\mathcal{I}}$). This tendency can result in a degraded MSE performance for TF-OMP at low SNR. However, as SNR improves the effect of false discoveries on MSE decreases, whereas, the effect of missed discoveries become more predominant. Consequently,

TF-OMP suffer less from MSE floors in such situations than OMP(k_0). To summarise, when there is no congruency between k_0 and k_f , TF-OMP can potentially deliver better MSE performance than OMP(k_0) at least in high SNR.

Remark 3. The only user defined parameter in TF-OMP is k_{max} . This can be set independent of the signal β . The only requirement for efficient operation of TF-OMP is that $k_{max} > k_0$, $\{\mathbf{X}_{\mathcal{J}^k}\}_{k=1}^{k_{max}}$ are full rank and the residuals $\{\mathbf{r}^{(k)}\}_{k=0}^{k_{max}}$ are not zero. It is impossible to ascertain *a priori* when the matrices become rank deficient or residuals become zero. Hence, one can set $k_{max} = n$ (since $\mathbf{X}_{\mathcal{J}^{n+1}}$ is rank deficient w.p.1) initially and terminate iterations when any of the aforementioned contingencies happen. However, the maximum value of k_0 for a fixed n that can be recovered using any sparse recovery technique is $\lfloor \frac{n+1}{2} \rfloor$. This follows from the fact that Spark of $\mathbf{X}$ satisfies $\text{spark}(\mathbf{X}) \leq n+1$ (equality for equiangular tight frames) and $k_0 < \lfloor \frac{\text{spark}(\mathbf{X})}{2} \rfloor$ is a necessary condition for sparse recovery using any algorithm [41]. Hence, instead of $k_{max} = n$, it is sufficient to set $k_{max} = \lfloor \frac{n}{2} \rfloor$ and this is the value of k_{max} used in our simulations. Needless to say, if one has *a priori* knowledge of maximum value of k_0 (not the exact value of k_0), k_{max} can be set to that value also.

A. Computational complexity of TF-OMP

The computational complexity of TF-OMP with $k_{max} = \lfloor \frac{n}{2} \rfloor$ is $O(n^2p)$ which is higher than the $O(npk_0)$ complexity of OMP(k_0). This is the cost one has to pay for not knowing k_0 or σ^2 *a priori*. However, TF-OMP is computationally much more efficient than either the second order conic programming (SOCP) or cyclic algorithm based implementation of the popular tuning free SPICE algorithm [28]. Even the cyclic algorithm based implementation of SPICE which is claimed to be computationally efficient (in comparison with SOCP) in small and medium sized problems involve multiple iterations and in each iteration it requires the inversion of a $n \times n$ matrix ($O(n^3)$ complexity) and a matrix matrix multiplication of complexity $O((n+p)^3)$. It is possible to reduce the complexity of TF-OMP by producing upper bounds on k_0 that is lower than the $k_{max} = \lfloor \frac{n}{2} \rfloor$ used in TF-OMP. Assuming *a priori* knowledge of an upper bound $k_{up} \geq k_0$ is a significantly weaker assumption than having exact *a priori* knowledge of k_0 . If one can produce an upper bound $k_{up} \geq k_0$ satisfying $k_{up} = O(k_0)$, then setting $k_{max} = k_{up}$ in TF-OMP gives the OMP(k_0) complexity of $O(k_0np)$.

For situations where the statistician is completely oblivious to k_0 , we propose two low complexity versions of TF-OMP, viz., QTF-OMP1 (quasi tuning free OMP) and QTF-OMP2 that uses a value of k_{max} lower than the $k_{max} = \lfloor \frac{n}{2} \rfloor$ used in TF-OMP. QTF-OMP1 uses $k_{max} = 1 + \lfloor \sqrt{\frac{n(p-1)}{p-n}} \rfloor$ and QTF-OMP2 uses $k_{max} = \lfloor n/\log(p) \rfloor$. QTF-OMP1 is motivated by the fact that the best coherence based guarantee for OMP extends upto $k_0 \leq \frac{1}{2}(1 + \frac{1}{\mu_{\mathbf{X}}})$ and $\mu_{\mathbf{X}}$ for any

$n \times p$ matrix satisfies $\mu_{\mathbf{X}} \geq \sqrt{\frac{p-n}{n(p-1)}}$ [41]. Hence, QTF-OMP1 uses a value of k_{max} which is two times higher than the maximum value of k_0 that can be covered by the coherence based guarantees available for OMP. Likewise, the best known asymptotic guarantee for OMP states that OMP can recover any k_0 sparse signal when $(n, p, k_0) \rightarrow \infty$ if $n = 2k_0(1 + \delta)\log(p - k_0)$, where $\delta > 0$ is any arbitrary value [19]. Hence, when $p \gg k_0$, the highest value of k_0 one can reliably detect using OMP asymptotically is $\frac{n}{2\log(p)}$. The value of k_{max} used in QTF-OMP1 and QTF-OMP2 is twice of the aforementioned maximum detectable values of k_0 to add sufficient robustness. The complexity of QTF-OMP1 and QTF-OMP2 are $O\left(np\sqrt{\frac{n(p-1)}{p-n}}\right)$ and $O\left(n^2\frac{p}{\log(p)}\right)$ which is significantly lower than the $O(n^2p)$ complexity of TF-OMP. Unlike TF-OMP which is completely tuning free, QTF-OMP1 and QTF-OMP2 involves a subjective choice of k_{max} (though motivated by theoretical properties). The rest of this article consider TF-OMP only and in Section VI we demonstrate that the performance of TF-OMP, QTF-OMP1 and QTF-OMP2 are similar across multiple experiments.

IV. ANALYSIS OF TF-OMP

In this section we will mathematically analyse various factors that will influence the performance of TF-OMP. In particular we discuss the conditions for successful recovery of a k_0 -sparse vector in l_2 bounded noise $\|\mathbf{w}\|_2 \leq \epsilon_2$. Note that the Gaussian vector $\mathbf{w} \sim \mathcal{N}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$ is essentially bounded in the sense that $\mathbb{P}\left(\|\mathbf{w}\|_2 > \sigma\sqrt{n + 2\sqrt{n\log(n)}}\right) \leq \frac{1}{n}$. Hence with $\epsilon_2 = \sigma\sqrt{n + 2\sqrt{n\log(n)}}$, this analysis is applicable to Gaussian noise too. For bounded noise, we define the SNR as $SNR_b = \frac{\|\mathbf{X}\beta\|_2^2}{\epsilon_2^2}$. We next state and prove a theorem regarding the successful support recovery by TF-OMP in bounded noise. Note that the accurate support recovery automatically translate to a MSE performance equivalent to that of an oracle with *a priori* knowledge of support $\mathcal{I}$. Throughout this section, we use $t(k)$ to denote the ratio $\|\mathbf{r}^{(k)}\|_2/\|\mathbf{r}^{(k-1)}\|_2$ instead of $\|\mathbf{r}^{(k)}\|_2^2/\|\mathbf{r}^{(k-1)}\|_2^2$.

Theorem 1. For any matrix signal pair $(\mathbf{X}, \beta)$ satisfying ERC, MIC or RIP with $\delta_{k_0+1} \leq \frac{1}{\sqrt{k_0} + 1}$, TF-OMP with $k_{max} > k_0$ will recover the correct support in bounded noise if the SNR (SNR_b) is sufficiently high.

Proof:- The analysis of TF-OMP is based on the fundamental results developed in the [14] and [35] stated next.

A. A brief review of relevant results from [14] and [35].

Let λ_{min} and λ_{max} denotes the minimum and maximum eigenvalues of $\mathbf{X}_{\mathcal{I}}^T \mathbf{X}_{\mathcal{I}}$ respectively.

Lemma 1. If $\lambda_{min} > 0$ and $\text{erc}(\mathbf{X}, \mathcal{I}) < 1$, then the following statements hold true [14].

A1):- $\lambda_{min}\|\beta_{u^k}\|_2 - \epsilon_2 \leq \|\mathbf{r}^{(k)}\|_2 \leq \lambda_{max}\|\beta_{u^k}\|_2 + \epsilon_2$, $1 \leq k \leq k_0$. Here $u^k = \mathcal{I}/\mathcal{J}^k$ denotes the indices in $\mathcal{I}$ that are

not selected after the k^{th} iteration.

A2):- $\epsilon_2 \leq \frac{\beta_{\min} \lambda_{\min}(1 - \text{erc}(\mathbf{X}, \mathcal{I}))}{2}$ implies that the first k_0 iterations are correct, i.e., $\{t_1, \dots, t_{k_0}\} = \mathcal{I}$.

A1) shows how to bound the residual norms used in $t(k)$ based on $\lambda_{\max}$ and $\lambda_{\min}$. A2) implies that the first k_0 iterations of OMP will be correct if SNR_b is sufficiently high and ERC is satisfied. We now state conditions similar to A1)-A2) in terms of MIC and RIC.

Lemma 2. MIC $\left(\mu_{\mathbf{X}} \leq \frac{1}{2k_0 - 1}\right)$ implies that $\text{erc}(\mathbf{X}, \mathcal{I}) \leq \frac{1 - (k_0 - 1)\mu_{\mathbf{X}}}{1 + (k_0 - 1)\mu_{\mathbf{X}}} < 1$ and $0 < 1 - (k_0 - 1)\mu_{\mathbf{X}} < \lambda_{\min} \leq \lambda_{\max} \leq 1 + (k_0 - 1)\mu_{\mathbf{X}}$ [13]. Substituting these bounds in A1) and A2) gives

B1):- $(1 - (k_0 - 1)\mu_{\mathbf{X}}) \|\beta_{u^k}\|_2 - \epsilon_2 \leq \|\mathbf{r}^{(k)}\|_2 \leq (1 + (k_0 - 1)\mu_{\mathbf{X}}) \|\beta_{u^k}\|_2 + \epsilon_2$, $1 \leq k \leq k_0$.

B2):- $\epsilon_2 \leq \frac{\beta_{\min}(1 - (2k_0 - 1)\mu_{\mathbf{X}})}{2}$ implies that the first k_0 iterations are correct, i.e., $\{t_1, \dots, t_{k_0}\} = \mathcal{I}$.

Lemma 3. RIC $\delta_{k_0} < 1$ implies that $1 - \delta_{k_0} \leq \lambda_{\min} \leq \lambda_{\max} \leq 1 + \delta_{k_0}$ [35]. Substituting this in A1) gives

C1):- $(1 - \delta_{k_0}) \|\beta_{u^k}\|_2 - \epsilon_2 \leq \|\mathbf{r}^{(k)}\|_2 \leq (1 + \delta_{k_0}) \|\beta_{u^k}\|_2 + \epsilon_2$, $1 \leq k \leq k_0$.

The next statement follows from Theorem 1 of [35].

C2):- If $\delta_{k_0+1} < \frac{1}{\sqrt{k_0} + 1}$, then $\epsilon_2 \leq \frac{\beta_{\min}(1 - (\sqrt{k_0} + 1)\delta_{k_0+1})}{\sqrt{1 + \delta_{k_0+1}} + 1}$ implies that the first k_0 iterations are correct.

Since the analysis based on $\text{erc}(\mathbf{X}, \mathcal{I})$ and $\{\lambda_{\min}, \lambda_{\max}\}$ are more general than MIC or RIC, we explain TF-OMP using $\text{erc}(\mathbf{X}, \mathcal{I})$ and $\{\lambda_{\min}, \lambda_{\max}\}$. However, as outlined in B1)-B2) and C1)-C2), this analysis can be easily replaced by $\mu_{\mathbf{X}}$ and $\{\delta_{k_0}, \delta_{k_0+1}\}$.

B. Sufficient conditions for sparse recovery using TF-OMP

The successful recovery of support of β using TF-OMP requires the simultaneous occurrence of the events E1)-E3) given below.

E1). The first k_0 iterations are correct, i.e., $\{t_1, \dots, t_{k_0}\} = \mathcal{I}$.

E2). $t(k) > t(k_0)$, for $1 \leq k \leq k_0 - 1$.

E3). $t(k) > t(k_0)$, for $k_0 + 1 \leq k \leq k_{\max}$.

E1) implies that OMP with *a priori* knowledge of k_0 , i.e., OMP(k_0) can perform exact sparse recovery, whereas, E2) and E3) implies that TF-OMP will be free from missed and false discoveries respectively. Note that the condition A2) implies that the event E1) occurs as long as $\lambda_{\min} > 0$, $\text{erc}(\mathbf{X}, \mathcal{I}) < 1$ and ϵ_2 is below a particular level ϵ^a given by

$$\epsilon^a = \frac{\beta_{\min} \lambda_{\min}(1 - \text{erc}(\mathbf{X}, \mathcal{I}))}{2}. \quad (9)$$

Next we consider the events E2) and E3) assuming that the noise $\mathbf{w}$ satisfies $\|\mathbf{w}\|_2 \leq \epsilon^a$, i.e., E1) is true. To establish $t(k_0) < t(k)$ for $k \neq k_0$, we produce an upper bound on $t(k_0)$ and lower bounds on $t(k)$ for $k \neq k_0$ and show that the upper bound on $t(k_0)$ is lower than the lower bound on $t(k)$ for $k \neq$

k_0 at high SNR. We first consider the event E2). Since all k_0 entries in β are selected in the first k_0 iterations $u^{k_0} = \phi$ and hence $\|\beta_{u^{k_0}}\|_2 = 0$. Likewise, only one entry in β is left out after $k_0 - 1$ iterations. Hence, $|u^{k_0-1}| = 1$ and $\|\beta_{u^{k_0-1}}\|_2 \geq \beta_{\min}$. Substituting these values in A1) of Lemma 1, we have $\|\mathbf{r}^{(k_0)}\|_2 \leq \epsilon_2$ and $\|\mathbf{r}^{(k_0-1)}\|_2 \geq \lambda_{\min} \beta_{\min} - \epsilon_2$. Hence, $t(k_0)$ is bounded by

$$t(k_0) = \frac{\|\mathbf{r}^{(k_0)}\|_2}{\|\mathbf{r}^{(k_0-1)}\|_2} \leq \frac{\epsilon_2}{\lambda_{\min} \beta_{\min} - \epsilon_2}, \forall \epsilon_2 < \epsilon^a. \quad (10)$$

Next we lower bound $t(k)$ for $k < k_0$. Note that $\beta_{u^{k-1}} = \beta_{u^k} + \beta_{u^{k-1}/u^k}$ after appending enough zeros in appropriate locations. Further, $\|\beta_{u^{k-1}/u^k}\|_2 = |\beta_{u^{k-1}/u^k}| \leq \beta_{\max}$, where $\beta_{\max} = \max_{k \in \mathcal{I}} |\beta_k|$. Applying triangle inequality to $\beta_{u^{k-1}} = \beta_{u^k} + \beta_{u^{k-1}/u^k}$ gives the bound

$$\|\beta_{u^{k-1}}\|_2 \leq \|\beta_{u^k}\|_2 + \|\beta_{u^{k-1}/u^k}\|_2 \leq \|\beta_{u^k}\|_2 + \beta_{\max} \quad (11)$$

Applying (11) in $t(k)$ gives

$$\begin{aligned} t(k) &= \frac{\|\mathbf{r}^{(k)}\|_2}{\|\mathbf{r}^{(k-1)}\|_2} \geq \frac{\lambda_{\min} \|\beta_{u^k}\|_2 - \epsilon_2}{\lambda_{\max} \|\beta_{u^{k-1}}\|_2 + \epsilon_2} \\ &\geq \frac{\lambda_{\min} \|\beta_{u^k}\|_2 - \epsilon_2}{\lambda_{\max} (\|\beta_{u^k}\|_2 + \beta_{\max}) + \epsilon_2} \end{aligned} \quad (12)$$

for $k < k_0$ and $\epsilon_2 \leq \epsilon^a$. The R.H.S of (12) can be rewritten as

$$\frac{\lambda_{\min} \|\beta_{u^k}\|_2 - \epsilon_2}{\lambda_{\max} (\|\beta_{u^k}\|_2 + \beta_{\max}) + \epsilon_2} = \frac{\lambda_{\min}}{\lambda_{\max}} \left(1 - \frac{\frac{\epsilon_2}{\lambda_{\min}} + \frac{\epsilon_2}{\lambda_{\max}} + \beta_{\max}}{\|\beta_{u^k}\|_2 + \beta_{\max} + \frac{\epsilon_2}{\lambda_{\max}}} \right) \quad (13)$$

From (13) it is clear that the R.H.S of (12) decreases with decreasing $\|\beta_{u^k}\|_2$. Note that the minimum value of $\|\beta_{u^k}\|_2$ is $\beta_{\min}$ itself. This leads to an even smaller lower bound on $t(k)$ for $k < k_0$ given by

$$t(k) \geq \frac{\lambda_{\min} \beta_{\min} - \epsilon_2}{\lambda_{\max} (\beta_{\max} + \beta_{\min}) + \epsilon_2}, \quad \forall k < k_0 \text{ and } \epsilon_2 < \epsilon^a. \quad (14)$$

For E2) to happen it is sufficient that the lower bound on $t(k)$ for $k < k_0$ is larger than the upper bound on $t(k_0)$, i.e.,

$$\frac{\lambda_{\min} \beta_{\min} - \epsilon_2}{\lambda_{\max} (\beta_{\max} + \beta_{\min}) + \epsilon_2} \geq \frac{\epsilon_2}{\lambda_{\min} \beta_{\min} - \epsilon_2}. \quad (15)$$

This will happen if $\epsilon_2 \leq \epsilon^b$, where

$$\epsilon^b = \frac{\lambda_{\min} \beta_{\min}}{1 + 2 \frac{\lambda_{\max}}{\lambda_{\min}} + \frac{\lambda_{\max} \beta_{\max}}{\lambda_{\min} \beta_{\min}}}. \quad (16)$$

In words, whenever $\epsilon_2 \leq \min(\epsilon^a, \epsilon^b)$, TF-OMP will not have any missed discoveries.

Next we consider the event E3) and assume again that $\epsilon_2 < \epsilon^a$. Since, the first k_0 iterations are correct, $(\mathbf{I}_n - \mathbf{P}_k) \mathbf{y} = (\mathbf{I}_n - \mathbf{P}_k) \mathbf{w}$ for $k \geq k_0$. Note that the quantity $t(k) = \frac{\|(\mathbf{I} - \mathbf{P}_k) \mathbf{w}\|_2}{\|(\mathbf{I} - \mathbf{P}_{k-1}) \mathbf{w}\|_2}$ is independent of the scaling factor ϵ_2 . Hence, define the quantity

$$\Gamma(\mathbf{X}, \mathcal{A}) = \min_{\substack{k_0 < k \leq k_{\max} \\ \|\mathbf{z}\|_2 = 1}} \frac{\|(\mathbf{I} - \mathbf{P}_k) \mathbf{z}\|_2}{\|(\mathbf{I} - \mathbf{P}_{k-1}) \mathbf{z}\|_2}. \quad (17)$$

where $\mathcal{A} = \{t_{k_0}, \dots, t_{k_{max}}\} \subset \{1, \dots, p\}$ is an ordered set representing the indices selected by OMP. By the definition of $\Gamma(\mathbf{X}, \mathcal{A})$, $t(k) \geq \Gamma(\mathbf{X}, \mathcal{A})$, $\forall k > k_0$. $\Gamma(\mathbf{X}, \mathcal{A})$ is a random variable depending on the indices $\mathcal{A} = \{t_{k_0}, \dots, t_{k_{max}}\}$ which depends on the noise vector $\mathbf{w}$. However, $\mathbf{w}$ influences $\Gamma(\mathbf{X}, \mathcal{A})$ only through $\mathcal{A}$. Since $\{\mathbf{P}_k\}_{k=k_0+1}^{k_{max}}$ depends on $\mathbf{w}$, it is difficult to characterize $\Gamma(\mathbf{X}, \mathcal{A})$. TF-OMP stops before $\mathbf{r}^{(k)} = \mathbf{0}_n$ deterministically and hence it is true that $\Gamma(\mathbf{X}, \mathcal{A}) > \gamma_{\mathcal{A}} > 0$ for each of the possible realization of $\mathbf{w}$ or equivalently, each possible realization $\mathcal{A}$. Further, the set of all possible $\mathcal{A}$ denoted by $\tilde{\mathcal{A}}$ is large, but finite. This implies that $\Gamma(\mathbf{X}, \mathcal{I}) = \min_{\mathcal{A} \in \tilde{\mathcal{A}}} \Gamma(\mathbf{X}, \mathcal{A}) \geq \min_{\mathcal{A} \in \tilde{\mathcal{A}}} \gamma_{\mathcal{A}} > 0$. This implies that $t(k) \geq \Gamma(\mathbf{X}, \mathcal{I}) > 0$ with probability one for all $k > k_0$ and $\Gamma(\mathbf{X}, \mathcal{I})$ is independent of ϵ_2 . At the same time, the bound $t(k_0) \leq \frac{\epsilon_2}{\lambda_{min}\beta_{min} - \epsilon_2}$ on $t(k_0)$ decreases to zero with decreasing ϵ_2 . Hence, $\exists \epsilon^c > 0$ given by

$$\epsilon^c = \frac{\lambda_{min}\beta_{min}\Gamma(\mathbf{X}, \mathcal{I})}{1 + \Gamma(\mathbf{X}, \mathcal{I})} \quad (18)$$

such that $t(k_0) < t(k)$ for all $k > k_0$ whenever $\epsilon_2 < \min(\epsilon^a, \epsilon^c)$. In words, TF-OMP will not make false discoveries whenever $\epsilon_2 < \min(\epsilon^a, \epsilon^c)$. Combining all the required conditions, we can see that TF-OMP will recover the correct support whenever $0 < \epsilon_2 < \epsilon_{min} = \min(\epsilon^a, \epsilon^b, \epsilon^c)$. In words, for any support $\mathcal{I}$ satisfying ERC, $\exists SNR_b^{\mathcal{I}} < \infty$, such that TF-OMP will recover $\mathcal{I}$ whenever $SNR_b > SNR_b^{\mathcal{I}}$. Hence proved. ■

We now make some remarks about the performance of TF-OMP.

Remark 4. The conditions on the matrix support pair $(\mathbf{X}, \mathcal{I})$ for the successful support recovery using TF-OMP is exactly same as the MIC, ERC and RIC based conditions outlined for OMP(σ^2) and OMP(k_0). From the expressions of ϵ_b in (16) and ϵ_c in (18), it is difficult to ascertain whether the $\min(\epsilon_b, \epsilon_c) < \epsilon_a$. In other words, it is difficult to state whether the required SNR for successful recovery using TF-OMP is higher than that required for OMP(k_0) or OMP(σ^2). However, extensive numerical simulations indicate that except in the very low SNR regime, TF-OMP performs very closely compared to OMP(k_0). This comparatively poor performance at low SNR can be directly attributed to the lack of knowledge of k_0 or σ^2 . Note that the analysis in this article is worst case and qualitative in nature. Deriving exact conditions on ϵ_2 for successful recovery will be more difficult and is not pursued in this article.

Remark 5. The bound (16) involves the term $\frac{\beta_{max}}{\beta_{min}}$ in the denominator. In particular, (16) implies that the noise level that allows for successful recovery, i.e., ϵ_{min} decreases with increasing $\frac{\beta_{max}}{\beta_{min}}$. This is the main qualitative difference between TF-OMP and the results in [14] and [38] available for OMP(σ^2) and OMP(k_0). This term can be attributed to the sudden fall in the residual power when a “very significant” entry in β is covered by OMP at an intermediate iteration which mimic the fall in residual power when the “last” entry in β is selected in the k_0 iteration. Note that the later fall in

residual power is what TF-OMP trying to detect. The main implication of this result is that the TF-OMP will be lesser effective while recovering β with significant variations (high $\frac{\beta_{max}}{\beta_{min}}$ ratio) than in recovering signals with lesser variations.

C. High SNR consistency of TF-OMP in Gaussian noise.

The high SNR consistency of variable selection techniques in Gaussian noise has received considerable attention in signal processing community recently [20], [36], [37], [42]. High SNR consistency is formally defined as follows.

Definition:- A support recovery technique is high SNR consistent iff the probability of support recovery error (PE) satisfies $\lim_{\sigma^2 \rightarrow 0} PE = 0$.

The following lemma stated and proved in [20] establish the necessary and sufficient condition for the high SNR consistency of OMP and LASSO.

Lemma 4. LASSO in (2) is high SNR consistent for any matrix signal pair $(\mathbf{X}, \beta)$ satisfying ERC if $\lim_{\sigma^2 \rightarrow 0} \lambda = 0$ and $\lim_{\sigma^2 \rightarrow 0} \frac{\lambda}{\sigma} = \infty$. OMP with SC that terminate iterations when $\|\mathbf{r}^{(k)}\|_2 \leq \gamma$ or $\|\mathbf{X}^T \mathbf{r}^{(k)}\|_{\infty} \leq \gamma$ are high SNR consistent if $\lim_{\sigma^2 \rightarrow 0} \gamma = 0$ and $\lim_{\sigma^2 \rightarrow 0} \frac{\gamma}{\sigma} = \infty$.

Lemma 4 implies that LASSO and OMP with residual based SC are high SNR consistent iff the tuning parameters are adapted according to σ^2 . In particular, Lemma 4 implies that widely used parameters for LASSO like $\lambda = \sigma\sqrt{2\log(p)}$ in [8] and OMP SC with $\gamma = \sigma\sqrt{n+2\sqrt{n\log(n)}}$ are inconsistent at high SNR. In the following theorem, we state and prove the high SNR consistency of TF-OMP. To the best of our knowledge no CS algorithm is shown to achieve high SNR consistency in the absence of knowledge of σ^2 .

Theorem 2. TF-OMP is high SNR consistent for any matrix signal pair $(\mathbf{X}, \beta)$ that satisfy ERC.

Proof. From the analysis of Section IV-B, we know that TF-OMP recover the correct support whenever $\|\mathbf{w}\|_2 < \epsilon_{min}$, where $\epsilon_{min} > 0$ is a function of β_{min}, β_{max} and support $\mathcal{I}$. Hence, $\mathbb{P}(\hat{\mathcal{I}} = \mathcal{I}) \geq \mathbb{P}(\|\mathbf{w}\|_2^2 \leq \epsilon_{min}^2) = \mathbb{P}(\frac{\|\mathbf{w}\|_2^2}{\sigma^2} \leq \frac{\epsilon_{min}^2}{\sigma^2})$. Note that $T = \frac{\|\mathbf{w}\|_2^2}{\sigma^2} \sim \chi_n^2$. Also the distribution of T is independent of σ^2 . Further, T is bounded in probability in the sense that $\lim_{l \rightarrow \infty} \mathbb{P}(T < a_l) = 1$ for any sequence $a_l \rightarrow \infty$. All these implies that

$$\lim_{\sigma^2 \rightarrow 0} \mathbb{P}(\hat{\mathcal{I}} = \mathcal{I}) \geq \lim_{\sigma^2 \rightarrow 0} \mathbb{P}(T < \frac{\epsilon_{min}^2}{\sigma^2}) = 1. \quad (19)$$

Hence proved. □

V. TUNING FREE ROBUST LINEAR REGRESSION IN THE PRESENCE OF SPARSE OUTLIERS

Throughout this article we have considered a linear regression model $\mathbf{y} = \mathbf{X}\beta + \mathbf{w}$ where β is a sparse vector and $\mathbf{w} \sim \mathcal{N}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$ is the noise. In this section we consider a different regression model

$$\mathbf{y} = \mathbf{X}\beta + \mathbf{w} + \mathbf{g} \quad (20)$$

Input:- Observed vector $\mathbf{y}$, Design Matrix $\mathbf{X}$ and SC.
Initialization:- $\mathbf{A}^{(0)} = \mathbf{X}$, $\mathbf{r}^{(0)} = (\mathbf{I}_n - \mathbf{P}_{\mathbf{A}^{(0)}})\mathbf{y}$. $k=1$.
Repeat Steps 1-4 until SC is met.
Step 1:- Identify the strongest residual in $\mathbf{r}^{(k-1)}$, i.e., $j_k = \arg \max_{j=1, \dots, n} \mathbf{r}_j^{(k-1)} .$
Step 2:- Update the matrix $\mathbf{A}^{(k)} = [\mathbf{A}^{(k-1)} \quad \mathbf{e}_{j_k}]$.
Step 3:- Jointly estimate β and $\mathbf{g}_{j_1}, \dots, \mathbf{g}_{j_k}$ as $[\hat{\beta}^T [\hat{\mathbf{g}}_{j_1}, \dots, \hat{\mathbf{g}}_{j_k}]]^T = \mathbf{A}^{(k)\dagger} \mathbf{y}.$
Step 4:- Update the residual $\mathbf{r}^{(k)} = (\mathbf{I}_n - \mathbf{P}_{\mathbf{A}^{(k)}})\mathbf{y}$. $k \leftarrow k + 1.$
Output:- Signal estimate $\hat{\beta}$.

TABLE III: Greedy algorithm for robust de-noising. $\mathbf{e}_k \in \mathbb{R}^n$ is the k^{th} column of $n \times n$ identity matrix $\mathbf{I}_n$.

where $\mathbf{X} \in \mathbb{R}^{n \times p}$ is a full rank design matrix with $n > p$ or $n \gg p$, regression vector β may or may not be sparse and the inlier noise $\mathbf{w} \sim \mathcal{N}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$. The outlier noise $\mathbf{g}$ represents the large errors in the regression equation that is not modelled using the inlier noise distribution. In addition to SNR, this regression model also require signal to interference ratio (SIR) given by

$$\text{SIR} = \frac{\|\mathbf{X}\beta\|_2^2}{\|\mathbf{g}\|_2^2}. \quad (21)$$

to quantify the impact of outliers. In many cases of practical interest $\mathbf{g}$ is modelled as sparse, i.e., $n_{out} = |\text{supp}(\mathbf{g})| \ll n$. However, $\mathbf{g}$ can have very large power, i.e., SIR can be very low [30]–[33]. A classic example of this is channel estimation in OFDM systems in the presence of narrow band interference [43]. In spite of the full rank of $\mathbf{X}$, traditional least squares (LS) estimate of β given by $\hat{\beta} = \mathbf{X}^\dagger \mathbf{y}$ is highly inefficient in terms of MSE. An algorithm called greedy algorithm for robust de-noising (GARD) [34] which is very closely related to the OMP algorithm discussed in this paper was proposed in [34] for such scenarios. An algorithmic description of GARD is given in TABLE III.

GARD can be considered as applying OMP to identify the significant entries in $\mathbf{g}$ after nullifying the signal component $\mathbf{X}\beta$ in the regression equation by projecting $\mathbf{y}$ onto a subspace orthogonal to the column span of $\mathbf{X}$. Just like OMP, the key component in GARD is the SC. One can stop GARD when n_{out} (which is unknown *a priori*) iterations are performed or when the residual $\|\mathbf{r}^{(k)}\|_2$ falls below a predefined threshold. However, setting the threshold requires the knowledge of σ^2 . We use the shorthand $\text{GARD}(n_{out})$ and $\text{GARD}(\sigma^2)$ to represent these schemes. However, producing high quality estimate of σ^2 in the presence of outliers is also a difficult task. Further, there exists a level of subjectivity in the choice of this threshold even if σ^2 is known. A better strategy would be to produce a version of GARD free of any tuning parameters.

Input:- Observed vector $\mathbf{y}$, Design matrix $\mathbf{X}$
Step 1:- Run GARD for k_{max} iterations.
Step 2:- Identify k_f as $\hat{k}_f = \arg \min_{1 \leq k \leq k_{max}} t(k)$.
Step 3:- Jointly estimate β and $\mathbf{g}_{j_1}, \dots, \mathbf{g}_{j_{k_f}}$ as $[\hat{\beta}^T [\hat{\mathbf{g}}_{j_1}, \dots, \hat{\mathbf{g}}_{j_{k_f}}]]^T = \mathbf{A}^{(\hat{k}_f)\dagger} \mathbf{y}.$
Output:- Signal estimate $\hat{\beta}$.

TABLE IV: Tuning free GARD

The principle developed for TF-OMP can be used in GARD also. To explain this, consider the statistic $t(k) = \frac{\|\mathbf{r}^{(k)}\|_2^2}{\|\mathbf{r}^{(k-1)}\|_2^2}$ and let k_f be the first iteration at which $\text{supp}(\mathbf{g}) \subseteq [j_1, \dots, j_{k_f}]$. For all $k < k_f$, $\mathbf{r}^{(k)}$ contains contributions from the outlier $\mathbf{g}$, whereas for all $k > k_g$, $\mathbf{r}^{(k)}$ has contributions from noise only. Hence, if entries in $\mathbf{g}$ are sufficiently large in comparison with noise level σ^2 , just like in the case of OMP, $t(k)$ experience a sudden dip at k_f . The algorithm given in TABLE IV identify this dip and deliver high quality estimate of β without having any tuning parameter.

Remark 6. The only parameter to be specified in TF-GARD is the maximum iterations k_{max} . The maximum number of iterations possible before the matrices $\mathbf{A}^{(k)}$ becoming rank deficient is $n-p$. Note that the objective of sparse outlier modelling is to model few number of gross errors that cannot be modelled by inlier noise. In other words, the model implicitly assumes that $n_{out} \ll n$. Further, the Cospark based analysis in [44] reveals that the maximum number of outliers n_{out} that can be tolerated satisfies $n_{out} \leq \lfloor \frac{\text{Cospark}(\mathbf{X})}{2} \rfloor$ and $\text{Cospark}(\mathbf{X})$ satisfies $\text{Cospark}(\mathbf{X}) \leq n - p + 1$. Taking these ideas into consideration, we fix k_{max} to be $\lfloor \frac{n - p + 1}{2} \rfloor$. In any case, one should stop before the matrix $\mathbf{A}^{(k)}$ is rank deficient or residual $\mathbf{r}^{(k)}$ is zero.

A detailed analysis of TF-GARD is not given in this article. However, following the similarities between OMP and GARD, we conjecture that the TF-GARD recover the support of $\mathbf{g}$ under the same set of conditions used in [34] albeit at a higher SNR than GARD itself. Numerical simulations indicate that the performance of TF-GARD is highly competitive with the performance of $\text{GARD}(n_{out})$ and $\text{GARD}(\sigma^2)$ over a wide range of SNR and SIR.

VI. NUMERICAL SIMULATIONS

In this section, we numerically evaluate the performance of techniques proposed in this paper *viz.*, TF-OMP and TF-GARD and provide insights into the strengths and shortcomings of the same. First we consider the case of TF-OMP. We compare the performance of TF-OMP with that of $\text{OMP}(k_0)$, $\text{OMP}(\sigma^2)$, LASSO [8] and SPICE [25], [28]. Among these, LASSO and $\text{OMP}(\sigma^2)$ are provided with noise variance σ^2 . $\text{OMP}(\sigma^2)$ stop iterations when $\|\mathbf{r}^{(k)}\|_2 \leq \sigma \sqrt{n + 2\sqrt{n \log(n)}}$ [14].

LASSO in (2) uses the value $\lambda = 2\sigma\sqrt{2\log(p)}$ proposed in [8]. To remove the bias in LASSO estimate, we re-estimate the non zero entries in LASSO estimate using LS. As mentioned before, SPICE is a tuning free algorithm. We implement SPICE using the cyclic algorithm proposed in [28]. The iterations in cyclic algorithm is terminated once the difference in the norm of quantity $\mathbf{p}^i$ in successive iterations are dropped below 10^{-6} . As observed in [27], SPICE results in biased estimate. To de-bias the SPICE estimate, we collect the coefficients in the SPICE estimate that comprises 95% of the energy and re-estimate these entries using LS. This estimate denoted by SPICE(95%) in figures exhibits highly competitive performance. All results except the PE vs SNR plot in Fig.2 and the symbol error rate (SER) vs SNR plot in Fig.7 are presented after 10^3 iterations. These two plots were produced after performing 10^4 iterations. Unless explicitly stated, the non zero entries of β are fixed at ± 1 and the locations of these non zero entries are randomly permuted in each iteration.

A. Small sample performance of TF-OMP.

In this section, we evaluate the performance of algorithms when the problem dimensions are small. For this, we consider a matrix of the form $\mathbf{X} = [\mathbf{I}_n, \mathbf{H}_n]$, where $\mathbf{H}_n$ is the $n \times n$ Hadamard matrix. It is well known that the mutual coherence of this matrix is given by $\mu(\mathbf{X}) = \frac{1}{\sqrt{n}}$ [41]. Hence, $\mathbf{X}$ satisfies the mutual incoherence property whenever $k_0 \leq \frac{1}{2}(1 + \sqrt{n})$. In our experiments we fix $n = 32$ and $k_0 = 3$. Note that $p = 2n$ by construction. For this particular (n, p, k_0) , MIC and ERC are satisfied.

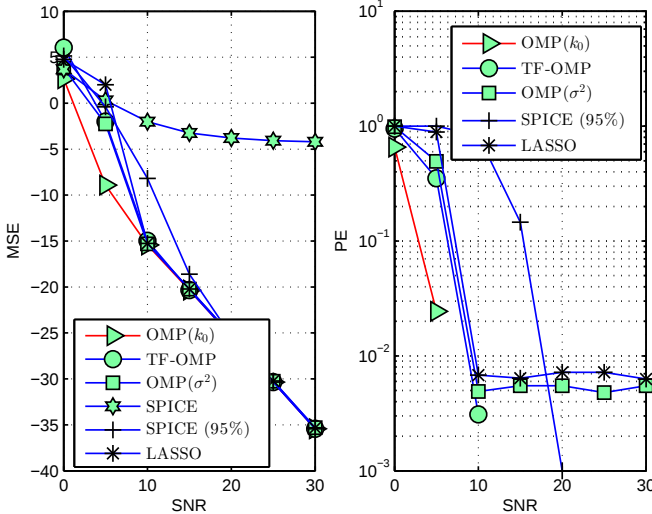


Fig. 2: MSE and PE performance when $n = 32$ and $k_0 = 3$ for $\mathbf{X} = [\mathbf{I}_n, \mathbf{H}_n]$.

From Fig.2, it can be observed that the performance of all algorithms under consideration are equivalent at high SNR in terms of MSE. At low SNR, OMP(k_0) has the best performance. The performance of TF-OMP is slightly inferior to OMP(k_0) at low SNR, whereas it matches OMP(σ^2) and LASSO across the entire SNR range. TF-OMP is performing

better in comparison with both versions of SPICE. This is important considering the fact that SPICE is also a tuning free algorithm. In terms of support recovery error, OMP(k_0) has the best performance followed closely by TF-OMP. Both LASSO and OMP(σ^2) are inconsistent at high SNR as proved in [20], whereas TF-OMP is high SNR consistent. This validates Theorems 1-2 in Section IV. Note that the SPICE estimate contains a number of very small entries which is an artefact of termination criteria. Identifying significant entries from this estimate in the absence of knowledge of β and σ^2 is difficult and is subjective in nature. We have used a 95% energy criteria to perform this task. However, unlike the MSE performance, we have observed that the PE of SPICE($\alpha\%$) depends crucially on α . We choose 95% percent mainly because it gave a very good MSE performance. As one can observe from Fig.2, SPICE(95%) is also high SNR consistent. However, with a different choice of α one can possibly improve the PE performance. OMP based algorithms being step wise in nature will not have this problem.

B. Large sample performance of TF-OMP.

In this section, we evaluate the performance of algorithms a).When both p and k_0 are fixed and n is increasing and b).When p is fixed and both n and k_0 are increasing. The matrix $\mathbf{X}$ for this purpose is generated by sampling $\mathbf{X}(i, j)$ i.i.d from a $\mathcal{N}(0, 1)$ distribution. Later the columns of $\mathbf{X}$ are normalised to unit l_2 norm. For the fixed sparsity and increasing n case, all algorithms under consideration except SPICE achieves similar performance. As the number of samples n increase, the MSE improves for all algorithms. In the second case, the sparsity k_0 is increased linearly with n . From the R.H.S of Fig.3 one can observe that the performance of OMP(k_0), LASSO and TF-OMP matches across the n/p ratio under consideration. In particular TF-OMP outperforms both SPICE(95%) and OMP(σ^2).

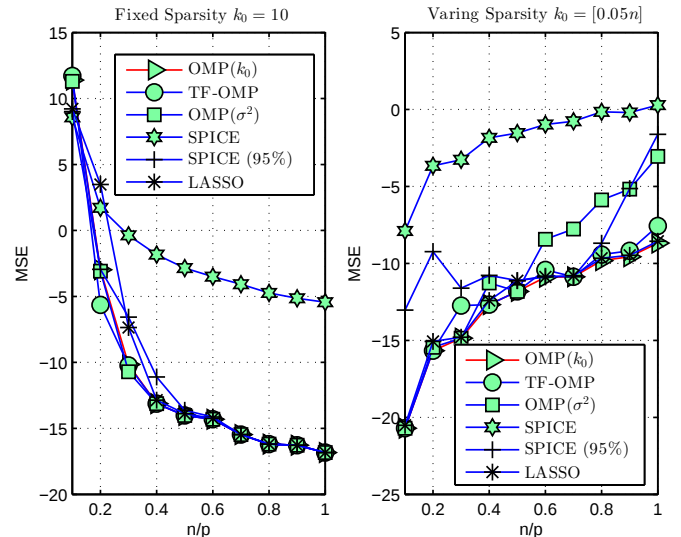


Fig. 3: MSE performance when $p = 500$, SNR=10 dB and $\mathbf{X}$ is a Gaussian random matrix.

C. Performance of TF-OMP in signals with high $\beta_{\max}/\beta_{\min}$.

The analysis in Section IV pointed to a deteriorated performance of TF-OMP when $\beta_{\max}/\beta_{\min}$ is large. In this section we evaluate this performance degradation numerically. The matrix under consideration is same the 32×64 matrix used in Section VI.A. The sparsity is fixed at $k_0 = 3$. However, the magnitude of non zero entries of β are $[a, a\alpha, a\alpha^2]$ and the signs are random as before. As the value of α decreases the variation $\beta_{\max}/\beta_{\min}$ increases. a and α are fixed such that $\|\beta\|_2$ is same as the case when the non zero entries were ± 1 , i.e., no decay. It is clear from Fig.4 that the performance of TF-OMP indeed deteriorate when non zero entries are decaying and the degradation becomes more and more severe as the decaying factor α decreases. However, as SNR increases the performance of TF-OMP still matches the performance of $\text{OMP}(k_0)$. This again validate Theorem 2, this time for exponentially decaying signals. The other tuning free algorithm under consideration, i.e., SPICE(95%) also performs poorly in the presence of high $\beta_{\max}/\beta_{\min}$. Further, unlike TF-OMP, the performance of SPICE(95%) is not improving with increasing SNR.

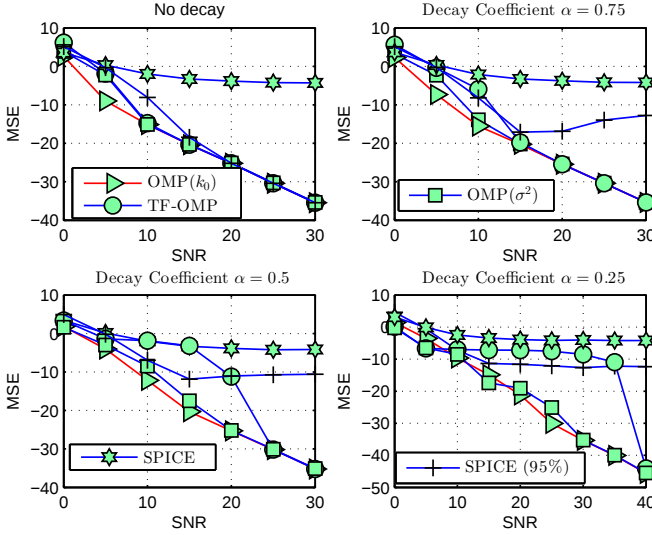


Fig. 4: MSE performance when $\mathbf{X} = [\mathbf{I}_n, \mathbf{H}_n]$, $n = 32$, $k_0 = 3$ and non zero entries in β are exponentially decaying.

D. Performance of TF-OMP in the presence of correlated random design matrices

The performance analysis of TF-OMP was conducted under the assumption of MIC and ERC. In this section, we study the performance of TF-OMP in coherent design matrices where these assumptions are no longer valid. For this purpose we generated random matrices with $n = 32$ and $p = 64$ such that all columns $\mathbf{X}_i$ have unit l_2 norm and correlation between $\mathbf{X}_i$ and $\mathbf{X}_j$ equals $\rho^{|i-j|}$. As the correlation factor $0 \leq \rho \leq 1$ increases, the correlation between the columns in $\mathbf{X}$ also increases. β has $k_0 = 3$ non zero entries which are ± 1 . It can be seen from Fig.5 that the performance of

all algorithms under consideration degrade with increasing correlation. However, the performance of TF-OMP is much better than $\text{OMP}(k_0)$. This can be attributed to the fact that in highly coherent dictionaries OMP is less likely to cover $\mathcal{I}$ in exactly k_0 iterations. At the same time TF-OMP can estimate a superset of entries in β containing $\mathcal{I}$ as long as OMP can cover $\mathcal{I}$ within $n/2$ iterations. LASSO and SPICE(95%) have the best performance. The performance of TF-OMP and SPICE(95%) are similar in the moderate SNR regime except when correlation factor is very high $\rho = 0.75$. However, all algorithms perform poorly at this level of correlation. In fact the MSE of SPICE(95%) at $\rho = 0.75$ is approximately 12 dB worse than the MSE at $\rho = 0$. To summarize, this experiment demonstrate the ability of TF-OMP to perform better than $\text{OMP}(k_0)$ when the design matrix is coherent.

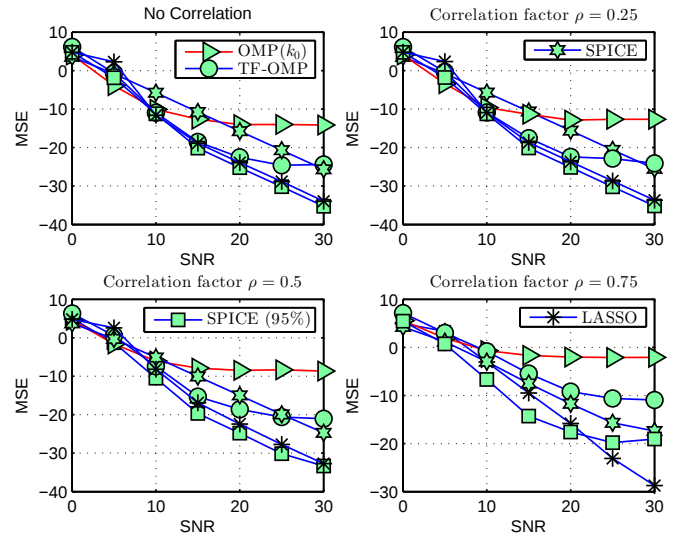


Fig. 5: MSE performance when $\mathbf{X}$ is highly coherent.

E. Performance of low complexity versions of TF-OMP

Fig.6 compare the performance of low complexity versions of QTF-OMP1 and QTF-OMP2 with that of TF-OMP and $\text{OMP}(k_0)$. ERC matrix in Fig.6 denotes simulation setting considered in Section VI.A and random matrix denotes the simulation setting in Section VI.B. It can be seen that the performance of QTF-OMP1 and QTF-OMP2 closely matches the performance of TF-OMP and $\text{OMP}(k_0)$ in the ERC matrix, in random matrix with $k_0 = 10$ and $k_0 = \lfloor 0.05n \rfloor$. When $k_0 = \lfloor 0.1n \rfloor$, it can be seen that the performance of QTF-OMP1 is poorer than the performance of other algorithms when n/p is low. This is because of the fact that $k_{\max}$ of QTF-OMP1 at low n/p is lower than $k_0 = \lfloor 0.1n \rfloor$ which results in poorer performance. However, k_0 is too high in that experiment and all algorithms under consideration performs poorly. We tabulate the number of iterations of concerned algorithms when $p = 500$ and n increases from 100 to 450 in TABLE V. It can be seen that QTF-OMP1 and QTF-OMP2 requires significantly lower number of iterations in comparison with TF-OMP. To summarize, it is possible to achieve a performance similar to that of TF-OMP with significantly

n	100	150	200	250	300	350	400	450
TF-OMP	50	75	100	125	150	175	200	225
QTF-OMP1	12	15	19	23	28	35	45	68
QTF-OMP2	16	24	32	40	48	56	64	72

TABLE V: Number of OMP iterations in TF-OMP, QTF-OMP1 and QTF-OMP2

lower computational complexity using QTF-OMP1 and QTF-OMP2.

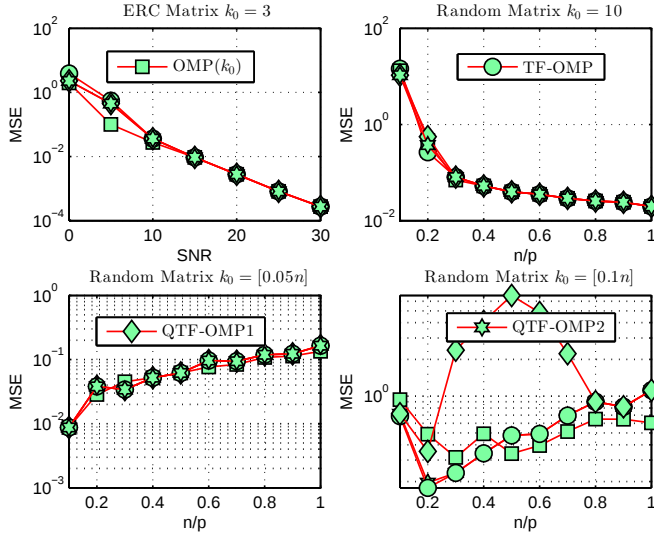


Fig. 6: MSE performance of QTF-OMP1 and QTF-OMP2.

F. Compressive Sensing Based MIMO Detection

Next we consider a practical application of TF-OMP in the CS based multiple input multiple output (MIMO) detection framework proposed in [45] and [46]. Consider a MIMO model $\mathbf{y} = \mathbf{H}\mathbf{x} + \mathbf{w}$ with N_r receiver antennas and N_t transmitter antennas. The channel matrix $\mathbf{H} \sim \mathbb{C}^{N_r \times N_t}$ is assumed to have *i.i.d* $\mathcal{CN}(0, 1)$ entries and is known completely at receiver. The transmitted vector $\mathbf{x}$ is modulated using QPSK symbols (i.e., $\mathbf{x}_j = \pm 1 \pm i$) and the noise vector $\mathbf{w} \sim \mathcal{CN}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$. Since ML decoding of large scale MIMO systems are NP-hard, low complexity sub optimal detectors are widely preferred. Let $\hat{\mathbf{x}}$ be an estimate of $\mathbf{x}$ using a low complexity MIMO detector. Then it is argued in [45] and [46] that the error vector $\mathbf{e} = \mathbf{x} - \hat{\mathbf{x}}$ is sparse in the moderate to high SNR regime, i.e., $\|\mathbf{e}\|_0 \ll N_t$. Hence one can estimate $\mathbf{e}$ from the regression model $\hat{\mathbf{y}} = \mathbf{y} - \mathbf{H}\hat{\mathbf{x}} = \mathbf{H}\mathbf{e} + \mathbf{w}$ using CS algorithms and this post processing can be used to correct the error in $\hat{\mathbf{x}}$ and improve the SER= $\mathbb{P}(\mathbf{x} \neq \hat{\mathbf{x}})$ performance. This framework is generic in the sense that any CS algorithm can be used for CS stage and any algorithm can be used to produce the preliminary estimate $\hat{\mathbf{x}}$. Even though this technique is applicable to both overdetermined $N_r \geq N_t$ and underdetermined $N_r < N_t$ MIMO systems, [45] and [46]

considered only the $N_r \geq N_t$ case and assumed that the noise variance σ^2 is known. Further to implement the CS stage, it was assumed that the number of errors $k_0 = \|\mathbf{e}\|_0 \leq 0.15N_t$.

In this section, we apply TF-OMP for detection in both underdetermined and overdetermined MIMO systems. In both cases σ^2 is assumed to be unknown. “Algorithm 1+Algorithm 2” in Fig.7 represents the performance of CS based MIMO detection with Algorithm 1 in first stage and Algorithm 2 in second stage. In the overdetermined MIMO case shown in the L.H.S of Fig.7, we use the LMMSE estimator in the first stage [45], [46]. Here, one can estimate σ^2 using ML estimate of σ^2 (denoted by $\hat{\sigma}^2$) and this estimate is used in implementing both LMMSE and OMP($\hat{\sigma}^2$) algorithms. From the L.H.S of Fig.7 it is clear that the performance of LMMSE+TF-OMP closely matches the performance of LMMSE+OMP($\hat{\sigma}^2$) and LMMSE+OMP(k_0).

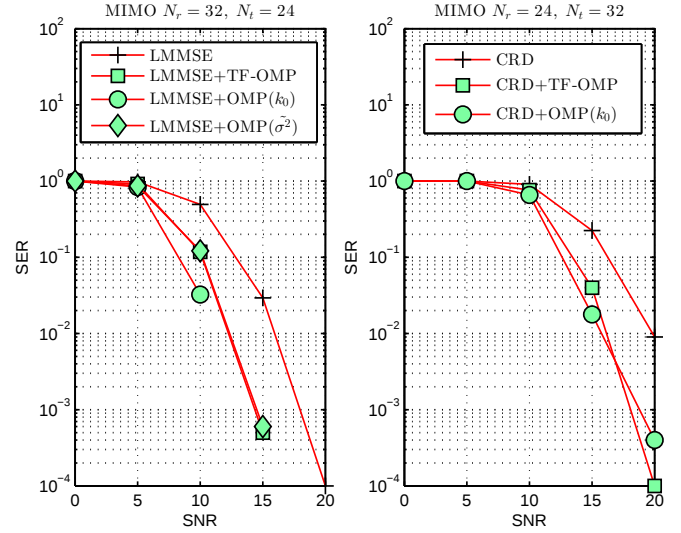


Fig. 7: SER performance of TF-OMP based MIMO detection.

A more interesting case is detection in underdetermined MIMO systems where σ^2 is non estimable. Hence, both Algorithm 1 and Algorithm 2 must not depend on σ^2 . This means that the LMMSE estimator considered in [45] and [46] cannot be applied in underdetermined MIMO models in the absence of prior knowledge of σ^2 . We use the widely popular convex relaxation detector (CRD) which estimate the entries of $\mathbf{x}_r = [\text{real}(\mathbf{x})^T, \text{imag}(\mathbf{x})^T]^T$ in the real valued equivalent MIMO model $\mathbf{y}_r = \mathbf{H}_r \mathbf{x}_r + \mathbf{w}_r$ using [47]

$$\hat{\mathbf{x}}_r = \arg \min_{\mathbf{z} \in \mathbb{R}^{2N_t}, -1 \leq z_i \leq 1} \|\mathbf{y}_r - \mathbf{H}_r \mathbf{z}\|_2^2. \quad (22)$$

We implemented this optimization problem using the “lsqlin” function in MATLAB. Later we produce the preliminary estimate $\hat{\mathbf{x}}$ by quantizing $\hat{\mathbf{x}}_r(1 : N_t) + i\hat{\mathbf{x}}_r(N_t + 1 : 2N_t)$. From the R.H.S of Fig.7 it is clear that CDR+TF-OMP significantly outperforms CDR as SNR improves. Further, the performance of CDR+TF-OMP is very close to that of CDR+OMP(k_0). This good performance is achieved without assuming anything about k_0 and without knowing σ^2 . This demonstrate that TF-OMP can be considered as an algorithm of choice for implementing the CS stage in the framework proposed in [45]

and [46] for underdetermined MIMO detection systems when σ^2 is unknown.

G. Performance of TF-GARD

Recall the linear regression model with sparse outlier given by $\mathbf{y} = \mathbf{X}\boldsymbol{\beta} + \mathbf{w} + \mathbf{g}$, where $\mathbf{w} \sim \mathcal{N}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$ is the inlier and $\mathbf{g}$ is the sparse outlier. The matrix $\mathbf{X} \in \mathbb{R}^{n \times p}$ is generated by *i.i.d* sampling from $\mathcal{N}(0, 1)$ and later normalised to have unit l_2 norm. All entries of $\boldsymbol{\beta}$ are non zero and generated *i.i.d* according to $\mathcal{N}(0, 1)$. We fix $n = 250$ and $p = 30$.

The non zero entries of $\mathbf{g}$ have magnitude $\sqrt{\frac{\|\mathbf{X}\boldsymbol{\beta}\|_2^2}{n_{out} \text{SIR}}}$ with random signs. In figures Fig.8 and Fig.9, “WO” represent the performance of LS estimate of $\boldsymbol{\beta}$ in the absence of outliers and “LS” represents the performance of LS estimate in the presence of outliers. In effect “WO” is the best performance one can hope for. GARD(σ^2) is the version of GARD which stops iterations when the residual drop below ϵ_{gard} , a bound on $\|\mathbf{w}\|_2$. This is the tuning parameter for GARD(σ^2). We fix the value of ϵ_{gard} at $\epsilon_{gard} = \sigma \sqrt{n + 2\sqrt{n \log(n)}}$. Note that for $\mathbf{w} \sim \mathcal{N}(\mathbf{0}_n, \sigma^2 \mathbf{I}_n)$, $\mathbb{P}\left(\|\mathbf{w}\|_2 > \sigma \sqrt{n + 2\sqrt{n \log(n)}}\right) \leq \frac{1}{n}$ [14] and hence this stopping rule is highly accurate. M-est use Tukey’s bi-weight estimator and is implemented using the MATLAB function “robustfit” with default settings [30]. This is also a tuning free robust algorithm.

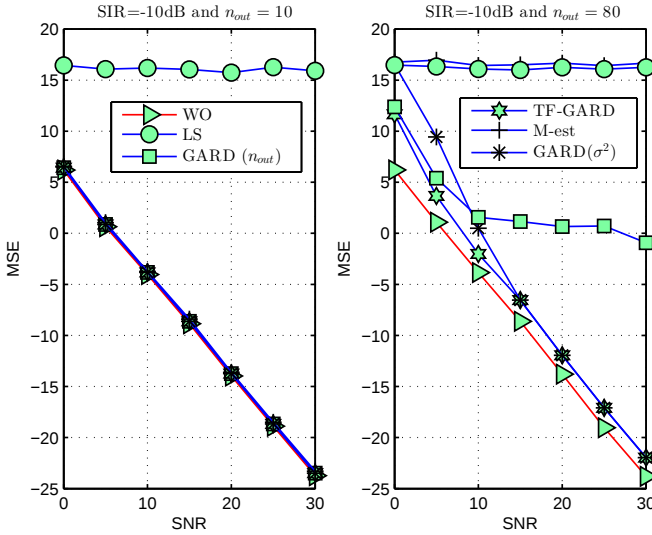


Fig. 8: MSE performance for fixed SIR, n_{out} and varying SNR.

In Fig.8 we compare the MSE performance of algorithms when the SIR is low and SNR is varying. It can be seen that when the number of outliers is low ($n_{out} = 10$), the performance of all algorithms matches the performance of LS estimate in the absence of outliers. In other words, all algorithms under consideration are able to mitigate the effect of outliers. However, when the number of outliers is high, i.e., $n_{out} = 80$, the performance of all algorithms deviate from the ideal represented by “WO”. However, the deviation from

the optimal is minimum for both TF-GARD and GARD(σ^2) at high SNR. Throughout the low to moderate SNR regime, TF-GARD outperforms GARD(σ^2). Note that TF-GARD is completely oblivious to the inlier noise statistics which is provided to GARD(σ^2). The performance of M-est at this level of n_{out} is very poor and is comparable to that of the ordinary LS estimate.

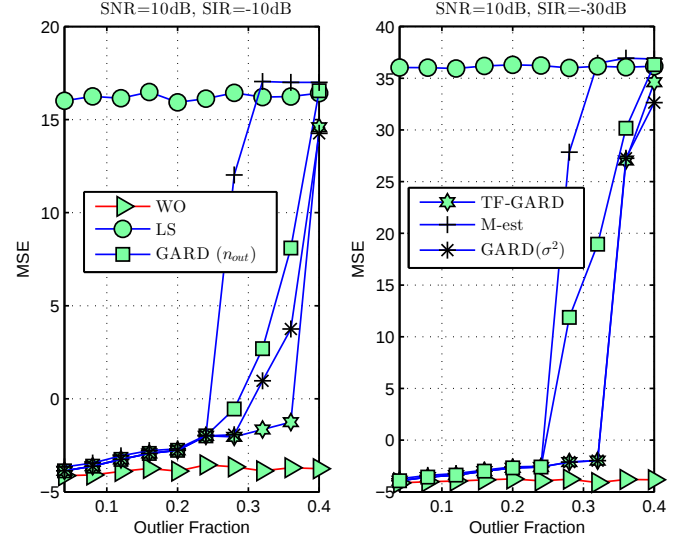


Fig. 9: MSE performance for fixed SIR, SNR and varying n_{out} .

In Fig.9 we present the MSE performance of algorithms when SNR is fixed and the number of outliers are varying. When the number of outliers are increasing, the performance of all algorithms deteriorates. However, the breakdown point of GARD based schemes are much higher than that of M-est. Further, the performance of TF-GARD matches the performance of GARD(σ^2) across the entire range of outlier fractions and slightly outperforms the latter in some cases. Over a wide range of simulations conducted, we have observed that TF-GARD matches the performance of GARD(σ^2). Further, the observations made in [34] about the relative merits and de-merits of GARD w.r.t algorithms like [31], [33] hold true for TF-GARD also.

VII. CONCLUSION AND FUTURE RESEARCH

This article developed a novel OMP based algorithm called TF-OMP that does not require sparsity level k_0 or noise variance σ^2 for efficient operation. TF-OMP is both analytically and numerically shown to achieve highly competitive performance in comparison with existing versions of OMP. The operating principle behind TF-OMP is extended to produce TF-GARD which is also exhibiting competitive performance. The broader area of CS involves many problem scenarios other than the linear regression model considered in this article. However, most CS algorithms involve tuning parameters that depends on nuisance parameters like noise variance which are difficult to estimate. Hence, it is of tremendous importance to develop tuning free and computationally efficient algorithms like TF-OMP and TF-GARD for other CS applications also.

REFERENCES

- [1] C. R. Berger, Z. Wang, J. Huang, and S. Zhou, "Application of compressive sensing to sparse channel estimation," *IEEE Commun. Mag.*, vol. 48, no. 11, pp. 164–174, November 2010.
- [2] S. Fortunati, R. Grasso, F. Gini, and M. S. Greco, "Single snapshot DOA estimation using compressed sensing," in *Proc. ICASSP*, May 2014, pp. 2297–2301.
- [3] B. Shim and B. Song, "Multiuser detection via compressive sensing," *IEEE Commun. Lett.*, vol. 16, no. 7, pp. 972–974, July 2012.
- [4] E. Elhamifar and R. Vidal, "Sparse subspace clustering: Algorithm, theory, and applications," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 35, no. 11, pp. 2765–2781, Nov 2013.
- [5] J. Wright, A. Y. Yang, A. Ganesh, S. S. Sastry, and Y. Ma, "Robust face recognition via sparse representation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 31, no. 2, pp. 210–227, Feb 2009.
- [6] Y. C. Eldar and G. Kutyniok, *Compressed sensing: Theory and applications*. Cambridge University Press, 2012.
- [7] J. Tropp, "Just relax: Convex programming methods for identifying sparse signals in noise," *IEEE Trans. Inf. Theory*, vol. 52, no. 3, pp. 1030–1051, March 2006.
- [8] E. J. Candès, Y. Plan *et al.*, "Near-ideal model selection by l_1 minimization," *Ann. Stat.*, vol. 37, no. 5A, pp. 2145–2177, 2009.
- [9] T. T. Emmanuel Candès, "The Dantzig selector: Statistical estimation when p is much larger than n ," *Ann. Stat.*, vol. 35, no. 6, pp. 2313–2351, 2007.
- [10] W. Dai and O. Milenkovic, "Subspace pursuit for compressive sensing signal reconstruction," *IEEE Trans. Inf. Theory*, vol. 55, no. 5, pp. 2230–2249, May 2009.
- [11] D. Needell and J. A. Tropp, "CoSaMP: Iterative signal recovery from incomplete and inaccurate samples," *Appl. Comput. Harmon. Anal.*, vol. 26, no. 3, pp. 301 – 321, 2009.
- [12] D. P. Wipf and B. D. Rao, "Sparse Bayesian learning for basis selection," *IEEE Trans. Signal Process.*, vol. 52, no. 8, pp. 2153–2164, 2004.
- [13] J. A. Tropp, "Greed is good: Algorithmic results for sparse approximation," *IEEE Trans. Inf. Theory*, vol. 50, no. 10, pp. 2231–2242, 2004.
- [14] T. Cai and L. Wang, "Orthogonal matching pursuit for sparse signal recovery with noise," *IEEE Trans. Inf. Theory*, vol. 57, no. 7, pp. 4680–4688, July 2011.
- [15] J. Wang, "Support recovery with orthogonal matching pursuit in the presence of noise," *IEEE Trans. Signal Process.*, vol. 63, no. 21, pp. 5868–5877, Nov 2015.
- [16] J. A. Tropp and A. C. Gilbert, "Signal recovery from random measurements via orthogonal matching pursuit," *IEEE Trans. Inf. Theory*, vol. 53, no. 12, pp. 4655–4666, 2007.
- [17] C. Herzet, A. Drmeau, and C. Soussen, "Relaxed recovery conditions for OMP/OLS by exploiting both coherence and decay," *IEEE Trans. Inf. Theory*, vol. 62, no. 1, pp. 459–470, Jan 2016.
- [18] J. Wang and B. Shim, "Exact recovery of sparse signals using orthogonal matching pursuit: How many iterations do we need?" *IEEE Trans. Signal Process.*, vol. 64, no. 16, pp. 4194–4202, Aug 2016.
- [19] A. K. Fletcher and S. Rangan, "Orthogonal matching pursuit: A Brownian motion analysis," *IEEE Trans. Signal Process.*, vol. 60, no. 3, pp. 1010–1021, March 2012.
- [20] S. Kallumil and S. Kalyani, "High SNR consistent compressive sensing," *arXiv preprint arXiv:1703.03596*, Submitted to *IEEE Trans. Signal Process.*, 2017.
- [21] C. Giraud, S. Huet, and N. Verzelen, "High-dimensional regression with unknown variance," *Statist. Sci.*, vol. 27, no. 4, pp. 500–518, 11 2012.
- [22] R. Ward, "Compressed sensing with cross validation," *IEEE Trans. Inf. Theory*, vol. 55, no. 12, pp. 5773–5782, Dec 2009.
- [23] S. Arlot and A. Celisse, "A survey of cross-validation procedures for model selection," *Statist. Surv.*, vol. 4, pp. 40–79, 2010.
- [24] A. Belloni, V. Chernozhukov, and L. Wang, "Square-root LASSO: Pivotal recovery of sparse signals via conic programming," *Biometrika*, vol. 98, no. 4, p. 791, 2011.
- [25] P. Stoica, P. Babu, and J. Li, "SPICE: A sparse covariance-based estimation method for array processing," *IEEE Trans. Signal Process.*, vol. 59, no. 2, pp. 629–638, Feb 2011.
- [26] P. Babu and P. Stoica, "Connection between SPICE and square-root LASSO for sparse parameter estimation," *Signal Processing*, vol. 95, pp. 10 – 14, 2014.
- [27] C. R. Rojas, D. Katselis, and H. Hjalmarsson, "A note on the SPICE method," *IEEE Trans. Signal Process.*, vol. 61, no. 18, pp. 4545–4551, Sept 2013.
- [28] P. Stoica and P. Babu, "SPICE and LIKES: Two hyperparameter-free methods for sparse-parameter estimation," *Signal Processing*, vol. 92, no. 7, pp. 1580 – 1590, 2012.
- [29] M. Slawski and M. Hein, "Non-negative least squares for high-dimensional linear models: Consistency and sparse recovery without regularization," *Electron. J. Statist.*, vol. 7, pp. 3004–3056, 2013. [Online]. Available: <http://dx.doi.org/10.1214/13-EJS868>
- [30] R. A. Maronna, R. D. Martin, and V. J. Yohai, *Robust Statistics*. Wiley USA, 2006.
- [31] E. J. Candès and P. A. Randall, "Highly robust error correction by convex programming," *IEEE Trans. Inf. Theory*, vol. 54, no. 7, pp. 2829–2840, July 2008.
- [32] K. Mitra, A. Veeraraghavan, and R. Chellappa, "Analysis of sparse regularization based robust regression approaches," *IEEE Trans. Signal Process.*, vol. 61, no. 5, pp. 1249–1257, March 2013.
- [33] Y. Jin and B. D. Rao, "Algorithms for robust linear regression by exploiting the connection to sparse signal recovery," in *Proc. ICASSP*, March 2010, pp. 3830–3833.
- [34] G. Papageorgiou, P. Bouboulis, and S. Theodoridis, "Robust linear regression analysis; A greedy approach," *IEEE Trans. Signal Process.*, vol. 63, no. 15, pp. 3872–3887, Aug 2015.
- [35] R. Wu, W. Huang, and D. R. Chen, "The exact support recovery of sparse signals with noise via orthogonal matching pursuit," *IEEE Signal Process. Lett.*, vol. 20, no. 4, pp. 403–406, April 2013.
- [36] S. Kallumil and S. Kalyani, "High SNR consistent linear model order selection and subset selection," *IEEE Trans. Signal Process.*, vol. 64, no. 16, pp. 4307–4322, Aug 2016.
- [37] K. Sreejith and S. Kalyani, "High SNR consistent thresholding for variable selection," *IEEE Signal Process. Lett.*, vol. 22, no. 11, pp. 1940–1944, Nov 2015.
- [38] J. Wang and B. Shim, "On the recovery limit of sparse signals using orthogonal matching pursuit," *IEEE Trans. Signal Process.*, vol. 60, no. 9, pp. 4973–4976, 2012.
- [39] G. Dziwoki, "Averaged properties of the residual error in sparse signal reconstruction," *IEEE Signal Process. Lett.*, vol. 23, no. 9, pp. 1170–1173, Sept 2016.
- [40] W. Xiong, J. Cao, and S. Li, "Sparse signal recovery with unknown signal sparsity," *EURASIP J. Adv. Signal Process.*, vol. 2014, no. 1, p. 178, 2014. [Online]. Available: <http://dx.doi.org/10.1186/1687-6180-2014-178>
- [41] M. Elad, *Sparse and Redundant Representations: From Theory to Applications in Signal and Image Processing*. Springer, 2010.
- [42] Q. Ding and S. Kay, "Inconsistency of the MDL: On the performance of model order selection criteria with increasing signal-to-noise ratio," *IEEE Trans. Signal Process.*, vol. 59, no. 5, pp. 1959–1969, May 2011.
- [43] G. Caire, T. Y. Al-Naffouri, and A. K. Narayanan, "Impulse noise cancellation in OFDM: An application of compressed sensing," in *Proc. IEEE ISIT*, July 2008, pp. 1293–1297.
- [44] E. J. Candès and T. Tao, "Decoding by linear programming," *IEEE Trans. Inf. Theory*, vol. 51, no. 12, pp. 4203–4215, Dec 2005.
- [45] J. W. Choi and B. Shim, "Sparse detection of non-sparse signals for large-scale wireless systems," *arXiv preprint arXiv:1512.01683*, 2015.
- [46] —, "New approach for massive MIMO detection using sparse error recovery," in *Proc. IEEE Globecom*, Dec 2014, pp. 3754–3759.
- [47] J. Pan, W. K. Ma, and J. Jaldn, "MIMO detection by Lagrangian dual maximum-likelihood relaxation: Reinterpreting regularized lattice decoding," *IEEE Trans. Signal Process.*, vol. 62, no. 2, pp. 511–524, Jan 2014.