

Matrix methods for Padé approximation: numerical calculation of poles, zeros and residues.

Luca Perotti* and Michał Wojtylak^{†‡}

March 14, 2022

Abstract

A representation of the Padé approximation of the Z -transform of a signal as a resolvent of a tridiagonal matrix J_n is given. Several formulas for the poles, zeros and residues of the Padé approximation in terms of the matrix J_n are proposed. Their numerical stability is tested and compared. Methods for computing forward and backward errors are presented.

Keywords. Padé approximation, nonsymmetric tridiagonal matrix, poles, residues, forward error, backward error, white noise

AMS subject classification. 15A18, 47B36, 15B05, 15B52

1 Introduction

When trying to extract the information part from a discrete finite data sequence $s = s_0, s_1, \dots, s_{(2n-1)}$ ($s_i \in \mathbb{C}$) where the signal is immersed in uncorrelated or weakly correlated additive noise, it is sometimes convenient to consider its Z -transform, which is a function of a complex variable defined by the series

$$Z(w) = \sum_{k=0}^{\infty} s_k w^{-k}, \quad (1)$$

convergent at least outside the unit circle.

As the exact calculation of $Z(w)$ is impossible due to the finiteness of the experimental sequence, one considers a Padé approximant of $Z(w)$, usually –for reasons that we shall present in Section 2– the $[n - 1/n]$ one, i.e. a function of the form $P_n(w)/Q_n(w)$, where $P_n(w)$ and $Q_n(w)$ are polynomials of degrees respectively at most $n - 1$ and n , without common zeros and such that

$$Z(w) - \frac{P_n(w)}{Q_n(w)} = \mathcal{O}(w^{-n-1}), \quad w \rightarrow \infty.$$

*Department of Physics, Texas Southern University, Houston, Texas 77004 USA
perotttil@tsu.edu

[†]Instytut Matematyki, Wydział Matematyki i Informatyki, Uniwersytet Jagielloński, Kraków, ul. Łojasiewicza 6, 30-348 Kraków, Poland michal.wojtylak@uj.edu.pl.

[‡]Supported by the Alexander von Humboldt Foundation with a by a Return Home Scholarship.

As our starting point is the technique presented in [10], we shall start with a brief review of its salient points. Consider a discrete finite data series $s = s_0, s_1, \dots, s_{(2n-1)}$ ($s_i \in \mathbb{C}$) where each term is the sum of a signal part and a noise part: $s_i = s_i^{\text{info}} + s_i^{\text{noise}}$. The task is to find the signal part, knowing only s and making minimal theoretical assumptions on both s^{info} and s^{noise} . We assume that the signal part is a finite sum of damped oscillations

$$s_k^{\text{info}} = \sum_{p=1}^P A_p e^{i\gamma_p k}, \quad k = 0, 1, 2, \dots, \quad \gamma_p = \frac{\omega_p T}{N} \quad (2)$$

where P is the number of oscillations, $N = 2n$ is the length of the data sequence, T is the time interval, A_p is the amplitude, $\omega_p = 2\pi f_p + ib_p$, f_p is the frequency, $b_p > 0$ is the damping factor for $p = 1, 2, \dots, P$. The noise is usually a complex uncorrelated (white, uniform or Gaussian) or lightly correlated ($1/f$ pink or ARMA) stationary noise [10], though other kinds of noise can be considered, as for example noise with a Cauchy distribution [11].

The method described in [10] is based on the following matrix representation

$$\frac{P_n(w)}{Q_n(w)} = \langle (wI_n - J_n)^{-1} \mathbf{e}_0, \mathbf{e}_0 \rangle.$$

Here J_n is a special $n \times n$ tridiagonal matrix, constructed recursively from the data sequence, \mathbf{e}_0 is the first vector of the canonical basis and I_n is the identity matrix. In Section 4.2 we will give a detailed construction of the matrix J_n . Consequently, the eigenvalues of J_n are the zeros of $Q_n(w)$, and the eigenvalues of the matrix J_n with the first row and first column removed are the zeros of $P_n(w)$.

In this way, the problem of signal decomposition is transformed into a problem of describing and computing the spectrum of a large, tridiagonal matrix.

We note here that, should the series (1) be truncated at $k = 2n$ instead than at $k = 2n - 1$, the Padé approximant would be of the $[n/n]$ type. Its construction is very similar to that of the $[n - 1/n]$ one; when needed, we shall –throughout the paper– point out the differences.

Our paper is related also to the theory of Hankel matrices and pencils, especially [12, 13, 30]. To clarify it, we remark that the polynomial $Q_n(w)$ is given by the determinant of a Hankel pencil:

$$Q_n(w) = \det(U_0 - wU_1),$$

where $U_0, U_1 \in \mathbb{C}^{n+1}$ are Hankel matrices defined by

$$U_0[i, j] = s_{i+j+1}, \quad U_1[i, j] = s_{i+j}, \quad i, j = 0, \dots, n,$$

see [2]. Hence, the matrix J_n is a companion matrix of the Hankel pencil $U_0 - zU_1$, in the sense that if $U_0 - zU_1$ has distinct simple eigenvalues, then the spectrum of J_n coincides with the spectrum of $U_0 - zU_1$, see Corollary 10 for a precise statement. Although this fact pertains to pure linear algebra, its proof relies heavily on the Padé approximation theory.

Our paper is organized as follows: Section 2, meant for a general readership, outlines the physical and data analysis motivations for our research; Section 3 gives a brief introduction to Padé approximants; in Section 4 we derive the algorithms for the construction of the J_n matrices for computing poles and zeros of the diagonal and subdiagonal Padé approximants to the Z-function; Section 5 presents several formulas for the residues of the poles; finally, Section 6 compares the numerical results of the different methods presented in the previous two sections.

2 Motivations

2.1 Comparison with FFT

While the method we outlined is more time consuming than the standard Fast Fourier Transform (FFT), it has some advantages that warrant its use:

- a. The structure of the sequence s is encoded in the zeros and poles of $P_n(w)/Q_n(w)$ in a way that permits to distinguish signal from noise poles, even when the noise is high. For information of the form (2) we have:
 - (i) There are $P < n$ poles of $P_n(w)/Q_n(w)$, each of them corresponding to a signal frequency whose amplitude can be constant or varying exponentially. The knowledge of the poles z_1, \dots, z_P and their residues completely determines all the signal parameters. These poles are stable: they do not move significantly when the length of the data sequence is changed (only a slight movement is caused by contamination from the noise poles due to the nonlinearity of the Padé approximant).
 - (ii) The remaining $n - P$ poles correspond to the noise and converge with $n \rightarrow \infty$ to the roots of unity. These poles are not stable: they move when the length of the data sequence is changed. Furthermore, each of these zeros is located close to a zero of $P_n(w)$, forming a so-called “Froissart-doublet” [17].
- b. Provided the signal is not too weak and the sequence is long enough (see below), signal poles repel both noise poles and zeros and therefore stand out among the other poles [23].
- c. The zeros of $Q_n(w)$ are not bound to a lattice on the unitary circle as is the case for the FFT, but are free to move in the complex plane. This has two positive consequences:
 - (i) The so called “super-resolution”: the Nyquist-Shannon sampling theorem [27] –that limits the frequency resolution to $1/T$, where T is

the total sampling time— is verified only in average, but not locally, as poles can cluster where the density of signals is high. Reductions of a factor 100 with respect to FFT of the number of data points required to resolve signals with similar frequencies have been observed [5, 6, 25].

- (ii) For FFT damped signals appear as peaks whose half-width equals the decay factor. Hence, weak signals next to strong damped ones can be covered by the wide peak of the FFT of the strong signal; also, nearby damped signals may not be resolved as they appear as a single wide peak. The current method avoids these problems, as damped signals appear as poles off the unit circle.

2.2 Applications

Padé analysis has found application in several areas, particularly when the system oscillations are damped (because of point c.(ii) above); or when they are chirped, or have a complicated time dependence. In these latter cases the signal is usually analyzed by looking at the signal frequencies in sliding “time windows” and plotting the frequencies found in each window vs. the window starting time; “super-resolution” (point c.(i) above) allows the use of shorter “windows” than FFT and to thus follow the changes in time of the system frequencies avoiding the often complicated sidebands that appear when using the longer “windows” required to obtain a sufficient resolution with FFT.

For applications involving damped signals, we can mention magnetic resonance spectroscopy [8]; for damped chirped signals in high noise, gravitational wave bursts [24]; and for signals with frequencies oscillating in a complicated way, synchronized neuronal hippocampal rhythms.

Other possible fields of application due to the presence of damped signals include financial modeling [21, 32] and acoustic localization of underground oil fields. Applications where strong noise is present (and therefore properties a. and b. are useful) include measuring-while-drilling data transmission in oil industry, early detection of structural faults in mechanical systems such as helicopter shafts, and detection of water distribution pipe leaks [1, 19].

2.3 The context

Several other methods of calculating poles and residues of Padé approximations are known, starting from the Jacobi one [20] (which we shall use in Theorem 8) to the Hankel matrices linear pencil one [2, 3]. However, we do not know of any other direct way in the literature of calculating the zeros, the usual procedure being to find $P(w)$ by taking the first n terms of the product $Z(w)Q(w)$, which can be numerically unstable. The method presented in Section 4 is based on matrix calculations and has also theoretical consequences: see e.g. Theorem 16 below.

While analytic continuation of the Z -transform inside the unit circle is a trivial matter in absence of noise, noise creates a natural boundary on the unit circle itself [28]. The boundary is usually assumed to be of the Carleman class [14], but a proof is still missing [11]. M. Froissart [17] has shown that, in the general noisy case, the natural boundary generated by the noise [28] is approximated by doublets of poles and zeros of the Padé approximants (Froissart doublets) surrounding the vicinity of the unit circle, with the mean distance of the members of each doublet proportional to the noise magnitude. This phenomenon was later discussed in the context of noise filtering in [9, 16, 15]. While the relationship between the elongation $|z_j^n - \lambda_j^n|$ of a Froissart doublet and the residue of the corresponding noise pole is clear, the rate of convergence of the elongation of the Froissart doublets to zero is still unknown.

This fact, although a formal argument is missing, suggest that for the a noisy signal case the $[n/n]$ approximant should be optimal. However, the $[n - 1/n]$ approximant is much easier in computation and allows more comfortable theoretical background, as will be seen in the course of the manuscript.

A further reason for the present study is the ongoing exploration of the statistical properties of noise poles, zeros, and residues of the Padé approximant of $Z(w)$ [4, 10, 11], whose aim is to better distinguish noise and signal so as to improve the current denoising methods. The maximum data sequence length we were able to analyze on a P.C. before encountering memory problems was 4×10^5 . The results of this study will be presented in a forthcoming paper.

3 General Padé approximation theory

We shall briefly discuss in this section the well known relation between the Padé approximation and continuous fractions in the special case of interest. Our aim is to review the existing theory in a way which is tailored for subsequent application. This will be done in two theorems, whose proofs can be found e.g. in [31].

Consider a power series

$$G(z) = \sum_{j=0}^{\infty} s_j z^j, \quad (3)$$

convergent in some disc $D(0, r)$, $r > 0$. By its $[L/M]$ *Padé approximation* we understand a rational function

$$G_{[L/M]}(z) = \frac{P(z)}{Q(z)},$$

where $P(z)$ and $Q(z)$ are polynomials without common zeros, of degrees at most L, M respectively and such that $Q(0) \neq 0$ and

$$G(z) - \frac{P(z)}{Q(z)} = O(z^{L+M+1}) \quad (z \rightarrow 0). \quad (4)$$

Further, for a continuous fraction

$$\frac{a_0}{b_1 + \frac{za_1}{b_2 + \frac{za_3}{b_3 + \ddots}}}, \quad a_i, b_i \in \mathbb{C} \setminus \{0\} \quad (5)$$

we denote by $S_k(z)$ the k -th partial sum of the fraction, and let

$$S_k(z) = \frac{A_k(z)}{B_k(z)}$$

where the polynomials $A_k(z)$ and $B_k(z)$ do not have common factors. The following theorem lists the basic properties of the polynomials A_k and B_k .

Theorem 1. *Let the polynomials A_k and B_k be as above, then the following statements hold.*

(i) *The polynomials A_k and B_k satisfy the following Frobenius recurrence relations*

$$\begin{aligned} zA_{-2}(z) &= 1, & A_{-1}(z) &= 0, \\ A_{k+2}(z) &= b_{k+3}A_{k+1}(z) + za_{k+2}A_k(z), & k &\geq -2, \end{aligned} \quad (6)$$

and

$$\begin{aligned} B_{-2}(z) &= 0, & B_{-1}(z) &= 1, \\ B_{k+2}(z) &= b_{k+3}B_{k+1}(z) + za_{k+2}B_k(z), & k &\geq -2, \end{aligned} \quad (7)$$

(ii) *The polynomial $A_k(z)$ is of degree $\lfloor \frac{k}{2} \rfloor$ and the polynomial B_k is of degree $\lfloor \frac{k+1}{2} \rfloor$ for $k \geq 0$.*

(iii) *The polynomials $A_k(z)$ and $B_k(z)$ have no common zeros for $k \geq 0$.*

(iv) *$B_k(0) \neq 0$ for $k \geq 0$.*

(v) *In the expansion of the partial sum in a Taylor series*

$$\frac{A_k(z)}{B_k(z)} = \sum_{i=0}^{k-1} s_i z^i + \mathcal{O}(z^k) \quad (z \rightarrow 0), \quad k \geq 0$$

(which is possible due to (iv)) the coefficients s_i ($i \geq 0$) do not depend on k .

(vi) *If the power series*

$$\sum_{i=0}^{\infty} s_i z^i$$

converges in some neighborhood of the origin, then $A_{2n-1}(z)/B_{2n-1}(z)$ is its $[n-1/n]$ Padé approximation and $A_{2n}(z)/B_{2n}(z)$ is its $[n/n]$ Padé approximation.

In view of the theorem above, to compute the diagonal or sub-diagonal Padé approximation of a given power series one needs to provide formulas for the coefficients a_i, b_i . These coefficients are non-unique; those we present here –while not optimal– have the advantage of being fraction-less, which is necessary in numerical applications using integer multiple precision mathematics to stabilize the procedure when noise is absent or very weak. We refer the reader to [7] for a general construction of fraction-less Padé approximants and a proof that the coefficients a_i and b_i below are indeed fraction-less.

Theorem 2. *Let $s_0, s_1, \dots \in \mathbb{C}$ be given and such that the power series*

$$G(z) = \sum_{k=0}^{\infty} s_k z^k$$

is convergent in some neighborhood of zero. Let us choose

$$a_l = (-1)^l \frac{f_l^0}{f_{l-2}^0}, \quad b_{l+1} = (-1)^l \frac{f_{l-1}^0}{f_{l-2}^0}, \quad l \geq 0 \quad (8)$$

where the numbers f_k^l are defined recursively as

$$\begin{aligned} f_{-2}^k &= f_{-1}^k = \delta_{0,k}, \quad f_0^k = s_k, \quad k \geq 0 \\ f_{l+1}^k &= \frac{(-1)^l}{f_{l-2}^0} [f_l^0 f_{l-1}^{k+1} - f_{l-1}^0 f_l^{k+1}], \quad l \geq 0. \end{aligned} \quad (9)$$

Then, the continuous fraction (5) expands as a power series $G(z)$ in the sense of statement (v) of Theorem 1.

Proof. (see [7]) Let us define

$$f_l(z) = \sum_{i=0}^{\infty} f_l^i z^i, \quad l \geq -2. \quad (10)$$

Then $f_{-2}(z) = f_{-1}(z) = 1$ and $f_0(z) = G(z)$. Observe, that because of (10)

$$b_{l+1} f_l^0 = a_l f_{l-1}^0, \quad l \geq 0. \quad (11)$$

Consequently

$$b_{l+1} f_l(z) + z f_{l+1}(z) = a_l f_{l-1}(z), \quad l \geq 0, \quad (12)$$

which implies that all the sequences in (10) are convergent in some neighborhood of the origin. Furthermore, $f_l(0) \neq 0$ ($l = -1, 0, \dots$). Define

$$u_l(z) = \frac{f_l(z)}{f_{l-1}(z)}, \quad l \geq 0. \quad (13)$$

The functions $u_l(z)$ satisfy the following recurrence relation

$$u_l(z) = \frac{a_l}{b_{l+1} + z u_{l+1}(z)}, \quad l \geq 0. \quad (14)$$

As $u_0(z) = G(z)$ the proof is complete. □

Summarizing Theorems 1 and 2 we get the following result.

Corollary 3. *Let $s_0, s_1, \dots \in \mathbb{C}$ be given and such that the power series*

$$G(z) = \sum_{k=0}^{\infty} s_k z^k$$

is convergent in some neighborhood of zero. Define the numbers f_l^k as in (9), a_i , b_i as in (8) and the polynomials $A_k(z)$ and $B_k(z)$ as in (6) and (7), respectively. Then $A_{2n-1}(z)/B_{2n-1}(z)$ and $A_{2n}(z)/B_{2n}(z)$ are respectively the $[n-1/n]$ and $[n/n]$ Padé approximation of $G(z)$. Furthermore, to compute $A_{2n-1}(z)/B_{2n-1}(z)$ and A_{2n}/B_{2n} one needs only the entries s_0, \dots, s_{2n-1} and s_0, \dots, s_{2n} , respectively.

Proof. Only the last statement requires a justification. Observe that by (6) and (7) to compute A_{2n-1}, B_{2n-1} one needs to compute a_0, \dots, a_{2n-1} and b_1, \dots, b_{2n} . For this aim one needs to know f_0^0, \dots, f_{2n-1}^0 , see (8). By (9) it is enough to know f_0^0, \dots, f_0^{2n-1} , i.e. s_0, \dots, s_{2n-1} . Similarly, to compute A_{2n} and B_{2n} one requires a_0, \dots, a_{2n} and b_1, \dots, b_{2n+1} and therefore f_0^0, \dots, f_{2n}^0 and s_0, \dots, s_{2n} \square

4 Poles and zeros

So far we have constructed fraction-less coefficients a_i , b_i , which can be computed using exact integer arithmetic. However, these coefficients grow rapidly with $l \rightarrow \infty$, see [7] for an explanation, which makes their use impossible for large n . Furthermore, our aim is to compute poles, zeros and residues of the Padé approximants, for which we have to resign exact arithmetics anyway. In the present section we shall derive numerically stable algorithms for computing the poles, zeros and residues.

4.1 Towards a numerical algorithm

Our first step is to normalize the polynomials $A_n(z)$ and $B_n(z)$ such that $\hat{A}_n(0) = \hat{B}_n(0) = 1$. Basing on (6) and (7) we easily get that

$$A_l(0) = a_0 b_2 b_3 \dots b_{l+1}, \quad B_l(0) = b_1 b_2 b_3 \dots b_{l+1}, \quad l \geq 0. \quad (15)$$

Hence,

$$\begin{aligned} \widehat{A}_l(z) &:= \frac{A_l(z)}{a_0 b_2 b_3 \dots b_{l+1}} = \frac{A_l(z)}{(-1)^{\frac{l(l+1)}{2}} \frac{f_0^0}{f_{l-2}^0} \frac{f_0^0}{f_{l-1}^0} \frac{f_1^0}{f_0^0} \dots \frac{f_{l-1}^0}{f_{l-2}^0}} = \\ &= \frac{A_l(z)}{(-1)^{\frac{l(l+1)}{2}} f_0^0 f_{l-1}^0} = \frac{A_l(z)}{(-1)^{\frac{l(l+1)}{2}} s_0 f_{l-1}^0}, \end{aligned} \quad (16)$$

$$\begin{aligned}\widehat{B}_l(z) &:= \frac{B_l(z)}{b_1 b_2 b_3 \dots b_{l+1}} = \frac{B_l(z)}{(-1)^{\frac{l(l+1)}{2}} \frac{f_{-1}^0}{f_{-2}^0} \frac{f_0^0}{f_{-1}^0} \frac{f_1^0}{f_0^0} \dots \frac{f_{l-1}^0}{f_{l-2}^0}} = \\ &= \frac{B_l(z)}{(-1)^{\frac{l(l+1)}{2}} f_{l-1}^0}.\end{aligned}\quad (17)$$

Hence,

$$\frac{A_{2n-1}(z)}{B_{2n-1}(z)} = \frac{s_0 \widehat{A}_{2n-1}(z)}{\widehat{B}_{2n-1}(z)} \quad \text{and} \quad \frac{A_{2n}(z)}{B_{2n}(z)} = \frac{s_0 \widehat{A}_{2n}(z)}{\widehat{B}_{2n}(z)} \quad (18)$$

are respectively the $[n-1/n]$ and $[n/n]$ Padé approximation of $G(z)$. We now provide recurrence relations for even and odd polynomials separately.

Lemma 4. *The following recurrence relations hold*

$$\begin{aligned}\widehat{A}_{-1}(z) &= 0, \quad \widehat{A}_1(z) = 1, \\ \widehat{A}_0(z) &= 1, \quad \widehat{A}_2(z) = 1 + zr_2 \\ \widehat{A}_{l+1}(z) &= [1 + (r_l + r_{l+1})z] \widehat{A}_{l-1}(z) - z^2 r_{l-1} r_{2l} \widehat{A}_{l-3}(z), \quad l \geq 2,\end{aligned}\quad (19)$$

$$\begin{aligned}\widehat{B}_{-1}(z) &= 1, \quad \widehat{B}_1(z) = 1 + r_1 z, \\ \widehat{B}_0(z) &= 1, \quad \widehat{B}_2(z) = 1 + (r_1 + r_2)z \\ \widehat{B}_{l+1}(z) &= [1 + (r_l + r_{l+1})z] \widehat{B}_{l-1}(z) - z^2 r_{l-1} r_{2l} \widehat{B}_{l-3}(z), \quad l \geq 2,\end{aligned}\quad (20)$$

where

$$r_0 = 0, \quad r_l = (-1)^{l-1} \frac{f_l^0 f_{l-3}^0}{f_{l-2}^0 f_{l-1}^0}, \quad l \geq 1.$$

Proof. Using (6) and (16) we get

$$\begin{aligned}a_0 b_2 b_3 \dots b_{l+3} \widehat{A}_{l+2}(z) &= a_0 b_2 b_3 \dots b_{l+2} b_{l+3} \widehat{A}_{l+1}(z) + \\ &+ z a_0 a_{l+2} b_2 b_3 \dots b_{l+1} \widehat{A}_l(z).\end{aligned}\quad (21)$$

which gives

$$b_{l+2} b_{l+3} \widehat{A}_{l+2}(z) = b_{l+2} b_{l+3} \widehat{A}_{l+1}(z) + z a_{l+2} \widehat{A}_l(z). \quad (22)$$

Consequently, repeating the recurrence three times

$$\widehat{A}_{l+1} = \widehat{A}_l(z) + z r_{l+1} \widehat{A}_{l-1}(z), \quad l \geq 0. \quad (23)$$

$$\widehat{A}_l(z) = \widehat{A}_{l-1}(z) + z r_l \widehat{A}_{l-2}(z) \quad (24)$$

$$\widehat{A}_{l-1}(z) = \widehat{A}_{l-2}(z) + z r_{l-1} \widehat{A}_{l-3}(z). \quad (25)$$

Substituting $\widehat{A}_{l-2}(z)$ from equation (25) to equation (24) and $\widehat{A}_l(z)$ from equation (24) to equation (23) we obtain (19).

Analogously we derive the formula (20) using (7) and (17) instead of (6) and (16). □

We introduce now the key for stable numerical implementation: the numbers h_l^k .

Proposition 5. *Let $s_0, s_1 \dots \in \mathbb{C}$, $s_0, s_1 \neq 0$ and let the numbers h_l^k ($k \geq 1, l \geq -1$) be given by a recurrence relation*

$$\begin{aligned} h_{-1}^k &= -\frac{s_k}{s_0}, \\ h_0^k &= \frac{s_k}{s_0} - \frac{s_{k+1}}{s_1} = -\left(h_{-1}^k + \frac{h_{-1}^{k+1}}{h_{-1}^1}\right), \\ h_l^k &= \frac{h_{l-2}^{k+1}}{h_{l-2}^1} - \frac{h_{l-1}^{k+1}}{h_{l-1}^1}, \quad l \geq 1. \end{aligned} \tag{26}$$

Then $r_l = h_{l-2}^1$ for $l \geq 0$, with r_l as in Lemma 4. Furthermore, r_l ($l \geq 0$) depends only on the first $l+1$ entries of the sequence s_0, s_1, \dots .

Proof. Note that for $l \geq 1$ we get by (9) that

$$\begin{aligned} r_l &= (-1)^{l-1} \frac{f_l^0 f_{l-3}^0}{f_{l-2}^0 f_{l-1}^0} \\ &= (-1)^{l-1} \frac{f_{l-3}^0}{f_{l-2}^0 f_{l-1}^0} \frac{(-1)^{l-1}}{f_{l-3}^0} [f_{l-1}^0 f_{l-2}^1 - f_{l-2}^0 f_{l-1}^1] \\ &= \frac{f_{l-2}^1}{f_{l-2}^0} - \frac{f_{l-1}^1}{f_{l-1}^0}. \end{aligned}$$

We set

$$h_l^k := g_l^k - g_{l+1}^k, \quad g_l^k = \frac{f_l^k}{f_l^0}, \quad k \geq 1, \quad l \geq -1, \tag{27}$$

so that

$$r_l = h_{l-2}^1, \quad l \geq 0.$$

It remains to prove that h_l^k satisfy the recursive relations (26). We first note that for $k \geq 0$ we have

$$\begin{aligned} h_{-1}^k &= g_{-1}^k - g_0^k = -\frac{s_k}{s_0}, \\ h_0^k &= g_0^k - g_1^k = \frac{s_k}{s_0} - \frac{s_{k+1}}{s_1} = -\left(h_{-1}^k + \frac{h_{-1}^{k+1}}{h_{-1}^1}\right). \end{aligned}$$

Furthermore, for $k \geq 1$, we get the recurrence

$$h_l^k = g_l^k - g_{l+1}^k = \frac{g_{l-2}^{k+1} - g_{l-1}^{k+1}}{g_{l-2}^1 - g_{l-1}^1} - \frac{g_{l-1}^{k+1} - g_l^{k+1}}{g_{l-1}^1 - g_l^1} = \frac{h_{l-2}^{k+1}}{h_{l-2}^1} - \frac{h_{l-1}^{k+1}}{h_{l-1}^1}, \tag{28}$$

where the second equality results from the fact that by (9) we have for $l \geq -1$

$$\begin{aligned} g_{l+1}^k &= \frac{f_l^0 f_{l-1}^{k+1} - f_{l-1}^0 f_l^{k+1}}{f_l^0 f_{l-1}^1 - f_{l-1}^0 f_l^1} \\ &= \frac{f_l^0 f_{l-1}^0 \left[\frac{f_{l-1}^{k+1}}{f_{l-1}^0} - \frac{f_l^{k+1}}{f_l^0} \right]}{f_l^0 f_{l-1}^0 \left[\frac{f_{l-1}^1}{f_{l-1}^0} - \frac{f_l^1}{f_l^0} \right]} = \frac{g_{l-1}^{k+1} - g_l^{k+1}}{g_{l-1}^1 - g_l^1}. \end{aligned}$$

To see the ‘furthermore’ part note that in order to compute $r_l = h_{l-2}^1$ we need h_{l-3}^k , $k = 1, 2$. Proceeding further by induction w.r.t. $j = 1, \dots, l-1$ we see that r_l depends only on h_{l-2-j}^k , $k = 1, \dots, j+1$. The case $j = l-1$ proves the statement. \square

4.2 Change of variables and matrix formulation

Recall that our final aim is approximation of the function

$$Z(w) = \sum_{i=1}^{\infty} s_i w^{-i} = G(z), \quad (29)$$

where $w = z^{-1}$. Let us introduce the monic polynomials ($n \geq 0$)

$$P_n(w) = w^{n-1} \hat{A}_{2n-1}(w^{-1}), \quad Q_n(w) = w^n \hat{B}_{2n-1}(w^{-1}), \quad (30)$$

and

$$\tilde{P}_n(w) = w^n \hat{A}_{2n}(w^{-1}), \quad \tilde{Q}_n(w) = w^n \hat{B}_{2n}(w^{-1}). \quad (31)$$

Note that with $w \rightarrow \infty$ one has by (18) that

$$\frac{s_0 w P_n(w)}{Q_n(w)} - Z(w) = \mathcal{O}(w^{-2n}), \quad \frac{s_0 \tilde{P}_n(w)}{\tilde{Q}_n(w)} - Z(w) = \mathcal{O}(w^{-2n}).$$

Based on (20) we get the following four recurrences:

$$\begin{aligned} P_0(w) &= 0, & P_1(w) &= 1 \\ P_{l+1}(w) &= (w - c_l)P_l(w) - d_l P_{l-1}(w), & l &\geq 1, \\ Q_0(w) &= 1, & Q_1(w) &= w + r_1 \\ Q_{l+1}(w) &= (w - c_l)Q_l(w) - d_l Q_{l-1}(w), & l &\geq 1, \end{aligned} \quad (32)$$

where

$$c_l = -(r_{2l} + r_{2l+1}), \quad d_l = r_{2l-1} r_{2l}, \quad l \geq 1; \quad (33)$$

and

$$\begin{aligned} \tilde{P}_0(w) &= 1, & \tilde{P}_1(w) &= w + r_2 \\ \tilde{P}_{l+1}(w) &= (w - \tilde{c}_l)\tilde{P}_l(w) - \tilde{d}_l \tilde{P}_{l-1}(w), & l &\geq 1, \\ \tilde{Q}_0(w) &= 1, & \tilde{Q}_1(w) &= w + r_1 + r_2 \\ \tilde{Q}_{l+1}(w) &= (w - \tilde{c}_l)\tilde{Q}_l(w) - \tilde{d}_l \tilde{Q}_{l-1}(w), & l &\geq 1, \end{aligned} \quad (34)$$

where

$$\tilde{c}_l = -(r_{2l+2} + r_{2l+1}), \quad \tilde{d}_l = r_{2l+1}r_{2l}, \quad l \geq 1. \quad (35)$$

Here we arrive at the main point of the paper – construction of the tridiagonal J_n matrix and its submatrix J' :

$$J_n = \begin{bmatrix} c_0 & 1 & & & \\ d_1 & c_1 & 1 & & \\ & d_2 & \ddots & \ddots & \\ & & \ddots & \ddots & 1 \\ & & & d_{n-1} & c_{n-1} \end{bmatrix}, \quad J'_{n-1} = \begin{bmatrix} c_1 & 1 & & & \\ d_2 & c_2 & 1 & & \\ & d_3 & \ddots & \ddots & \\ & & \ddots & \ddots & 1 \\ & & & d_{n-1} & c_{n-1} \end{bmatrix},$$

where $c_0 = -r_1$. Analogously we define the two matrices \tilde{J}_n and \tilde{J}'_n :

$$\tilde{J}_n = \begin{bmatrix} \tilde{c}_0 & 1 & & & \\ \tilde{d}_1 & \tilde{c}_1 & 1 & & \\ & \tilde{d}_2 & \ddots & \ddots & \\ & & \ddots & \ddots & 1 \\ & & & \tilde{d}_{n-1} & \tilde{c}_{n-1} \end{bmatrix}, \quad \tilde{J}'_n = \begin{bmatrix} \tilde{c}'_0 & 1 & & & \\ \tilde{d}_1 & \tilde{c}_1 & 1 & & \\ & \tilde{d}_2 & \ddots & \ddots & \\ & & \ddots & \ddots & 1 \\ & & & \tilde{d}_{n-1} & \tilde{c}_{n-1} \end{bmatrix},$$

where $\tilde{c}_0 = -r_1 - r_2$ and $\tilde{c}'_0 = -r_2$. The following result expresses the zeros of $P_n(w)$, $Q_n(w)$, $\tilde{P}_n(w)$, and $\tilde{Q}_n(w)$ as eigenvalues of the above four matrices.

Theorem 6. *For $n \geq 1$ we have*

$$\begin{aligned} P_n(w) &= \det(wI_{n-1} - J'_{n-1}), & Q_n(w) &= \det(wI_n - J_n), \\ \tilde{P}_n(w) &= \det(wI_n - \tilde{J}'_n), & \tilde{Q}_n(w) &= \det(wI_n - \tilde{J}_n) \end{aligned}$$

where I_n denotes the identity matrix of size n . Consequently,

$$\begin{aligned} \mathbf{e}_0^* (wI_n - J_n)^{-1} \mathbf{e}_0 &= \frac{P_n(w)}{Q_n(w)}, \quad n \geq 1, \\ \frac{\mathbf{e}_0^* (wI_n - \tilde{J}_n)^{-1} \mathbf{e}_0}{\mathbf{e}_0^* (wI_n - \tilde{J}'_n)^{-1} \mathbf{e}_0} &= \frac{\tilde{P}_n(w)}{\tilde{Q}_n(w)}, \quad n \geq 1, \end{aligned}$$

where \mathbf{e}_0 is the first vector of the canonical basis.

Proof. Let

$$j_n(w) := \det(wI_{n+1} - J_{n+1}).$$

Note that by the Laplace expansion the following recurrence holds

$$j_n(w) = (w - c_{n-1})j_{n-1} - d_{n-1}j_{n-2}, \quad n \geq 1, \quad (36)$$

where the initial conditions are given by

$$j_{-1}(w) := 0, \quad j_0(w) := 1.$$

Comparing this with (34) gives the statement concerning $Q_n(w)$. The statements concerning $P_n(w)$, $\tilde{P}_n(w)$, $\tilde{Q}_n(w)$ can be shown in a similar way. The proof of the 'Consequently' part follows directly by the adjugate matrix formula for the inverse. \square

A standard diagonalization for the J_n matrix is the following.

Lemma 7. *Let $n \geq 1$ and let $s_0, \dots, s_{2n-1} \in \mathbb{C}$ be such that the zeros z_0^n, \dots, z_{n-1}^n of $Q_n(w)$ are simple. Then the matrix*

$$T_n = [T_n[i, j]]_{ij=0}^{n-1} = [Q_i(z_j^n)]_{ij=0}^{n-1}$$

is the diagonalisation of J_n , i.e.

$$J_n = T_n \text{diag}(z_0^n, \dots, z_{n-1}^n) T_n^{-1}.$$

Similarly, if the zeros $\tilde{z}_0^n, \dots, \tilde{z}_{n-1}^n$ of $\tilde{Q}_n(w)$ are simple then $\tilde{T}_n = [\tilde{Q}_i(z_j^n)]_{ij=0}^{n-1}$ is the diagonalisation of \tilde{J}_n .

Proof. Note that by (32) we have

$$(z_j^n I_n - J_n) \begin{bmatrix} Q_0(z_j^n) \\ \vdots \\ Q_{n-2}(z_j^n) \\ Q_{n-1}(z_j^n) \end{bmatrix} = \begin{bmatrix} 0 \\ \vdots \\ 0 \\ Q_n(z_j^n) \end{bmatrix} = 0,$$

i.e. the vectors $[Q_0(z_j^n), \dots, Q_{n-1}(z_j^n)]^\top$ ($j = 1, \dots, n$) constitute the eigenvector basis for J_n . The statement concerning \tilde{J}_n can be proved similarly. \square

Key point of the above lemma is the assumption that the zeros of $Q_n(w)$ are simple. We show now this is a generic property. More precisely, by a generic subset of \mathbb{C}^k we mean a set, whose complement is a subset of a proper algebraic subset of \mathbb{C}^k . Due to the presence of noise any realisation of the signal lies almost surely, under mild assumptions, in a given generic set. For formulating

the statement recall the following classical formulas (cf. [20]):

$$Q_n(w) = \det \begin{bmatrix} s_n & s_{n-1} & \cdots & s_0 \\ s_{n+1} & s_n & \cdots & s_1 \\ \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot \\ s_{2n-1} & s_{2n-2} & \cdots & s_{n-1} \\ 1 & w & \cdots & w^n \end{bmatrix}, \quad (37)$$

$$\tilde{Q}_n(w) = \det \begin{bmatrix} s_{n+1} & s_n & \cdots & s_1 \\ s_{n+2} & s_{n+1} & \cdots & s_2 \\ \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot \\ s_{2n} & s_{2n-1} & \cdots & s_n \\ 1 & w & \cdots & w^n \end{bmatrix}. \quad (38)$$

In particular, $\tilde{Q}_n(w)$ depends on s_1, \dots, s_{2n} only.

Theorem 8. *Let $n \geq 1$. The zeros of the polynomials $Q_n(w)$ (respectively, $\tilde{Q}_n(w)$) are simple for all $\mathbf{s} = [s_0, \dots, s_{2n-1}]^\top$ ($\mathbf{s} = [s_1, \dots, s_{2n}]^\top$) in some generic subset of \mathbb{C}^{2n} . In particular, if \mathbf{s} is a random vector that has a continuous distribution on \mathbb{C}^{2n} , then the zeros of $Q_n(w)$ (of $\tilde{Q}_n(w)$) are almost surely simple.*

Proof. We show only the part concerning $Q_n(w)$, the proof for $\tilde{Q}_n(w)$ is similar. Due to (37) $Q_n(w)$ can be written as

$$Q_n(w) = \sum_{j=0}^n p_j(s_0, \dots, s_{2n-1}) w^j,$$

where p_j is some polynomial in multiple variables. The polynomial $Q_n(w)$ has a double zero if and only if the Sylvester resultant matrix $S(Q_n, Q'_n)$ is singular [18, 29]. Note that

$$p(s_0, \dots, s_{2n-1}) := \det(S(Q_n, Q'_n))$$

is a polynomial in s_0, \dots, s_{2n-1} . Therefore, the set of all s_0, \dots, s_{2n-1} for which the zeros of $Q_n(z)$ are not simple is an algebraic subset of \mathbb{C}^{2n} . To show that it is a proper algebraic subset we need to show that p is a nonzero polynomial. Observe that for $s_j = \delta_{j,0} + \delta_{j,n}$ ($j = 0, \dots, 2n-1$) we get $Q_n(w) = w^n - 1$, which has no double roots. In consequence $p(s_0, \dots, s_{2n-1}) \neq 0$. \square

Remark 9. Theorem 6 gives a direct way of computing the zeros of $Q_n(z)$. However, note that the zeros of $Q_n(z)$ can also be computed using different methods. In particular, it is known that they are eigenvalues of the linear pencil

$$U_0 - \lambda U_1,$$

where $U_0, U_1 \in \mathbb{C}^{n+1}$ are Hankel matrices defined by

$$U_0[i, j] = s_{i+j+1}, \quad U_1[i, j] = s_{i+j}, \quad i, j = 0, \dots, n,$$

as $\det(U_0 - zU_1) = Q_n(z)$, see [2].

We postpone the comparison of the numerical results of the two methods to Section 6.4 and conclude the present section by formulating a purely linear algebraic corollary, announced already in the Introduction.

Corollary 10. *Consider the Hankel pencil $U_0 - zU_1$ defined above. Then for all $s_0, \dots, s_{2n-1} \in \mathbb{C}$ except a proper semialgebraic subset of \mathbb{C}^{2n} its eigenvalues are simple and in such case the matrix J_n constructed above is a companion matrix of the pencil, in the sense that the spectra of J_n and $U_0 - zU_1$ coincide.*

5 The residues

In the last two sections of the paper we shall concentrate on the $[n-1/n]$ Padé approximation. And so let z_i^n ($i = 0, \dots, n-1$) denote the zeros of $Q_n(w)$ and λ_i^n ($i = 1, \dots, n-1$) the zeros of $P_n(w)$. Our aim is to find a numerically effective method to calculate the residues of the rational function

$$Z_{[n-1/n]}(w) = s_0 w P_n(w) / Q_n(w).$$

Note that the leading terms of $P_n(w)$ and $Q_n(w)$ equal one, due to (30) and that $\hat{A}_{2n-1}(0) = \hat{B}_{2n-1}(0) = 1$. Consequently,

$$\frac{s_0 w P_n(w)}{Q_n(w)} = s_0 w \frac{\prod_{i=1}^{n-1} (w - \lambda_i^n)}{\prod_{i=1}^n (w - z_i^n)}. \quad (39)$$

Different formulas are available; here we list six of them. The first three ones immediately stem from the sections above:

Theorem 11. *Let $n \geq 1$ and assume that $Q_n(w)$ has simple zeros only. Then the residues ρ_j^n of $Z_{[n-1/n]}(w)$ corresponding to the poles z_j^n ($j = 0, \dots, n-1$) are given by the following three formulas:*

$$\rho_j^n = s_0 z_j^n \frac{\prod_{i=0}^{n-2} (z_j^n - \lambda_i^n)}{\prod_{\substack{i=0 \\ i \neq j}}^{n-1} (z_j^n - z_i^n)}; \quad (40)$$

$$\rho_j^n = s_0 z_j^n \frac{P_n(z_j^n)}{Q'_n(z_j^n)}; \quad (41)$$

$$\rho_j^n = s_0 z_j^n T_n^{-1}[j, 0]; \quad (42)$$

where T_n is the diagonalization of J_n as in Lemma 7.

Proof. Equations (40) and (41) follow directly from the definition of the residue of a rational function. To see equation (42) note that

$$\begin{aligned} \mathbf{e}_0^* (wI_n - J_n)^{-1} \mathbf{e}_0 &= \mathbf{e}_0^* T_n \text{diag}(w - z_0^n, \dots, w - z_{n-1}^n)^{-1} T_n^{-1} \mathbf{e}_0 \\ &= \sum_{j=0}^{n-1} \mathbf{e}_0^* T_n \mathbf{e}_j \mathbf{e}_j^* T_n^{-1} \mathbf{e}_0 (w - z_j^n)^{-1} \end{aligned}$$

and it is enough to use Theorem 6 and note that by definition

$$\mathbf{e}_0^* T_n \mathbf{e}_j = T_n[0, j] = Q_0(z_j^n) = 1.$$

□

Remark 12. As the factors in (40) can be very small, in its numerical implementation we first calculated $\log \rho_j^n$ as an appropriate sum. The values $Q'_l(z_j^n)$ in (41) can be calculated recursively by differentiating (34):

$$\begin{aligned} Q'_0(z_j^n) &= 0, \quad Q'_1(z_j^n) = 1 \\ Q'_{l+1}(z_j^n) &= (z_j^n - c_l)Q'_l(z_j^n) + Q_l(z_j^n) - d_l Q'_{l-1}(z_j^n), \quad l \geq 1. \end{aligned} \quad (43)$$

A fourth method to calculate the residues of a Padé approximation –by far the most accurate numerically, as we shall see in Subsection 6.4– is based on the following proposition.

Proposition 13. Let $\mathbf{s} = [s_0, \dots, s_{2n-1}]^\top$ be the vector of the given signal s and let $V \in \mathbb{C}^{2n \times n}$ be the matrix with elements $V[k, j] = (z_j^n)^{k-1}$ ($k = 0, \dots, 2n-1$, $j = 0, \dots, n-1$). Then the overdetermined consistent system of linear equations

$$\mathbf{s} = V\mathbf{x} \quad (44)$$

has precisely one solution $\mathbf{x} = \boldsymbol{\rho} = [\rho_0^n, \dots, \rho_{n-1}^n]^\top$.

Proof. From (39) we have with $z = w^{-1}$ that

$$Z_{[n-1/n]}(w) = s_0 w \sum_{j=0}^{n-1} \frac{\rho_j^n / (s_0 z_j^n)}{w - z_j^n} = \sum_{j=0}^{n-1} \frac{\rho_j^n / z_j^n}{1 - z z_j^n}, \quad (45)$$

which after expansion into a Taylor series at $z = 0$ gives

$$Z_{[n-1/n]}(z) = \sum_{k=0}^{\infty} \sum_{j=0}^{n-1} \rho_j^n (z_j^n)^{k-1} z^k. \quad (46)$$

As $Z_{[n-1/n]}(z)$ is the $[n-1/n]$ Padé approximation of the function given by Eq. (3), we have

$$s_k = \sum_{j=1}^n \rho_j^n (z_j^n)^{k-1} \quad k = 0, \dots, 2n-1, \quad (47)$$

which is exactly stating that $\boldsymbol{\rho}$ is a solution of (44). By uniqueness of the $[n-1/n]$ Padé approximation, the solution is unique. □

Remark 14. We explain here some details for the numerical implementation of Proposition 13 above. First, we observe that extra care should be taken in the construction of the matrix V : especially when n is large the matrix V could be ill-conditioned or even not be possible to obtain due to numerical overflow. We therefore calculate not the matrix V but the following product:

$$\tilde{V} = VD, \quad D = \text{diag}(d_0, \dots, d_{n-1}), \quad d_j = \begin{cases} 1 : & |z_j^n| \leq 1 \\ |z_j^n|^{-2n+2} : & |z_j^n| > 1 \end{cases}.$$

The columns of the matrix \tilde{V} should be built recursively. Namely, if $|z_j^n| > 1$, we start from the last entry $\tilde{V}[2n-1, j] = 1$ and construct the column backward: $\tilde{V}[k-1, j] = \tilde{V}[k, j]/z_j^n$. The columns j for which $|z_j^n| \leq 1$ are constructed directly starting from $\tilde{V}[0, j] = (z_j^n)^{-1}$.

Second, we note that $\tilde{\rho} := D^{-1}\rho$ is the unique solution of the overdetermined consistent system

$$\tilde{V}\tilde{\rho} = \mathbf{s}. \quad (48)$$

However, due to the roundoff errors appearing when calculating the poles z_j^n , the above system is not consistent in practice. Therefore, to calculate $\tilde{\rho}$ we perform a least square evaluation of the residues by solving the normal system:

$$\tilde{V}^\top \mathbf{s} = (\tilde{V}^\top \tilde{V})\tilde{\rho} \quad (49)$$

which can be easily done using the Matlab operator `\ (mldivide)`: $\tilde{\rho} = \tilde{V} \backslash \mathbf{s}$. As the last step of the procedure we multiply $\rho = D\tilde{\rho}$. Note that some of the residues obtained this way are hard zeros, see Figure 5.

For sake of completeness, we mention that the residues may be also computed as a solution of the system

$$V[k=0:n-1, j=0:n-1]\rho = [s_0, \dots, s_{n-1}]^\top, \quad (50)$$

(this formula was proposed in [3]), or by solving any other square subsystem of the system (44). As we shall see in the next section, this method, while faster, gives slightly worse results than solving the full system (44).

Remark 15. In the $[n/n]$ case, we can again use eq. (44) to calculate the residues, but with $\mathbf{s} = [s_1, \dots, s_{2n}]^\top$ and $V[k, j] = (z_j^n)^{k-1}$ ($k = 1, \dots, 2n$, $j = 0, \dots, n-1$).

The last method of computing the residues we list, important more from a theoretical point of view than a numerical one, is given by the following theorem.

Theorem 16. Let denote $\lambda_j^n(\tau)$ the eigenvalues of the matrix $J_n + \tau \mathbf{e}_0 \mathbf{e}_0^*$, defined in such way that they are continuous functions of the parameter $\tau \in \mathbb{R}^+$. Then for $\tau \rightarrow \infty$ and for all s_0, \dots, s_{2n-1} except a set of Lebesgue measure zero on which the eigenvalues of J_n are not simple (see Theorem 8)

- (i) $n-1$ of the curves $\lambda_j^n(\tau)$ converge to the zeros $\lambda_1^n, \dots, \lambda_{n-1}^n$ of P_n and one converges to infinity as $\tau \rightarrow \infty$;

(ii) we have

$$\frac{d\lambda_j^n}{d\tau}(0) = \rho_j^n s_0 z_j^n. \quad (51)$$

Proof. The proof of statement (i) is a standard reasoning based on the Rouché theorem, see e.g. [26, Theorem 4.1]. Statement (ii) follows from the fact that $\lambda_j^n(\tau)$ ($\tau \geq 0$) satisfies the equation

$$(\mathbf{e}_0^*(\lambda_j^n(\tau)I_n - J_n)^{-1}\mathbf{e}_0)^{-1} = \tau,$$

which together with Theorem 6 gives

$$\left(\sum_{j=0}^{n-1} \frac{\rho_j^n}{\lambda_j^n(\tau) - z_j^n} \right)^{-1} = s_0 \lambda_j^n(\tau) \tau.$$

Differentiating both sides at $\tau = 0$ we obtain

$$\frac{(\lambda_j^n)'(0)}{\rho_j^n} = s_0 z_j^n.$$

□

Remark 17. Although it is not stated above, one may easily show using the results of [26] that the curves $\lambda_j(\tau)$ are analytic and do not intersect each other. Therefore, Theorem 16 provides a method of joining the zeros z_j^n of $Q_n(w)$ with the zeros λ_j^n of $P_n(w)$ (an one with infinity) with analytic curves. A similar construction for the $[n/n]$ case can be obtained with the use of matrices \tilde{J}_n and \tilde{J}_n' of Theorem 6. The relation of the nature these curves to the Froissart doublets is under investigation.

6 Numerical tests

The total numerical error is a combination of four errors that appear during the procedure:

- calculation of the J_n matrix in Section 4.2.
- calculation of the eigenvalues of the J_n matrix.
- calculation of the corresponding residues.

The total backward or forward error is here very hard to estimate. Furthermore, one can easily show artificial examples where each of the two algorithms for computing the poles fails. E.g., when s_0 or s_1 are numerical zeros, the construction of the J_n matrix fails, while the pencil constructed as in Remark 9 works correctly for $s_0 = 0$. Furthermore, the calculation of the poles via the pencil method can fail for example in the case when the signal consists of a few

(much less than one quarter of the number of data points) damped oscillations and very low noise, as in that case the pencil $U_0 - \lambda U_1$ is too close to a singular pencil.

In the current section we present a strategy for verifying the reliability of the numerical computations using the different formulas presented above. The tests provide a numerical computation of the forward and backward error.

We here test the algorithms on data series $\mathbf{s}^n \in \mathbb{C}^{2n}$ consisting of complex Gaussian white noise $\mathbf{s}^n = \mathbf{s}_1^n + i\mathbf{s}_2^n$, where $\mathbf{s}_1^n, \mathbf{s}_2^n \in \mathbb{C}^{2n}$ are normally distributed real vectors, with mean zero and variance one, generated –for each n separately– by the Matlab `randn` function. The reasons are threefold: firstly, this allows us to easily identify the formulas for calculating poles and residues that in usual circumstances are unsuitable for numerical computations. Secondly, our computations for white noise can serve as a reference point in further studies on more complicated data sequences. Thirdly, the statistical properties of poles and zeros of the Padé approximant of a pure noise data series are of interest both from the theoretical point of view [4, 10, 11] and from that of their of applications in signal detection [23] and hence, reliable numerical methods are required for this particular case.

Our aim here is to study the stability and accuracy of the proposed methods as a function of the number of data points, by plotting the numerical error vs. n , which is half of the length of the above random signal. Note that increasing the number of data points in most cases increases the information on one hand, but on the other hand it also increases the numerical error. Hence, finding the proper length of the signal is always a matter of a careful study, the tools for which are provided below.

6.1 Forward error of the methods for computing the poles

First, let us compare the computation time for the poles using the J_n matrix method (Theorem 6) and the pencil method (Remark 9), as a function of the number of data points $2n$. The results are shown in Figure 1: for $n = 10^3$ the J_n matrix method appears to be 10 times faster, which for real time analysis might make the difference. The results for data sequences of various signals plus noise show the same behavior. The Matlab function `eig` was used to compute both the eigenvalues of J_n and of the linear pencil $U_0 - \lambda U_1$. For the J_n matrix, an ad-hoc LR routine, with origin shift to speed up convergence, would have the advantage of working with only two vectors instead than with a whole matrix [22].

We now pass to comparing the accuracy of the two methods of computing the eigenvalues by the following procedure: given a set of poles $\mathbf{z}^n = [z_0^n, \dots, z_{n-1}^n]^\top$ and the residues $\boldsymbol{\rho}^n = [\rho_0^n, \dots, \rho_{n-1}^n]^\top$, we use equation (44) to create a data sequence \mathbf{s} . For this \mathbf{s} we calculate the poles $\tilde{\mathbf{z}}$. Both algorithms have the property that $\tilde{\mathbf{z}}$ equals \mathbf{z} in theory. We set $\|\tilde{\mathbf{z}}^n - \mathbf{z}^n\| / \|\mathbf{z}^n\|$ as a measure of the relative forward error in computing the poles and we calculate it for both methods.

The results of simulations for consecutive values of n can be found in Figure

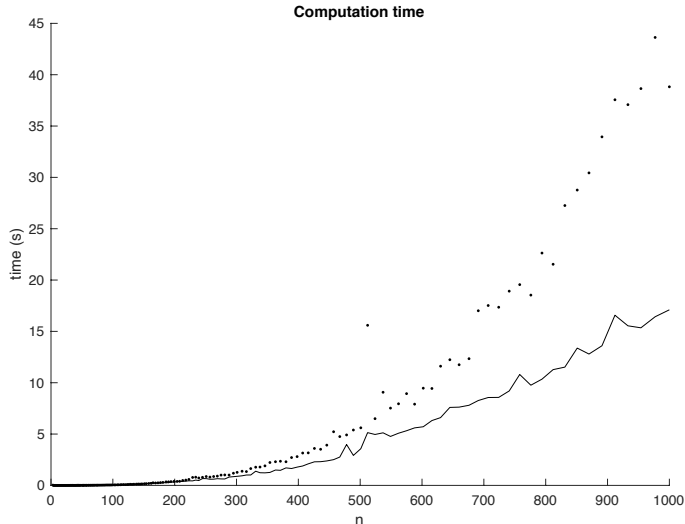


Figure 1: Computation time of the poles \mathbf{z}^n for Gaussian white noise in the complex plane using the J_n matrix (solid line) and the $U_0 - \lambda U_1$ pencil (dots).

2. To avoid unrealistic values of poles and residues \mathbf{z}^n and $\boldsymbol{\rho}^n$, we generate them from a complex Gaussian white noise sample $\hat{\mathbf{s}}$ using the pencil method and equation (44), respectively. While both methods give quite small errors, a comparison of Figure 2 with Figure 1 indicates that the advantage in speed of the J_n matrix method is compensated by a loss of precision of approximately the same order of magnitude. We note here in passing that we have observed cases of data series \mathbf{s} comprising noise plus a signal of the form (2), where using the J_n matrix gives a smaller error. These cases will be dealt with in a forthcoming paper.

6.2 Forward error of the methods for computing the residues

We adopt the same strategy to compute the forward error for the different methods to calculate the residues: the distance between the output $\tilde{\boldsymbol{\rho}}^n$ of the chosen algorithm and the original residues $\boldsymbol{\rho}^n$, measured as $\|\tilde{\boldsymbol{\rho}}^n - \boldsymbol{\rho}^n\| / \|\boldsymbol{\rho}^n\|$ is a measure of the relative forward error in computing the residues. The results can be found in Figure 3. As only the J_n method gives the zeros of the Padé approximant needed for eq. (40) (and eq. (41) whose results we do not present here as they always are essentially identical to those of eq. (40)), the eigenvalues were computed with the J_n method. Apart from the derivative formula (51) all the methods appear to give comparable relative errors.

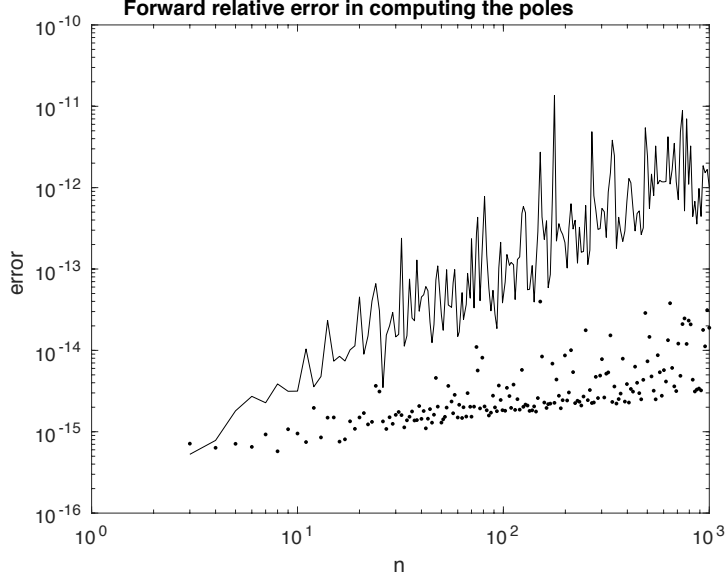


Figure 2: Forward relative error of the poles \mathbf{z}^n for complex Gaussian white noise, computed using the J_n matrix (solid line) and the $U_0 - \lambda U_1$ pencil (dots).

6.3 A global test for correctness of the residues computation

A fast test of the numerical reliability of equations (40),(41),(42),(44) and (51) is based on the equality

$$\sum_{j=0}^{n-1} \frac{\rho_j^n}{s_0 z_j^n} = 1$$

that follows from the fact that by the Euler-Jacobi vanishing condition the sum of the residues of the fraction of two monic polynomials

$$\frac{\prod_{i=1}^{n-1} (w - \lambda_i^n)}{\prod_{i=0}^{n-1} (w - z_i^n)}. \quad (52)$$

equals one. The results of simulation can be found in Figure 4 and are essentially in agreement with those of Figure 3, the Vandermonde methods (44) and (50) giving only slightly worse results than the product (40) and J_n matrix eigenvectors (42) methods. The eigenvalues were computed with the J_n method.

Remark 18. In the $[n/n]$ case the corresponding Euler-Jacobi vanishing condition reads

$$\sum_{j=0}^{n-1} \frac{\rho_j^n}{s_0} = \sum_{i=0}^{n-1} (z_i^n - \lambda_i^n).$$

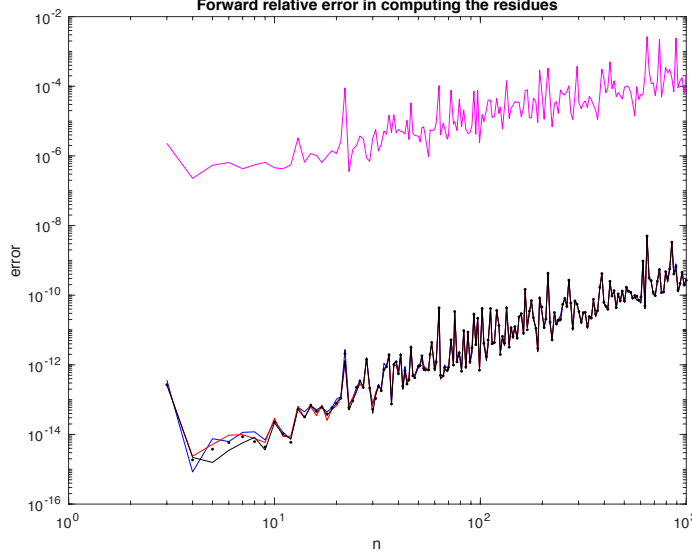


Figure 3: Forward relative error of the residues for complex Gaussian white noise, computed using the product (40) (red), eigenvectors of the J_n matrix (42) (black), overdetermined Vandermonde system (44) (blue), square Vandermonde system (50) (black dots) and the derivative formula (51) (magenta).

6.4 A graphical test for correctness of the residues computation

In Figure 5 we plot the absolute value of the residues $|\rho_j^n|$ against the poles' radial positions $|z_j^n|$ for complex Gaussian white noise. The residues are computed using five of the above methods (again, we did not plot the results for eq. (41) as they are very similar to those for eq. (40)). The eigenvalues were computed with the J_n method. For $|z_j^n| \geq 1$ —where the magnitude of the residues sharply decreases—the differences between the Vandermonde methods and the other methods that give comparable results for the forward and global error become evident. The flattening of the magnitude of the residues on the right hand side depends on the method used and is clearly an artifact: (relatively) large residues for large $|z_j^n|$'s cause the signal reconstructed using eq. (47) to explode exponentially. More in detail: the amplitude of an addendum of the signal (47) associated with a pole z_j^n equals approximately $\sigma |\rho_j^n| |z_j^n|^{(k-1)}$, where σ is the noise amplitude. If $|z_j^n| < 1$, the signal decays exponentially and the corresponding residue mostly affects the first terms of the series s_k ; if instead $|z_j^n| > 1$, the corresponding residue mostly affects the the last terms of \mathbf{s} . The amplitude of an addendum of the signal associated with a pole z_j^n outside the

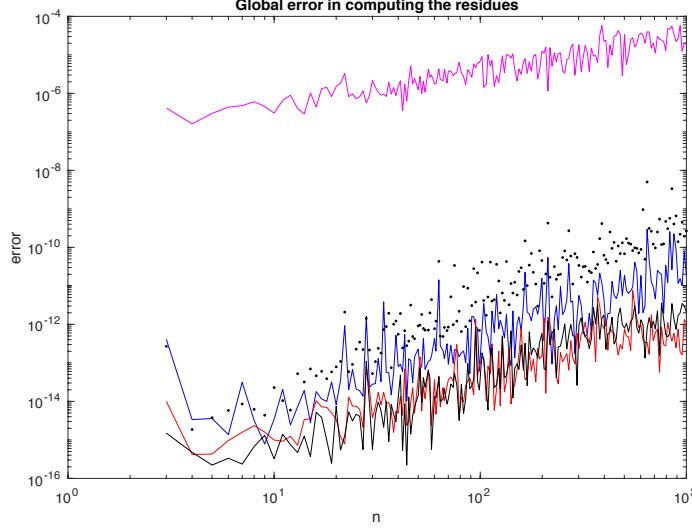


Figure 4: Global error of the residues for complex Gaussian white noise, computed using the product (40) (red), eigenvectors of the J_n matrix (42) (black), overdetermined Vandermonde system (44) (blue), square Vandermonde system (50) (black dots) and the derivative formula (51) (magenta).

unit disc should therefore be bounded, i.e.

$$|\rho_j^n| |z_j^n|^{2(n-1)} \lesssim \sigma. \quad (53)$$

Writing $|z_j^n| = 1 + \delta_j$ with $\delta_j \ll 1$ we can approximate (53) by

$$\ln |\rho_j^n| \lesssim -2(n-1)\delta_j + \text{const},$$

meaning that we expect the residues of poles outside the unit circle to decay exponentially with the pole's distance from the unit circle.

From Figure 5 it clearly appears that eq. (44) –which follows the fall of the residues for 324 orders of magnitude to the `Matlab` hard zero– is the most effective numerically, while eq. (51) gives the worst result. Eq. (50) gives results somehow similar to those of eq. (44), but while the residues obtained using eq. (44) lie on a straight line coinciding with the bound (53), the line formed by the residues calculated using eq. (50) is (slightly) curved upward.

6.5 Computing backward error by reconstructing of signal

A comparison of the original data sequence \mathbf{s} with the one reconstructed from the calculated poles and their residues by formula (47), denoted by $\tilde{\mathbf{s}}$, can also serve as a test of the reliability of the procedure. From a numerical perspective,

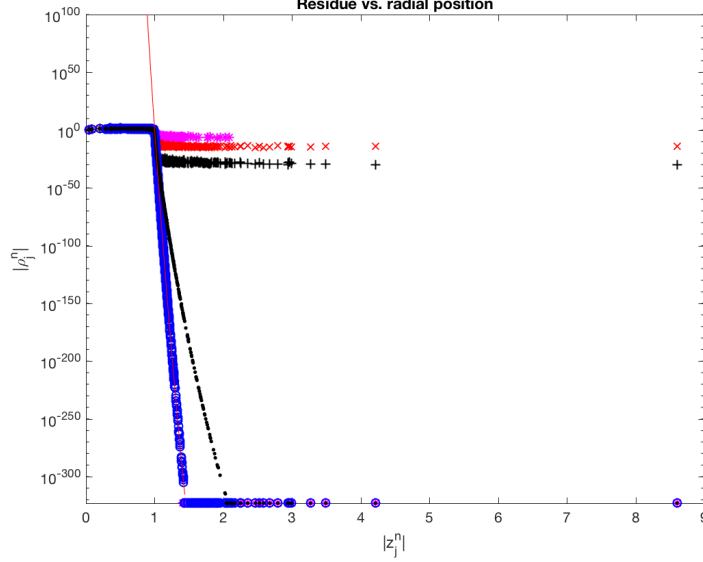


Figure 5: Comparison of the magnitude of the residues for Gaussian white noise vs. radial position for $n = 1000$, using (40) (red \times), (42) (black $+$), (44) (blue \circ), (50) (black dots) and (51) (magenta $*$); 200 different realizations of the data sequence s were used. To guide the eye, eq. (53) is plotted as a red line. The bottom horizontal line of the residues corresponds to $|\rho_j^n| = 10^{-324}$, which is a hard zero in `Matlab`.

$\|\mathbf{s} - \widetilde{\mathbf{s}}\| / \|\mathbf{s}\|$ is a measure of the backward error in computing the eigenvalues and poles.

The results for the four methods given by equations (40), (42), (44), and (50) applied to complex Gaussian white noise are compared in Figure 6. In all cases the signal was reconstructed using equation (48). The `Matlab` function `eig` was again used to compute poles as eigenvalues of the J_n matrix. Only eq. (44) gives a good reconstruction (the error goes approximately as $3 \cdot 10^{-17} n^{3/2}$). Due to the explosion of the reconstruction discussed in Section 6.4, other methods of computing the residues not only give for $n = 1000$ backward errors of order exceeding 10^{50} , but for some noise realizations the reconstruction of the signal fails completely. This indicates a definite advantage of the (44) method.

7 Conclusions

We have presented two numerical method to calculate the poles of Padé approximations of data series and six methods to calculate the residues. Using them, we have been able to calculate on a common desktop PC poles and zeros of noisy series up to 2×10^4 data points. We also provided tools for checking

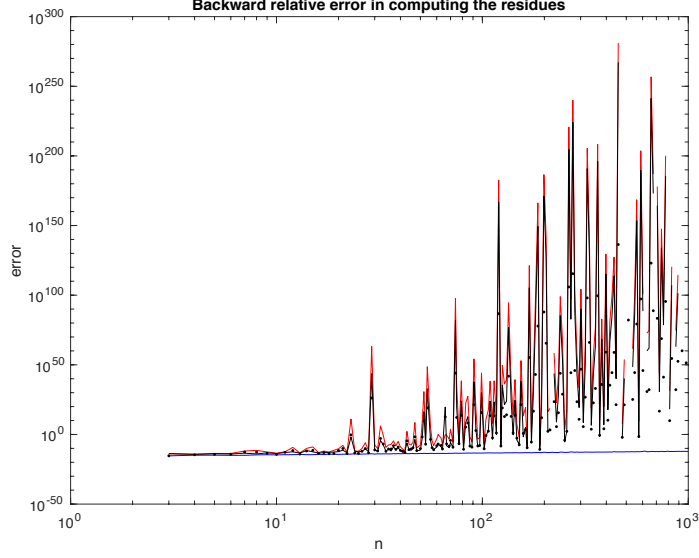


Figure 6: Backward relative error of the whole procedure for complex Gaussian white noise, computed using the product (40) (red), the eigenvectors of the J_n matrix (42) (black), the overdetermined Vandermonde system (44) (blue), and the square Vandermonde system (50) (black dots).

the numerical stability of the algorithms on the given data series. The choice between the methods to calculate the poles appears to be not obvious, and in each case the backward and forward error should be compared. A comparison of the different methods to calculate the residues of the poles indicates instead that eq. (44) is the best choice for numerical implementation. In the case the zeros of the Padé approximation are sought instead or beside the residues of the poles, they are easily accessible by the J_n matrix method.

Acknowledgments

We would like to thank Christian Schröder for many fruitful discussions and an essential help in implementing some of the numerical algorithms.

References

- [1] M. M. Azencott R. and W. J. Automated diagnosis for helicopter engines and rotating parts.

- [2] P. Barone. A new transform for solving the noisy complex exponentials approximation problem. *Journal of Approximation Theory*, 155(1):1–27, 2008.
- [3] P. Barone. Estimation of a new stochastic transform for solving the complex exponentials approximation problem: Computational aspects and applications. *Digital Signal Processing*, 20:724–735, 2013.
- [4] P. Barone. On the universality of the distribution of the generalized eigenvalues of a pencil of hankel random matrices. *Random Matrices: Theory and Applications*, 2(01):1250014, 2013.
- [5] P. Barone and R. March. On the super-resolution properties of prony’s method. *Zeitschrift für angewandte Mathematik und Mechanik*, 76:177–180, 1996.
- [6] P. Barone and R. March. Some properties of the asymptotic location of poles of padé approximants to noisy rational functions, relevant for modal analysis. *Signal Processing, IEEE Transactions on*, 46(9):2448–2457, 1998.
- [7] B. Beckermann and G. Labahn. Fraction-free computation of matrix rational interpolants and matrix gcds. *SIAM Journal on Matrix Analysis and Applications*, 22(1):114–144, 2000.
- [8] D. Belkic and K. Belkic. In vivo magnetic resonance spectroscopy by the fast padé transform. *Physics in medicine and biology*, 51(5):1049–1076, 2006.
- [9] D. Bessis. Padé approximations in noise filtering. In *Proceedings of the Sixth International Congress on Computational and Applied Mathematics (Leuven, 1994)*, volume 66, pages 85–88, 1996.
- [10] D. Bessis and L. Perotti. Universal analytic properties of noise: introducing the j-matrix formalism. *Journal of Physics A: Mathematical and Theoretical*, 42(36):365202, 2009.
- [11] D. Bessis, L. Perotti, and D. Vrinceanu. Noise in the complex plane: open problems. *Numerical Algorithms*, pages 1–11, 2013.
- [12] D. L. Boley, F. T. Luk, and D. Vandevoorde. Vandermonde factorization of a hankel matrix. *Scientific computing (Hong Kong, 1997)*, pages 27–39, 1998.
- [13] W. Bryc, A. Dembo, and T. Jiang. Spectral measure of large random hankel, markov and toeplitz matrices. *The Annals of Probability*, pages 1–38, 2006.
- [14] T. Carleman. *Les Fonctions quasi analytiques: leçons professées au Collège de France*. Gauthier-Villars et Cie, 1926.

- [15] J.-D. Fournier and R. Bucarest. Statistical properties of the zeros of the transfer functions in signal processing. In *Chaos and Diffusion in Hamiltonian Systems: Proceedings of the Fourth Workshop in Astronomy and Astrophysics of Chamonix (France), 7-12 February 1994*, page 257. Atlantica Séguier Frontières, 1995.
- [16] J.-D. Fournier, G. Mantica, A. Mezincescu, and D. Bessis. Universal statistical behavior of the complex zeros of wiener transfer functions. *EPL (Europhysics Letters)*, 22(5):325, 1993.
- [17] M. Froissart. Approximation de padé: application à la physique des particules élémentaires. *RCP, Programme*, 25:1–13, 1969.
- [18] O. Holtz and M. Tyaglov. Structured matrices, continued fractions, and root localization of polynomials. *SIAM Review*, 54(3):421–509, 2012.
- [19] O. Humaidi and W. T. Chu.
- [20] C. G. J. Jacobi. Über die darstellung einer reihe gegebner werthe durch eine gebrochne rationale function. *Journal für die reine und angewandte Mathematik*, 30:127–156, 1846.
- [21] L. S. Junior and I. D. P. Franca. Shocks in financial markets, price expectation, and damped harmonic oscillators. *arXiv preprint arXiv:1103.1992*, 2011.
- [22] B. Parlett.
- [23] L. Perotti, , D. Vrinceanu, and D. Bessis. Beyond the fourier transform: Signal symmetry breaking in the complex plane. *IEEE Signal Processing Letters*, 19(12):865–867, 2012.
- [24] L. Perotti, T. Regimbau, D. Vrinceanu, and D. Bessis. Identification of gravitational-wave bursts in high noise using Padé filtering. *Physical Review D*, 90:124047, 2014.
- [25] L. Perotti, D. Vrinceanu, and D. Bessis. Enhanced frequency resolution in data analysis. *American Journal of Computational Mathematics*, 3(03):242, 2013.
- [26] A. C. M. Ran and M. Wojtylak. Eigenvalues of rank one perturbations of unstructured matrices. *Linear Algebra Appl.*, 437:589–600, 2012.
- [27] M. A. Shayman. Pole placement by dynamic compensation for descriptor systems. *Automatica*.
- [28] H. Steinhaus. Über die wahrscheinlichkeit dafür, daß der konvergenzkreis einer potenzreihe ihre natürliche grenze ist. *Mathematische Zeitschrift*, 31(1):408–416, 1930.

- [29] J. J. Sylvester. Xxiii. a method of determining by mere inspection the derivatives from two equations of any degree. *The London and Edinburgh Philosophical Magazine and Journal of Science*, 16(101):132–135, 1840.
- [30] E. E. Tyrtysnikov. How bad are hankel matrices? *Numerische Mathematik*, 67(2):261–269, 1994.
- [31] H. Wall. *Analytic Theory of Continued Fractions*, by H. S. Wall,... D. Van Nostrand, 1948.
- [32] M.-C. Wu. Damped oscillations in the ratios of stock market indices. *EPL (Europhysics Letters)*, 97(4):48009, 2012.