

# Exploiting Model Sparsity in Adaptive MPC: A Compressed Sensing Viewpoint

Monimoy Bujarbaruah\*, Charlott Vallon\*

October 14, 2021

## Abstract

This paper proposes an Adaptive Stochastic Model Predictive Control (MPC) strategy for stable linear time-invariant systems in the presence of bounded disturbances. We consider multi-input, multi-output systems that can be expressed by a Finite Impulse Response (FIR) model. The parameters of the FIR model corresponding to each output are unknown but assumed *sparse*. We estimate these parameters using the Recursive Least Squares algorithm. The estimates are then improved using set-based bounds obtained by solving the Basis Pursuit Denoising [1] problem. Our approach is able to handle hard input constraints and probabilistic output constraints. Using tools from distributionally robust optimization, we reformulate the probabilistic output constraints as tractable convex second-order cone constraints, which enables us to pose our MPC design task as a convex optimization problem. The efficacy of the developed algorithm is highlighted with a thorough numerical example, where we demonstrate performance gain over the counterpart algorithm of [2], which does not utilize the sparsity information of the system impulse response parameters during control design.

## 1 Introduction

If the true dynamics of a system are uncertain, Adaptive Control strategies have been applied for meeting control objectives and ensuring system stability [3–5], typically under no output and input constraints. The uncertainty in these systems can be primarily attributed to two factors: (i) model uncertainty (e.g. modeling mismatch and inaccuracies), and (ii) exogenous disturbances (e.g. sensor noise). More recently, utilizing tools from classical Adaptive Control, Adaptive Model Predictive Control (MPC) [2, 6–8] has established itself as a promising approach for control of uncertain systems subject to input and output constraints. For linear systems specifically, the literature on Adaptive MPC has extensively focused on either robust or probabilistic satisfaction of such imposed constraints on the system, using either state-space or input-output modeling.

---

\*Authors contributed equally to this work. The authors are with the MPC Lab, UC Berkeley, USA.  
E-mails: {monimoyb,charlott}@berkeley.edu

In [9, 10] additive model uncertainties are considered with known system matrices, and imposed state and input constraints are robustly satisfied for all such realizable uncertainties. In [7, 11, 12] robust state-input constraint satisfaction is extended to include both unknown system dynamics matrices and additive disturbances. The approach introduced in [10] is also suited for satisfaction of probabilistic chance constraints on system states. Furthermore, the work in [13–15] uses Gaussian Process (GP) regression for real-time learning of an uncertain model and satisfies probabilistic state constraints with a traditional stochastic MPC [16] controller. Although such state-space modeling based Adaptive MPC controllers have proven to be effective, they involve construction of positive invariant sets [17, 18], which can become computationally cumbersome. As a consequence, input-output modeling of systems has been opted in literature for proposing computationally efficient Adaptive MPC algorithms for certain applications (e.g. for stable, slow systems).

Adaptive MPC algorithms using input-output modeling of the system are presented in [2, 6, 19, 20], both for robust and probabilistic satisfaction of imposed input-output constraints. The works of [6, 19, 20] deal with modeling errors in the Finite Impulse Response (FIR) domain, in the presence of a bounded additive disturbance, and prove recursive feasibility and stability [21, Chapter 12] of the proposed robust Adaptive MPC approaches. These ideas are extended in [2], where a recursively feasible adaptive stochastic MPC algorithm is presented, demonstrating satisfaction of probabilistic output constraints and hard input constraints. The proposed approach in [2] obtains a better performance compared to [6] measured in terms of closed-loop cost, owing to the allowance of output constraint violations with a certain (low) probability.

In this paper, we build on the work of [2, 6], and propose an *Adaptive Stochastic MPC* algorithm that considers probabilistic output constraints and hard input constraints for a Multi Input Multi Output (MIMO) system. Similar to [2], we consider an uncertain FIR model of the system that is subject to bounded disturbances with known mean and variance. The support for the set of all possible models, which we call the Feasible Parameter Set (FPS), is adapted at each timestep using a set membership based approach. In contrast to previous work [2], we additionally consider that the impulse response parameters corresponding to each output are sparse. Such sparse impulse response modeling can be motivated by [22, 23] for MIMO systems. Our goal is to utilize this additional sparsity information to demonstrate performance improvement over the algorithm in [2]. Our contributions can be summarized as follows:

- Offline before the control process, we compute a set containing all possible values of the unknown sparse FIR vectors corresponding to each output, with a very *high* probability. This set, which we call the Feasible Sparse Parameter Set (FSPS) is computed using the Basis Pursuit Denoising [1] problem.
- Online during the control process, we obtain a point estimate of the unknown system inside the intersection of the FPS and the FSPS, using a Recursive Least Squares (RLS) estimator. Using this estimated system, we propagate our nominal predicted outputs used in the MPC controller objective function to improve performance. Simultaneously, we ensure satisfaction of the output chance constraints for the unknown true system.

- Through numerical simulations, we demonstrate that our algorithm exhibits better performance than the algorithm presented in [2].

## 2 Problem Description

### 2.1 System Modeling and Control Objective

We consider stable linear time-invariant systems described by a Finite Impulse Response (FIR) model of the form

$$y(t) = H_a \Phi(t) + w(t), \quad (1)$$

where the number of inputs and outputs considered is  $n_u$  and  $n_y$ , respectively. The FIR regressor vector of length  $m$  is denoted by  $\Phi(t) \in \mathbb{R}^{n_u m} = [u_1(t-1), \dots, u_1(t-m), \dots, u_{n_u}(t-1), \dots, u_{n_u}(t-m)]^\top$ , where  $u_i(t)$  denotes the  $i^{\text{th}}$  input at time  $t$ . The matrix  $H_a \in \mathbb{R}^{n_y \times n_u m}$  is a matrix comprising of the impulse response coefficients that relate inputs to the outputs of the system. The disturbance vector  $w(t) \in \mathbb{R}^{n_y}$  is assumed to be a zero-mean random variable with a known variance, component-wise bounded as

$$|w_j(t)| \leq \bar{w}_j, \forall j = 1, 2, \dots, n_y, \quad (2)$$

where the  $\bar{w}_j$  are assumed known. Finally,  $y(t) \in \mathbb{R}^{n_y}$  is the measured output of the system.

Our goal is to control the output  $y(t)$  while satisfying input and output constraints of the form

$$Cu(t) \leq g, \quad t = 0, 1, \dots, \quad (3a)$$

$$\mathbb{P}\{Ey(t) \leq p\} \geq 1 - \epsilon, \quad t = 0, 1, \dots, \quad (3b)$$

where  $\epsilon \in (0, 1)$  is the maximum allowed probability of output constraint violation. Following [2], we consider a single linear output chance constraint, meaning  $E$  is a row vector and  $p \in \mathbb{R}$ . Notice that joint (linear) chance constraints (3b) can be reformulated into a set of individual (linear) chance constraints using Bonferroni's inequality, and can therefore also be addressed by our proposed framework.

**Assumption 1.** *We assume that each row of impulse response matrix  $H_a$  is sparse. Without loss of generality, we further assume that the sparsity index for each row, i.e. the number of nonzero entries, is at most  $\bar{k}$ .*

### 2.2 Method Outline

We assume in this paper that the system matrix  $H_a$  in (1) is unknown. This paper proposes a method for identifying this unknown system matrix  $H_a$ , and using the estimate in a robust control formulation to safely regulate the constrained uncertain system. Our proposed method uses the following steps:

1. **Offline** before the control process begins: Use  $q$  number of collected input sequence regressors  $[\Phi_1, \Phi_2, \dots, \Phi_q]$  to compute a set  $\mathcal{B}(H_a)$ , called the Feasible Sparse Parameter Set (FSPS). We compute this set via the Basis Pursuit Denoising problem [1]. The FSPS contains the true unknown model  $H_a$ , with a *high* probability.

2. Online during the control process: At each timestep  $t$ ,
  - (a) Obtain the current output measurement  $y(t)$  and, using the known disturbance bounds (2), update the time-varying set  $\mathcal{F}(t)$ , which we call the Feasible Parameter Set (FPS). The FPS is a set guaranteed to contain the true model  $H_a$ .
  - (b) Use the previous applied control inputs and measured outputs to construct an estimate  $\mu_a(t)$  of  $H_a$ , lying in the intersection of  $\mathcal{F}(t)$  and the offline-computed FSPS. The estimate is constructed using the Recursive Least Squares method.
  - (c) Compute the input sequence that minimizes the objective function obtained with  $\mu_a(t)$  while satisfying the input and output constraints (3) for all models in the FPS  $\mathcal{F}(t)$ . Apply the first computed control input and continue to step 2a.

In the following Section 3, we discuss steps 1-2(b). Step 2(c) is detailed in Section 4.

### 3 Model Estimation and Adaptation

We approximate system (1) with the form

$$y(t) = H(t)\Phi(t) + w(t), \quad (4)$$

where our model  $H(t) \in \mathbb{R}^{n_y \times n_u m}$  is a random variable whose support we estimate online during the control process from the output measurements. The support for the set of all possible models  $H(t)$  consistent with the recorded system data, which we call the Feasible Parameter Set (FPS), is guaranteed to contain the true model  $H_a$ . Based on the knowledge that system (1) has sparse impulse response properties, we also construct a Feasible Sparse Parameter Set (FSPS) offline by solving the Basis Pursuit Denoising Problem. During control run-time, a point estimate of  $H_a$  is then computed to lie in the intersection of the offline-computed FSPS and the online-updated FPS. This estimate is then used in the control design. We decouple the offline and online phases of this design process and delineate the steps in detail in the following sections.

#### 3.1 Offline: Construct the Feasible Sparse Parameter Set

The Feasible Sparse Parameter Set (FSPS), denoted by  $\mathcal{B}(H_a)$ , is a function of the (unknown) true system response  $H_a$ , and is synthesized *offline* utilizing the sparsity aspect of system responses from Assumption 1. Proposition 1 clarifies how this set is synthesized. We first introduce the following definition.

**Definition 1** (Restricted Isometry Property (RIP) [24]). *A matrix  $\mathcal{A}$  satisfies the Restricted Isometry Property (RIP) of order  $\bar{k}$ , with constant  $\delta \in [0, 1)$ , if*

$$(1 - \delta)\|x\|_2^2 \leq \|\mathcal{A}x\|_2^2 \leq (1 + \delta)\|x\|_2^2, \quad \forall x \text{ } \bar{k} \text{ sparse.}$$

*The order- $\bar{k}$  restricted isometry constant  $\delta_{\bar{k}}(\mathcal{A})$  is the smallest number  $\delta$  such that the above inequality holds.*

**Proposition 1.** Suppose we collect  $q$  output measurements offline. Suppose  $\mathbf{y}_i = \mathcal{A}H_{a_i}^\top + \mathbf{w}_i$  for  $i = 1, 2, \dots, n_y$ , where each  $\mathbf{y}_i \in \mathbb{R}^{q \times 1}$  and  $\mathcal{A} = [\Phi_1, \Phi_2, \dots, \Phi_q]^\top \in \mathbb{R}^{q \times n_{um}}$ ,  $\mathbf{w}_i \in \mathbb{R}^{q \times 1}$  with  $\|\mathbf{w}_i\|_2 \leq \sqrt{q}\bar{w}_i$ , and  $H_{a_i} \in \mathbb{R}^{1 \times n_{um}}$  denotes the  $i^{\text{th}}$  row of  $H_a$ . If  $\delta_{2\bar{k}}(\mathcal{A}) < \sqrt{2} - 1$ , then any solution  $\hat{\mathbf{x}}$  to the Basis Pursuit Denoising optimization problem

$$\begin{aligned} \min \quad & \|\mathbf{x}\|_1 \\ \text{s.t.} \quad & \|\mathcal{A}\mathbf{x} - \mathbf{y}_i\|_2 \leq \sqrt{q}\bar{w}_i, \text{ (denoted as } \mathcal{B}(H_{a_i})) \end{aligned} \quad (5)$$

satisfies  $\|\hat{\mathbf{x}} - H_{a_i}\|_2 \leq \bar{C}\sqrt{q}\bar{w}_i$  for some constant  $\bar{C} \in \mathbb{R}$ , and for all  $i = 1, 2, \dots, n_y$ .

*Proof.* See [25, Theorem 3.5.1]. The proof follows from the known result of [26, Theorem 1.1], with relaxation of  $\delta_{4\bar{k}}(\mathcal{A}) < \frac{1}{4}$  to  $\delta_{2\bar{k}}(\mathcal{A}) < \sqrt{2} - 1$ .  $\square$

The set  $\mathcal{B}(H_a)$  is obtained as  $\mathcal{B}(H_a) = [\mathcal{B}(H_{a_1}), \dots, \mathcal{B}(H_{a_{n_y}})]^\top$ . Note that this set  $\mathcal{B}(H_a)$  is synthesized offline, as the regressor vectors  $[\Phi_1, \Phi_2, \dots, \Phi_q]$  are required to come from a Gaussian distribution in order to ensure the RIP property of each matrix  $\mathcal{A}_i$  for  $i = 1, 2, \dots, n_y$ . Such Gaussian inputs are not always allowable during control with system constraints (3). Details on our choice of these offline regressors  $[\Phi_1, \Phi_2, \dots, \Phi_q]$  to ensure  $\delta_{2\bar{k}}(\mathcal{A}) < \sqrt{2} - 1$  with *high* probability are described in the Appendix.

**Remark 1.** As pointed out in the proof of [25, Theorem 3.5.1], a possible choice of the numerical constant  $\bar{C}$  in Proposition 1 is  $\bar{C} = \frac{2}{\sqrt{\lambda}}$ , with  $\sqrt{\lambda} = \frac{1 - \delta_{2\bar{k}}(1 + \sqrt{2})}{\sqrt{2(1 + \delta_{2\bar{k}})}}$ . However, since  $\delta_{2\bar{k}}$  is not exactly known, computing  $\bar{C}$  and hence  $\mathcal{B}(H_a)$  accurately is not possible. We see that  $\bar{C} \rightarrow 2\sqrt{2}$  as  $\delta_{2\bar{k}} \rightarrow 0$ . Therefore offline regressor vectors  $[\Phi_1, \Phi_2, \dots, \Phi_q]$  should be chosen to ensure  $\delta_{2\bar{k}} < \bar{\delta}$ , with  $\bar{\delta} \ll \sqrt{2} - 1$ . Under such choice of the offline regressors as shown in the Appendix, we pick the constant  $\bar{C} \approx 2\sqrt{2}$ .

## 3.2 Online: Update the Feasible Parameter Set

Following [2, 6], a set-membership identification method is used for updating the time-varying FPS, denoted by  $\mathcal{F}(t)$ . The initialization of  $\mathcal{F}(0)$  is done considering the fact that the true system (1) is stable. We update the FPS as given by

$$\mathcal{F}(t) = \mathcal{F}(t-1) \cap \{H(t) : H(t)\Phi(t) \leq y(t) + \bar{w}\} \cap \{H(t) : -H(t)\Phi(t) \leq -y(t) + \bar{w}\}, \quad (6)$$

where  $\bar{w} = [\bar{w}_1, \dots, \bar{w}_{n_y}]^\top$  is the bound of the additive disturbance given by (2). In order to bound the computational complexity of (6) over time, an alternative algorithm to compute (6) is presented in [6].

## 3.3 Online: Obtain Point Estimate $\mu_a(t)$

We rewrite (4) as

$$y(t) = \Phi(t)\mathbf{H}(t) + w(t),$$

where  $\Phi(t) \in \mathbb{R}^{n_y \times n_y n_{um}}$  and  $\mathbf{H}(t) \in \mathbb{R}^{n_y n_{um} \times 1}$  are shown in the Appendix. Furthermore, let  $\sigma_w^2$  be the variance of the disturbance  $w(t)$ . Let the initial prior mean and variance

estimates for true system be  $\mu_{\mathbf{a}}(0)$  and  $\sigma_{\mathbf{a}}^2(0)$  respectively. Now, the conditional mean and variance estimates, given measurements up to  $y(t)$ , can be obtained using the Recursive Least Squares method [27, Sec. (3.1)]. These estimates may differ from the true conditional distribution parameters, as  $w(t)$  is not necessarily assumed to be Gaussian.

We ensure that the mean point estimate  $\mu_{\mathbf{a}}(t)$  at any time instant  $t$  is chosen as a point contained in a set  $\mathcal{F}_p(t)$ , that is,  $\mu_{\mathbf{a}}(t) \in \mathcal{F}_p(t)$ , with

$$\mathcal{F}_p(t) = \mathcal{F}(t) \cap \mathcal{B}(H_a). \quad (7)$$

One way of obtaining such a constrained estimate of  $H_a$  in  $\mathcal{F}_p(t)$  is to project the mean. As shown in [2], this is achieved by solving

$$\mu_{\mathbf{a}}(t) = \arg \min_{X \in \mathcal{F}_p(t)} (X - \mu_{\mathbf{a}}(t))^{\top} M (X - \mu_{\mathbf{a}}(t)), \quad (8)$$

where  $M = (\sigma_{\mathbf{a}}^2(t))^{-1} \succ 0$ . The mean in matrix form, that is,  $\mu_{\mathbf{a}}(t) \in \mathbb{R}^{n_y \times n_u m}$  is obtained by reorganizing  $\mu_{\mathbf{a}}(t) \in \mathbb{R}^{n_y n_u m \times 1}$  into  $n_u m$  columns. This provides the minimum mean squared error estimate (with any linear estimator) of the true system  $H_a$ . Note that (8) is a convex optimization problem, as the set  $\mathcal{F}_p$  in (7) is an intersection of two convex sets. We can further obtain a polytopic  $\mathcal{F}_p$  by outer approximation of  $\mathcal{B}(H_a)$  with the infinity norm.

**Remark 2.** In [2] the set  $\mathcal{F}_p(t)$  in (7) is set as the FPS  $\mathcal{F}(t)$  for all timesteps  $t \geq 0$ . Thus [2] does not utilize the sparsity information of rows of  $H_a$  to construct the nominal point model estimate  $\mu_{\mathbf{a}}(t)$ . The construction of  $\mathcal{B}(H_a)$  in (7) with our proposed approach utilizes such sparsity information from Assumption 1. However, this comes with additional offline computation of  $\mathcal{B}(H_a)$ , as shown in Proposition 1.

## 4 Control Synthesis

### 4.1 Prediction Model

Let  $N > m$  be the prediction horizon for a predictive controller for system (1). We denote the predicted system outputs at time  $t$  by  $y(k|t) = H(t)\Phi(k|t) + w(k)$ , for some  $H(t) \in \mathcal{F}(t)$ . Similarly,  $\Phi(k|t)$  denotes the *predicted regressor vector*, for  $k \in \{t+1, \dots, t+N\}$ , and is computed as

$$\Phi(k|t) = W\Phi(k-1|t) + Zu(k-1|t), \quad (9)$$

where, the matrices  $W$  and  $Z$  are as reported in the Appendix. With these predicted regressor vectors, the estimated system  $\mu_{\mathbf{a}}(t)$  obtained in Section 3.3 is used to propagate the nominal predicted outputs as  $\hat{y}(k+1|t) = \mu_{\mathbf{a}}(t)\Phi(k+1|t)$ , for all  $k \in \{t, \dots, t+N-1\}$ . This is shown in the optimization problem presented in Section 4.3.

### 4.2 Reformulation of Chance Constraints

Within each prediction horizon we enforce  $\mathbb{P}\{Ey(k|t) \leq p\} \geq 1 - \epsilon$ , where  $y(k|t)$  is a function of some  $H(t) \in \mathcal{F}(t)$ . Therefore, to ensure satisfaction of (3b) despite uncertainty in the true system, we must satisfy the constraint for all  $H(t) \in \mathcal{F}(t)$ . Using the theory of

distributionally robust optimization [28, 29], we can conservatively approximate the output chance constraints (3b) as

$$\kappa_\epsilon \sqrt{\bar{\Phi}^\top(k|t)\Gamma\bar{\Phi}(k|t) + \Phi^\top(k|t)\bar{E}\mathbf{H}(t) - p} \leq 0, \quad \forall H(t) \in \mathcal{F}(t), \quad (10)$$

where we have  $k \in \{t+1, \dots, t+N\}$ ,  $\kappa_\epsilon = \sqrt{\frac{1-\epsilon}{\epsilon}}$  and  $\bar{\Phi}(k|t) = [\Phi^\top(k|t) \quad 1 \quad 1]^\top$ . Here,  $\Gamma \succeq 0$  is an appended covariance matrix shown in the Appendix. As  $\mathcal{F}(t)$  is a polytope, (10) can be succinctly written as

$$\kappa_\epsilon \sqrt{\bar{\Phi}^\top(k|t)\Gamma\bar{\Phi}(k|t) + \Phi^\top(k|t)\bar{E}f^j(t) - p} \leq 0, \quad (11)$$

where  $f^j(t)$  denote the vertices of the polytope  $\mathcal{F}(t)$ .

**Remark 3.** *The reformulated chance constraints (11) are robustly satisfied for all  $H(t) \in \mathcal{F}(t)$ , and only the choice of the point model estimate  $\mu_a(t)$  depends on the set  $\mathcal{B}(H_a)$ , as shown in (7). Hence, satisfaction of (3b) is guaranteed by (11), despite  $\mathbb{P}(H_a \in \mathcal{B}(H_a)) \neq 1$ .*

### 4.3 MPC Problem

We solve the following optimization problem for given weight matrices  $Q \in \mathbb{R}^{n_y \times n_y}$ ,  $S \in \mathbb{R}^{n_u \times n_u} \succ 0$ :

$$\begin{aligned} \min_{U(t)} \quad & \sum_{k=t}^{t+N-1} [\hat{y}^\top(k|t)Q\hat{y}(k|t) + u^\top(k|t)Su(k|t)] + \hat{y}^\top(t+N|t)Q\hat{y}(t+N|t) \\ \text{s.t.} \quad & \hat{y}(k+1|t) = \mu_a(t)\Phi(k+1|t), \\ & \hat{y}(t|t) = y(t), \\ & Cu(k|t) \leq g, \\ & \Phi(t+N|t) = W\Phi(t+N|t) + Zu(t+N-1|t), \\ & \kappa_\epsilon \sqrt{\bar{\Phi}^\top(k+1|t)\Gamma\bar{\Phi}(k+1|t) + \Phi^\top(k+1|t)\bar{E}f^j(t)} \leq p, \\ & \forall k = t, \dots, t+N-1, \\ & \forall f^j(t) \in \text{vertex}(\mathcal{F}(t)), \mu_a(t) \in \mathcal{F}(t) \cap \mathcal{B}(H_a), \end{aligned} \quad (12)$$

where  $U(t) = [u(t|t)^\top, u(t+1|t)^\top, \dots, u(t+N-1|t)^\top]^\top$ , and the regressor  $\Phi(k|t)$  is as in (9). We have included the terminal constraint on the regressor vector as given in [6]

$$\Phi(t+N|t) = W\Phi(t+N|t) + Zu(t+N-1|t). \quad (13)$$

This means the terminal regressor corresponds to a steady state (i.e. the last  $m$  control inputs in a horizon are kept constant). Problem (12) is a convex optimization problem and can be solved with existing solvers. After solving (12), we apply the first input

$$u(t) = u^*(t|t) \quad (14)$$

to system (1) in closed-loop. We then re-solve (12) at timestep  $t+1$  with new estimated data  $\mu_a(t+1)$  and  $\mathcal{F}(t+1)$ . This yields a receding-horizon control scheme. The resulting algorithm is summarized in Algorithm 1.

---

**Algorithm 1** Adaptive Stochastic MPC: Sparse-FIR MIMO Systems

---

**Initialize:**  $\mathcal{F}(0), \mu_{\mathbf{a}}(0), \sigma_{\mathbf{a}}(0)$ .

**Inputs:**  $q, \bar{w}, \bar{k}, t_{\text{end}}$

*begin Basis Pursuit Denoising (offline)*

1: Construct offline regressors  $[\Phi_1, \Phi_2, \dots, \Phi_q]$  such that operator  $\mathcal{A}$  in Proposition 1 satisfies  $\delta_{2\bar{k}}(\mathcal{A}) < \bar{\delta} \ll \sqrt{2} - 1$ ;

2: Solve (5) for  $i = 1, 2, \dots, n_y$  to obtain the FSPS  $\mathcal{B}(H_a)$ ;

*end Basis Pursuit Denoising*

*begin MPC control process (online)*

3: **for** timestep  $1 \leq t \leq t_{\text{end}}$  **do**

4: Obtain  $y(t)$  and update the FPS  $\mathcal{F}(t)$  using (6);

5: Estimate mean and variance  $\mu_{\mathbf{a}}(t)$  and  $\sigma_{\mathbf{a}}^2(t)$  with RLS estimator. Project the mean with (8) to the set  $\mathcal{F}_p(t)$ ;

6: Solve (12) and apply  $u(t) = u^*(t|t)$  to system (1);

7: **end for**

---

**Theorem 1.** Consider Algorithm 1 and the receding horizon closed-loop control law (14) applied to system (1) after solving optimization problem (12). If the optimization problem (12) is feasible at timestep  $t = 0$ , then it is feasible at all subsequent timesteps  $0 \leq t \leq t_{\text{end}}$ .

*Proof.* Let (12) be feasible at timestep  $t$  and let the corresponding optimal input sequence be  $U^*(t) = [u^*(t|t)^\top, u^*(t+1|t)^\top, \dots, u^*(t+N-1|t)^\top]^\top$ . After applying control (14) in closed-loop to (1), consider a candidate open loop control sequence at the next timestep as

$$U(t+1) = [u^*(t+1|t)^\top, \dots, u^*(t+N-1|t)^\top, u^*(t+N-1|t)^\top]^\top. \quad (15)$$

This candidate sequence (15) satisfies the input constraints (3a) and the terminal constraint (13) at  $(t+1)$ . So, using candidate sequence (15) and condition (13), we obtain

$$\Phi(k|t+1) = \Phi^*(k|t), \forall k \in \{t+2, \dots, t+N\}, \quad (16a)$$

$$\Phi(t+N+1|t+1) = \Phi^*(t+N|t). \quad (16b)$$

To show feasibility of (12) at  $(t+1)$ , we finally must ensure that (11) satisfied with (15) at  $(t+1)$ . That is, we require for all  $k \in \{t+2, \dots, t+N+1\}$

$$\kappa_\epsilon \sqrt{\bar{\Phi}^\top(k|t+1) \Gamma \bar{\Phi}(k|t+1) + \Phi^\top(k|t+1) \bar{E} f^j(t+1) - p} \leq 0, \quad (17)$$

for all  $f^j(t+1) \in \mathcal{F}(t+1)$  vertices. Now, for the chosen input sequence (15), by using (13) and (16), condition (17) can be expressed as

$$\kappa_\epsilon \sqrt{\bar{\Phi}^{*\top}(k|t) \Gamma \bar{\Phi}^*(k|t) + \Phi^{*\top}(k|t) \bar{E} f^j(t+1) - p} \leq 0, \quad (18)$$

for all  $k \in \{t+2, \dots, t+N\}$ . We can now guarantee that (18) will be satisfied at timestep  $(t+1)$  with (15). This is due to the observation that feasible parameter set follows  $\mathcal{F}(t) \supseteq \mathcal{F}(t+1)$  as new cuts (6) are introduced at each timestep. So vertices  $f^j(t+1)$  at timestep  $(t+1)$  are convex combinations of the ones at  $t$ . Thus, control sequence (15) is feasible for (12) at timestep  $(t+1)$ . This completes the proof.  $\square$



## 5 Numerical Simulations

We present simulation results for a simple single-input, single-output system<sup>1</sup>. We compare the performance of our Algorithm 1 with that from the adaptive stochastic MPC presented in [2]. This performance is measured in terms of the expected closed-loop cost  $\mathbb{E}[\mathcal{V}]$ , where the closed-loop cost of any trajectory which is a function of the disturbance realization  $\bar{\mathbf{w}} = [w(0), w(1), \dots, w(t_{\text{end}})]$ , is given by

$$\mathcal{V}(\bar{\mathbf{w}}, \Phi(0), \mathcal{F}_p(0), \mu_{\mathbf{a}}(0), \sigma_{\mathbf{a}}(0)) = \sum_{t=0}^{t_{\text{end}}} y^\top(t) Q y(t) + (u^*(t))^\top S u^*(t),$$

where  $\mathcal{F}_p(\cdot)$  for Algorithm 1 is obtained as in (7), and for the algorithm in [2],  $\mathcal{F}_p(\cdot) = \mathcal{F}(\cdot)$ , as Remark 2 points out. For simulating both the algorithms, we use the parameters given in Table 1, with the true system response given as  $H_a = [-1, 0, 0, 0, 0, 0, 0, 0, -2, 0]$ , which is  $\bar{k} = 2$  sparse. We run 100 Monte Carlo simulations with both algorithms for 100 randomly

Table 1: Simulation Parameters

Parameter	Value	Parameter	Value
$m$	10	$N$	12
$t_{\text{end}}$	20	$w$	$U \sim [-0.1, 0.1]$
$n_u$	1	$n_y$	1
$\epsilon$	0.1	$\kappa_\epsilon$	3
$E$	1	$p$	5
$C$	$\text{diag}(1, -1)$	$g$	$[1, 1]^\top$
$Q$	$\text{diag}(20, 20)$	$S$	$\text{diag}(2, 2)$
$\mu_{\mathbf{a}}(0)$	$\mathbf{1}_{10 \times 1}$	$\sigma_{\mathbf{a}}^2(0)$	$0.1 \times \mathbb{I}_{10}$
$\Phi(0)$	$0.1 \times \mathbf{1}_{10 \times 1}$	$\mathcal{F}(0)$	$-\mathbf{3}_{10 \times 1} \leq H^\top \leq \mathbf{3}_{10 \times 1}$

chosen disturbance sequences  $\bar{\mathbf{w}}$ . We approximate the average closed-loop cost  $\mathbb{E}[\mathcal{V}]$  with the empirical average

$$\hat{\mathcal{V}}(\Phi(0), \mathcal{F}_p(0), \mu_{\mathbf{a}}(0), \sigma_{\mathbf{a}}(0)) = \frac{1}{100} \sum_{\tilde{m}=1}^{100} \mathcal{V}((\bar{\mathbf{w}})^{\star \tilde{m}}, \Phi(0), \mathcal{F}_p(0), \mu_{\mathbf{a}}(0), \sigma_{\mathbf{a}}(0)), \quad (19)$$

where  $(\cdot)^{\star \tilde{m}}$  represents the  $\tilde{m}^{\text{th}}$  Monte Carlo sample.

### 5.1 Cost Comparison

Fig. 1 shows the comparison of closed-loop cost expressed as  $\mathcal{V}(\bar{\mathbf{w}}, \Phi(0), \mathcal{F}_p(0), \mu_{\mathbf{a}}(0), \sigma_{\mathbf{a}}(0)) = \sum_{t=0}^{20} y^\top(t) Q y(t) + (u^*(t))^\top S u^*(t)$  for 100 different Monte Carlo draws of trajectories, obtained with Algorithm 1 and the algorithm in [2]. We see that the empirical average closed-loop cost obtained as (19) for Algorithm 1 is around 30% lower than the corresponding value obtained with [2]. This demonstrates performance gain by Algorithm 1 as a consequence of

<sup>1</sup>We choose this model for the sake of simulation simplicity. Sparsity in FIR models is well motivated typically for MIMO systems.

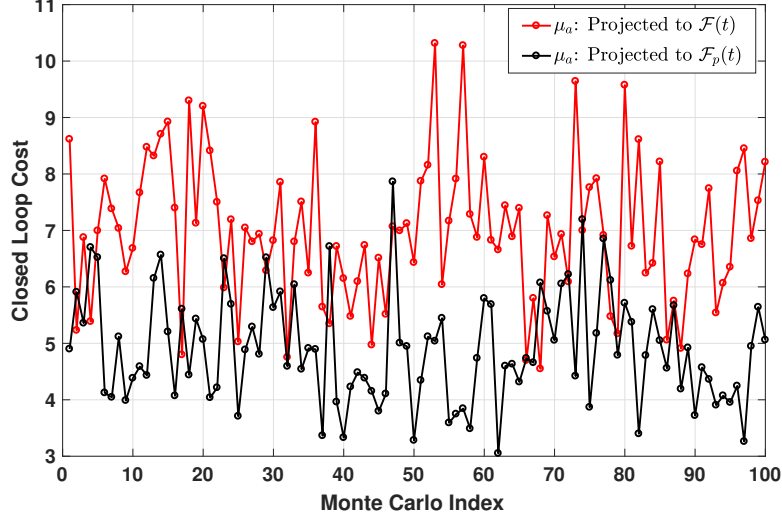


Figure 1: Closed-Loop Cost  $\sum_{t=0}^{20} y^\top(t)Qy(t) + (u^*(t))^\top Su^*(t)$  Along 100 Monte Carlo Simulation of Trajectories.

leveraging sparsity information of  $H_a$  via the FSPS set  $\mathcal{B}(H_a)$ . Furthermore, the closed-loop costs obtained for 90% out of the 100 trajectories were lower with Algorithm 1 compared to the corresponding cost obtained with [2]. This improvement in cost is explained in the next section via a closer look at the corresponding trajectories of the system.

## 5.2 Closed-loop Trajectory Comparison

In order to further analyze the performance gain seen above, we consider the difference in absolute value of the outputs along each one of 100 trajectories (Fig. 2). Specifically, we analyze

$$\Delta|y(t)| = |y^1(t)| - |y^2(t)|,$$

for  $t \in [0, 20]$ , where  $y^2(\cdot)$  and  $y^1(\cdot)$  denote the outputs obtained using Algorithm 1 and the algorithm in [2] respectively. We see from Fig. 2 that out of all 2000 timesteps simulated, only at about 30% of them is  $\Delta|y(t)| < 0$ . This implies that at about 70% of all timesteps simulated, Algorithm 1 resulted in outputs closer to the origin, as desired.

Fig. 3 further plots the difference in absolute value of corresponding closed-loop inputs, i.e.,

$$\Delta|u^*(t)| = |u^{*,1}(t)| - |u^{*,2}(t)|,$$

for  $t \in [0, 20]$  along all the 100 trajectories, where  $u^{*,2}(\cdot)$  and  $u^{*,1}(\cdot)$  denote the optimal closed-loop inputs obtained using Algorithm 1 and the algorithm in [2] respectively. At only 19% of the 2000 timesteps  $\Delta|u^*(t)| < 0$ , which indicates that the improved output regulation in Fig. 2 does not come at the cost of higher magnitudes of inputs. Thus, Fig. 2 and Fig. 3 combined, provides a comprehensive explanation of cost improvement in Fig. 1.

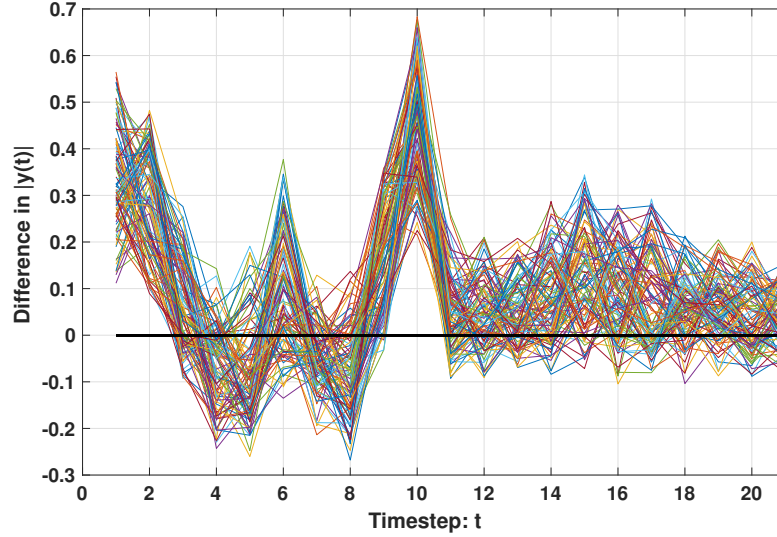


Figure 2: Difference in Closed-Loop Outputs  $\Delta|y(t)|$  Along 100 Monte Carlo Simulation of Trajectories.

## 6 Conclusions

We proposed an Adaptive Stochastic Model Predictive Control (MPC) algorithm for stable linear time-invariant MIMO systems expressed with an FIR model. The parameters of the FIR model corresponding to each output are sparse, but unknown. We solve a Basis Pursuit Denoising problem offline before the control process, which utilizes the sparsity information of the system model to give set based bounds containing the true system parameters. Online during control process, we estimate these parameters with the Recursive Least Squares algorithm and the estimates are refined using the set based bounds obtained offline. With Set Membership Methods, our MPC controller safely ensures satisfaction of all imposed constraints by the unknown true system. With a thorough numerical example we demonstrated performance gain over the algorithm of [2].

## Appendix

### Choosing Offline Regressors

Following [25, Theorem 3.3.4], there exists a numerical constant  $\tilde{C} > 0$  such that if  $\mathcal{A} = [\Phi_1, \Phi_2, \dots, \Phi_q]^\top \in \mathbb{R}^{q \times n_{um}}$  is a random matrix with entries independent  $\mathcal{N}(0, \frac{1}{q})$  random variables, with high probability,  $\delta_{2\bar{k}}(\mathcal{A}) < \bar{\delta} \ll \sqrt{2} - 1$ , provided

$$q \geq \frac{2\tilde{C}\bar{k} \log(\frac{n_{um}}{2\bar{k}})}{\bar{\delta}^2}. \quad (20)$$

Offline regressor vectors  $[\Phi_1, \Phi_2, \dots, \Phi_q]$  are thus chosen satisfying (20), with each entry of  $\mathcal{A}$  as  $\mathcal{N}(0, \frac{1}{q})$ . The constant  $\tilde{C}$  can be exactly found using properties of phase transition in compressed sensing [30].

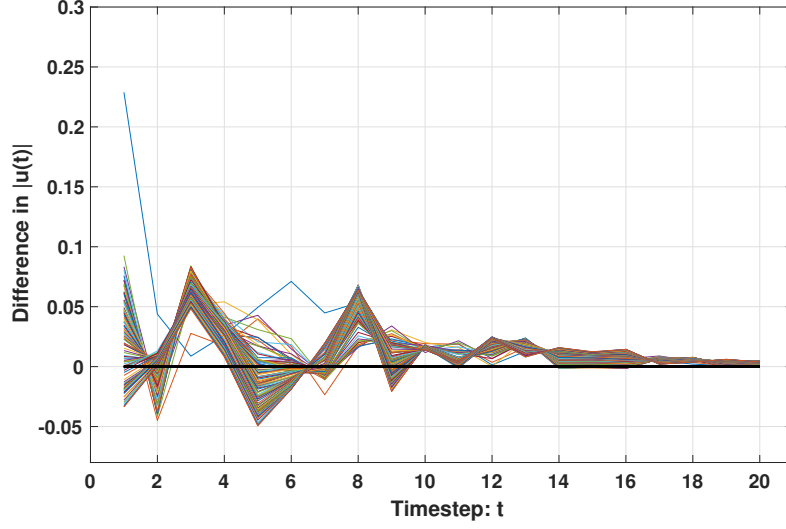


Figure 3: Difference in Optimal Closed-Loop Inputs  $\Delta|u^*(t)|$  Along 100 Monte Carlo Simulation of Trajectories.

## Matrix Notations

We define

$$\begin{aligned}\mathbf{H}(t) &= [H_1, H_2, \dots, H_{n_y}]^\top \in \mathbb{R}^{n_y n_u m \times 1}, \\ \Phi(t) &= \text{diag}(\Phi^\top(t), \Phi^\top(t), \dots, \Phi^\top(t)) \in \mathbb{R}^{n_y \times n_y n_u m},\end{aligned}$$

where  $H_i(t)$  denotes the  $i^{\text{th}}$  row of  $H(t)$ . Moreover,

$$\bar{q} = \begin{bmatrix} 0 & 0 & \cdots & 0 & 0 \\ 1 & 0 & \cdots & 0 & 0 \\ 0 & 1 & \cdots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \cdots & 1 & 0 \end{bmatrix} \in \mathbb{R}^{m \times m}$$

Based on this matrix  $\bar{q}$  we get:

$$\begin{aligned}W &= \text{diag}(\bar{q}, \bar{q}, \dots, \bar{q}) \in \mathbb{R}^{n_u m \times n_u m}, \\ z &= [1, 0, \dots, 0]^\top \in \mathbb{R}^m,\end{aligned}$$

which gives  $Z = \text{diag}(z, z, \dots, z) \in \mathbb{R}^{n_u m \times n_u}$ .

## Chance Constraint to Conic Optimization

For this part we repeat the derivation of [2]. To ensure satisfaction of (3b) with unknown true system  $H_a$ , we must satisfy them for all  $H(t) \in \mathcal{F}(t)$ . Thus  $H(t)$  is treated as a

deterministic variable (mean  $H(t)$  and variance  $\mathbf{0}$ ) while reformulating (3b) to equivalent convex constraints. Therefore, for all  $H(t) \in \mathcal{F}(t)$ , we have:

$$\begin{aligned} & \mathbb{P}\{EH(t)\Phi(k|t) + Ew(k) \leq p\} \geq 1 - \epsilon \\ \iff & \mathbb{P}\{[EH(t) \quad Ew(k)][\Phi^\top(k|t) \quad 1]^\top \leq p\} \geq 1 - \epsilon. \end{aligned}$$

We denote,

$$a_1^\top(t) = [EH(t) \quad Ew(k)], \implies \hat{a}_1^\top(t) = [EH(t) \quad 0],$$

where  $\hat{x}$  denotes the mean of a quantity  $x$ . Moreover,

$$\bar{\Phi}(k|t) = [\Phi^\top(k|t) \quad 1 \quad 1]^\top, \text{ and,}$$

$$d_1(t) = [a_1^\top(t) \quad -p]^\top, \implies \hat{d}_1(t) = [\hat{a}_1^\top(t) \quad -p]^\top.$$

From these we can derive the variance  $\Gamma$  of  $d_1(t)$  as

$$\begin{aligned} \Gamma &= \sigma^2(d_1(t)) = \sigma^2\left(\begin{bmatrix} \bar{E}\mathbf{H}(t) \\ Ew(k) \\ -p \end{bmatrix}\right), \text{ where } \bar{E} = \text{diag}(E, E, \dots, E), \\ &= \text{diag}(0, E\sigma_w^2 E^\top, 0) \succeq 0. \end{aligned}$$

As in [2], we assume no correlation between the disturbance and the impulse response distribution. Now, (3b) is reformulated into second-order cone constraints following [28]

$$\kappa_\epsilon \sqrt{\{\bar{\Phi}^\top(k|t)\Gamma\bar{\Phi}(k|t)\}} + \hat{d}_1^\top(t)\bar{\Phi}(k|t) \leq 0, \quad (21)$$

for all  $k \in \{t+1, \dots, t+N\}$ , where  $\kappa_\epsilon = \sqrt{\frac{1-\epsilon}{\epsilon}}$  for any bounded disturbance distributions  $w(k)$  with known moments. After simplifications, (21) can be written for all  $H(t) \in \mathcal{F}(t)$  as

$$\kappa_\epsilon \sqrt{\{\bar{\Phi}^\top(k|t)\Gamma\bar{\Phi}(k|t)\}} + \Phi^\top(k|t)\bar{E}\mathbf{H}(t) - p \leq 0.$$

## References

- [1] S. S. Chen, D. L. Donoho, and M. A. Saunders, "Atomic decomposition by basis pursuit," *SIAM review*, vol. 43, no. 1, pp. 129–159, 2001.
- [2] M. Bujarbaruah, X. Zhang, and F. Borrelli, "Adaptive MPC with chance constraints for FIR systems," in *2018 Annual American Control Conference (ACC)*, June 2018, pp. 2312–2317.
- [3] M. Krstic, I. Kanellakopoulos, and P. V. Kokotovic, *Nonlinear and adaptive control design*. Wiley, 1995.

- [4] P. A. Ioannou and J. Sun, *Robust adaptive control*. PTR Prentice-Hall Upper Saddle River, NJ, 1996, vol. 1.
- [5] S. Sastry and M. Bodson, *Adaptive control: stability, convergence and robustness*. Courier Corporation, 2011.
- [6] M. Tanaskovic, L. Fagiano, R. Smith, and M. Morari, “Adaptive receding horizon control for constrained mimo systems,” *Automatica*, vol. 50, no. 12, pp. 3019–3029, 2014.
- [7] M. Lorenzen, M. Cannon, and F. Allgöwer, “Robust MPC with recursive model update,” *Automatica*, vol. 103, pp. 461 – 471, 2019.
- [8] J. Köhler, P. Kötting, R. Soloperto, F. Allgöwer, and M. A. Müller, “A robust adaptive model predictive control framework for nonlinear uncertain systems,” *arXiv preprint arXiv:1911.02899*, 2019.
- [9] R. Soloperto, M. A. Müller, S. Trimpe, and F. Allgöwer, “Learning-based robust model predictive control with state-dependent uncertainty,” in *IFAC Conference on Nonlinear Model Predictive Control*, Madison, Wisconsin, USA, Aug. 2018.
- [10] M. Bujarbaruah, X. Zhang, M. Tanaskovic, and F. Borrelli, “Adaptive MPC under time varying uncertainty: Robust and Stochastic,” *arXiv preprint arXiv:1909.13473*, 2019.
- [11] B. A. H. Vicente and P. A. Trodden, “Stabilizing predictive control with persistence of excitation for constrained linear systems,” *Systems & Control Letters*, vol. 126, pp. 58 – 66, 2019.
- [12] J. Köhler, E. Andina, R. Soloperto, M. A. Müller, and F. Allgöwer, “Linear robust adaptive model predictive control: Computational complexity and conservatism,” *arXiv preprint arXiv:1909.01813*, 2019.
- [13] L. Hewing and M. N. Zeilinger, “Cautious model predictive control using gaussian process regression,” *arXiv preprint arXiv:1705.10702*, 2017.
- [14] T. Koller, F. Berkenkamp, M. Turchetta, and A. Krause, “Learning-based model predictive control for safe exploration,” in *2018 IEEE Conference on Decision and Control (CDC)*. IEEE, 2018, pp. 6059–6066.
- [15] C. J. Ostafew, A. P. Schoellig, and T. D. Barfoot, “Learning-based nonlinear model predictive control to improve vision-based mobile robot path-tracking in challenging outdoor environments,” in *Robotics and Automation (ICRA), 2014 IEEE International Conference on*. IEEE, 2014, pp. 4029–4036.
- [16] M. Farina, L. Giulioni, and R. Scattolini, “Stochastic linear model predictive control with chance constraints—a review,” *Journal of Process Control*, vol. 44, pp. 53–67, 2016.

- [17] I. Kolmanovsky and E. G. Gilbert, “Theory and computation of disturbance invariant sets for discrete-time linear systems,” *Mathematical problems in engineering*, vol. 4, no. 4, pp. 317–367, 1998.
- [18] F. Blanchini, “Set invariance in control,” *Automatica*, vol. 35, no. 11, pp. 1747–1767, 1999.
- [19] M. Tanaskovic, L. Fagiano, and V. Gligorovski, “Adaptive model predictive control for linear time varying MIMO systems,” *Automatica*, vol. 105, pp. 237 – 245, 2019.
- [20] A. Parsi, A. Iannelli, M. Yin, M. Khosravi, and R. S. Smith, “Robust adaptive model predictive control with worst-case cost,” *arXiv preprint arXiv:1911.08607*, 2019.
- [21] F. Borrelli, A. Bemporad, and M. Morari, *Predictive control for linear and hybrid systems*. Cambridge University Press, 2017.
- [22] J. Benesty, Y. A. Huang, J. Chen, P. A. Naylor, E. Hänsler, and G. Schmidt, “Adaptive algorithms for the identification of sparse impulse responses,” *Selected methods for acoustic echo and noise control*, vol. 5, pp. 125–153, 2006.
- [23] D. Etter, “Identification of sparse impulse response systems using an adaptive delay filter,” in *IEEE International Conference on Acoustics, Speech, and Signal Processing*, vol. 10, 1985, pp. 1169–1172.
- [24] E. J. Candes and T. Tao, “Decoding by linear programming,” *IEEE Transactions on Information Theory*, vol. 51, no. 12, pp. 4203–4215, Dec 2005.
- [25] J. Wright and Y. Ma, *High-Dimensional Data Analysis with Low-Dimensional Models: Theory, Computation, and Applications*. Cambridge Press, expected 2020.
- [26] E. J. Candes, J. K. Romberg, and T. Tao, “Stable signal recovery from incomplete and inaccurate measurements,” *Communications on Pure and Applied Mathematics: A Journal Issued by the Courant Institute of Mathematical Sciences*, vol. 59, no. 8, pp. 1207–1223, 2006.
- [27] B. Anderson and J. Moore, *Optimal Filtering*. Englewood Cliffs, NJ: Prentice-Hall, 1979.
- [28] G. C. Calafiore and L. El Ghaoui, “On distributionally robust chance-constrained linear programs,” *Journal of Optimization Theory and Applications*, vol. 130, no. 1, pp. 1–22, 2006.
- [29] S. Zymler, D. Kuhn, and B. Rustem, “Distributionally robust joint chance constraints with second-order moment information,” *Mathematical Programming*, pp. 1–32, 2013.
- [30] D. L. Donoho *et al.*, “Compressed sensing,” *IEEE Transactions on information theory*, vol. 52, no. 4, pp. 1289–1306, 2006.