

FEEDBACK CONTROL THEORY & MODEL ORDER REDUCTION FOR STOCHASTIC EQUATIONS

SIMON BECKER, CARSTEN HARTMANN, MARTIN REDMANN, AND LORENZ RICHTER

ABSTRACT. We analyze structure-preserving model order reduction methods for Ornstein-Uhlenbeck processes and linear SPDEs with multiplicative noise based on balanced truncation with non-zero initial data. We then marry these model order reduction methods with stochastic optimal control theory and prove error bounds for a class of linear quadratic regulator problems. We discuss the application of our approach to enhanced sampling methods from non-equilibrium statistical mechanics.

1. INTRODUCTION

Balanced truncation is among the most popular model reduction techniques for linear and bilinear control systems, since it features computable error bounds and preserves many structural properties of the dynamics, such as stability or passivity. Nevertheless, considered as an approximation tool for the Hankel operator that is underlying the system under consideration, it heavily relies on L^2 -isometries and the fact that inputs and outputs are square-integrable functions on the positive reals [G84].

With few exceptions (see [BGM17, HRA11, DHQ19]), most of the available error bounds consider the dynamics under zero (or: homogeneous) initial conditions. This is somewhat surprising as, for example, the system-theoretic concepts of finite-time controllability and reachability make assertions about bounded measurable control inputs only and do not assume the initial condition to be zero (see, e.g. [C85, Sec. 4]). It is possible to think of the initial conditions as an extra control input, however the control input associated with the initial condition is a Dirac delta function, and as a consequence it is neither bounded nor square-integrable; the approach thus requires an appropriate regularisation that then leads to Hankel norm error bounds that depend on the particular regularisation chosen (see e.g. [HRA11]).

In this article we follow a different route and extend the notion of the Hankel operator to account for the non-zero initial conditions by an appropriate shifting of the underlying reachability and observability Gramians. The details will be given below in Section 2. In doing so, we study balanced model order reduction methods for two types of stochastic differential equations with nonzero initial condition: (feedback-)controlled Ornstein-Uhlenbeck (ou) processes and linear S(P)DEs with multiplicative noise (lin).

The study of controlled Ornstein-Uhlenbeck processes (1.1a) is of great practical relevance and has various applications such as interest rates models [V77] or pair trading in mathematical finance [ES19], and Langevin equations in physics [K07]. Such processes are also considered to model random perturbations of linear deterministic systems [HLPZ14]. Linear stochastic differential equations with multiplicative noise generalizes a dissipative geometric Brownian motion and has various applications in mathematical finance. Most prominently, such equations describe stock prices in the Black-Scholes model [H09]. Examples involving SPDEs include stochastic variants of the linearised Navier-Stokes equations [DFV14], stochastic polymer models [MHKZ89], or the Kushner-Stratonovich equations of nonlinear filtering [B65].

To fix ideas, let $(M_t)_{t \geq 0}$ be a square-integrable mean zero Lévy process and let $(\mathcal{F}_t)_{t \geq 0}$ be its induced filtration. For control functions $u \in L^2_{\text{ad}}(\Omega \times (0, T))$ with values in \mathbb{R}^m , we study the differential equations

$$dZ_t^{\text{ou}} = AZ_t^{\text{ou}} dt + Bu_t dt + K dM_t, \text{ and} \quad (1.1a)$$

$$dZ_t^{\text{lin}} = AZ_t^{\text{lin}} dt + Bu_t dt + NZ_t^{\text{lin}} dM_t, \text{ for } t \in (0, T) \quad (1.1b)$$

on some separable Hilbert space X . In (1.1a) the process is allowed to take values in a space \mathbb{R}^d , whereas in equation (1.1b) the Lévy process is assumed to be scalar¹. The precise assumptions we impose on the OU process (1.1a) are stated in Section 3 and for equation 2 in Section 4. Most of the notation will be explained in Section 1.1. In the equations above $B : \mathbb{R}^m \rightarrow X$, is the linear *input operator*. We are interested in outputs CZ_t , where $C : X \rightarrow \mathcal{H}$ is the linear *output operator*.

Reduced order models, based on balanced truncation, for (uncontrolled) Ornstein-Uhlenbeck processes (Z_t^{ou}) have been considered in [FR18]. Controlled processes (Z_t^{lin}) have been extensively studied within the standard stochastic balanced truncation framework and we refer the reader to [BH18, BR15, BD11] and references therein for a general overview.

For the optimal control problem associated to the equations in (1.1), we consider the following control functions with time horizon $T \in (0, \infty)$ given by

$$\begin{aligned} J_{\text{LQR}}^{\text{ou}}(CZ, u, T) &:= \frac{1}{T} \left(\|CZ^{\text{ou}}\|_{L^2(\Omega_T)}^2 + \langle u, Ru \rangle_{L^2(\Omega_T)} \right) \\ J_r^{\text{lin}}(CZ^{\text{lin}}, u, T) &:= \|CZ\|_{L_r^2 L_w^{\infty}(\Omega_T)}^2 + \langle u, Ru \rangle_{L^2(\Omega_T)} \text{ with } r \in (1, 2]. \end{aligned} \quad (1.2)$$

(For the definition of the corresponding norms and scalar products, see Section 1.1 below.) In case of $T = \infty$ we define for the Ornstein-Uhlenbeck process

$$J_{\text{LQR}}^{\text{ou}}(CZ, u, \infty) := \limsup_{T \rightarrow \infty} J_{\text{LQR}}^{\text{ou}}(CZ, u, T).$$

¹This assumption is only to simplify the notation in this article and an adaptation to multiple noise terms $\sum_{i=1}^l N_i Z_t^{\text{lin}} dM_t^i$ is straightforward

In (1.2), R is a (strictly) symmetric positive-definite matrix such that all eigenvalues of R are strictly positive.

Although balanced truncation methods for (1.1b), as described in [BH18, BR15, BD11], take into account operators A , N , and B , non-zero initial states of the dynamics are in general not considered in the balanced truncation model order reduction framework. Only for deterministic linear systems such adaptations have been studied for example in [BGM17, HRA11, DHQ19]. To include subspaces of relevant initial states in the model order reduction process, we define for an orthonormal family $\phi_i \in L^2(\Omega, X)$, the map $B_{\text{in}} : \mathbb{R}^k \rightarrow X$ by $B_{\text{in}}v := \sum_{i=1}^k \langle v, \widehat{e}_i \rangle_{\mathbb{R}^k} \phi_i$. Here, $\text{span} \{\phi_i; i \in \{1, \dots, k\}\}$ is the space of *admissible initial states*. In other words, we define an operator B_{in} such that $B_{\text{in}}B_{\text{in}}^*$ is a projection onto the subspace of possible initial states we consider.

In many applications not all possible initial states are relevant, but only a certain (low-dimensional) subspace of all possible initial states is of interest. This subspace will be called the space of *admissible initial states*. In particular, we analyze how additional knowledge on the location of initial states can be harnessed in the model order reduction process. This way, we obtain balanced truncation-based model order reduction methods for which initial-state dependent error bounds can be obtained. This allows us to obtain error bounds for optimal control problems, as well.

The outline of the article is as follow: Before presenting balanced truncation in a nutshell in Section 2, we briefly introduce the basic notation used throughout the article in Section 1.1. The OU semigroup and the corresponding model reduction error bound are discussed in Section 3, whereas linear S(P)DEs with multiplicative noise are the subject of Section 4. The error OU and S(P)DE bounds are then revisited from the perspective of optimal control theory in Section 5, where we focus on linear quadratic regulator (LQR) problems. Finally, in Section 6, we illustrate the theoretical findings from Sections 3–5 with suitable numerical examples.

1.1. Notation. The space of bounded linear operators between Banach spaces X, Y is denoted by $\mathcal{L}(X, Y)$ and just by $\mathcal{L}(X)$ if $X = Y$. The operator norm of a bounded operator $T \in \mathcal{L}(X, Y)$ is written as $\|T\|$. The trace-class and Hilbert-Schmidt operators between Hilbert spaces X, Y are denoted by $\text{TC}(X, Y)$ and $\text{HS}(X, Y)$, respectively. In particular, we recall that for a linear operator $T \in \text{TC}(X, Y)$, where X and Y are now separable Hilbert spaces, the trace norm is given as

$$\|T\|_{\text{TC}} = \sup \left\{ \sum_{n \in \mathbb{N}} |\langle f_n, T e_n \rangle_Y| : (e_n)_{n \in \mathbb{N}} \text{ ONB of } X \text{ and } (f_n)_{n \in \mathbb{N}} \text{ ONB of } Y \right\}. \quad (1.3)$$

The Hilbert-Schmidt norm is given by

$$\|T\|_{\text{HS}} := \sqrt{\sum_{n,m \in \mathbb{N}} |\langle f_m, T e_n \rangle_Y|^2} \quad (1.4)$$

where $(e_n)_{n \in \mathbb{N}}$ is any ONB of X and $(f_n)_{n \in \mathbb{N}}$ any ONB of Y .

We say that $g = \mathcal{O}(f)$ if there is a $C > 0$ such that $\|g\| \leq C \|f\|$. The domain of unbounded operators A is denoted by $D(A)$.

We write $\Delta(\Xi)$ to denote the difference of the quantity Ξ for two systems, i.e. $\Delta(\Xi) = \Xi_{\text{System 1}} - \Xi_{\text{System 2}}$. We denote the expectation of a random variable Y by $\mathbb{E}(Y)$ where we throughout the article assume to work on some fixed probability space $(\Omega, \mathcal{F}, \mathbb{P})$. If we want to address an operator L for both OU processes and linear systems with multiplicative noise, we write $L^{\text{ou|lin}}$.

We write $\Omega_T := \Omega \times (0, T)$ and define, for a Banach space Y , the norm associated with the space $L^2(\Omega_T, Y)$

$$\|f\|_{L^2(\Omega_T, Y)} := \sqrt{\mathbb{E} \int_{(0, T)} \|f(t)\|_Y^2 dt}. \quad (1.5)$$

When writing L^p spaces, we most often omit the domain and sometimes also the image space to shorten the notation.

We also define the norm on iterated $L^p L^q$ spaces by

$$\|f\|_{L_x^p L_y^q} := \|x \mapsto \|y \mapsto f(x, y)\|_{L^q}\|_{L^p}, \quad (1.6)$$

where the L^q norm is taken over the second argument, y , followed by the L^p norm integration over the first argument, x .

We use the subscript *ad* for L^p spaces to denote stochastic processes in L^p that are adapted to a canonical filtration.

The convolution of two functions is denoted by

$$(f * g)(x) = \int_{\mathbb{R}} f(x - y)g(y) dy.$$

We write $\mathbb{1}_X$ for the indicator function on some measurable set X , i.e. $\mathbb{1}_X(x) = 1$ if $x \in X$ and 0 otherwise.

If a sequence (x_n) converges with respect to the weak topology of a Banach space to some element x of that space, we write $x_n \rightharpoonup x$.

2. BALANCED TRUNCATION IN A NUTSHELL

In this article, we study model order reduction methods for equations (1.1). To fix ideas, let us now assume that the underlying Hilbert space X is finite-dimensional. In

the first step of the model order reduction process, positive semidefinite observability and reachability Gramians $\mathcal{O}^{\text{ou}|\text{lin}}$ and $\mathcal{P}^{\text{ou}|\text{lin}}$ are computed from Lyapunov equations, using an auxiliary operator $S := B_{\text{in}}B_{\text{in}}^* + K\mathbb{E}(M_1M_1^*)K^*$.

For Ornstein-Uhlenbeck processes, for which we consider two types of reachability Gramians \mathcal{P}^{ou} and \mathcal{P}^{ou} , the Lyapunov equations (Prop. 3.3) take the form

$$\begin{aligned} A^* \mathcal{O}^{\text{ou}} + \mathcal{O}^{\text{ou}} A + C^* C &= 0, \\ A \mathcal{P}^{\text{ou}} + \mathcal{P}^{\text{ou}} A^* + BB^* + K\mathbb{E}(M_1M_1^*)K^* &= 0 \text{ and} \\ A(\mathcal{P}^{\text{ou}} - S) + (\mathcal{P}^{\text{ou}} - S)A^* + BB^* &= 0. \end{aligned} \tag{2.1}$$

- The first reachability Gramian \mathcal{P}^{ou} is employed to obtain an error bound on the supremum norm with initial state 0 (Theorem 1).
- The second reachability Gramian \mathcal{P}^{ou} depends also on the chosen initial states and allows us to obtain an L^2 error bound (Theorem 2).

For linear systems with multiplicative noise they satisfy (see Prop. 4.2 below)

$$\begin{aligned} A(\mathcal{P}^{\text{lin}} - B_{\text{in}}B_{\text{in}}^*) + (\mathcal{P}^{\text{lin}} - B_{\text{in}}B_{\text{in}}^*)A^* + N(\mathcal{P}^{\text{lin}} - B_{\text{in}}B_{\text{in}}^*)N^* \\ + BB^* + B_{\text{in}}B_{\text{in}}^* &= 0 \text{ and} \\ A^* \mathcal{O}^{\text{lin}} + \mathcal{O}^{\text{lin}} A + N^* \mathcal{O}^{\text{lin}} N + C^* C &= 0. \end{aligned} \tag{2.2}$$

Since both $\mathcal{O}^{\text{ou}|\text{lin}}$ and $\mathcal{P}^{\text{ou}|\text{lin}}$ are positive semidefinite, they can be decomposed as $\mathcal{O}^{\text{ou}|\text{lin}} = W^*W$ and $\mathcal{P}^{\text{ou}|\text{lin}} = RR^*$. Let $\mathcal{O}^{\text{ou}|\text{lin}}$ and $\mathcal{P}^{\text{ou}|\text{lin}}$ have for simplicity full rank, the *balanced representation* is obtained by first performing a singular value decomposition $WR = V\Sigma U^*$, to identify a dominant subspace for the dynamics of the system, where V, U are unitary and Σ is diagonal. Then, we conjugate the system by operators $T := \Sigma^{-1/2}V^*W$ and $T^{-1} := RU\Sigma^{-1/2}$ such that

$$\begin{aligned} A_b^{\text{ou}|\text{lin}} &:= TA^{\text{ou}|\text{lin}}T^{-1}, \quad B_b^{\text{ou}|\text{lin}} := TB^{\text{ou}|\text{lin}}, \quad C_b^{\text{ou}|\text{lin}} := C^{\text{ou}|\text{lin}}T^{-1}, \text{ and} \\ N_b^{\text{lin}} &:= TN^{\text{lin}}T^{-1}, \quad K_b^{\text{ou}} := TK^{\text{ou}}. \end{aligned} \tag{2.3}$$

To obtain a *reduced system*, the operator Σ is approximated. This approximation is obtained by discarding the smallest singular values of Σ . Error bounds in this article are commonly expressed in terms of the difference of Hankel operators for the full and the reduced system. This difference of Hankel operators we denote by $\Delta(H)$. The Hankel operator is one possible decomposition WR of the Gramians above. The precise definition of the Hankel operator is stated in Definitions 3.2, for OU processes, and 4.1, for linear systems with multiplicative noise, respectively. However, to evaluate the trace norm difference it is not necessary to analyze the Hankel operator directly:

To evaluate the singular values of $\Delta(H)$, and thus the trace norm of $\Delta(H)$, we introduce an *error system*

$$\begin{aligned} \widehat{A}^{\text{ou}|\text{lin}} &:= \begin{pmatrix} A & 0 \\ 0 & \tilde{A} \end{pmatrix}, \quad \widehat{B}^{\text{ou}|\text{lin}} := (B^*, \tilde{B}^*)^*, \quad \widehat{B}_{\text{in}}^{\text{ou}|\text{lin}} = (B_{\text{in}}^*, \tilde{B}_{\text{in}}^*)^*, \quad \widehat{C}^{\text{ou}|\text{lin}} := (C, -\tilde{C}), \\ \text{and } \widehat{N}^{\text{lin}} &:= \begin{pmatrix} N & 0 \\ 0 & \tilde{N} \end{pmatrix}, \quad \text{and } \widehat{K}_{\text{in}}^{\text{ou}} = (K_{\text{in}}^*, \tilde{K}_{\text{in}}^*)^*, \end{aligned} \tag{2.4}$$

where operators without tilde belong to System 1, as in (1.1), and with tilde to some System 2. This second system could be any other system with the same structure such as the reduced system. Then one can define Gramians $\widehat{O} = \widehat{W}^* \widehat{W}$ and $\widehat{P} = \widehat{R} \widehat{R}^*$ of this error system (2.4) that satisfy Lyapunov equations (2.1) or (2.2) for the error system, i.e.

$$\begin{aligned} \widehat{A}^* \widehat{O}^{\text{ou}} + \widehat{O}^{\text{ou}} \widehat{A} + \widehat{C}^* \widehat{C} &= 0, \\ \widehat{A}(\widehat{P}^{\text{ou}} - \widehat{S}) + (\widehat{P}^{\text{ou}} - \widehat{S}) \widehat{A}^* + \widehat{B} \widehat{B}^* &= 0 \end{aligned} \tag{2.5}$$

where $\widehat{S} := \widehat{B}_{\text{in}} \widehat{B}_{\text{in}}^* + \widehat{K} \mathbb{E}(M_1 M_1^*) \widehat{K}^*$ and analogously for linear systems with multiplicative noise. We can then perform a singular value decomposition $\widehat{W} \widehat{R} = \widehat{V} \Lambda \widehat{U}^*$ with diagonal operator Λ that contains all singular values of the error system (2.4) on its diagonal [RS14, Theorem 5.1]. It is then easy to check that

$$\|\Delta(H)\|_{\text{TC}} = \sum_{\lambda \in \Lambda} \lambda = \sum_{\mu \in \sqrt{\sigma(\widehat{O} \widehat{P})}} \mu.$$

This property follows as any decomposition $\widehat{W} \widehat{R}$ is equivalent to the Hankel operator \widehat{H} associated with system (2.4):

More precisely, there exist unitary mappings [RS14, Prop. 6.1] $U : \overline{\text{ran}}(\widehat{W} \widehat{R}) \rightarrow \overline{\text{ran}}(\widehat{H})$ and $V : \ker^\perp(\widehat{W} \widehat{R}) \rightarrow \ker^\perp(\widehat{H})$ such that

$$\Delta(H)|_{\ker^\perp(\widehat{H})} = \widehat{H}|_{\ker^\perp(\widehat{H})} = U \left(\widehat{W} \widehat{R} \right) |_{\ker^\perp(\widehat{W} \widehat{R})} V^* |_{\ker^\perp(\widehat{H})}.$$

We summarize the preceding discussion of the Hankel operator error bounds:

- The trace class norm of the Hankel operator difference is computable by solving in addition the Lyapunov equations for the error system consisting of the original and the reduced system (2.4).
- The error bound does not require the user to compute the Hankel operator directly.
- As a word of caution: The Hankel operators do not have any obvious energy interpretation. In particular, the difference of Hankel operators in trace norm is not the same as the sum of truncated Hankel singular values in the model order reduction process.

3. ORNSTEIN-UHLENBECK PROCESSES

Let X be a Hilbert space, A be the generator of a C_0 -semigroup $(T_t)_{t \geq 0}$ on X , as well as $K : \mathbb{R}^d \rightarrow X$ and $B : \mathbb{R}^m \rightarrow X$ both linear and continuous maps. For the OU processes (1.1a), we define the mild solution $(Z_t^{\text{ou}})_{t \geq 0}$ with initial state $\xi \in L^2(\Omega, \mathcal{F}_0, X)$ with output given by the variation of constant formula

$$Y_t = CZ_t^{\text{ou}} = CT_t \xi + \int_0^t CT_{t-s} K dM_s + \int_0^t CT_{t-s} B u_s ds. \quad (3.1)$$

In particular, if X is finite-dimensional or more general, if (T_t) is uniformly continuous, then the semigroup is just given by $T_t := e^{tA}$.

For OU processes we make the following stability assumption:

Assumption 1 (OU processes). *We assume that A is the generator of an exponentially stable semigroup $(T_t)_{t \geq 0}$ such that for some $\omega > 0$ and $\nu \geq 1$: $\|T_t\| \leq \nu e^{-\omega t}$. Moreover, we assume that (M_t) is a square-integrable mean zero Lévy process taking values in \mathbb{R}^d .*

Definition 3.1 (OU Gramians). *For the controlled OU process, we define the observability Gramian for $x, y \in X$ by*

$$\langle x, \mathcal{O}^{\text{ou}} y \rangle_X := \int_0^\infty \langle CT_s x, CT_s y \rangle_{\mathcal{H}} ds \quad (3.2)$$

and two types of reachability Gramians for $x, y \in X$ by

$$\begin{aligned} \langle x, \mathcal{P}^{\text{ou}} y \rangle_X &:= \int_0^\infty \langle x, T_t (K \mathbb{E}(M_1 M_1^*) K^* + BB^*) T_t^* y \rangle_X dt, \text{ and} \\ \langle x, \mathcal{P}^{\text{ou}} y \rangle_X &:= \int_0^\infty \langle x, T_t BB^* T_t^* y \rangle_X dt + \langle x, (B_{\text{in}} B_{\text{in}}^* + K \mathbb{E}(M_1 M_1^*) K^*) y \rangle_X. \end{aligned} \quad (3.3)$$

If X is finite-dimensional, then the definition of the Gramians reduces in case of the observability Gramian to

$$\mathcal{O}^{\text{ou}} = \int_0^\infty T_s^* C^* C T_s ds \quad (3.4)$$

and for the reachability Gramians to

$$\begin{aligned} \mathcal{P}^{\text{ou}} &= \int_0^\infty T_t (K \mathbb{E}(M_1 M_1^*) K^* + BB^*) T_t^* dt, \text{ and} \\ \mathcal{P}^{\text{ou}} &= \int_0^\infty T_t BB^* T_t^* dt + B_{\text{in}} B_{\text{in}}^* + K \mathbb{E}(M_1 M_1^*) K^*. \end{aligned} \quad (3.5)$$

The weak formulation for infinite-dimensional spaces X is needed in general, as $t \mapsto T_t$ is not necessarily measurable but $t \mapsto T_t x$ for any fixed $x \in X$ is.

Definition 3.2 (OU Hankel operator). *The OU Hankel operator is the operator $H^{\text{ou}} := W^{\text{ou}}R^{\text{ou}} \in \mathcal{L}(L^2((0, \infty), \mathbb{R}^m) \oplus \mathbb{R}^d \oplus \mathbb{R}^k, L^2((0, \infty), \mathcal{H}))$.*

Here, we assume that the controls take values in \mathbb{R}^m , the space of admissible initial states is k -dimensional, and the noise process takes values in \mathbb{R}^d .

The observability map $W^{\text{ou}} \in \mathcal{L}(X, L^2((0, \infty), \mathcal{H}))$ is defined as

$$W_t^{\text{ou}}x := CT_t x \text{ such that } \mathcal{O}^{\text{ou}} = W^{\text{ou}*}W^{\text{ou}},$$

where W^{ou} is a Hilbert-Schmidt operator if \mathcal{H} is finite-dimensional.

The reachability map $R^{\text{ou}} \in \text{HS}(L^2((0, \infty), \mathbb{R}^m) \oplus \mathbb{R}^d \oplus \mathbb{R}^k, X)$ is defined as

$$R^{\text{ou}}(f, v, u) := \int_0^\infty T_s B f_s ds + K \sqrt{\mathbb{E}(M_1 M_1^*)} v + B_{\text{in}} u \quad (3.6)$$

such that $\mathcal{P}^{\text{ou}} = R^{\text{ou}}R^{\text{ou}}$.*

The Gramians (3.2) and (3.3) satisfy the following Lyapunov equations:

Proposition 3.3 (Lyapunov equations). *The observability Gramian satisfies for all $x_2, y_2 \in D(A)$*

$$\langle Ax_2, \mathcal{O}^{\text{ou}}y_2 \rangle_X + \langle x_2, \mathcal{O}^{\text{ou}}Ay_2 \rangle_X + \langle x_2, C^*Cy_2 \rangle_X = 0$$

and the reachability Gramians satisfies, for all $x_1, y_1 \in D(A^)$, with $S := B_{\text{in}}B_{\text{in}}^* + K\mathbb{E}(M_1 M_1^*)K^*$,*

$$\langle x_1, \mathcal{P}^{\text{ou}}A^*y_1 \rangle_X + \langle A^*x_1, \mathcal{P}^{\text{ou}}y_1 \rangle_X + \langle x_1, (BB^* + K\mathbb{E}(M_1 M_1^*)K^*)y_1 \rangle_X = 0 \text{ and}$$

$$\langle x_1, (\mathcal{P}^{\text{ou}} - S)A^*y_1 \rangle_X + \langle A^*x_1, (\mathcal{P}^{\text{ou}} - S)y_1 \rangle_X + \langle x_1, BB^*y_1 \rangle_X = 0.$$

If A is bounded, the equations reduce to

$$A^* \mathcal{O}^{\text{ou}} + \mathcal{O}^{\text{ou}}A + C^*C = 0$$

and

$$\mathcal{P}^{\text{ou}}A^* + A\mathcal{P}^{\text{ou}} + BB^* + K\mathbb{E}(M_1 M_1^*)K^* = 0 \text{ and}$$

$$(\mathcal{P}^{\text{ou}} - S)A^* + A(\mathcal{P}^{\text{ou}} - S) + BB^* = 0.$$

Proof. The Lyapunov equations follow immediately from the Lyapunov equations for linear deterministic systems [ORW13]:

This is immediate for the observability Gramian, since it coincides with the observability Gramian for linear systems.

For the reachability Gramian it suffices to observe that \mathcal{P}^{ou} and $\mathcal{P}^{\text{ou}} - S$ are of the form of a linear reachability Gramian. \square

3.1. Error bounds. We start by stating a direct bound for two OU processes as in (1.1a) with (C, A, K, B) and $(\tilde{C}, \tilde{A}, \tilde{K}, \tilde{B})$ starting from zero. Let (T_t) and (\tilde{T}_t) be the semigroups generated by A and \tilde{A} , respectively. To state the error bound, we introduce for $i \in \{1, 2\}$ auxiliary Gramians defined in terms of $B_1 = B$ and $B_2 = K\sqrt{\mathbb{E}(M_1 M_1^*)}$

$$\begin{aligned} AP_i + P_i A^* &= -B_i B_i^*, \quad P_i := \int_0^\infty CT_s B_i B_i^* T_s^* C^* ds, \\ AP_{i,g} + P_{i,g} \tilde{A}^* &= -B_i \tilde{B}_i^*, \quad P_{i,g} := \int_0^\infty CT_s B_i \tilde{B}_i^* \tilde{T}_s^* \tilde{C}^* ds, \\ \tilde{A} \tilde{P}_i + \tilde{P}_i \tilde{A}^* &= -\tilde{B}_i \tilde{B}_i^*, \quad \tilde{P}_i := \int_0^\infty \tilde{C} \tilde{T}_s \tilde{B}_i \tilde{B}_i^* \tilde{T}_s^* \tilde{C}^* ds, \end{aligned} \quad (3.7)$$

and observe that the sums $\mathcal{P}^{\text{ou}} = P_1 + P_2$ and $\tilde{\mathcal{P}}^{\text{ou}} = \tilde{P}_1 + \tilde{P}_2$ coincide with the reachability Gramian for $B_{\text{in}} = 0$. Moreover, we write $\mathcal{P}_g^{\text{ou}} = P_{1,g} + P_{2,g}$. We then have the following error bound for two Ornstein-Uhlenbeck processes starting from zero with possibly two different controls.

Theorem 1 (Error bound from zero). *For control functions $u, \tilde{u} \in L^2_{\text{ad}}(\Omega_T, \mathbb{R}^n)$ and initial conditions $Y_0 = \tilde{Y}_0 = 0$, it follows that the difference of two OU processes satisfies*

$$\begin{aligned} \sup_{t \in [0, T]} \sqrt{\mathbb{E} \left[\|Y_t - \tilde{Y}_t\|^2 \right]} &\leq \sqrt{2} (1 \vee \|u\|_{L^2(\Omega_T)}) \left(\text{tr} \left(C \mathcal{P}^{\text{ou}} C^* - 2C \mathcal{P}_g^{\text{ou}} \tilde{C}^* \right. \right. \\ &\quad \left. \left. + \tilde{C} \tilde{\mathcal{P}}^{\text{ou}} \tilde{C}^* \right) \right)^{\frac{1}{2}} + \left(\text{tr}(\tilde{C} \tilde{P}_1 \tilde{C}^*) \right)^{1/2} \|u - \tilde{u}\|_{L^2(\Omega_T)}. \end{aligned} \quad (3.8)$$

Proof. The explicit outputs of controlled OU processes are according to (3.1) given by

$$\begin{aligned} Y_t &= \underbrace{C \int_0^t T_{t-s} B u_s ds}_{=: I_1(u)} + \underbrace{C \int_0^t T_{t-s} K dM_s}_{=: I_2} \quad \text{and} \\ \tilde{Y}_t &= \underbrace{\tilde{C} \int_0^t \tilde{T}_{t-s} \tilde{B} \tilde{u}_s ds}_{=: \tilde{I}_1(\tilde{u})} + \underbrace{\tilde{C} \int_0^t \tilde{T}_{t-s} \tilde{K} dM_s}_{=: \tilde{I}_2}. \end{aligned} \quad (3.9)$$

We insert the representations for Y_t and \tilde{Y}_t from (3.9) and obtain for (3.8)

$$\begin{aligned} \left(\mathbb{E} \|Y_t - \tilde{Y}_t\|^2 \right)^{\frac{1}{2}} &= \left(\mathbb{E} \|(I_1(u) - \tilde{I}_1(u)) + (\tilde{I}_1(u) - \tilde{I}_1(\tilde{u})) + (I_2 - \tilde{I}_2)\|^2 \right)^{\frac{1}{2}} \\ &\leq \left(\mathbb{E} \|I_1(u) - \tilde{I}_1(u)\|^2 \right)^{\frac{1}{2}} + \left(\mathbb{E} \|I_2 - \tilde{I}_2\|^2 \right)^{\frac{1}{2}} + \left(\mathbb{E} \|\tilde{I}_1(u) - \tilde{I}_1(\tilde{u})\|^2 \right)^{\frac{1}{2}} \end{aligned} \quad (3.10)$$

From [FR18, (31)] we know that

$$\mathbb{E}[\|I_2 - \tilde{I}_2\|^2] \leq \text{tr} \left[CP_2C^* - 2CP_{2,g}\tilde{C}^* + \tilde{C}\tilde{P}_2\tilde{C}^* \right] \quad (3.11)$$

for all $t \in [0, T]$. We can estimate the first term in (3.10) using that

$$\begin{aligned} \mathbb{E}[\|I_1(u) - \tilde{I}_1(u)\|^2] &= \mathbb{E} \left[\left\| \int_0^t (CT_{t-s}Bu_s - \tilde{C}\tilde{T}_{t-s}\tilde{B}\tilde{u}_s) ds \right\|^2 \right] \\ &\leq \mathbb{E} \left[\left(\int_0^t \left\| CT_{t-s}B - \tilde{C}\tilde{T}_{t-s}\tilde{B} \right\|_{\text{HS}} \|u_s\| ds \right)^2 \right] \\ &\leq \mathbb{E} \left[\int_0^t \left\| CT_{t-s}B - \tilde{C}\tilde{T}_{t-s}\tilde{B} \right\|_{\text{HS}}^2 ds \int_0^t \|u_s\|^2 ds \right] \quad (3.12) \\ &= \int_0^t \left\| CT_{t-s}B - \tilde{C}\tilde{T}_{t-s}\tilde{B} \right\|_{\text{HS}}^2 ds \mathbb{E} \left[\int_0^t \|u_s\|^2 ds \right] \\ &\leq \text{tr} \left[CP_1C^* - 2CP_{1,g}\tilde{C}^* + \tilde{C}\tilde{P}_1\tilde{C}^* \right] \|u\|_{L^2(\Omega_T)}^2, \end{aligned}$$

where we used Cauchy-Schwarz and took the limit $t \rightarrow \infty$ in the first integral and $t \rightarrow T$ in the second one. Furthermore, we find for the remaining term in (3.10) that

$$\begin{aligned} \left(\mathbb{E} \|\tilde{I}_1(u) - \tilde{I}_1(\tilde{u})\|^2 \right)^{\frac{1}{2}} &\leq \left(\mathbb{E} \left[\left(\int_0^t \left\| \tilde{C}e^{\tilde{A}(t-s)}\tilde{B}_1 \right\|_{\text{HS}} \|u_s - \tilde{u}_s\| ds \right)^2 \right] \right)^{\frac{1}{2}} \\ &\leq \left(\int_0^t \left\| \tilde{C}e^{\tilde{A}(t-s)}\tilde{B}_1 \right\|_{\text{HS}}^2 ds \right)^{\frac{1}{2}} \left(\mathbb{E} \int_0^t \|u_s - \tilde{u}_s\|^2 ds \right)^{\frac{1}{2}} \\ &\leq \left(\text{tr}(\tilde{C}\tilde{P}_1\tilde{C}^*) \right)^{\frac{1}{2}} \|u - \tilde{u}\|_{L^2(\Omega_T)}. \end{aligned}$$

In order to get (3.8), we estimate

$$\left(\mathbb{E} \|I_1(u) - \tilde{I}_1(u)\|^2 \right)^{\frac{1}{2}} + \left(\mathbb{E} \|I_2 - \tilde{I}_2\|^2 \right)^{\frac{1}{2}} \leq \sqrt{2} \sqrt{\mathbb{E}[\|I_1(u) - \tilde{I}_1(u)\|^2] + \mathbb{E}[\|I_2 - \tilde{I}_2\|^2]} \quad (3.13)$$

applying $a + b \leq \sqrt{2}\sqrt{a^2 + b^2}$ for $a, b \in \mathbb{R}^+$. We insert (3.11) and (3.12) into (3.13) and enlarge the resulting expression through 1, $\|u\|_{L^2(\Omega_T)}^2 \leq (1 \vee \|u\|_{L^2(\Omega_T)}^2)$. The bound (3.8) now follows, by the linearity of the trace. \square

A different control \tilde{u} in the reduced order model, e.g., appears if model reduction is applied in the context of optimal control. Solving an optimal control problem in the reduced system leads to a different control strategy than in the full model. However, we see from the bound in Theorem 1 that the expression depending on the difference of u and \tilde{u} is scaled by a term depending on \tilde{P}_1 , an operator that cannot be expected to be small. Hence, one can only guarantee a good approximation if u and \tilde{u} are not too different. We now state an error bound in case the initial condition is not zero.

Corollary 3.4 (Error bound non zero initial states). *Let $u, \tilde{u} \in L^2_{\text{ad}}(\Omega_T, \mathbb{R}^n)$, Y be the output of (1.1a) with $Z_0^{\text{ou}} = \xi = B_{in}v$ and \tilde{Y} be the output of the reduced system with $\tilde{Z}_0^{\text{ou}} = 0$. We define*

$$\tilde{Y}_t^{(0)} = \tilde{C}^{(0)}\tilde{T}_t^{(0)}\tilde{B}_{in}v + \tilde{Y}_t, \quad (3.14)$$

where $(\tilde{T}_t^{(0)})_{t \geq 0}$ is a C_0 -semigroup generated by some operator $\tilde{A}^{(0)}$ and \tilde{B}_{in} , $\tilde{C}^{(0)}$ are additional input and output operators, respectively. Then, we have

$$\begin{aligned} \|Y - \tilde{Y}^{(0)}\|_{L^2(\Omega_T)} &\leq \sqrt{2T}(1 \vee \|u\|_{L^2(\Omega_T)}) \left(\text{tr} \left(C \mathcal{P}^{\text{ou}} C^* - 2C \mathcal{P}_g^{\text{ou}} \tilde{C}^* + \tilde{C} \tilde{\mathcal{P}}^{\text{ou}} \tilde{C}^* \right) \right)^{\frac{1}{2}} \\ &\quad + \|v\|_{L^2(\Omega)} \left(\text{tr} \left(CP_0 C^* - 2CP_{0,g} \tilde{C}^{(0)*} + \tilde{C}^{(0)} \tilde{P}_0 \tilde{C}^{(0)*} \right) \right)^{\frac{1}{2}} \\ &\quad + \sqrt{T} \left(\text{tr}(\tilde{C} \tilde{P}_1 \tilde{C}^*) \right)^{1/2} \|u - \tilde{u}\|_{L^2(\Omega_T)}, \end{aligned}$$

where $P_0, P_{0,g}$ and \tilde{P}_0 satisfy

$$AP_0 + P_0 A^* = -B_{in} B_{in}^*, \quad AP_{0,g} + P_{0,g} \tilde{A}^{(0)*} = -B_{in} \tilde{B}_{in}^*, \quad \tilde{A}^{(0)} \tilde{P}_0 + \tilde{P}_0 \tilde{A}^{(0)*} = -\tilde{B}_{in} \tilde{B}_{in}^*.$$

Proof. We use the triangle inequality to obtain

$$\begin{aligned} \|Y - \tilde{Y}^{(0)}\|_{L^2(\Omega_T)} &\leq \left(\mathbb{E} \int_0^T \|(Y_t - CT_t B_{in}v) - \tilde{Y}_t\|^2 dt \right)^{\frac{1}{2}} \\ &\quad + \left(\mathbb{E} \int_0^T \|CT_t B_{in}v - \tilde{C}^{(0)}\tilde{T}_t^{(0)}\tilde{B}_{in}v\|^2 dt \right)^{\frac{1}{2}}. \end{aligned}$$

Since the function $Y_t - CT_t B_{in}v$, $t \in [0, T]$, is the output to (1.1a) with zero initial state, Theorem 1 yields

$$\begin{aligned} \left(\mathbb{E} \int_0^T \|(Y_t - CT_t B_{in}v) - \tilde{Y}_t\|^2 dt \right)^{\frac{1}{2}} &\leq \sqrt{T} \left(\text{tr}(\tilde{C} \tilde{P}_1 \tilde{C}^*) \right)^{1/2} \|u - \tilde{u}\|_{L^2(\Omega_T)} \\ &\quad + \sqrt{2T}(1 \vee \|u\|_{L^2(\Omega_T)}) \left(\text{tr} \left(C \mathcal{P}^{\text{ou}} C^* - 2C \mathcal{P}_g^{\text{ou}} \tilde{C}^* \tilde{C} \tilde{\mathcal{P}}^{\text{ou}} \tilde{C}^* \right) \right)^{\frac{1}{2}}. \end{aligned}$$

Moreover, as in previous estimates, we find

$$\begin{aligned} \mathbb{E} \int_0^T \|CT_t B_{in}v - \tilde{C}^{(0)}\tilde{T}_t^{(0)}\tilde{B}_{in}v\|^2 dt &\leq \int_0^T \|CT_t B_{in} - \tilde{C}^{(0)}\tilde{T}_t^{(0)}\tilde{B}_{in}\|_{HS}^2 dt \mathbb{E}\|v\|^2 \\ &\leq \mathbb{E}\|v\|^2 \text{tr} \left(CP_0 C^* - 2CP_{0,g} \tilde{C}^{(0)*} + \tilde{C}^{(0)} \tilde{P}_0 \tilde{C}^{(0)*} \right) \end{aligned}$$

concluding the proof. \square

Remark 1. *The choice of $\tilde{Y}^{(0)}$ in (3.14) is motivated by the fact that (1.1a) can be decomposed into a homogeneous and inhomogeneous part. Its output can then be*

written as $Y_t = C\mathcal{H}_t^{\text{ou}} + C\mathcal{I}_t^{\text{ou}}$, where

$$d\mathcal{H}_t^{\text{ou}} = A\mathcal{H}_t^{\text{ou}} dt, \quad \mathcal{H}_0^{\text{ou}} = \xi = B_{\text{in}}v, \quad (3.15)$$

$$d\mathcal{I}_t^{\text{ou}} = A\mathcal{I}_t^{\text{ou}} dt + Bu_t dt + K dM_t, \quad \mathcal{I}_0^{\text{ou}} = 0. \quad (3.16)$$

As in [BGM17], balanced truncation based on the Gramian P_0 can be applied to (3.15) in order to get a reduced system with matrices $(\tilde{A}^{(0)}, \tilde{B}_{\text{in}}, \tilde{C}^{(0)})$. Balanced truncation is used a second time but now based on \mathcal{P}^{ou} to find a reduced system to (3.16). The reduced order matrices in this case are $(\tilde{A}, \tilde{B}, \tilde{C}, \tilde{K})$. The sum of both reduced order outputs is then a suitable candidate for the choice of $\tilde{Y}^{(0)}$.

We now state another error bound that takes into account the initial states and bounds the norms appearing in the control functional (1.2). This one invokes the Hankel operator which relies on the reachability Gramian \mathcal{P}^{ou} .

Lemma 3.5. *Let $\mathcal{H} \simeq \mathbb{R}^n$ be a finite-dimensional space, then for two systems with the same Lévy noise profile, satisfying Assumption 1, the difference of their Hankel operators $\Delta(H^{\text{ou}})$ satisfies*

$$\begin{aligned} \frac{1}{\sqrt{T}} \left\| \Delta \left(\int_0^t CT_{t-s}K dM_s \right) \right\|_{L^2(\Omega_T, \text{HS}(\mathbb{R}^m, \mathbb{R}^n))} &\leq \|\Delta(H^{\text{ou}})\|_{\text{HS}}, \\ \|\Delta(CTB_{\text{in}})\|_{L^2(0, \infty), \text{HS}(\mathbb{R}^k, \mathbb{R}^n)} &\leq \|\Delta(H^{\text{ou}})\|_{\text{HS}}, \text{ and} \\ \|\Delta(CTB)\|_{L^1((0, \infty), \text{HS}(\mathbb{R}^m, \mathbb{R}^n))} &\leq 2 \|\Delta(H^{\text{ou}})\|_{\text{TC}}. \end{aligned} \quad (3.17)$$

Proof. To obtain the first bound in (3.17), consider the process $X_t := \int_0^t CT_{t-s}K dM_s$ such that by Ito's isometry

$$\begin{aligned} \frac{1}{T} \|\Delta(X)\|_{L^2(\Omega_T)}^2 &= \frac{1}{T} \int_0^T \mathbb{E} \|\Delta(X_t)\|^2 dt \\ &\stackrel{\text{Ito's iso.}}{=} \frac{1}{T} \int_0^T \int_0^t \|\Delta(CT_{t-s}K) \sqrt{\mathbb{E}(M_1 M_1^*)}\|_{\text{HS}}^2 ds dt \\ &\stackrel{t-s \rightarrow s}{=} \frac{1}{T} \int_0^T \int_0^t \|\Delta(CT_sK) \sqrt{\mathbb{E}(M_1 M_1^*)}\|_{\text{HS}}^2 ds dt \\ &\stackrel{(1)}{\leq} \frac{1}{T} \int_0^T \int_0^T \|\Delta(CT_sK \sqrt{\mathbb{E}(M_1 M_1^*)})\|_{\text{HS}}^2 ds dt \\ &\stackrel{(2)}{=} \int_0^T \left\| \Delta(CT_sK \sqrt{\mathbb{E}(M_1 M_1^*)}) \right\|_{\text{HS}}^2 ds \end{aligned} \quad (3.18)$$

where in (1) we extended the integration range from 0 to T and in (2) we used that the integrand is independent of t .

We now derive a lower bound on the Hilbert-Schmidt norm of the Hankel operator. Recall that the Hilbert-Schmidt norm of an operator is defined in (1.4).

Thus, using any ONB $(e_i)_{i \in \mathbb{N}}$ of $L^2((0, \infty), \mathbb{R}^n)$ and $(f_j)_{j \in \{1, \dots, d\}}$ of \mathbb{R}^d , we have the lower bound on the Hilbert-Schmidt norm, since we do not take a complete basis of the input space of the Hankel operator, yields the first estimate in (3.17)

$$\begin{aligned}
 \|\Delta(H^{\text{ou}})\|_{\text{HS}}^2 &\stackrel{(1.4)}{\geq} \sum_{j=1}^d \sum_{i=1}^{\infty} |\langle \Delta(H^{\text{ou}})(0, f_j, 0), e_i \rangle_{L^2}|^2 \\
 &\stackrel{\text{Def. 3.2}}{=} \sum_{j=1}^d \sum_{i=1}^{\infty} \left| \left\langle \Delta \left(CT \bullet K \sqrt{\mathbb{E}(M_1 M_1^*)} \right) f_j, e_i \right\rangle_{L^2} \right|^2 \\
 &\stackrel{(1.4)}{=} \int_0^{\infty} \left\| \Delta(CT_s K \sqrt{\mathbb{E}(M_1 M_1^*)}) \right\|_{\text{HS}}^2 ds \stackrel{(3.18)}{\geq} \frac{1}{T} \|\Delta(X)\|_{L^2(\Omega_T)}^2.
 \end{aligned} \tag{3.19}$$

The second bound in (3.17) follows straight from the definition of the Hilbert-Schmidt norm by taking an orthonormal basis $(e_i)_{i \in \mathbb{N}}$ of $L^2((0, \infty), \mathcal{H})$ and $(f_i)_{i \in \{1, \dots, k\}}$ an orthonormal system of \mathbb{R}^k . Then, it follows that

$$\begin{aligned}
 \|\Delta(H)\|_{\text{HS}}^2 &\geq \sum_{i=1}^{\infty} \sum_{j=1}^k |\langle e_i, \Delta(H)(0, 0, f_j) \rangle_{L^2}|^2 \\
 &= \|\Delta(CTB_{\text{in}})\|_{L^2((0, \infty), \text{HS}(\mathbb{R}^k, \mathbb{R}^n))}^2.
 \end{aligned} \tag{3.20}$$

The last bound in (3.17) follows from linear balanced truncation theory [CGP88, Theorem 2.1]. \square

From the preceding estimates we obtain the following error bound on the global dynamics.

Theorem 2 (OU Error bound). *Consider two OU-processes with the same control function $u \in L^2(\Omega_T, \mathbb{R}^m)$, see (1.5), driven by the same Lévy processes, but (possibly different) initial conditions $\xi := \sum_{i=1}^k \langle v, \hat{e}_i \rangle_{\mathbb{R}^k} \phi_i$ and $\tilde{\xi} := \sum_{i=1}^k \langle v, \hat{e}_i \rangle_{\mathbb{R}^k} \tilde{\phi}_i$. Here, (ϕ_i) is the $L^2(\Omega, \mathcal{F}_0, X)$ -orthonormal system of B_{in} .*

The difference of two such processes, satisfies for the same noise profile

$$\frac{\|\Delta(CZ^{\text{ou}})\|_{L^2(\Omega_T)}}{\sqrt{T}} \leq \|\Delta(H^{\text{ou}})\|_{\text{TC}} \left(1 + \frac{\|\xi\|_{L^2(\Omega)} + 2\|u\|_{L^2(\Omega_T)}}{\sqrt{T}} \right). \tag{3.21}$$

Proof. We have for $v \in \mathbb{R}^k$ by orthonormality of (ϕ_i) that $\|v\| = \|\xi\|_{L^2(\Omega)}$ and define $X_t := \int_0^t CT_{t-s} K dM_s$. By Young's inequality, which implies that for $f(s) := \|\Delta(\mathbf{1}_{[0, \infty)} CT_s B)\|$ and $g(s) := \mathbf{1}_{[0, T)} \|u_s\|$ we have

$$\|f * g\|_{L^2(0, T)} \leq \|f\|_{L^1(0, T)} \|g\|_{L^2(0, T)},$$

and Lemma 3.5, it follows that

$$\begin{aligned}
\|\Delta(CZ^{\text{ou}})\|_{L^2(\Omega_T)} &\stackrel{(3.1)}{\leq} \left(\|\Delta(X)\|_{L^2(\Omega_T)} + \|\Delta(CTB_{\text{in}})(v)\|_{L^2(\Omega_T)} \right. \\
&\quad \left. + \|\|\Delta(\mathbb{1}_{[0,\infty)}CTB)\| * \mathbb{1}_{[0,T)}\|u\|\|_{L^2(\Omega_T)} \right) \\
&\stackrel{\text{Young's ineq.}}{\leq} \left(\|\Delta(X)\|_{L^2(\Omega_T)} + \|\Delta(CTB_{\text{in}})\|_{(0,\infty)} \|\xi\|_{L^2(\Omega)} \right. \\
&\quad \left. + \|\Delta(CTB)\|_{L^1(0,\infty)} \|u\|_{L^2(\Omega_T)} \right) \\
&\stackrel{\text{Lemma 3.5}}{\leq} \|\Delta(H^{\text{ou}})\|_{\text{TC}} \left(\sqrt{T} + \|\xi\|_{L^2(\Omega)} + 2\|u\|_{L^2(\Omega_T)} \right).
\end{aligned}$$

□

4. LINEAR SYSTEMS WITH MULTIPLICATIVE NOISE

The solution to the linear S(P)DE (1.1b) is by linearity just given as the sum of the homogeneous process satisfying

$$\begin{aligned}
d\mathcal{H}_t^{\text{lin}} &= A\mathcal{H}_t^{\text{lin}} dt + N\mathcal{H}_t^{\text{lin}} dM_t, \text{ such that} \\
\mathcal{H}_0^{\text{lin}} &= \xi
\end{aligned} \tag{4.1}$$

and the solution to the inhomogeneous problem starting from zero

$$\begin{aligned}
d\mathcal{I}_t^{\text{lin}} &= A\mathcal{I}_t^{\text{lin}} dt + N\mathcal{I}_t^{\text{lin}} dM_t + Bu_t dt, \text{ such that} \\
\mathcal{I}_0^{\text{lin}} &= 0.
\end{aligned} \tag{4.2}$$

The solution to the homogeneous equation (4.1), started at time s from state ξ , defines a flow $\mathcal{H}_t^{\text{lin}} =: \Phi_{t,s}^{\text{lin}}\xi$. If the initial time is $s = 0$, we just write $\Phi_t^{\text{lin}} := \Phi^{\text{lin}}(t, 0)$.

Assumption 2 (Linear systems with multiplicative noise). *We make the assumption that Φ^{lin} is exponentially stable in mean square sense, i.e. there are $\gamma, c > 0$ such that for all $\xi \in L^2(\Omega, \mathcal{F}_s, X)$ and $t \geq s$*

$$\mathbb{E}(\|\Phi_{t,s}^{\text{lin}}\xi\|^2) \leq \gamma e^{-c(t-s)} \mathbb{E}\|\xi\|^2. \tag{4.3}$$

Moreover, we assume that $(M_t)_{t \geq 0}$ is a square-integrable scalar-valued mean zero Lévy process.

We use the following representation of the homogeneous solution with flow $\mathcal{H}_t^{\text{lin}} =: \Phi_t^{\text{lin}}\xi$ such that

$$CZ_t^{\text{lin}} := C\mathcal{H}_t^{\text{lin}} + C\mathcal{I}_t^{\text{lin}} = C\Phi_t^{\text{lin}}\xi + \int_0^t C\Phi_{t,s}^{\text{lin}}Bu_s ds. \tag{4.4}$$

This expression coincides with the output of the mild solution as discussed in [BH18, (5.4)ff.]. The observability and reachability Gramian for linear systems with multiplicative noise are for $x, y \in X$ defined as

$$\begin{aligned} \langle x, \mathcal{O}^{\text{lin}} y \rangle_X &= \mathbb{E} \int_0^\infty \langle C \Phi_s^{\text{lin}} x, C \Phi_s^{\text{lin}} y \rangle_{\mathcal{H}} ds \\ \langle x, \mathcal{P}^{\text{lin}} y \rangle_X &= \mathbb{E} \int_0^\infty \langle x, (\Phi_s^{\text{lin}} B)(\Phi_s^{\text{bil}} B)^* y \rangle_X ds + \langle x, B_{\text{in}} B_{\text{in}}^* y \rangle_X. \end{aligned} \quad (4.5)$$

To decompose the Gramians as

$$\mathcal{O}^{\text{lin}} = W^{\text{lin}*} W^{\text{lin}} \quad \text{and} \quad \mathcal{P}^{\text{lin}} = R^{\text{lin}} R^{\text{lin}*}, \quad (4.6)$$

we introduce observability $W^{\text{lin}} \in \mathcal{L}(X, L^2(\Omega_\infty, \mathcal{H}))$ and reachability maps $R^{\text{lin}} \in \text{HS}(L^2(\Omega_\infty, \mathbb{R}^m) \oplus \mathbb{R}^k, X)$ defined as

$$(W^{\text{lin}} x)_t := C \Phi_t^{\text{lin}} x \quad \text{and} \quad R^{\text{lin}}(f, u) := \mathbb{E} \int_0^\infty \Phi_s^{\text{lin}} B f_s ds + B_{\text{in}} u. \quad (4.7)$$

A straightforward computation shows that the above operators indeed satisfy (4.6).

Definition 4.1 (Hankel operator). *The Hankel operator for the linear system with multiplicative noise is the Hilbert-Schmidt operator defined as*

$$H^{\text{lin}} := W^{\text{lin}} R^{\text{lin}} \in \text{HS}(L^2(\Omega_\infty, \mathbb{R}^m) \oplus \mathbb{R}^k, \mathcal{H})$$

and is trace-class if \mathcal{H} is finite-dimensional.

The above Hilbert-Schmidt and trace-class properties follow from the same arguments as in [BH18, Sec. 5.2]. Adding the operator B_{in} to R^{lin} does not affect these properties as B_{in} is a finite rank operator.

The Gramians (4.5) satisfy the following Lyapunov equations:

Proposition 4.2 (Lyapunov equations). *The stochastic Gramians for the system with multiplicative noise satisfy the following Lyapunov equations for all $x_1, y_1 \in D(A^*)$ and $x_2, y_2 \in D(A)$*

$$\begin{aligned} &\langle x_1, B B^* y_1 \rangle_X + \langle A^* x_1, (\mathcal{P}^{\text{lin}} - B_{\text{in}} B_{\text{in}}^*) y_1 \rangle_X + \langle x_1, (\mathcal{P}^{\text{lin}} - B_{\text{in}} B_{\text{in}}^*) A^* y_1 \rangle_X \\ &\quad + \langle N^* x_1, (\mathcal{P}^{\text{lin}} - B_{\text{in}} B_{\text{in}}^*) N^* y_1 \rangle_X \quad \mathbb{E}(M_1^2) = 0 \quad \text{and} \\ &\langle x_2, C^* C y_2 \rangle_X + \langle A x_2, \mathcal{O}^{\text{lin}} y_2 \rangle_X + \langle x_2, \mathcal{O}^{\text{lin}} A y_2 \rangle_X + \langle N x_2, \mathcal{O}^{\text{lin}} N y_2 \rangle_X \quad \mathbb{E}(M_1^2) = 0. \end{aligned}$$

Proof. It suffices to observe that the observability Gramian and $\mathcal{P}^{\text{lin}} - B_{\text{in}} B_{\text{in}}^*$ coincide with the observability and reachability Gramian in [BH18]. The Lyapunov equations are then stated in [BH18, Lemma 5.6]. \square

Lemma 4.3. *Let \mathcal{H} be a finite-dimensional space, we consider two linear multiplicative systems with the same or two i.i.d. square-integrable mean zero Lévy processes $(M_t)_{t \geq 0}$ each, then the difference of Hankel operators $\Delta(H^{\text{lin}})$ satisfies*

$$\begin{aligned} \|\Delta(C\Phi^{\text{lin}}B_{\text{in}})\|_{L^2(\Omega_\infty, \text{HS}(\mathbb{R}^k, \mathbb{R}^n))} &\leq \|\Delta(H^{\text{lin}})\|_{\text{HS}} \quad \text{and} \\ \|\Delta(C\Phi^{\text{lin}}B)\|_{L_t^1 L_\omega^2(\Omega_\infty, \text{HS}(\mathbb{R}^m, \mathbb{R}^n))} &\leq 2 \|\Delta(H^{\text{lin}})\|_{\text{TC}}. \end{aligned} \quad (4.8)$$

Proof. The first bound in (4.8) follows straight from the definition of the Hilbert-Schmidt norm, i.e. let $(f_j)_{j \in \{1, \dots, k\}}$ be an orthonormal basis of \mathbb{R}^k and $(e_i)_{i \in \mathbb{N}}$ an orthonormal basis of $L^2(\Omega_{(0, \infty)}, \mathcal{H})$. This implies that

$$\|\Delta(H^{\text{lin}})\|_{\text{HS}}^2 \geq \sum_{j=1}^k \sum_{i=1}^{\infty} |\langle e_i, \Delta(H^{\text{lin}})(0, f_j) \rangle_{L^2}|^2 = \|\Delta(C\Phi^{\text{lin}}B_{\text{in}})\|_{L^2(\Omega_\infty, \text{HS}(\mathbb{R}^k, \mathbb{R}^n))}^2.$$

The second bound has been derived in [BH18, Theorem 3, (5.11)] under the assumption that the noise profiles are independent. In the case of the same noise profile, the same proof as for [BH18, Theorem 3] applies. This is because the flow of the coupled system $\widehat{Z}_t = (Z_t, \widetilde{Z}_t)$ is a Markov process, which is the key property used in [BH18, (5.12)].

The Markov property of \widehat{Z}_t follows, since \widehat{Z}_t is a solution to the S(P)DE

$$d\widehat{Z}_t^{\text{lin}} = \widehat{A}^{\text{lin}} \widehat{Z}_t^{\text{lin}} dt + \widehat{N}^{\text{lin}} \widehat{Z}_t^{\text{lin}} dM_t + \widehat{B}^{\text{lin}} u_t dt, \quad (4.9)$$

where we used the notation introduced in (2.4). The solution to this system satisfies the Markov property [PZ07, Sec.9.6]. □

Theorem 3 (Error bound). *Consider two linear systems with multiplicative noise. For initial conditions $\xi = \sum_{i=1}^k \langle v, \widehat{e}_i \rangle_{\mathbb{R}^k} \xi_i$ with $L^2(\Omega, \mathcal{F}_0, X)$ -orthonormal system (ξ_i) , and $\widetilde{\xi} := \sum_{i=1}^k \langle v, \widehat{e}_i \rangle_{\mathbb{R}^k} \widetilde{\xi}_i$, it follows that for two Lévy processes $(M_t)_{t \geq 0}$, which we assume to be either the same or independent, each one of them driving the dynamics of a linear system with multiplicative noise, we have for control functions $u \in L_{\text{ad}}^2(\Omega_\infty, \mathbb{R}^m)$ that*

$$\|\Delta(CZ^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)} \leq \|\Delta(H^{\text{lin}})\|_{\text{TC}} \left(\|\xi\|_{L^2(\Omega)} + 2 \|u\|_{L^2(\Omega_\infty)} \right) \quad (4.10)$$

and for control functions $u \in L_t^2 L_\omega^\infty(\Omega_\infty, \mathbb{R}^n)$ we have

$$\|\Delta(CZ^{\text{lin}})\|_{L^2(\Omega_\infty)} \leq \|\Delta(H^{\text{lin}})\|_{\text{TC}} \left(\|\xi\|_{L^2(\Omega)} + 2 \|u\|_{L_t^2 L_\omega^\infty(\Omega_\infty)} \right) \quad (4.11)$$

Proof. From (4.4) we find that

$$\begin{aligned} \|\Delta(CZ^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)} &\leq \|\Delta(C\mathcal{H}^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)} + \|\Delta(C\mathcal{T}^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)} \quad \text{and} \\ \|\Delta(CZ^{\text{lin}})\|_{L^2(\Omega_\infty)} &\leq \|\Delta(C\mathcal{H}^{\text{lin}})\|_{L^2(\Omega_\infty)} + \|\Delta(C\mathcal{T}^{\text{lin}})\|_{L^2(\Omega_\infty)}. \end{aligned} \quad (4.12)$$

For the first terms on the right-hand side of (4.12) we have using

- the Cauchy-Schwarz inequality in (1),
- the explicit expression for the homogeneous solution in (2), and
- the first estimate of (4.8) in (3)

that

$$\begin{aligned}
 \|\Delta(C\mathcal{H}^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)} &\stackrel{(1)}{\leq} \|\Delta(C\mathcal{H}^{\text{lin}})\|_{L^2(\Omega_\infty)} \\
 &\stackrel{(2)}{\leq} \|\Delta(C\Phi^{\text{lin}} B_{\text{in}})\|_{L^2(\Omega_\infty, \text{HS}(\mathbb{R}^k, \mathbb{R}^n))} \|\xi\|_{L^2(\Omega)} \\
 &\stackrel{(3)}{\leq} \|\Delta(H^{\text{lin}})\|_{\text{HS}} \|\xi\|_{L^2(\Omega)}.
 \end{aligned} \tag{4.13}$$

To estimate the second terms on the right-hand side of (4.12) we require some additional estimates on the inhomogeneous flow (4.2)

$$\begin{aligned}
 \|\Delta(C\mathcal{I}^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)}^2 &\leq \int_0^\infty \left(\mathbb{E} \int_0^t \|\Delta(C\Phi_{t,s} B)\| \|u_s\| ds \right)^2 dt \\
 &\stackrel{(1)}{\leq} \int_0^\infty \left(\int_0^t \sqrt{\mathbb{E}(\|\Delta(C\Phi_{t,s} B)\|^2)} \sqrt{\mathbb{E}(\|u_s\|^2)} ds \right)^2 dt \\
 &\stackrel{(2)}{\leq} \int_0^\infty \left(\int_0^t \sqrt{\mathbb{E}(\|\Delta(C\Phi_{t-s} B)\|_{\text{HS}}^2)} \sqrt{\mathbb{E}(\|u_s\|^2)} ds \right)^2 dt \\
 &\stackrel{(3)}{=} \int_{\mathbb{R}} \left(\int_{\mathbb{R}} \mathbb{1}_{[0,\infty)}(t-s) \sqrt{\mathbb{E}(\|\Delta(C\Phi_{t-s} B)\|_{\text{HS}}^2)} \mathbb{1}_{[0,\infty)}(s) \sqrt{\mathbb{E}(\|u_s\|^2)} ds \right)^2 dt.
 \end{aligned} \tag{4.14}$$

In (1) we applied Hölder's inequality in the expectation value and in (2) we use the Markov property, cf. [BH18, (5.15)]. In (3) we just rewrote the expression using indicator functions to make the convolutional structure more apparent. If we then introduce auxiliary functions $f(s) := \mathbb{1}_{[0,\infty)}(s) \sqrt{\mathbb{E}(\|\Delta(C\Phi_s B)\|_{\text{HS}}^2)}$ and $g(s) := \mathbb{1}_{[0,\infty)}(s) \sqrt{\mathbb{E}(\|u_s\|^2)}$, we can interpret the above estimate as a convolution estimate

$$\|\Delta(C\mathcal{I}^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)} \leq \|f * g\|_{L^2}.$$

If we then apply Young's convolution inequality we find

$$\|f * g\|_{L^2} \leq \|f\|_{L^1} \|g\|_{L^2}.$$

Using that $\|f\|_{L^1} = \|\Delta(C\Phi^{\text{lin}} B)\|_{L_t^1 L_\omega^2(\Omega_\infty, \text{HS}(\mathbb{R}^m, \mathbb{R}^n))}$ and $\|g\|_{L^2} = \|u\|_{L^2(\Omega_\infty)}$ and combining this with the second inequality in (4.8) yields

$$\begin{aligned}
 \|\Delta(C\mathcal{I}^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_\infty)} &\leq \|\Delta(C\Phi^{\text{lin}} B)\|_{L_t^1 L_\omega^2(\Omega_\infty, \text{HS}(\mathbb{R}^m, \mathbb{R}^n))} \|u\|_{L^2(\Omega_{(0,\infty)})} \\
 &\leq 2 \|\Delta(H^{\text{lin}})\|_{\text{TC}} \|u\|_{L^2(\Omega_\infty)}.
 \end{aligned} \tag{4.15}$$

Analogously, we find using Minkowski's integral inequality in (1) and analogous arguments as presented in estimates (4.14) and (4.15) to obtain (2) and (3) respectively,

and using the second estimate in (4.8) to get (4) that

$$\begin{aligned}
\|\Delta(C\mathcal{T}^{\text{lin}})\|_{L^2(\Omega_\infty)}^2 &= \int_0^\infty \mathbb{E} \left(\int_0^t \|\Delta(C\Phi_{t,s}B)\| \|u_s\| ds \right)^2 dt \\
&\stackrel{(1)}{\leq} \int_0^\infty \left(\int_0^t \sqrt{\mathbb{E}(\|\Delta(C\Phi_{t,s}B)\|^2)} \|u_s\|_{L^\infty(\Omega)} ds \right)^2 dt \\
&\stackrel{(2)}{\leq} \int_0^\infty \left(\int_{\mathbb{R}} \mathbb{1}_{(0,\infty)}(t-s) \sqrt{\mathbb{E}(\|\Delta(C\Phi_{t-s}B)\|_{\text{HS}}^2)} \mathbb{1}_{(0,\infty)}(s) \|u_s\|_{L^\infty(\Omega)} ds \right)^2 dt \quad (4.16) \\
&\stackrel{(3)}{\leq} \|\Delta(C\Phi^{\text{lin}}B)\|_{L_t^1 L_\omega^2(\Omega_\infty, \text{HS}(\mathbb{R}^m, \mathbb{R}^n))}^2 \|u\|_{L_t^2 L_\omega^\infty(\Omega_\infty)}^2 \\
&\stackrel{(4)}{\leq} 4 \|\Delta(H^{\text{lin}})\|_{\text{HS}}^2 \|u\|_{L_t^2 L_\omega^\infty(\Omega_\infty)}^2.
\end{aligned}$$

Inserting bounds (4.13), (4.15), (4.16) into (4.12) then yields the claim. \square

We can (formally) improve our previous convergence result using interpolation to $q \in (1, 2)$. The convex case $q = 2$ will be analyzed separately in Section 5.1 for Wiener noise.

Corollary 4.4. *Consider two linear systems with multiplicative noise profile that we assume to be either i.i.d. or the same for both systems. For initial conditions $\xi = \sum_{i=1}^k \langle v, \widehat{e}_i \rangle_{\mathbb{R}^k} \xi_i$ with $L^2(\Omega, \mathcal{F}_0, X)$ orthonormal system (ξ_i) , and $\widetilde{\xi} := \sum_{i=1}^k \langle v, \widehat{e}_i \rangle_{\mathbb{R}^k} \widetilde{\xi}_i$. Let $q \in (1, 2)$ then the following estimate holds*

$$\|\Delta(CZ^{\text{lin}})\|_{L_t^2 L_\omega^q(\Omega_T)} \leq \|\Delta(CZ^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_T)}^{2q-1-1} \|\Delta(CZ^{\text{lin}})\|_{L^2(\Omega_T)}^{2(1-q^{-1})}$$

Moreover, we have that for any $T \in [0, \infty]$ that for $u \in L_{\text{ad}}^2(\Omega_T)$ and γ, c as in (4.3)

$$\|CZ^{\text{lin}}\|_{L^2(\Omega_\infty)} \leq \gamma \|C\| \left(\frac{\|\xi\|_{L^2(\Omega)}}{\sqrt{2c}} + \frac{\|B\|}{c} \|u\|_{L^2(\Omega_\infty)} \right). \quad (4.17)$$

It follows that for two Lévy processes $(M_t)_{t \geq 0}$, that we assume either to be independent or the same, that drive the dynamics of a linear system with multiplicative noise, we have for control functions $u \in L_{\text{ad}}^2(\Omega_T)$ that

$$\begin{aligned}
\|\Delta(CZ^{\text{lin}})\|_{L_t^2 L_\omega^q(\Omega_T)} &\leq \left(\|\Delta(H^{\text{lin}})\|_{\text{TC}} \left(\|\xi\|_{L^2(\Omega)} + 2 \|u\|_{L^2(\Omega_T)} \right) \right)^{2q-1-1} \times \\
&\quad \times \left(\gamma \|C\| \left(\frac{\|\xi\|_{L^2(\Omega)}}{\sqrt{2c}} + \frac{\|B\|}{c} \|u\|_{L^2(\Omega_\infty)} \right) \right)^{2(1-q^{-1})}. \quad (4.18)
\end{aligned}$$

Proof. The result follows from applying Hölder's inequality twice: After applying Hölder's inequality in the expectation with parameters $p = (2-q)^{-1}$ and $\widetilde{p} = (q-1)^{-1}$ for q as in the statement, we obtain

$$\begin{aligned}
\mathbb{E}(\|\Delta(CZ_t^{\text{lin}})\|^q) &\leq \mathbb{E}(\|\Delta(CZ_t^{\text{lin}})\|^{2-q} \|\Delta(CZ_t^{\text{lin}})\|^{2(q-1)}) \\
&\leq (\mathbb{E}(\|\Delta(CZ_t^{\text{lin}})\|))^{2-q} (\mathbb{E}(\|\Delta(CZ_t^{\text{lin}})\|^2))^{q-1}. \quad (4.19)
\end{aligned}$$

We thus conclude that after applying Hölder's inequality with $p = (2q^{-1} - 1)^{-1}$ and $\tilde{p} = (2 - 2q^{-1})^{-1}$ in time that

$$\begin{aligned}
 \|\Delta(CZ^{\text{lin}})\|_{L_t^2 L_\omega^q(\Omega_T)}^2 &= \int_0^T \mathbb{E} (\|\Delta(CZ_t^{\text{lin}})\|^q)^{2/q} dt \\
 &\leq \int_0^T (\mathbb{E} (\|\Delta(CZ_t^{\text{lin}})\|))^{4q^{-1}-2} (\mathbb{E} (\|\Delta(CZ_t^{\text{lin}})\|^2))^{2(1-q^{-1})} dt \\
 &\leq \left(\int_0^T (\mathbb{E} (\|\Delta(CZ_t^{\text{lin}})\|))^2 dt \right)^{2q^{-1}-1} \left(\int_0^T (\mathbb{E} (\|\Delta(CZ_t^{\text{lin}})\|^2)) dt \right)^{2(1-q^{-1})} \\
 &= \|\Delta(CZ^{\text{lin}})\|_{L_t^2 L_\omega^1(\Omega_T)}^{2(2q^{-1}-1)} \|\Delta(CZ^{\text{lin}})\|_{L^2(\Omega_T)}^{4(1-q^{-1})}.
 \end{aligned} \tag{4.20}$$

It therefore suffices to verify the $L^2(\Omega_T)$ -boundedness of the process CZ_t , which is the second term in the last line of (4.20), since the first term has been estimated in Theorem 3.

We then have from (4.4)

$$\|\Delta(CZ^{\text{lin}})\|_{L^2(\Omega_T)} \leq \|\Delta(C\mathcal{H}^{\text{lin}})\|_{L^2(\Omega_T)} + \|\Delta(C\mathcal{I}^{\text{lin}})\|_{L^2(\Omega_T)}. \tag{4.21}$$

The first term on the right-hand side, we can easily estimate as in (4.13)

$$\|\Delta(C\mathcal{H}^{\text{lin}})\|_{L^2(\Omega_T)} \leq \|\Delta(H^{\text{lin}})\|_{\text{HS}} \|\xi\|_{L^2(\Omega)}. \tag{4.22}$$

Thus, it suffices to bound for $u \in L^2(\Omega_\infty)$ the second term on the right-hand side of (4.21). This can be done by looking at

$$\mathcal{I}_t^{\text{lin}} = \int_0^t T_{t-s} N \mathcal{I}_s^{\text{lin}} dM_s + \int_0^t T_{t-s} B u_s ds.$$

Recall that the solution is given

$$CZ_t^{\text{lin}} := C\mathcal{H}_t^{\text{lin}} + C\mathcal{I}_t^{\text{lin}} = C\Phi_t^{\text{lin}} \xi + \int_0^t C\Phi_{t,s}^{\text{lin}} B u_s ds.$$

Using that the flow is exponentially stable, we find uniformly for all $T > 0$

$$\|C\Phi^{\text{lin}} \xi\|_{L^2(\Omega_T)} \leq \gamma \|C\| \|\xi\|_{L^2(\Omega)} \sqrt{\int_0^T e^{-2ct} dt} \leq \gamma \frac{\|C\| \|\xi\|_{L^2(\Omega)}}{\sqrt{2c}}$$

and similarly for $X_t := \int_0^t C\Phi_{t,s}^{\text{lin}} B u_s ds$ using exponential stability of the flow and Minkowski's integral inequality in (1) and Young's convolution inequality in (2)

$$\begin{aligned}
 \|X\|_{L^2(\Omega_T)} &\stackrel{(1)}{\leq} \sqrt{\int_0^T \left(\int_0^t \gamma \|C\| \|B\| e^{-c(t-s)} \sqrt{\|\mathbb{E}\| u_s\|^2} ds \right)^2 dt} \\
 &\stackrel{(2)}{\leq} \frac{\gamma \|C\| \|B\|}{c} \|u\|_{L^2(\Omega_T)}.
 \end{aligned} \tag{4.23}$$

Thus, we have altogether that

$$\|CZ^{\text{lin}}\|_{L^2(\Omega_T)} \leq \gamma \|C\| \left(\frac{\|\xi\|_{L^2(\Omega)}}{\sqrt{2c}} + \frac{\|B\|}{c} \|u\|_{L^2(\Omega_T)} \right).$$

The final inequality in the statement of the Corollary then follows from the above estimates together with Theorem 3. \square

5. OPTIMAL CONTROL THEORY

We start by showing that the abstract optimal control problems for the two stochastic equations (1.1) with control functionals (1.2) are well-posed. Moreover, we state explicit bounds for the optimal control error under model order reduction.

Proposition 5.1. *The optimal control problem (OCP) for stochastic systems (1.1) with associated energy functionals J ,² as in (1.2), is well-posed and there exists a minimizer $u \in L^2(\Omega_T)$ to the OCP. Let us now consider two systems, with outputs CZ and $\tilde{C}\tilde{Z}$ satisfying the conditions of Theorems 2 and 3 respectively, and consider two minimizers, of the two energy functionals systems given by*

$$u_* = \arg \min_u J(CZ(u), u, T) \text{ and } \tilde{u}_* = \arg \min_u J(\tilde{C}\tilde{Z}(u), u, T). \quad (5.1)$$

In the case of Ornstein-Uhlenbeck processes we have

$$\begin{aligned} & \left| \sqrt{J_{\text{LQR}}^{\text{ou}}(CZ^{\text{ou}}(u_*), u_*, T)} - \sqrt{J_{\text{LQR}}^{\text{ou}}(\tilde{C}\tilde{Z}^{\text{ou}}(\tilde{u}_*), \tilde{u}_*, T)} \right| \leq \|\Delta(H^{\text{ou}})\|_{\text{TC}} \times \\ & (1 + T^{-1/2} (\|\xi\|_{L^2(\Omega)} + 2 \max\{\|u_*\|_{L^2(\Omega_T)}, \|\tilde{u}_*\|_{L^2(\Omega_T)}\})) \end{aligned} \quad (5.2)$$

and for linear systems with multiplicative noise and $r \in [1, 2)$ there is $C_T > 0$ such that

$$\begin{aligned} & \left| \sqrt{J_r^{\text{lin}}(CZ^{\text{lin}}(u_*), u_*, T)} - \sqrt{J_r^{\text{lin}}(\tilde{C}\tilde{Z}^{\text{lin}}(\tilde{u}_*), \tilde{u}_*, T)} \right| \\ & \leq \left(\|\Delta(H^{\text{lin}})\|_{\text{TC}} \left(\|\xi\|_{L^2(\Omega)} + 2 \max\{\|u_*\|_{L^2(\Omega_\infty)}, \|\tilde{u}_*\|_{L^2(\Omega_\infty)}\} \right) \right)^{2r^{-1}-1} \\ & \quad \left(\gamma \|C\| \left(\frac{\|\xi\|_{L^2(\Omega)}}{\sqrt{2c}} + \frac{\|B\|}{c} \max\{\|u_*\|_{L^2_{\text{ad}}(\Omega_T)}, \|\tilde{u}_*\|_{L^2_{\text{ad}}(\Omega_T)}\} \right) \right)^{2(1-r^{-1})}. \end{aligned} \quad (5.3)$$

Proof. We restrict us, for the proof of the existence of minimizers, to systems (1.1b), as controlled OU processes (1.1a) can be studied in a similar way.

²We just write J to denote any of the functionals in (1.2)

Since the control functional is bounded from below, we can find a minimizing sequence of $u_n \in L^2_{\text{ad}}(\Omega_T)$ defining processes Z_n^{lin} such that

$$\lim_{n \rightarrow \infty} J_r^{\text{lin}}(CZ_n^{\text{lin}}(u_n), u_n, T) = \inf_{u_* \in L^2_{\text{ad}}(\Omega_T)} J_r^{\text{lin}}(CZ^{\text{lin}}(u_*), u_*, T)$$

so that the u_n satisfy

$$Z_n^{\text{lin}}(t) = T_t \xi + \int_0^t T_{t-s} N Z_n^{\text{lin}}(s) dM_s + \int_0^t T_{t-s} B u_n(s) ds. \quad (5.4)$$

Since the $L^2_{\text{ad}}(\Omega_T)$ norm of the elements (u_n) is bounded, it follows from (4.17) that (Z_n^{lin}) is uniformly bounded in $L^2_{\text{ad}}(\Omega_T)$.

Weak compactness implies the existence of weak limits in $L^2_{\text{ad}}(\Omega_T)$ for subsequences, that we denote just as the original sequences, $Z_n^{\text{lin}} \rightharpoonup Z^{\text{lin}} \in L^2_{\text{ad}}(\Omega_T)$ and $u_n \rightharpoonup u \in L^2_{\text{ad}}(\Omega_T)$.

Recall that by Ito's isometry and $\|T_{t-s}\| \leq \nu e^{-\omega(t-s)}$ in (1), and Young's inequality (2) with $f(s) := \mathbb{1}_{[0, \infty)}(s) \nu^2 e^{-2\omega s}$ and $g(s) := \mathbb{1}_{[0, T)}(s) \mathbb{E} \|\mathcal{S}_s\|^2$ we have

$$\|f * g\|_{L^1(\mathbb{R})} \leq \|f\|_{L^1(\mathbb{R})} \|g\|_{L^1(\mathbb{R})} = \nu^2 / (2\omega) \|\mathcal{S}\|_{L^2(\Omega_T)}^2,$$

there exists a linear continuous operator

$$\begin{aligned} I : L^2_{\text{ad}}(\Omega_T) &\rightarrow L^2_{\text{ad}}(\Omega_T), \quad I(\mathcal{S})_t = \int_0^t T_{t-s} N \mathcal{S}_s dM(s) \\ \|I(\mathcal{S})\|_{L^2(\Omega_T)} &\stackrel{(1)}{\leq} \sqrt{\mathbb{E}(M_1^2)} \|N\| \sqrt{\|f * g\|_{L^2(\mathbb{R})}} \stackrel{(2)}{\leq} \frac{\nu \sqrt{\mathbb{E}(M_1^2)} \|N\|}{\sqrt{2\omega}} \|\mathcal{S}\|_{L^2(\Omega_T)}. \end{aligned} \quad (5.5)$$

Similarly, there is a continuous linear operator

$$\begin{aligned} D : L^2_{\text{ad}}(\Omega_T) &\rightarrow L^2_{\text{ad}}(\Omega_T), \quad D(u)_t = \int_0^t T_{t-s} B u_s ds \\ \|D(u)\|_{L^2(\Omega_T)} &\leq \frac{\|B\| \nu}{\omega} \|u\|_{L^2(\Omega_T)}. \end{aligned} \quad (5.6)$$

Thus, by weak convergence $Z_n^{\text{lin}} \rightharpoonup Z^{\text{lin}}$ in $L^2_{\text{ad}}(\Omega_T)$, we can take any functional $f \in L^2_{\text{ad}}(\Omega_T)^*$. Then $f \circ I \in L^2_{\text{ad}}(\Omega_T)^*$ and thus the following weak limit exists

$$I(Z_n^{\text{lin}}) \rightharpoonup I(Z^{\text{lin}}) \text{ in } L^2_{\text{ad}}(\Omega_T).$$

Furthermore, we have the following weak limits in $L^2_{\text{ad}}(\Omega_T)$

$$\begin{aligned} \int_0^t T_{t-s} N Z_n^{\text{lin}}(s) dM_s &\rightharpoonup \int_0^t T_{t-s} N Z_s^{\text{lin}} dM_s \text{ and} \\ \int_0^t T_{t-s} B u_n(s) ds &\rightharpoonup \int_0^t T_{t-s} B u_s ds \end{aligned} \quad (5.7)$$

such that the process Z^{lin} satisfies with optimal control u

$$Z_t^{\text{lin}} = T_t \xi + \int_0^t T_{t-s} N Z_s^{\text{lin}} dM_s + \int_0^t T_{t-s} B u_s ds.$$

Finally, to see that this solution actually minimizes the optimal control functional, we use that by weak convergence and lower semicontinuity of the norm

$$\begin{aligned} \|CZ(u)\|_{L_t^2 L_\omega^2(\Omega_T)}^2 + \langle u, Ru \rangle_{L^2(\Omega_T)} &\leq \inf_{u_* \in L_{\text{ad}}^2(\Omega_T)} J_r^{\text{lin}}(CZ^{\text{lin}}(u_*), u_*, T) \\ &\leq \lim_{n \rightarrow \infty} J_r^{\text{lin}}(CZ(u_n), u_n, T) \end{aligned} \quad (5.8)$$

which means that by the assumption on the sequence u_n , the control function u is a minimizer.

We now write $Z(u)$ or $\tilde{Z}(u)$ where u is a control in order to emphasize which control is used. We then observe that from the inverse triangle inequality, we have for Ornstein-Uhlenbeck processes using (1.2)

$$\begin{aligned} \sqrt{J_{\text{LQR}}^{\text{ou}}(\tilde{C}\tilde{Z}^{\text{ou}}(u_*), u_*, T) - T^{-1/2} \|\Delta(CZ^{\text{ou}}(u_*))\|_{L^2(\Omega_T)}} &\leq \sqrt{J_{\text{LQR}}^{\text{ou}}(CZ^{\text{ou}}(u_*), u_*, T)} \\ \sqrt{J_{\text{LQR}}^{\text{ou}}(CZ^{\text{ou}}(\tilde{u}_*), \tilde{u}_*, T) - T^{-1/2} \|\Delta(CZ^{\text{ou}}(\tilde{u}_*))\|_{L^2(\Omega_T)}} &\leq \sqrt{J_{\text{LQR}}^{\text{ou}}(\tilde{C}\tilde{Z}^{\text{ou}}(\tilde{u}_*), \tilde{u}_*, T)} \end{aligned} \quad (5.9)$$

and for systems with multiplicative noise

$$\begin{aligned} \sqrt{J_r^{\text{lin}}(\tilde{C}\tilde{Z}^{\text{lin}}(u_*), u_*, T) - \|\Delta(CZ^{\text{lin}}(u_*))\|_{L^2(\Omega_T)}} &\leq \sqrt{J_r^{\text{lin}}(CZ^{\text{lin}}(u_*), u_*, T)} \\ \sqrt{J_r^{\text{lin}}(CZ^{\text{lin}}(\tilde{u}_*), \tilde{u}_*, T) - \|\Delta(CZ^{\text{lin}}(\tilde{u}_*))\|_{L^2(\Omega_T)}} &\leq \sqrt{J_r^{\text{lin}}(\tilde{C}\tilde{Z}^{\text{lin}}(\tilde{u}_*), \tilde{u}_*, T)}. \end{aligned} \quad (5.10)$$

Since u_* and \tilde{u}_* are minimizers of the respective functional, we have

$$\begin{aligned} J_{\text{LQR}|r}^{\text{ou|lin}}(\tilde{C}\tilde{Z}^{\text{ou|lin}}(\tilde{u}_*), \tilde{u}_*, T) &\leq J_{\text{LQR}|r}^{\text{ou|lin}}(\tilde{C}\tilde{Z}^{\text{ou|lin}}(u_*), u_*, T) \\ J_{\text{LQR}|r}^{\text{ou|lin}}(CZ^{\text{ou|lin}}(u_*), u_*, T) &\leq J_{\text{LQR}|r}^{\text{ou|lin}}(CZ^{\text{ou|lin}}(\tilde{u}_*), \tilde{u}_*, T). \end{aligned} \quad (5.11)$$

Both estimates imply immediately that

$$\begin{aligned} &\left| \sqrt{J_{\text{LQR}}^{\text{ou}}(\tilde{C}\tilde{Z}^{\text{ou}}(\tilde{u}_*), \tilde{u}_*, T) - \sqrt{J_{\text{LQR}}^{\text{ou}}(CZ^{\text{ou}}(u_*), u_*, T)}} \right| \\ &\leq T^{-1/2} \max \{ \|\Delta(CZ^{\text{ou}}(\tilde{u}_*))\|_{L^2(\Omega_T)}, \|\Delta(CZ^{\text{ou}}(u_*))\|_{L^2(\Omega_T)} \} \quad \text{and} \\ &\left| \sqrt{J_r^{\text{lin}}(\tilde{C}\tilde{Z}^{\text{lin}}(\tilde{u}_*), \tilde{u}_*, T) - \sqrt{J_r^{\text{lin}}(CZ^{\text{lin}}(u_*), u_* T)}} \right| \\ &\leq \max \{ \|\Delta(CZ^{\text{lin}}(\tilde{u}_*))\|_{L^2(\Omega_T)}, \|\Delta(CZ^{\text{lin}}(u_*))\|_{L^2(\Omega_T)} \}. \end{aligned} \quad (5.12)$$

The bounds then follow from the conditions stated in Theorems 2 and 3 respectively. \square

5.1. Infinite time Linear Quadratic Regulator. In the previous subsection we showed that the energy functionals (1.2) with optimal control are well-approximated by the reduced order models, cf. Proposition 5.1.

In this subsection we go one step further and focus on the control itself and discuss techniques to approximate the optimal control using a reduced order model with a focus on infinite time horizons.

5.1.1. Ornstein-Uhlenbeck processes. Before discussing further the links between model order reduction and optimal control theory, we state in the next Proposition an approximation result on the optimal control u to a high-dimensional Ornstein-Uhlenbeck process with Gaussian noise (1.1a) and error control.

Proposition 5.2. *Let X be finite-dimensional and let $(Z_t^{\text{ou}})_{t \geq 0}$ be a controlled Ornstein-Uhlenbeck process (1.1a) satisfying Assumption 1 with standard Wiener noise $(W_t)_{t \geq 0}$ such that the pair (A, C) is observable. The solution to the OCP with $T = \infty$ and $R > 0$ in (1.2) is given by the fixed-point equation³*

$$u_P(t) = -R^{-1}B^*PZ_t^{\text{ou}}, \quad (5.13)$$

where P is the unique positive-definite solution to the Riccati equation

$$A^*P + PA + C^*C - PBR^{-1}B^*P = 0. \quad (5.14)$$

For a sequence $P_k \geq 0$ of unique solutions to standard Lyapunov equations

$$A_k^*P_k + P_kA_k + C^*C + L_k^*RL_k = 0 \quad (5.15)$$

where $L_k := R^{-1}B^*P_{k-1}$ for $k \geq 1$ and $A_k := A - BL_k$ for $k \geq 0$ with $L_0 := 0$, matrices P_k then converge quadratically and monotonically, in the sense of operators, to P . The control functions

$$u_{P_k}(t) = -R^{-1}B^*P_kZ_t^{\text{ou}},$$

satisfy for $\|P - P_k\|$ sufficiently small, uniformly in the final time parameter T ,

$$T^{-1/2}\|u_P - u_{P_k}\|_{L^2(\Omega_T)} = \mathcal{O}(\|P_k - P_{k-1}\|^2).$$

Proof. Substituting (5.13) into (1.1a) yields an Ornstein-Uhlenbeck process

$$dZ_t^{\text{ou}} = (A - BR^{-1}B^*P)Z_t^{\text{ou}} dt + K dW_t. \quad (5.16)$$

The operator $A_P := A - BR^{-1}B^*P$ is the generator of an exponentially stable semi-group $\|T_P(t)\| \leq \nu e^{-\omega t}$ [Z75, Theorem 1] for some $\nu, \omega > 0$.

³as Z_t^{ou} itself depends on u

Here, P is the unique positive solution to the Riccati equation such that for all $x, y \in D(A)$

$$\langle Ax, Py \rangle_X + \langle Px, Ay \rangle_X + \langle (C^*C - PBR^{-1}B^*P)x, y \rangle_X = 0.$$

By Newton's method, one can approximate P by a sequence $P_k \geq 0$, where P_k solve Lyapunov equations (5.15), for Hurwitz matrices A_k [Kl68, Proof 1)] with quadratic convergence rate [Kl68, (13)] to the solution of the Riccati equation, namely

$$\|P - P_k\| \leq c\|P_k - P_{k-1}\|^2. \quad (5.17)$$

Standard results from semigroup theory imply that A_k is also a generator with semigroup satisfying [EN00, 1.3, Chap. 3]

$$\|T_k(t)\| \leq \nu e^{(-\omega + \nu\|BR^{-1}B^*\|\|P - P_k\|)t}. \quad (5.18)$$

For an approximation P_k of P we find using (3.1), (5.13), and (5.16)

$$\begin{aligned} & \| (u_P - u_{P_k})(t) \|_{L^2(\Omega)} \\ & \leq \|R^{-1}B^*\| \|P - P_k\| \|Z_t^{\text{ou}}\|_{L^2(\Omega)} + \|R^{-1}B^*P_k\| \|Z_t^{\text{ou}} - Z_{k,t}^{\text{ou}}\|_{L^2(\Omega)} \\ & \leq \|R^{-1}B^*\| \left(\|P - P_k\| \left(\left\| \int_0^t T_P(t-s)K dW_s \right\|_{L^2(\Omega)} + \nu e^{-\omega t} \|\xi\|_{L^2(\Omega)} \right) \right. \\ & \quad \left. + \|P_k\| \left(\left\| \int_0^t (T_P - T_k)(t-s)K dW_s \right\|_{L^2(\Omega)} + \|(T_P - T_k)(t)\xi\|_{L^2(\Omega)} \right) \right). \end{aligned}$$

We then use that by the product rule of differentiation

$$\begin{aligned} (T_P - T_k)(t)\xi &= - \int_0^t \frac{d}{ds} (T_P(t-s)T_k(s)\xi) ds \\ &= - \int_0^t T_P(t-s)BR^{-1}B^*(P_k - P)T_k(s)\xi ds \end{aligned} \quad (5.19)$$

such that due to (5.18) and (5.19)

$$\begin{aligned} \|(T_P - T_k)(t)\xi\|_{L^2(\Omega)} &\leq \nu^2 \|BR^{-1}B^*\| \|P - P_k\| \times \\ &\quad \int_0^t e^{-\omega(t-s)} e^{-(\omega - \nu\|BR^{-1}B^*\|\|P - P_k\|)s} ds \|\xi\|_{L^2(\Omega)} \\ &= \nu^2 e^{-\omega t} \|BR^{-1}B^*\| \|P - P_k\| \int_0^t e^{\nu\|BR^{-1}B^*\|\|P - P_k\|s} ds \|\xi\|_{L^2(\Omega)} \\ &= \nu e^{-\omega t} \left(e^{\nu\|BR^{-1}B^*\|\|P - P_k\|t} - 1 \right) \|\xi\|_{L^2(\Omega)}. \end{aligned}$$

Rearranging and estimating further using Ito's isometry and the integral identity

$$\int_0^\infty (e^{-at} (e^{ct} - 1))^2 dt = \frac{c^2}{4a^3 - 6a^2c + 2ac^2}, \text{ for } \operatorname{Re}(a) > \operatorname{Re}(c), \operatorname{Re}(a) > 0, \quad (5.20)$$

we obtain by setting $\alpha := \nu \|BR^{-1}B^*\|$

$$\begin{aligned} \|(u_P - u_{P_k})(t)\|_{L^2(\Omega)} &\leq \nu \|R^{-1}\| \|B\| \left(\|P - P_k\| \left(\|\xi\|_{L^2(\Omega)} + \frac{\|K\|_{\text{HS}}}{\sqrt{2\omega}} \right) \right. \\ &\quad \left. + \frac{\alpha \|K\|_{\text{HS}} \|P - P_k\|}{\sqrt{4\omega^3 - 6\omega^2\alpha \|P - P_k\| + 2\omega\alpha^2 \|P - P_k\|^2}} + e^{-\omega t} (e^{\alpha \|P - P_k\| t} - 1) \|\xi\| \right). \end{aligned} \quad (5.21)$$

By taking the L^2 norm and regularizing the expression by dividing it by \sqrt{T} , we then finally obtain, using $T^{-1/2}\|1\|_{L^2(\Omega_T)} = 1$ and (5.20) in the last term, the following estimate

$$\begin{aligned} T^{-1/2} \|u_P - u_{P_k}\|_{L^2(\Omega_T)} &\leq \nu \|R^{-1}\| \|B\| \|P - P_k\| \times \left(\left(\|\xi\|_{L^2(\Omega)} \frac{\|K\|_{\text{HS}}}{\sqrt{2\omega}} \right) \right. \\ &\quad \left. + \frac{\alpha (\|K\|_{\text{HS}} + T^{-1/2} \|\xi\|)}{\sqrt{4\omega^3 - 6\omega^2\alpha \|P - P_k\| + 2\omega\alpha^2 \|P - P_k\|^2}} \right). \end{aligned} \quad (5.22)$$

□

Thus, by approximating the solution to the Riccati equation using the scheme outlined in Proposition 5.2, the optimal feedback law (5.13) is approximated by the output of a new (uncontrolled) linear system

$$\begin{aligned} dZ_t^{\text{ou}} &= \tilde{A} Z_t^{\text{ou}} dt + K dW_t, \\ Z_0^{\text{ou}} &= \xi, \text{ and} \\ u_{P_k}(t) &= \tilde{C} Z_t^{\text{ou}} \end{aligned} \quad (5.23)$$

with operators

$$\tilde{C} = -R^{-1}B^*P_k, \quad \tilde{A} = A - BR^{-1}B^*P_k, \quad \text{and} \quad \text{ran}(B_{\text{in}}) \ni \xi.$$

If we now define a reduced model to this system, e.g. by balancing the system $(\tilde{C}, \tilde{A}, B = 0, K, B_{\text{in}})$, we can use Theorem 2 to control the error between the outputs. This allows us to approximate the optimal control of the full high-dimensional system by the output of a reduced system of (5.23).

The method outlined in this section allows us to approximate the (unique) optimal control of the full system using an auxiliary reduced order model. This is a stronger result than the approximation of energy functionals in Proposition 5.1. In general, the approximation of the optimal control may not be possible, since the optimal control may not be unique and may not be given as the output of a linear system, again.

5.1.2. *Linear systems with multiplicative noise.* We now turn to the infinite time OCP for finite-dimensional linear systems with multiplicative standard Wiener noise (W_t) (1.1b) and optimal control functionals (1.2) with optimal control

$$u_* = \operatorname{argmin}_{u \in L^2(\Omega_T)} J_{\text{LQR}}^{\text{lin}}(CZ^{\text{lin}}, u, \infty). \quad (5.24)$$

Let P then be the solution to the augmented Riccati equation [RZ00, (5)]

$$A^*P + PA + N^*PN - PBR^{-1}B^TP + C^*C = 0.$$

The optimal control to (5.24) is then given by the fixed-point equation (Z^{lin} also depends on u_*)

$$u_*(t) = -R^{-1}B^*PZ_t^{\text{lin}}. \quad (5.25)$$

Thus, by replacing u_* in the above expression by (5.25), we find that u_* is the output of

$$\begin{aligned} dZ_t^{\text{lin}} &= \tilde{A}Z_t^{\text{lin}} dt + NZ_t^{\text{lin}} dW_t \\ Z_0^{\text{lin}} &= \xi, \text{ and} \\ u_*(t) &= \tilde{C}Z_t^{\text{lin}} \end{aligned} \quad (5.26)$$

with operators

$$\tilde{C} = -R^{-1}B^*P, \quad \tilde{A} = A - BR^{-1}B^*P, \text{ and } \operatorname{ran}(B_{\text{in}}) \ni \xi.$$

Reducing (5.26) leads to an approximation for time optimal control that is based on solving a low-dimensional system.

6. NUMERICAL EXAMPLES

6.1. **Controlled Ornstein-Uhlenbeck.** For an illustration of the above bounds we consider an Ornstein-Uhlenbeck process with control $u_t = \sin(t)\mathbf{1} \in \mathbb{R}^d$ governed by

$$\begin{aligned} dZ_t &= AZ_t dt + B_1u_t dt + B_2 dW_t, \\ Y_t &= CZ_t, \quad Z_0 = z_0, \end{aligned} \quad (6.1)$$

with $Z_t, W_t \in \mathbb{R}^d$, $A, B_1, B_2 \in \mathbb{R}^{d \times d}$, $C \in \mathbb{R}^{m \times d}$, $d, m = 50$, where we choose the corresponding matrices such that the dynamics is most pronounced in the first $r = 5$ dimensions, namely

$$A, B_1, B_2, C = \operatorname{diag}(\underbrace{-1, \dots, -1}_{r \text{ times}}, \underbrace{-0.01, \dots, -0.01}_{d-r \text{ times}}) + (\alpha_{ij}), \quad (6.2)$$

with random noise $\alpha_{ij} \sim \mathcal{N}(0, 10^{-6})$ i.i.d. being different for each variable. We either choose $z_0^* = (0, \dots, 0)$ or $z_0^* = (\underbrace{1, \dots, 1}_{r \text{ times}}, \underbrace{0, \dots, 0}_{d-r \text{ times}})$ as an initial value, take $B_{\text{in}} = z_0$ and

compare the bounds obtained in Theorems 1 and 2 and Corollary 3.4 with a simulation of the full and the reduced dynamics using balanced truncation.

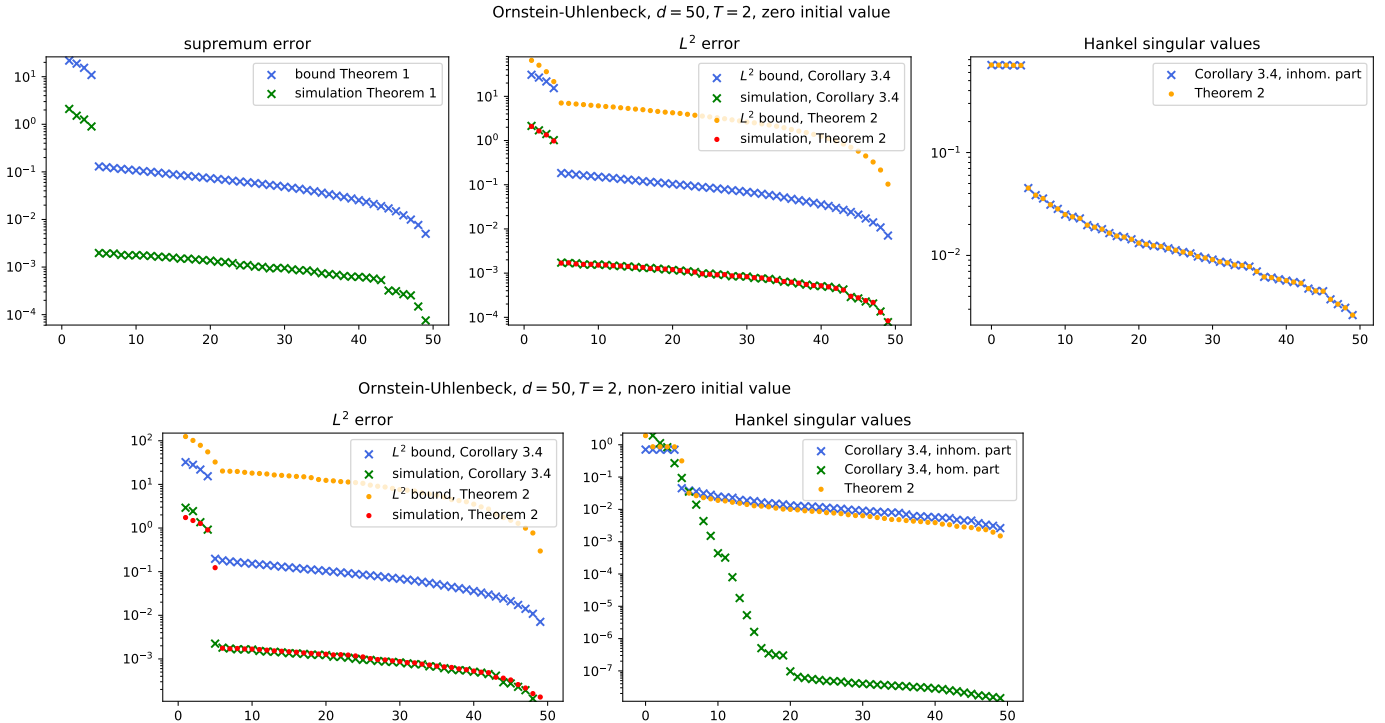


FIGURE 1. Error bounds and simulations of balanced truncation of Ornstein-Uhlenbeck systems. The simulation is the numerically simulated error of the norm specified in the respective Theorem/Corollary.

In the top panel of Figure 1 we show the error bounds as well as the Hankel singular values and simulation results with varying dimension r of the reduced model when starting in $z_0^* = (0, \dots, 0)$. The simulation results are obtained with a simple Euler-Maruyama discretization with step-size 0.01. We see that both bounds are rather conservative, the supremum bound on the left hand side seems to be a bit tighter than the L^2 bounds (also naturally due to the \sqrt{T} scaling of the latter) and we in particular realize that the bound from Corollary 3.4 seems to be tighter than the one from Theorem 2. The bottom panel shows the same approach, however, now choosing $z_0^* = (1, \dots, 1, 0, \dots, 0)$. Here, we do not have a supremum bound anymore, but realize that the two L^2 bounds hold and that model reduction works well. For computing all the Gramians we use the formulas (2.1). The code can be found at github.com/lorenzrichter/balanced-truncation.

6.2. Chain of oscillators. The one-dimensional chain of oscillators is a non-equilibrium statistical mechanics model that describes heat transport through a chain of N particles coupled at each end to heat reservoirs at different temperatures with friction parameter γ at the first and last particle. It was first introduced for the rigorous

derivation of Fourier's law, or a rigorous proof of its breakdown: this is well described in [BLR00]. We consider N particles and denote by q_i the location of each particle with respect to their equilibrium position and by p_i its momentum.

The Hamilton function $H : \mathbb{R}^{2N} \rightarrow \mathbb{R}$ of the system is given by

$$\begin{aligned} H(\mathbf{q}, \mathbf{p}) &= \frac{\langle \mathbf{p}, M^{-1} \mathbf{p} \rangle}{2} + V_{\eta, \zeta}(\mathbf{q}) \text{ where} \\ V_{\eta, \zeta}(\mathbf{q}) &= \sum_{i=1}^N \eta_i q_i^2 + \sum_{i=1}^{N-1} \xi_i (q_i - q_{i+1})^2 \end{aligned} \quad (6.3)$$

with mass matrix $M := m \text{id}_{\mathbb{C}^{N \times N}}$ and coupling strengths $\eta_i, \xi_i > 0$. The above form of the potential describes particles that are fixed by a quadratic *pinning* potential $U_{\text{pin}, i}(q) = \eta_i q^2$ and interact with their nearest neighbors through a quadratic *interaction* potential $U_{\text{int}, i}(q_i - q_j) = \xi_i (q_i - q_j)^2$ for $j = i + 1$ and $i \in \{1, \dots, N\}$.

The 1st and N^{th} particle are each coupled to a heat bath at inverse temperatures β_1 and β_N , respectively. We also assume these two particles $I = \{1, N\}$ to be subject to friction. The dynamics of the system is described by the Langevin dynamics

$$\begin{aligned} d\mathbf{q}_t &= M^{-1} \mathbf{p}_t dt \\ d\mathbf{p}_t &= (-S\mathbf{q}_t - \Gamma \mathbf{p}_t + \sigma u_t) dt + \sigma dW_t \end{aligned}$$

where $u_t \in \mathbb{R}^N$ is an external control and (W_t) an \mathbb{R}^N -valued standard Wiener process. Expressing the system using phase-space coordinates $\mathbf{Z}_t := (\mathbf{q}_t^*, \mathbf{p}_t^*)^*$ we see that the entire system is described by the Ornstein-Uhlenbeck process

$$d\mathbf{Z}_t = (A\mathbf{Z}_t + B u_t) dt + K dW_t \quad (6.4)$$

with

$$\begin{aligned} A &= \begin{pmatrix} 0 & M^{-1} \\ -S & -\Gamma \end{pmatrix}, \quad K = B = \begin{pmatrix} 0 & 0 \\ 0 & \sigma \end{pmatrix}, \text{ with fluctuation-dissipation relation} \\ \sigma &= \text{diag} \left(\frac{\sqrt{2m\gamma}}{\sqrt{\beta_1}}, 0, \dots, 0, \frac{\sqrt{2m\gamma}}{\sqrt{\beta_N}} \right), \quad \Gamma = \text{diag}(\gamma, 0, \dots, 0, \gamma). \end{aligned} \quad (6.5)$$

Here, we changed the notation so that $u_t \in \mathbb{R}^{2N}$ is an external control and (W_t) an \mathbb{R}^{2N} -valued standard Wiener process.

The operator S is the Jacobi (tridiagonal) matrix for $f = (f_1, \dots, f_N) \in \mathbb{R}^N$ defined as

$$(Sf)_n = -\xi_n f_{n+1} - \xi_{n-1} f_{n-1} + (\eta_n + (2 - \delta_{n \in I}) \xi_n) f_n$$

where $f_0 = f_{N+1} := 0$. The matrix A is Hurwitz if all parameters of the model are strictly positive.

The invariant distribution to the uncontrolled process (6.4) is given by [LLR67]

$$\mu_{\Sigma_\beta}(\mathbf{q}, \mathbf{p}) := (2\pi)^{-N/2} \det(\Sigma_\beta^{-1/2}) \exp \left(-\frac{1}{2} \langle (\mathbf{q}, \mathbf{p}), \Sigma_\beta^{-1} (\mathbf{q}, \mathbf{p}) \rangle \right), \quad (6.6)$$

where the covariance matrix Σ_β is the solution to the Lyapunov equation [LLR67, (2.8)]

$$A\Sigma_\beta + \Sigma_\beta A^* + KK^* = 0. \quad (6.7)$$

6.3. Friction and spectral gap. If in the chain of oscillators one chooses the friction according to (6.5), then the spectral gap of A closes necessarily as $N \rightarrow \infty$. This is apparent by studying

$$\sum_{\lambda \in \sigma(A)} \lambda = \text{tr}(A) = \text{tr}(-\Gamma) = -2\gamma.$$

Since we have $2N$ (counting multiplicity) eigenvalues with negative real parts, we conclude that the one with largest real part decays to zero at least with rate $|\text{Re}(\lambda_S)| = \mathcal{O}(N^{-1})$.

The situation changes once we apply a constant non-zero friction $\gamma := \gamma_1 = \gamma_2 > 0$ such that $\Gamma := \text{diag}(\gamma, \dots, \gamma)$ to all the particles. In this case, we find for the determinant using the block-determinant formula

$$\det \begin{pmatrix} Q_{11} & Q_{12} \\ Q_{21} & Q_{22} \end{pmatrix} = \det(Q_{22}Q_{11} - Q_{21}Q_{12}) \text{ if } Q_{11}Q_{12} = Q_{12}Q_{11}$$

the decomposition

$$\det(A - \lambda I) = \det(\lambda^2 I + \lambda \Gamma + SM^{-1}) = 0.$$

This equation is equivalent to solving $\lambda^2 + \gamma\lambda + \mu = 0$ where $\mu \in \sigma(SM^{-1})$. By explicitly solving the quadratic equation, one can see that this equation has only solutions with strictly negative real part if SM^{-1} has a uniform -in the number of particles- spectral gap. A comprehensive discussion of the spectral gap for this model can be found in [M19, BM19].

For our numerical simulations we do not want the closing of the spectral gap to inflict the simulations. We therefore consider a mild constant friction parameter γ_2 and a larger friction parameter γ_1 at the terminal ends of the chain. To be precise, we choose a simulation time $T = 10$, $N = 75$ oscillators and $\gamma_1 = 10, \gamma_2 = 0.25, m = \xi_n = \eta_n = \beta_1 = \beta_N = 1$. Figure 2 shows the balanced truncation bound from Theorem 1 on the left hand side and the L^2 bound from 2 in the middle subplot along with the simulated errors, again with varying reduced dimension r on the x -axis. The plot on the right hand side shows the Hankel singular values. We can see that indeed one can reduce the dimension of the system significantly with only getting a small error and we note that the L^2 error bound seems to saturate for large r , which might be due to numerical issues.

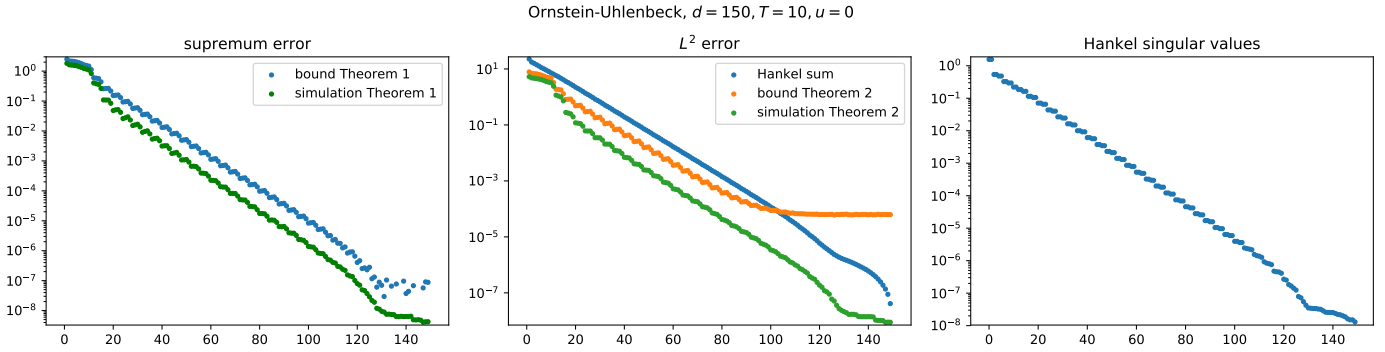


FIGURE 2. Error analysis of the chain of oscillators when applying balanced truncation.

6.4. Stochastic optimal control. We now study the set of reachable distributions $\mathcal{N}(0, \Sigma)$ for a controlled OU process (1.1a). To be precise, we are looking for a feedback law of minimal energy

$$J_{\text{LQR}}^{\text{ou}}(0, u, \infty) := \lim_{T \rightarrow \infty} \frac{\|u\|_{L^2(\Omega_T)}^2}{T} \quad (6.8)$$

to maintain an invariant state μ_Σ for some given $\Sigma > 0$, namely

$$\mu_\Sigma(\mathbf{q}, \mathbf{p}) := (2\pi)^{-N} \det(\Sigma^{-1/2}) \exp\left(-\frac{1}{2} \langle (\mathbf{q}, \mathbf{p}), \Sigma^{-1}(\mathbf{q}, \mathbf{p}) \rangle\right). \quad (6.9)$$

According to [CGP16, Theorem 4] this invariant state can be attained with a control $u_t^* = -K^* \Pi \mathbf{Z}_t$, where Π is (any) symmetric matrix that satisfies

$$(A - BB^* \Pi) \Sigma + \Sigma (A - BB^* \Pi)^* + KK^* = 0. \quad (6.10)$$

In our next Proposition we show that, from the invariant distribution for the chain of oscillators associated with some boundary temperatures $\beta = (\beta_1, \beta_N)$, we can reach the invariant state associated with any other boundary temperature $\beta' = (\beta'_1, \beta'_N)$.

Proposition 6.1. *There exists a control that steers the chain of oscillators (6.4), with physical temperature $\beta = (\beta_1, \beta_N)$, to the invariant distribution $\mathcal{N}(0, \Sigma_{\beta'})$ with temperatures $\beta' = (\beta'_1, \beta'_N)$. If $\beta_1 = \beta_n$ and $\beta'_1 = \beta'_N$ then the invariant state has covariance matrix*

$$\Sigma_{\beta'} = \beta_1'^{-1} \begin{pmatrix} S^{-1} & 0 \\ 0 & M \end{pmatrix} \quad (6.11)$$

and a solution Π to (6.10) reads

$$\Pi = \text{diag} \left(0, \frac{(\beta'_1 - \beta_1)}{2} M^{-1} \right). \quad (6.12)$$

Proof. A sufficient condition [CGP16, Theorem 4] to be able to reach a state $\mathcal{N}(0, \Sigma_{\beta'})$ is that $\text{im}(B) \subset \text{im}(K)$ and Σ solves the Lyapunov equation

$$\Sigma_{\beta'} A^* + A \Sigma_{\beta'} + K K^* + B X^* + X B^* = 0$$

for some X . We thus define diagonal matrices X_δ for $\delta_1, \delta_N \in \mathbb{R}$ by

$$X_\delta := \text{diag}(\underbrace{0, \dots, 0}_{n \text{ times}}, \delta_1, \underbrace{0, \dots, 0}_{n-2 \text{ times}}, \delta_N). \quad (6.13)$$

It is then obvious that for a suitable choice of δ and any other temperature $\beta' = (\beta'_1, \beta'_N)$ at the terminal ends of the chain we have due to (6.7)

$$A \Sigma_{\beta'} + \Sigma_{\beta'} A^* + K_{\beta'} K_{\beta'}^* = 0$$

such that by choosing δ such that

$$A K_\beta K_\beta^* + B_\beta X_\delta^* + X_\delta B_\beta^* = K_{\beta'} K_{\beta'}^*$$

where we used the subscript β to emphasize the temperature profile used in the respective matrix. This implies that the uncontrolled chain of oscillators (6.4) with equilibrium state (6.6) and temperature β can be steered into the equilibrium state (6.6) for any other temperature β' .

The form of the covariance matrix (6.11) can be directly verified by inserting it into (6.7).

To verify (6.12), we use the fluctuation-dissipation relation $\sigma \sigma^* = \frac{2}{\beta_1} M \Gamma$ and write the symmetric matrix Π as a block matrix

$$\Pi = \begin{pmatrix} \Pi_{11} & \Pi_{12} \\ \Pi_{21} & \Pi_{22} \end{pmatrix},$$

we then get

$$\begin{aligned} & \left(\begin{pmatrix} 0 & M^{-1} \\ -S & -\Gamma \end{pmatrix} - \begin{pmatrix} 0 & 0 \\ 0 & \sigma \sigma^* \end{pmatrix} \begin{pmatrix} \Pi_{11} & \Pi_{12} \\ \Pi_{21} & \Pi_{22} \end{pmatrix} \right) \begin{pmatrix} S^{-1} & 0 \\ 0 & M \end{pmatrix} \\ & + \begin{pmatrix} S^{-1} & 0 \\ 0 & M \end{pmatrix} \left(\begin{pmatrix} 0 & -S \\ M^{-1} & -\Gamma \end{pmatrix} - \begin{pmatrix} \Pi_{11}^* & \Pi_{21}^* \\ \Pi_{12}^* & \Pi_{22}^* \end{pmatrix} \begin{pmatrix} 0 & 0 \\ 0 & \sigma \sigma^* \end{pmatrix} \right) = -\beta'_1 \begin{pmatrix} 0 & 0 \\ 0 & \sigma \sigma^* \end{pmatrix} \end{aligned}$$

which reduces to

$$\begin{aligned} & \begin{pmatrix} 0 & M^{-1} \\ -S - \sigma \sigma^* \Pi_{21} & -\Gamma - \sigma \sigma^* \Pi_{22} \end{pmatrix} \begin{pmatrix} S^{-1} & 0 \\ 0 & M \end{pmatrix} \\ & + \begin{pmatrix} S^{-1} & 0 \\ 0 & M \end{pmatrix} \begin{pmatrix} 0 & -S - \Pi_{21}^* \sigma \sigma^* \\ M^{-1} & -\Gamma - \Pi_{22}^* \sigma \sigma^* \end{pmatrix} \\ & = -\beta'_1 \begin{pmatrix} 0 & 0 \\ 0 & \sigma \sigma^* \end{pmatrix}. \end{aligned}$$

From the block (12) we get

$$M^{-1}M - S^{-1}S - S^{-1}\Pi_{21}^*\sigma\sigma^* = 0 \text{ such that we can choose } \Pi_{21} = 0.$$

From the block (22) we get

$$\beta_1'^{-1}(-\Gamma M - \sigma\sigma^*\Pi_{22}M - M\Gamma - M\Pi_{22}^*\sigma\sigma^*) = -\sigma\sigma^*.$$

By symmetry, $\Pi_{12} = 0$. One can check that

$$\Pi_{22} = \frac{(\beta_1' - \beta_1)}{2}M^{-1}.$$

At last, we may then choose $\Pi_{11} = 0$ since this matrix does not enter in the Lyapunov equation.

To see that our choice of Π is admissible it remains to verify that $A - KK^*\Pi$ is Hurwitz. This however follows immediately since A is Hurwitz and $-KK^*\Pi$ is diagonal with non-positive entries.

□

Remark 2. *If one wants to solve (6.10) for a general covariance matrix Σ , vectorization can be used to get*

$$\begin{aligned} \text{vec}(A\Sigma + \Sigma A^* + KK^*) &= \text{vec}(BB^*\Pi\Sigma + \Sigma\Pi^*BB^*) \\ &= (\Sigma \otimes BB^*) \text{vec}(\Pi) + (BB^* \otimes \Sigma) \text{vec}(\Pi^*) \\ &= (\Sigma \otimes BB^* + BB^* \otimes \Sigma) \text{vec}(\Pi), \end{aligned}$$

since we assume Π to be symmetric. Note that Π is admissible only if the rank condition

$$\text{rank} \begin{pmatrix} A\Sigma + \Sigma A^* + KK^* & B \\ B^* & 0 \end{pmatrix} = \text{rank} \begin{pmatrix} 0 & B \\ B^* & 0 \end{pmatrix}$$

holds and $A - BB^*\Pi$ is Hurwitz (see [CGP16]).

6.5. Optimal control meets balanced truncation. We now discuss how to use balanced truncation to steer subsystems into a designated steady state.

We again consider the high-dimensional Ornstein-Uhlenbeck process (6.4), for which we have discussed in Subsection 6.4 the convergence of

$$\Sigma_t = \mathbb{E}(Z_t Z_t^*)$$

to a designated covariance matrix $\Sigma > 0$, under certain conditions.

Now, we want to study the case where we only want to find a control that maintains a certain covariance matrix $\mathbb{R}^{r \times r} \ni \Sigma_{rr} > 0$ for an $r \ll d$ -dimensional projection of our original system. In this case, the above method does not apply immediately.

To be precise, we are interested in reaching the sub-covariance matrix Σ_{rr} as the limiting covariance matrix of

$$\mathcal{Q}\Sigma_t\mathcal{Q}^* = \mathcal{Q}\mathbb{E}(Z_t Z_t^*)\mathcal{Q} = \mathbb{E}((\mathcal{Q}Z_t)(\mathcal{Q}Z_t)^*),$$

where \mathcal{Q} is a suitable projection matrix.

We can now first reduce the model to r dimensions (recall that r is the rank of \mathcal{Q}) using balanced truncation with observability matrix $C = \mathcal{Q}$ and then apply the method described in Subsection (6.4) to the reduced system $(\tilde{C}, \tilde{A}, \tilde{K}, \tilde{B})$ by using that

$$\mathcal{Q}\Sigma_t\mathcal{Q}^* \approx \mathbb{E}\left(\tilde{C}\tilde{Z}_t(\tilde{C}\tilde{Z}_t)^*\right).$$

More precisely, it follows that

$$\begin{aligned} & \left\| \mathbb{E}((CZ_t)(CZ_t)^*) - \mathbb{E}\left((\tilde{C}\tilde{Z}_t)(\tilde{C}\tilde{Z}_t)^*\right) \right\| \\ & \leq \left\| \mathbb{E}\left((CZ_t - \tilde{C}\tilde{Z}_t)(CZ_t)^*\right) \right\| + \left\| \mathbb{E}\left((\tilde{C}\tilde{Z}_t)((CZ_t)^* - (\tilde{C}\tilde{Z}_t)^*)\right) \right\| \\ & \leq \|CZ_t - \tilde{C}\tilde{Z}_t\|_{L^2(\Omega)} \left(\|CZ_t\|_{L^2(\Omega)} + \|\tilde{C}\tilde{Z}_t\|_{L^2(\Omega)} \right). \end{aligned} \quad (6.14)$$

Thus, the covariance matrix $\mathbb{E}\left(\tilde{Z}_t\tilde{Z}_t^*\right)$ that the reduced process \tilde{Z}_t is supposed to maintain is the normal distribution (6.9) with (formal inverse) $\Sigma^{-1} = \tilde{C}^*\Sigma_{rr}^{-1}\tilde{C}$. If Σ^{-1} has full rank, and thus Σ^{-1} is the inverse of an actual matrix Σ^{-1} , then this auxiliary distribution for the reduced system can be used to compute an optimal control, as described in Section 6.4, for the full system.

We illustrate the above ideas in the following example.

Example 1 (Target distribution of outmost oscillators.). *Let us say we want to prescribe the covariance matrix of the subsystem containing only the leftmost and rightmost oscillators and accordingly choose $\mathcal{Q} \in \mathbb{R}^{4 \times d}$, $d = 2N$, with $\mathcal{Q}_{11} = 1$, $\mathcal{Q}_{2,N} = 1$, $\mathcal{Q}_{3,N+1} = 1$, $\mathcal{Q}_{4,2N} = 1$, to retain position and momentum variables, and choose all other $\mathcal{Q}_{ij} = 0$. We can then employ balanced truncation to obtain a reduced system associated with the original system*

$$\begin{aligned} dZ_t &= (AZ_t + Bu_t) dt + K_\beta dW_t \\ Y_t &= \mathcal{Q}Z_t. \end{aligned} \quad (6.15)$$

The reduced system is of lower dimension r with $r \ll d$,

$$\begin{aligned} d\tilde{Z}_t &= (\tilde{A}\tilde{Z}_t + \tilde{B}u_t) dt + \tilde{K}_\beta dW_t \\ \tilde{Y}_t &= \tilde{\mathcal{Q}}\tilde{Z}_t. \end{aligned} \quad (6.16)$$

To run a numerical simulation we choose the sub-covariance to be

$$\Sigma_{kk} = S_{kk} + S_{kk}^*, \quad S_{kk} = \text{diag}(3, \dots, 3) + (|a_{ij}|), \quad a_{ij} \sim \mathcal{N}(0, 1) \quad (6.17)$$

and compute the optimal control as described above. We have realized that it is important to actually check the speed of convergence as [CGP16] does not say anything about the time needed to be “close” to the stationary distribution. This can for instance be done by looking at the smallest real part of the eigenvalues of the matrix $A - BB^*\Sigma$. To evaluate the closeness to our desired target distribution, we compare the empirical covariance $\hat{\Sigma}_{rr,t}$ to the desired covariance Σ_{rr} by means of the scaled Frobenius norm $\frac{1}{d}\|\hat{\Sigma}_{rr,t} - \Sigma_{rr}\|_F$. Figure 3 displays this measure as a function of time by simulating k different realizations of the reduced controlled process up to $T = 30$. We see that we indeed get very close to the desired target, in particular if we choose k large enough. The time discretization of the Euler-Maruyama scheme that we use for discretization seems to be small enough in all trials.

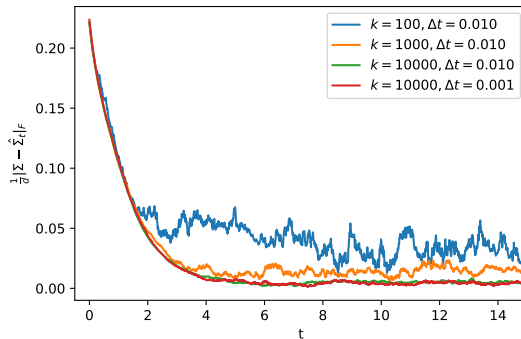


FIGURE 3. Convergence of the reduced chain of oscillator system to the desired target distribution.

Acknowledgements. This work was partly supported by the EPSRC grant EP/L016516/1 for the University of Cambridge CDT, the CCA (S.B.), and the DFG Collaborative Research Center 1114 “Scaling Cascades in Complex Systems”, project A05 (L.R.).

REFERENCES

- [B16] Benner, B., Ohlberger, M., Patera, T., Rozza, G., and Urban, K. (2016). *Model Reduction of Parametrized Systems- Modeling, Simulation and Applications*. Springer International Publishing, Cham.
- [BD10] Breiten, T. and Damm, T. (2010). *Krylov subspace methods for model order reduction of bilinear control systems*. Systems and Control Letters, Elsevier.
- [BD11] Benner, P. and Damm, T. (2011). *Lyapunov equations, energy functionals, and model order reduction of bilinear and stochastic systems*. SIAM Journal on Control and Optimization.
- [BD14] Benner, P. and Damm, T. (2014). *Balanced Truncation for Stochastic Linear Systems with Guaranteed Error Bound*. Proceedings of MTNS-2014. 1492-1497.
- [BGM17] Beattie, C.A., Gugercin, S., and Mehrmann, V. (2017). *Model reduction for systems with inhomogeneous initial conditions*. Systems & Control Letters 99:99-106.

- [BH18] Becker, S. and Hartmann, C. (2019). *Infinite-dimensional bilinear-and stochastic balanced truncation with error bounds*, Mathematics of Control, Signals, and Systems. 31:5.
- [BM19] Becker, S. and Menegaki, A. (2019). *Spectral gap in $\mathcal{O}(n)$ -model and chain of oscillators using Schrödinger operators*, [arXiv:1909.12241](https://arxiv.org/abs/1909.12241).
- [BLR00] Bonetto, F., Lebowitz, J. L., and Rey-Bellet, L. (2000). *Fourier's law: a challenge to theorists*. In: Mathematical physics 2000 (London: Imp. Coll. Press, 2000), pp. 128–150.
- [BR15] Benner, P. and Redmann, M. (2015). *Model reduction for stochastic systems*. Stoch PDE: Anal Comp 3: 291.
- [B65] Bucy, R.S. (1965). *Nonlinear filtering theory*. IEEE Transactions on Automatic Control 10, 198–198.
- [C85] Casti, J.L. (1985). *Nonlinear System Theory*. Academic Press, Inc., Orlando, Florida.
- [CG86] Curtain, R. and Glover K. (1986). *Balanced realisation for infinite-dimensional systems. Operator Theory and Systems*. Birkhäuser, Boston, MA.
- [CGP88] Glover, K., Curtain, R., and Partington, J. (1988). *Realisation and Approximation of Linear Infinite-Dimensional Systems with Error Bounds*. SIAM Journal on Control and Optimization 26:4, 863-898.
- [CGP16] Chen, Y., Georgiou, T., and Pavon, M. (2016). *Optimal Steering of a Linear Stochastic System to a Final Probability Distribution, Part II*. IEEE Transactions on Automatic Control, Volume: 61, 5.
- [DHQ19] Daraghme, A., Hartmann, C., Qatanani, N. (2019). *Balanced model reduction of linear systems with nonzero initial conditions: Singular perturbation approximation*. Appl. Math. Comput. 353, 295–307.
- [DFV14] Donev, A., Fai, T.G., and Vanden-Eijnden, E. (2019). *A reversible mesoscopic model of diffusion in liquids: from giant fluctuations to Fick's law*. J. Stat. Mech. Theor. Exp. 2014(4), P04004.
- [EN00] Engel, K-J. and Nagel, R. (2000). *One-Parameter Semigroups for Linear Evolution Equations*. Springer. Graduate Texts in Mathematics.
- [ES19] Endres, S. and Stübinger, J. (2019). *Optimal trading strategies for Lévy-driven Ornstein-Uhlenbeck processes*. Applied Economics, 2019 - Taylor & Francis
- [FR18] Freitag, M. and Redmann, M. (2018). *Balanced model order reduction for linear random dynamical systems driven by Lévy noise*. Journal of Computational Dynamics, 5, 33-59, 27.
- [G84] Glover, K. (1984). *All optimal Hankel-norm approximations of linear multivariable systems and their L^∞ -error bounds*. Intl. J. Control 39, 1115–1193.
- [H09] Hull, J. (2009). *Options, Futures, and other Derivatives* (7 ed.).
- [HLPZ14] Hartmann, C., Latorre, J.C., Pavliotis, G., and Zhang, W. (2014). *Optimal Control of multiscale systems using reduced-order models*. Journal of Computational Dynamics, Volume 1, Number 2.
- [HRA11] Heinkenschloss, M., Reis, T., and Antoulas, A.C. (2011). *Balanced truncation model reduction for systems with inhomogeneous initial conditions*. Automatica
- [K07] Van Kampen, N.G. (2007) *Stochastic Processes in Physics and Chemistry*. 3. Auflage. North Holland.
- [K168] Kleinman, D.L. (1968). *On an iterative technique for Riccati equation computations*. IEEE Trans. Automatic Control ACo13, 114-115.
- [LLR67] Lieb, E., Lebowitz, J.L., and Rieder, Z. (1967). *Properties of a Harmonic Crystal in a Stationary Nonequilibrium State*. In: Nachtergaele B., Solovej J.P., Yngvason J. (eds) Statistical Mechanics. Springer, Berlin, Heidelberg.

- [MHKZ89] Medina, E., Hwa, T., Kardar, M., and Zhang, Y.-C. (1989). *Burgers equation with correlated noise: Renormalization-group analysis and applications to directed polymers and interface growth*. Phys.Rev. A 39, 3053–3075.
- [M19] Menegaki, A. (2019). *Quantitative Rates of Convergence to Non-Equilibrium Steady State for a Weakly Anharmonic Chain of Oscillators*. [arXiv:1909.11718](https://arxiv.org/abs/1909.11718)
- [ORW13] Opmeer, M., Reis, T., and Wollner, W. (2013). *Finite-Rank ADI Iteration for Operator Lyapunov Equations*. SIAM J. Control and Optimization, 51(5), 4084-4117.
- [PZ07] Peszat, S. and Zabczyk, J. (2007). *Stochastic Partial Differential Equations with Lévy Noise*. Cambridge University Press.
- [RS14] Reis, T. and Selig, T. (2014). *Balancing Transformations for Infinite-Dimensional Systems with Nuclear Hankel operator*. T. Integr. Equ. Oper. Theory, Volume 79, Issue 1, pp 67-105.
- [RZ00] Rami, M. A. and Zhou, X. Y. (2000). *Linear Matrix Inequalities, Riccati Equations, and Indefinite Stochastic Linear Quadratic Controls*. IEEE Transactions on Automatic Control, Vol. 45, No. 6.
- [SHSS11] Schäfer-Bung, B., Hartmann, C., Schmidt, B. and Schütte, C. (2011). *Dimension reduction by balanced truncation: Application to light-induced control of open quantum systems*. J. Chem. Phys. 135, 014112.
- [V77] Vasicek, O. (1977). *An equilibrium characterization of the term structure*. Journal of Financial Economics. 5 (2): 177-188.
- [Z75] Zabczyk, J. (1975). *Remarks on the algebraic Riccati equation in Hilbert space*. Remarks on the algebraic Riccati equation in Hilbert space.

E-mail address: `simon.becker@damtp.cam.ac.uk`

DAMTP, UNIVERSITY OF CAMBRIDGE, WILBERFORCE ROAD, CAMBRIDGE CB3 0WA, UK

E-mail address: `carsten.hartmann@b-tu.de`

INSTITUTE FOR MATHEMATICS, BRANDENBURGISCHE TECHNISCHE UNIVERSITÄT, KONRAD-WACHSMANN-ALLEE 1, 03046 COTTBUS, GERMANY

E-mail address: `martin.redmann@wias-berlin.de`

WIAS BERLIN, MOHRENSTRASSE 39, 10117 BERLIN

E-mail address: `lorenz.richter@gmail.com`

INSTITUTE OF MATHEMATICS, FREIE UNIVERSITÄT BERLIN, BERLIN; INSTITUTE FOR MATHEMATICS, BRANDENBURGISCHE TECHNISCHE UNIVERSITÄT, KONRAD-WACHSMANN-ALLEE 1, 03046 COTTBUS, GERMANY