

# Comments on “Low-Complexity SIC Detection Algorithms for Multiple-Input Multiple-Output Systems”

Hufei Zhu and Yanpeng Wu

**Abstract**—In the above paper, the optimal-ordered successive interference cancellation (SIC) detector proposed for multiple input multiple output (MIMO) systems was claimed to require a lower computational complexity than the optimal-ordered SIC detector proposed in the paper “An Improved Square-Root Algorithm for V-BLAST Based on Efficient Inverse Cholesky Factorization” (*IEEE Trans. Wireless Commun.*, vol. 10, no. 1, Jan. 2011), since several incorrect complexities were quoted or claimed. In this comment, we revise the incorrect complexities, to draw the conclusion that the above-mentioned two detectors actually require the same dominant complexity.

**Index Terms**—Multiple input multiple output (MIMO) system, signal detection, successive interference cancellation (SIC), optimal-ordered.

## I. INTRODUCTION

IN [1], an optimal-ordered successive interference cancellation (SIC) detector was proposed for multiple input multiple output (MIMO) systems, and its computational complexity was compared with the complexity of the optimal-ordered SIC detector proposed in [2]. Unfortunately, incorrect complexities have been quoted in [1] for the detector in [2] and a Givens rotation [3], respectively, and an incorrect complexity has been claimed for the detector in [1], which utilizes a sequence of Givens rotations. In this comment, the above-mentioned incorrect complexities will be revised, and the corresponding conclusion on complexity comparison will be modified.

## II. MAIN REMARKS

As in [1],  $N$  and  $M$  denote the numbers of transmit and receive antennas, respectively. Moreover, as in [2], let  $(k, l)$  denotes the computational complexity of  $k$  complex multiplications and  $l$  complex additions.

In row 5 of Table V in [1], only [2] was cited to claim that the dominant worst-case complexity of the optimal-ordered SIC detector in [2] is  $(\frac{1}{2}MN^2 + \frac{7}{6}N^3, \frac{1}{2}MN^2 + \frac{5}{6}N^3)$ , which should actually be

$$\left(\frac{1}{2}MN^2 + \frac{5}{6}N^3, \frac{1}{2}MN^2 + \frac{1}{2}N^3\right), \quad (1)$$

since (1) has been given in lines 28 and 29 of the right column on [2, p. 46]. On the other hand, [3] was cited in lines 3-5

of the right column on [1, p. 4630], to claim that a complex Givens rotation on a  $(j+1) \times 2$  matrix requires a complexity of

$$(2j+2, 2j+2). \quad (2)$$

However, as described in lines 11 and 12 of the right column on [2, p. 46], (2) should be revised into <sup>1</sup>

$$(3j+3, j+1). \quad (3)$$

Since the complexity of a Givens rotation has been modified from (2) to (3), step 13 in Table II of [1] (which consists of a sequence of Givens rotations) should actually require the worst-case complexity of  $(\frac{1}{2}N^3, \frac{1}{6}N^3)$ , instead of  $(\frac{1}{3}N^3, \frac{1}{3}N^3)$  claimed in lines 8 and 9 of the right column on [1, p. 4630]. Accordingly, the worst-case complexity of the optimal-ordered SIC detector proposed in [1], which includes the complexity of the above-mentioned step 13, should be (1) instead of  $(\frac{1}{2}MN^2 + \frac{2}{3}N^3, \frac{1}{2}MN^2 + \frac{2}{3}N^3)$  claimed in lines 10-12 of the right column on [1, p. 4630]. Thus it can be concluded that both optimal-ordered SIC detectors proposed in [1] and [2] require the same dominant complexity, which is  $O(MN^2 + N^3)$ .

## III. NUMERICAL EXPERIMENTS

Assume  $N = M$ . For different number of transmit/receive antennas, we carried out numerical experiments to count the worst-case and average floating-point operations (flops) of the optimal-ordered SIC detectors proposed in [1] and [2], and the corresponding Matlab source code with an explanatory document has been shared in [4]. The results are shown in Fig. 1. As in [1] and [2], the maximum number of Givens rotations are assumed to count the worst-case flops. To count the average flops, we simulate 10000 random channel matrices  $\mathbf{H}$ , and neither detectors in [1] and [2] permutes the columns in  $\mathbf{H}$  for fair comparison <sup>2</sup>. From Fig. 1, it can be seen that the complexity of the detector in [1] is close to that of the detector in [2], which is consistent with the complexity comparison in the last section.

<sup>1</sup>In equation (5.1.12) on [3, p. 244], the complex Givens rotation is written as  $\begin{bmatrix} c & s \\ -s^* & c \end{bmatrix}$  with a real  $c$  and a complex  $s$ , which is the same as the complex Givens rotation in lines 8-10 of the right column on [2, p. 46].

<sup>2</sup>In [2], the columns in the channel matrix  $\mathbf{H}$  are permuted according to the optimal detection order of the adjacent subcarrier if MIMO OFDM systems are utilized, while in [1], the columns in  $\mathbf{H}$  are permuted in increasing order of their norms, or permuted equivalently by the sorted Cholesky factorization. We do not need to compare the different methods to permute  $\mathbf{H}$ , since the method to permute  $\mathbf{H}$  in [1] can be applied in [2], and vice versa. Accordingly, we do not permute  $\mathbf{H}$  for fair comparison.

H. Zhu is with the College of Computer Science and Software, Shenzhen University, Shenzhen 518060, China (e-mail: zhuhufei@szu.edu.cn).

Y. Wu is with the Department of Information Science and Engineering, Hunan First Normal University, Changsha 410205, China (e-mail: xjzxwyp@hnfnu.edu.cn)

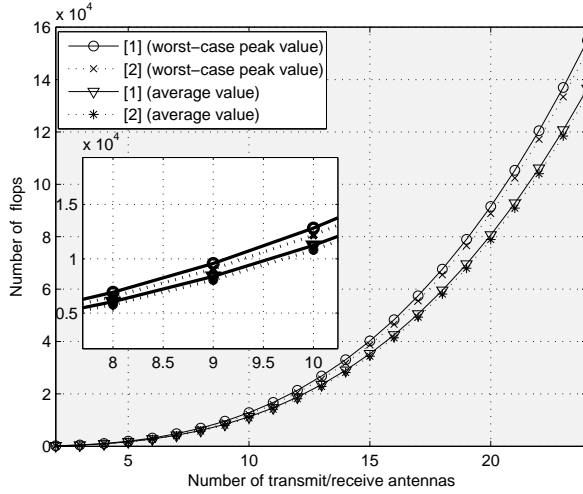


Fig. 1. Comparison of the worst-case and average complexities between the two optimal-ordered SIC detectors proposed in [1] and [2].

#### IV. CONCLUSION

In this comment, we revise the incorrect worst-case complexity quoted in [1] for the optimal-ordered SIC detector proposed in [2]. On the other hand, we also correct the wrong complexity quoted in [1] for a Givens rotation, to revise the worst-case complexity claimed for the optimal-ordered SIC detector proposed in [1]. By comparing the two revised worst-case complexities for the detectors in [1] and [2], we draw the conclusion that both optimal-ordered SIC detectors proposed in [1] and [2] require the same  $O(MN^2 + N^3)$  complexity, which is then confirmed by the results of numerical experiments.

#### REFERENCES

- [1] K. Pham and K. Lee, "Low-Complexity SIC Detection Algorithms for Multiple-Input Multiple-Output Systems", *IEEE Trans. on Signal Processing*, pp. 4625-4633, vol. 63, no. 17, Sept. 2015.
- [2] H. Zhu, W. Chen, B. Li, and F. Gao, "An Improved Square-Root Algorithm for V-BLAST Based on Efficient Inverse Cholesky Factorization", *IEEE Trans. Wireless Commun.*, vol. 10, no. 1, Jan. 2011.
- [3] G. H. Golub and C. F. Van Loan, *Matrix Computations*, Johns Hopkins University Press, Baltimore, MD, 3rd edition, 1996.
- [4] Y. Wu and H. Zhu, "Complexity Comparison between Two Optimal-Ordered SIC MIMO Detectors Based on Matlab Simulations", arXiv preprint arXiv: 2003.03732 (2020).