

Phase-modulated cavity magnon polaritons as a precise magnetic field probe

Nicolò Crescini,^{1,2,*} Giovanni Carugno,^{1,3} and Giuseppe Ruoso²

¹*Dipartimento di Fisica e Astronomia, Via Marzolo 8, 35131 Padova, Italy*

²*INFN-Laboratori Nazionali di Legnaro, Viale dell'Università 2, 35020 Legnaro (PD), Italy*

³*INFN - Sezione di Padova, Via Marzolo 8, 35131 Padova, Italy*

(Dated: November 17, 2020)

We describe and operate a novel spin-magnetometer based on the phase modulation of cavity magnon polaritons. In this scheme a rf magnetic field is detected through the sidebands it induces on a pump, and the experimental configuration allows for a negligible pump noise and a high frequency readout. The demonstrator setup, based on a copper cavity coupled to an yttrium iron garnet sphere hybrid system, reached a sensitivity of $2.0 \text{ pT}/\sqrt{\text{Hz}}$, evading the pump noise and matching the theoretical previsions. An optimized setup can attain a rf magnetic field sensitivity of about $8 \text{ fT}/\sqrt{\text{Hz}}$ at room temperature. An orders of magnitude improvement is expected at lower temperatures, making this instrument one of the few magnetometers accessing the sub-fT limit.

The detection of ultra-low magnetic fields is a long standing technological challenge. The most sensitive types of magnetic field detectors are essentially two: superconducting quantum interference devices (SQUIDs) [1–5] and spin-exchange relaxation-free (SERFs) [6–8] magnetometers, which reach the $\text{fT}/\sqrt{\text{Hz}}$ sensitivity. Medical applications, such as nuclear magnetic resonance (NMR) detection, is possibly the most studied utilization of such devices [9]. Remarkable results have been obtained with both SQUIDs [10–16] and SERFs [17–21]. In the last decades several magnetic field sensors were proposed or demonstrated [22–29, 29–32], making precision magnetometry an alive and dynamic field. SQUIDs are based on Josephson junctions and require cryogenic temperatures to be operated. Room temperature devices are advantageous for cost and possible applications. SERFs magnetometers do not need cryogenics, but require heavy shielding and their sensitivity is volume-dependent.

This letter presents a magnetometer which embodies room temperature operation, size-independent sensitivity, and rf working frequency. It is based on the phase modulation of a pump field exciting a cavity magnon polariton resonance. Measurement of extremely low fields are possible by the detection of a sideband component induced on the input pump. Its expected limit sensitivity is competitive with present state-of-the-art magnetometers and could find application, for example, in medical imaging, communication, and fundamental physics research [8, 33–35].

The working principle of this new device is based on the excitation of the Larmor transition in a magnetic material. By taking a ferrite or a paramagnet and biasing it with a static field \mathbf{B}_0 we obtain an electron spin resonance at the frequency $\omega_L = \gamma B_0$, where $\gamma = (2\pi)28 \text{ GHz/T}$ is the electron gyromagnetic ratio. The presence of a weak magnetic field \mathbf{b}_1 , with frequency ω_b , has different effects. If \mathbf{b}_1 is perpendicular to \mathbf{B}_0 and on-resonance with ω_L , it will accumulate power into the Larmor transition, whose amount is proportional to \mathbf{b}_1 and can be used to measure it [36, 37]. In the complementary case where the direc-

tion of \mathbf{b}_1 is parallel to the static field, the total field determining the Larmor transition is time modulated and will periodically change the frequency of the spin resonance. A microwave tone pumping the magnetic material at the frequency ω_L will thus be phase modulated due to \mathbf{b}_1 with the result of producing sidebands at frequencies $\omega_L \pm n\omega_b$, with n an integer number. The detection of the sidebands will eventually give a measurement of the weak perturbing magnetic field. The device we are presenting in this letter originate by embedding the second scheme in a photon magnon hybrid system (PMHS).

A PMHS consists in two coupled harmonic oscillators, e. g. the normal mode of a microwave cavity and the electron spin resonance of a magnetic material [38–40]. A typical realization of such a system is obtained by properly inserting in a copper microwave cavity a sphere of yttrium iron garnet (YIG), a ferrimagnetic insulator with high spin density and low losses [41–43]. Antennas coupled to the cavity are used for inserting and extracting power from the system. An external static magnetic field \mathbf{B}_0 is used to tune the Larmor frequency of electrons in YIG to the cavity mode frequency and couple the two systems. For ω_L close to the cavity frequency ω_0 , the cavity mode splits into two hybrid modes with frequencies ω_1 and ω_2 , where $g_{21} = \min(\omega_2 - \omega_1)/2$ is the coupling strength. If $g_{21} > \gamma_{1,2}$, the hybrid modes linewidth, the system is in the strong coupling regime. The resulting system can be described by quasiparticles called cavity magnon polaritons (CMPs), whose dispersion relation is an anticrossing curve [44–46].

Let us consider an oscillating field \mathbf{b}_1 parallel to the static one, and apply a monochromatic tone on one of the hybrid modes, like the one at the frequency ω_2 . As in the case of the simple system described before, the oscillating field will produce a frequency modulation of ω_2 , thus causing a phase modulation of the electromagnetic field stored in the PMHS, and sidebands are generated at the frequencies $\omega_2 \pm n\omega_b$. However, since the PMHS has only two resonant modes, for $\omega_b > \gamma_2$, only the sideband satisfying the relation $\omega_2 \pm n\omega_b = \omega_1$ will be present and

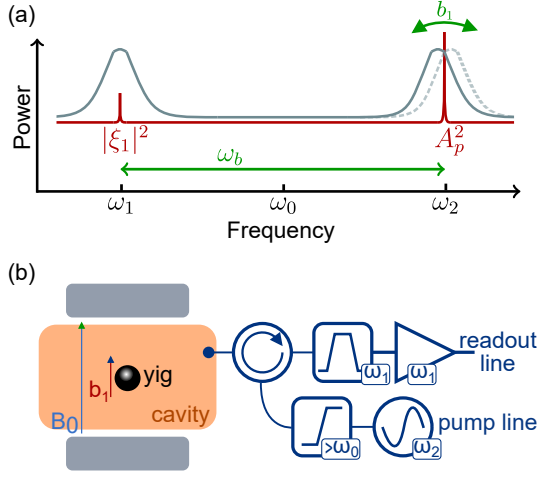


FIG. 1: (a) Scheme of the spin-magnetometer working principle. The gray line represents the transmission spectrum of the PMHS, the dark red line is the pump with the corresponding sideband, the magnetic field effect and its frequency are reported in green. (b) Electronics of an example device. The pump line is filtered with a waveguide with cutoff around ω_0 before exciting the ω_2 resonance. An antenna (full dot) is used to inject the tone and extract the sideband. The output power is filtered and amplified before the readout.

all others will be suppressed. By detecting the power at ω_1 , it will be possible to obtain a measurement of the perturbing field. For small fields the only component with significant amplitude corresponds to $n = 1$ and this system is sensitive to fields whose frequency is $\omega_b = 2g_{21}$. With a PMHS the transduction coefficient between B_0 and mode frequency is not given anymore by the gyro-magnetic ratio but to a smaller coefficient $\gamma_P\gamma$. Such coefficient, extracted from $\partial\omega_{1,2}/\partial B_0$, is practically γ for hybrid modes far away from the cavity resonance, while goes to zero for an hybrid mode close to it. In the case of full hybridization, namely $\omega_2 - \omega_0 = \omega_0 - \omega_1 = g_{21}$, we have $\gamma_P = 1/2$.

A scheme of the spin-magnetometer principle is reported in Fig. 1a. The monochromatic tone can be written as $A_0 \cos(\omega_2 t + \phi_b(t))$, where $\phi_b(t)$ is an oscillating phase added by the field $|\mathbf{b}_1| = b_1 \sin(\omega_b t)$. The resulting phase modulated signal is

$$\xi(t) = A_0 e^{-i\omega_2 t} e^{-ix \sin(\omega_b t)}, \quad (1)$$

where x is the modulation index given by the maximum deviation divided by the working frequency

$$x = \pi Q_2 \gamma_P b_1 / B_0. \quad (2)$$

Here, $Q_2 = \omega_2 / \gamma_2$ is the quality factor of the hybrid resonance. For small values of x , Eq. (1) can be recast in terms of the first kind Bessel functions $J_n(x)$ as

$$\begin{aligned} \xi(t) &= \sum_{n=0}^{+\infty} \xi_n(t) = A_0 e^{-i\omega_2 t} \sum_{n=0}^{+\infty} J_n(x) e^{-in\omega_b t} \\ &\simeq A_0 e^{-i\omega_2 t} \sum_{n=0}^{+\infty} \frac{x^n}{2^n n!} e^{-in\omega_b t}, \end{aligned} \quad (3)$$

where n is a positive integer. The amplitudes of carrier and lower order sidebands are

$$|\xi_0| = A_0, \quad |\xi_1| = \frac{\pi A_0 Q_2 \gamma_P b_1}{2 B_0}, \quad |\xi_2| = \frac{1}{8} \left(\frac{\pi A_0 Q_2 \gamma_P b_1}{B_0} \right)^2. \quad (4)$$

The first order sideband ξ_1 has the higher amplitude, and by comparing it with the backgrounds it allows to calculate the magnetometer's sensitivity to b_1 .

The scheme for a possible experimental set-up is shown in Fig. 1b. A signal generator provides the tone at ω_2 , filtered by a waveguide with cut-off frequency between ω_1 and ω_2 . The waveguide reduces the pump noise at the frequency ω_1 by a factor k_1 that could be as large as 80 dB, depending on the separation between the cut-off and pump frequencies. The waveguide output is fed to the PMHS, namely a resonant cavity with YIG inside, in the total field $\mathbf{B}_0 + \mathbf{b}_1$. The antenna has couplings $\beta_{1,2}$ to the two resonant modes, respectively. The power reflected from the cavity is band-pass filtered and amplified before the readout. The filtering removes the residual pump tone avoiding saturation of the amplifier.

In an experimental setup we consider $Q_2 = Q_2^{(0)} / (1 + \beta_2) = Q_2^L$, the loaded quality factor of the CMP resonance. The output power at the frequency $\omega_1 = \omega_2 - \omega_b$, normalized with the amplifier gain G_1 and filter transmittance c_1 , results

$$\begin{aligned} \frac{P_s(\omega_1)}{G_1 c_1} &= \frac{\beta_1}{1 + \beta_1} |\xi_1|^2 + k_1 \left(\frac{1 - \beta_1}{1 + \beta_1} \right)^2 A_p^2 |\text{RAM}(\omega_b)|^2 \delta\nu + k_B \left[\frac{4\beta_1}{(1 + \beta_1)^2} T + T_n \right] \delta\nu \\ &= A_p^2 \left[\frac{\beta_1}{1 + \beta_1} \frac{4\beta_2}{(1 + \beta_2)^2} \left| \frac{\pi Q_2^{(0)} \gamma_P b_1}{2(1 + \beta_2) B_0} \right|^2 + k_1 \left(\frac{1 - \beta_1}{1 + \beta_1} \right)^2 |\text{RAM}(\omega_b)|^2 \delta\nu \right] + k_B \left[\frac{4\beta_1 T}{(1 + \beta_1)^2} + T_n \right] \delta\nu. \end{aligned} \quad (5)$$

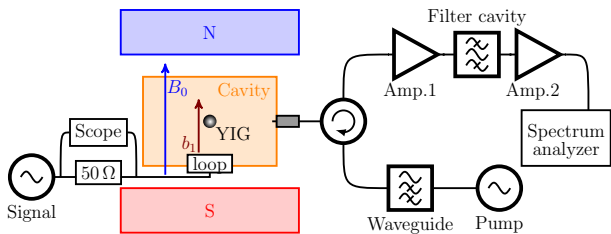


FIG. 2: Scheme of the magnetometer demonstrator. The calibration signal b_1 (dark red) is provided by a generator connected to a loop on the holed side of the cavity, and is monitored with an oscilloscope. The cavity (orange) houses a YIG sphere (black), which is biased with the static field B_0 supplied by an electromagnet represented with its north (N, blue) and south (S, red) poles. The rf cavity field is extracted by an antenna with variable coupling (grey), and passes through a circulator before being amplified by Amp.1 and Amp.2, while the filter cavity avoids the saturation of the second amplifier. The microwave pumping line delivers to the cavity a monochromatic tone filtered with a waveguide.

Here $\text{RAM}(\omega_b)$ is the relative residual amplitude modulation of the pump at ω_b . The absorbed pump power at ω_2 is $A_0^2 = 4\beta_2 A_p^2 / (1 + \beta_2)^2$, k_1 is the waveguide transmittance at ω_1 , k_B is the Boltzmann constant, T the cavity temperature, T_n the detection chain noise temperature and $\delta\nu$ the resolution bandwidth. Cables and circulators have been considered lossless.

The sources of noise present in Eq. (5) are related to the pump and to the system noise temperature. The typical behavior of $\text{RAM}(\omega)$ shows large values at low frequencies with $1/f$ -like trend up to a few MHz. At more than 10 MHz the noise of a commercial pump is flat with values $|\text{RAM}(\omega)|^2 \simeq -160$ dBc/Hz; the best oscillators reduce this limit down to -180 dBc/Hz [47]. This noise can then further reduced to a negligible level by using the waveguide filtering, obtaining a thermal-noise limited device. In this limit we calculate the sensitivity σ_{b_1} of the apparatus, defined as the value of b_1 giving a $\text{SNR} = 1$ in the unit time,

$$\sigma_{b_1} = \frac{2\eta B_0}{\pi Q_2^L \gamma_P} \sqrt{\frac{k_B T_s}{A_p^2}}, \quad (6)$$

where the antennas coupling correction η and system noise temperature T_s are

$$\eta = \frac{(1 + \beta_2)}{2} \sqrt{\frac{1 + \beta_1}{\beta_2 \beta_1}}, \quad T_s = \frac{4\beta_1 T}{(1 + \beta_1)^2} + T_n. \quad (7)$$

With typical values $\beta_{1,2} \simeq 1$, $Q_2^L = 10^4$, $B_0 = 0.4$ T, $A_p^2 = 100$ mW, $T_s = 350$ K, and by working in the dispersive regime (i. e. with $\gamma_P \sim 1$) a sensitivity $\sigma_{b_1} \simeq 8$ fT/ $\sqrt{\text{Hz}}$ is expected already at room temperature.

To demonstrate the operation of the magnetometer we built the apparatus of Fig. 2. It features a microwave copper cavity 32.1 mm long, with a quasi-rectangular section

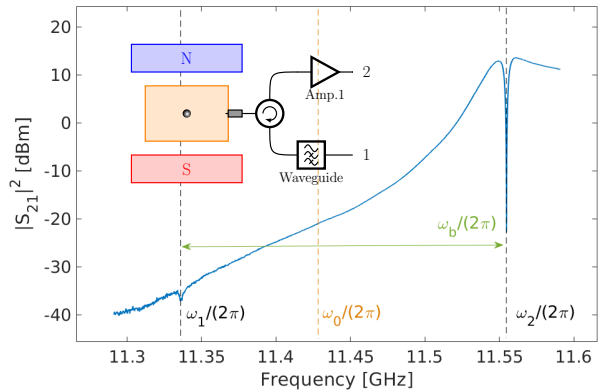


FIG. 3: S_{21} spectrum of the system reported as inset. The two absorption profiles are at the frequencies of the two hybrid modes ω_1 and ω_2 . The waveguide cut-off is roughly at the frequency ω_0 . The setup in the inset has the same colour legend described in Fig. 2.

of 14.8×24.8 mm², as the shorter sides were rounded. A 2 mm-diameter YIG sphere is placed at the center of the cavity, where the rf magnetic field of the chosen TM₁₀₂ mode is maximum. The mode frequency is $\omega_0/2\pi \simeq 11.43$ GHz, and the static field necessary to create the PMHS is $B_0 = \omega_0/\gamma \simeq 0.4$ T, provided by an electromagnet with a bore of 10 cm diameter. The resulting hybrid modes resonate at $\omega_1 \simeq (2\pi) 11.33$ GHz and $\omega_2 \simeq (2\pi) 11.55$ GHz, obtaining $2g_{21} = \omega_2 - \omega_1 \simeq (2\pi) 220$ MHz close to the full hybridization, and thus with $\gamma_P \simeq 0.5$. The cavity is equipped with a hole on one side, hosting a small loop to generate a known test field b_1 parallel to the static field B_0 . A scope measures the current provided to the loop to infer the generated field, with a current to field conversion factor measured by analysing the effect of a dc field on the Larmor frequency of the YIG sample. The generator for the pump A_p could deliver a power up to 26 dBm, injected to a in-house fabricated waveguide with a cut off frequency at about ω_0 . The waveguide has a cross section of 12.8×6.3 mm². The antenna is movable in order to choose appropriate coupling. The two amplifiers are low noise high-electron-mobility transistor (HEMT), with nominal gains $G_1 = 34$ dB, $G_2 = 35$ dB, and the band-pass filter is done with a resonant cavity tuned to ω_2 . The readout is done with a spectrum analyzer.

Fig. 3 shows a spectroscopic measurement of the PMHS, from which we measure $\gamma_1 \simeq (2\pi) 2.2$ MHz, $\gamma_2 \simeq (2\pi) 4.2$ MHz, and a coupling to the hybrid modes $\beta_1 \simeq 0.3$ at ω_1 , and $\beta_2 \simeq 1$ at ω_2 . Even with the band-pass filter, these couplings are necessary to avoid the saturation of the amplifier due to the pump, and still extract some power from ω_1 . The reflected tone power at ω_2 is reduced of more than 30 dB. By injecting calibrated rf signals in the antenna input of the circulator (see Fig. 2),

we measured $T_s \simeq 337$ K, compatible with the amplifiers specifications. We fed the system with a pump of power $A_p^2 = 0.2$ mW at the antenna input. Following Eq. (7), the expected sensitivity results

$$\sigma_{b_1} = 1.9 \times 10^{-12} \text{ T}/\sqrt{\text{Hz}}. \quad (8)$$

We remind that this spin-magnetometer is sensitive to a field at the frequency $2g_{21} \simeq (2\pi) 220$ MHz on a bandwidth as large as the linewidth γ_1 .

The system was tested using the small loop placed on the cavity side hole (see Fig. 2). Fig. 4a shows the spectra of the output signal for different input test fields. The experimental points reported in Fig. 4b shown the voltage A_s measured on a $R = 50 \Omega$ load at the signal frequency $\omega_1 \simeq (2\pi) 11.33$ GHz vs the field generated with the loop. The errors on the values A_s are estimated from repeated measurements with the same input field, they account for an $\sim 18\%$ of the average value and are essentially due to instabilities in the experimental set-up. The uncertainty on the input field, 28%, is almost totally due to the determination of the loop transduction coefficient. Data have been fitted with a linear function, giving the slope $m_{\text{fit}} = (1.1 \pm 0.3) \times 10^5$ V/T. The expected value, derived from Eq. (5), is

$$\begin{aligned} \frac{\sqrt{RP_s(\omega_1)}}{b_1} &= \sqrt{RG_1G_2c_1} \frac{\pi Q_2^I A_p \gamma_P}{2\eta B_0} \\ &= (1.6 \pm 0.3) \times 10^5 \text{ V/T}, \end{aligned} \quad (9)$$

where the total gain $G_1G_2c_1 = 56 \pm 1$ dB has been measured independently. The discrepancy can be due to unaccounted losses in the cables, but essentially the measured value agrees with the expected one, confirming the validity of the proposed device.

From this data we obtained the noise $P_n = -99.8$ dBm with a resolution bandwidth of $\text{RBW} = 100$ Hz, resulting in a voltage sensitivity of 2.2×10^{-7} V/ $\sqrt{\text{Hz}}$. By using the measured transduction coefficient m_{fit} , the field sensitivity results

$$\sigma_{b_1}^s = (2.0 \pm 0.7) \times 10^{-12} \text{ T}/\sqrt{\text{Hz}}, \quad (10)$$

which agrees with the calculated one given by Eq. (8). The noise level at the cavity output results $P_n^i = P_n/(G_1G_2c_1) = (2.6 \pm 0.5) \cdot 10^{-21}$ W/Hz. In the absence of waveguide filtering, the pump noise at ω_1 would be $\sim 10^{-19}$ W/Hz, orders of magnitude higher than the measured thermal noise. By removing the waveguide we verified that the noise grows, and test signals has to be increased to obtain the same SNR. We conclude that the pump noise has been drastically reduced in this setup, and that the limiting background of the apparatus is mostly due to room temperature thermodynamic fluctuations.

The time response of the system is limited by the relaxation time of the hybrid modes and is of order 100 ns.

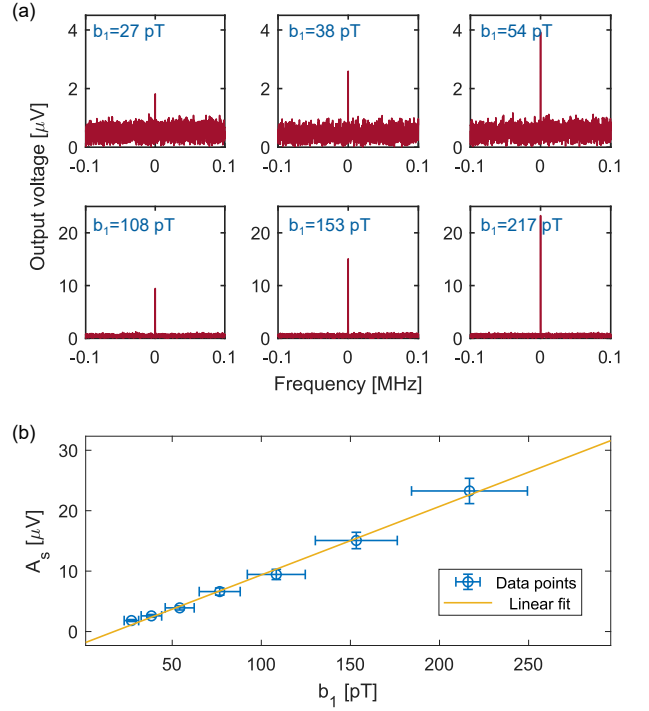


FIG. 4: (a) Signal spectra obtained with different test loop fields. The x -axis is the frequency offset from $\omega_1/(2\pi)$, while the y -axis is the voltage read at the spectrum analyser. The top-left spectrum corresponds to a $\text{SNR} = 1$ field with a resolution bandwidth of 100 Hz, i.e. an integration time of 10 ms. (b) Test measurement of the spin-magnetometer, showing the voltage at ω_1 vs the calculated input field generated with the loop. Data points have been fitted to a linear function, giving a slope $m_{\text{fit}} = (1.1 \pm 0.3) \times 10^5$ V/T and an intercept $q_{\text{fit}} = (-1.9 \pm 0.7) \mu\text{V}$.

The maximum measurable field is given by the condition $Q_1 b_1 \ll B_0$, which holds up to tens of μT amplitudes. The operational bandwidth is an interval of width γ_1 centered at ω_1 . The CMPs frequencies are tuned by varying the static field B_0 , allowing us to obtain an effective bandwidth of hundreds of MHz [48]. The loop on the cavity side, which has been used for testing the setup, can be coupled to an external pick-up coil. With such a scheme it will be possible to measure magnetic fields not directly located on the YIG sample. By properly designing the loop impedance, optimum matching conditions can be achieved with the pick-up loop. The sensitivity can be further pushed by increasing the tone power, however, this value is limited due either to non-linearities of the YIG or thermal-induced instabilities that may arise. By using a cryogenically cooled device coupled with an ultra low noise first-stage amplifier, the limiting noise could be reduced to the standard quantum limit. By replacing the factor $k_B T_s$ with $\hbar\omega$ in Eq. (7), the quoted value $\sigma_{b_1} \simeq 8$ fT/ $\sqrt{\text{Hz}}$ can be further reduced to $\sigma_{b_1} \simeq 0.3$ fT/ $\sqrt{\text{Hz}}$.

As the device sensitivity is not dependent on its size,

one can engineer a much smaller PMHS, consisting for example in printed circuits or dielectric cavities coupled to a suitable magnetic material. Miniaturization may allow for simpler construction and implementation of the device. Multiplexing is also a possibility, for example by means of superconducting circuits [49–51] resonating within the magnetometer bandwidth, which have demonstrated quality factors up to 10^8 [52–54].

In conclusion, we devised and tested a spin-magnetometer based on the phase modulation of cavity magnon polaritons. Our prototype demonstrated the working principle of the device by showing a pT field sensitivity, and an optimized version of the same setup could measure magnetic fields with $\text{fT}/\sqrt{\text{Hz}}$ precision. The tested design is not the only realization of the experimental scheme, which can be implemented in a number of different configurations. The magnetometer has a variable input impedance, a large dynamic range, and a remarkable sensitivity, allowing for its application for example in the field on magnetic imaging. All these features are unprecedented, and make this instrument the first of a class of magnetometers based on photon-magnon hybrid system.

We acknowledge Enrico Berto, Mario Tessaro and Fulvio Calao for their work on the building and operation of the prototype. We thank Federico Chiossi, Caterina Braggio, Antonello Ortolan and Pierre Sikivie for the stimulating discussion regarding the physics of the instrument. The support of INFN-Laboratori Nazionali di Legnaro and of INFN-CNTT is deeply acknowledged. The authors declare that there is a pending patent application related to this research.

* Electronic address: nicolo.crescini@phd.unipd.it

- [1] R. C. Jaklevic, John Lambe, A. H. Silver, and J. E. Mercereau. Quantum interference effects in josephson tunneling. *Phys. Rev. Lett.*, 12:159–160, Feb 1964.
- [2] S. N. Ern , H.-D. Hahlbohm, and H. L bbig. Theory of rf-biased superconducting quantum interference device for nonhysteretic regime. *Journal of Applied Physics*, 47(12):5440–5442, 1976.
- [3] Marco Aprili. The nanosquid makes its debut. *Nature Nanotechnology*, 1(1):15–16, 2006.
- [4] R. Kleiner, D. Koelle, F. Ludwig, and J. Clarke. Superconducting quantum interference devices: State of the art and applications. *Proceedings of the IEEE*, 92(10):1534–1548, Oct 2004.
- [5] Clarke John and Braginski Alex I. *The SQUID Handbook*. John Wiley & Sons, Ltd, 2005.
- [6] I. K. Kominis, T. W. Kornack, J. C. Allred, and M. V. Romalis. A subfemtotesla multichannel atomic magnetometer. *Nature*, 422(6932):596–599, 2003.
- [7] I. M. Savukov, S. J. Seltzer, M. V. Romalis, and K. L. Sauer. Tunable atomic magnetometer for detection of radio-frequency magnetic fields. *Phys. Rev. Lett.*, 95:063004, Aug 2005.
- [8] Dmitry Budker and Michael Romalis. Optical magnetometry. *Nature Physics*, 3(4):227–234, 2007.
- [9] Lukasz J. Zielinski, Shin Utsuzawa, Mason Greer, Yi-Qiao Song, and Martin H rlmann. Remote detection of earth’s field nuclear magnetic resonance with a robust induction magnetometer. *Phys. Rev. Applied*, 13:051002, May 2020.
- [10] Ya. S. Greenberg. Application of superconducting quantum interference devices to nuclear magnetic resonance. *Rev. Mod. Phys.*, 70:175–222, Jan 1998.
- [11] John Clarke, Michael Hatridge, and Michael M ble. Squid-detected magnetic resonance imaging in microtesla fields. *Annual Review of Biomedical Engineering*, 9(1):389–413, 2007. PMID: 17328671.
- [12] Vadim S Zotev, Andrei N Matlashov, Petr L Volegov, Algis V Urbaitis, Michelle A Espy, and Robert H Kraus Jr. SQUID-based instrumentation for ultralow-field MRI. *Superconductor Science and Technology*, 20(11):S367–S373, oct 2007.
- [13] T Fedele, H J Scheer, M Burghoff, G Curio, and R K rber. Ultra-low-noise EEG/MEG systems enable bimodal non-invasive detection of spike-like human somatosensory evoked responses at 1 kHz. *Physiological Measurement*, 36(2):357–368, jan 2015.
- [14] J-H Storm, D Drung, M Burghoff, and R K rber. A modular, extendible and field-tolerant multichannel vector magnetometer based on current sensor SQUIDs. *Superconductor Science and Technology*, 29(9):094001, jul 2016.
- [15] D. Drung, C. Abmann, J. Beyer, A. Kirste, M. Peters, F. Ruede, and T. Schurig. Highly sensitive and easy-to-use squid sensors. *IEEE Transactions on Applied Superconductivity*, 17(2):699–704, June 2007.
- [16] J-H Storm, P H mmen, N H fner, and R K rber. Detection of body noise with an ultra-sensitive SQUID system. *Measurement Science and Technology*, 30(12):125103, sep 2019.
- [17] I. M. Savukov and M. V. Romalis. Nmr detection with an atomic magnetometer. *Phys. Rev. Lett.*, 94:123001, Mar 2005.
- [18] I.M. Savukov, S.J. Seltzer, and M.V. Romalis. Detection of nmr signals with a radio-frequency atomic magnetometer. *Journal of Magnetic Resonance*, 185(2):214 – 220, 2007.
- [19] H. Xia, A. Ben-Amar Baranga, D. Hoffman, and M. V. Romalis. Magnetoencephalography with an atomic magnetometer. *Applied Physics Letters*, 89(21):211104, 2006.
- [20] W. Wasilewski, K. Jensen, H. Krauter, J. J. Renema, M. V. Balabas, and E. S. Polzik. Quantum noise limited and entanglement-assisted magnetometry. *Phys. Rev. Lett.*, 104:133601, Mar 2010.
- [21] J. C. Allred, R. N. Lyman, T. W. Kornack, and M. V. Romalis. High-sensitivity atomic magnetometer unaffected by spin-exchange relaxation. *Phys. Rev. Lett.*, 89:130801, Sep 2002.
- [22] Arne Wickenbrock, Huijie Zheng, Lykourgos Bougas, Nathan Leefer, Samer Afach, Andrey Jarmola, Victor M. Acosta, and Dmitry Budker. Microwave-free magnetometry with nitrogen-vacancy centers in diamond. *Applied Physics Letters*, 109(5):053505, 2016.
- [23] J. M. Taylor, P. Cappellaro, L. Childress, L. Jiang, D. Budker, P. R. Hemmer, A. Yacoby, R. Walsworth, and M. D. Lukin. High-sensitivity diamond magnetometer with nanoscale resolution. *Nature Physics*, 4(10):810–

- 816, Oct 2008.
- [24] Juho Luomahaara, Visa Vesterinen, Leif Grönberg, and Juha Hassel. Kinetic inductance magnetometer. *Nature Communications*, 5(1):4872, 2014.
- [25] I. Baumgart, J.-M. Cai, A. Retzker, M. B. Plenio, and Ch. Wunderlich. Ultrasensitive magnetometer using a single atom. *Phys. Rev. Lett.*, 116:240801, Jun 2016.
- [26] S. Forstner, S. Prams, J. Knittel, E. D. van Ooijen, J. D. Swaim, G. I. Harris, A. Szorkovszky, W. P. Bowen, and H. Rubinsztein-Dunlop. Cavity optomechanical magnetometer. *Phys. Rev. Lett.*, 108:120801, Mar 2012.
- [27] Gianni Di Domenico, Hervé Saudan, Georg Bison, Paul Knowles, and Antoine Weis. Sensitivity of double-resonance alignment magnetometers. *Phys. Rev. A*, 76:023407, Aug 2007.
- [28] F. Giazotto and F. Taddei. Hybrid superconducting quantum magnetometer. *Phys. Rev. B*, 84:214502, Dec 2011.
- [29] Derek F. Jackson Kimball, Alexander O. Sushkov, and Dmitry Budker. Precessing ferromagnetic needle magnetometer. *Phys. Rev. Lett.*, 116:190801, May 2016.
- [30] Tadas Pyragius, Hans Marin Florez, and Thomas Fernholz. Voigt-effect-based three-dimensional vector magnetometer. *Phys. Rev. A*, 100:023416, Aug 2019.
- [31] Akihiro Kuwahata, Takahiro Kitaizumi, Kota Saichi, Takumi Sato, Ryuji Igarashi, Takeshi Ohshima, Yuta Masuyama, Takayuki Iwasaki, Mutsuko Hatano, Fedor Jelezko, Moriaki Kusakabe, Takashi Yatsui, and Masaki Sekino. Magnetometer with nitrogen-vacancy center in a bulk diamond for detecting magnetic nanoparticles in biomedical applications. *Scientific Reports*, 10(1):2483, Feb 2020.
- [32] Samuel Piotr Wolski, Dany Lachance-Quirion, Yutaka Tabuchi, Shingo Kono, Atsushi Noguchi, Koji Usami, and Yasunobu Nakamura. Dissipation-based quantum sensing of magnons with a superconducting qubit. <https://arxiv.org/abs/2005.09250>.
- [33] Vladislav Gerginov, F. Silva, and David Howe. Prospects for magnetic field communications and location using quantum sensors. *Review of Scientific Instruments*, 88:125005, 12 2017.
- [34] Gian Luca Romani, Samuel J. Williamson, and Lloyd Kaufman. Biomagnetic instrumentation. *Review of Scientific Instruments*, 53(12):1815–1845, 1982.
- [35] Karsten Sternickel and Alex I Braginski. Biomagnetism using SQUIDs: status and perspectives. *Superconductor Science and Technology*, 19(3):S160–S171, feb 2006.
- [36] N. Crescini, D. Alesini, C. Braggio, G. Carugno, D. D’Agostino, D. Di Gioacchino, P. Falferi, U. Gambardella, C. Gatti, G. Iannone, C. Ligi, A. Lombardi, A. Ortolan, R. Pengo, G. Ruoso, and L. Taffarello. Axion search with a quantum-limited ferromagnetic haloscope. *Phys. Rev. Lett.*, 124:171801, May 2020.
- [37] Crescini, N., Alesini, D., Braggio, C., Carugno, G., Di Gioacchino, D., Gallo, C. S., Gambardella, U., Gatti, C., Iannone, G., Lamanna, G., Ligi, C., Lombardi, A., Ortolan, A., Pagano, S., Pengo, R., Ruoso, G., Speake, C. C., and Taffarello, L. Operation of a ferromagnetic axion haloscope at $m_a = 58 \mu\text{eV}$. *Eur. Phys. J. C*, 78(9):703, 2018.
- [38] Dany Lachance-Quirion, Yutaka Tabuchi, Arnaud Gloppe, Koji Usami, and Yasunobu Nakamura. Hybrid quantum systems based on magnonics. *Applied Physics Express*, 12(7):070101, jun 2019.
- [39] Hans Huebl, Christoph W. Zollitsch, Johannes Lotze, Fredrik Hocke, Moritz Greifenstein, Achim Marx, Rudolf Gross, and Sebastian T. B. Goennenwein. High cooperativity in coupled microwave resonator ferrimagnetic insulator hybrids. *Phys. Rev. Lett.*, 111:127003, Sep 2013.
- [40] A. A. Clerk, K. W. Lehnert, P. Bertet, J. R. Petta, and Y. Nakamura. Hybrid quantum systems with circuit quantum electrodynamics. *Nature Physics*, 16(3):257–267, Mar 2020.
- [41] The saga of yig: Spectra, thermodynamics, interaction and relaxation of magnons in a complex magnet. *Physics Reports*, 229(3):81 – 144, 1993.
- [42] E. G. Spencer, R. C. LeCraw, and A. M. Clogston. Low-temperature line-width maximum in yttrium iron garnet. *Phys. Rev. Lett.*, 3:32–33, Jul 1959.
- [43] R. C. LeCraw, E. G. Spencer, and C. S. Porter. Ferromagnetic resonance line width in yttrium iron garnet single crystals. *Phys. Rev.*, 110:1311–1313, Jun 1958.
- [44] Charles Kittel. *Introduction to Solid State Physics*. Wiley, 8 edition, 2004.
- [45] Lev D. Landau and Evgenij M. Lifshitz. *Theoretical Physics IX - Statistical physics II: theory of the condensed state*. Editori riuniti - university press, 2010.
- [46] Daniel F Walls and Gerard J Milburn. *Quantum optics*. Springer Science & Business Media, 2007.
- [47] T. M. Fortier, C. W. Nelson, A. Hati, F. Quinlan, J. Taylor, H. Jiang, C. W. Chou, T. Rosenband, N. Lemke, A. Ludlow, D. Howe, C. W. Oates, and S. A. Diddams. Sub-femtosecond absolute timing jitter with a 10 ghz hybrid photonic-microwave oscillator. *Applied Physics Letters*, 100(23):231111, 2012.
- [48] N. Crescini, C. Braggio, G. Carugno, R. Di Vora, A. Ortolan, and G. Ruoso. Magnon-driven dynamics of a hybrid system excited with ultrafast optical pulses. *Communications Physics*, 3(1):164, Sep 2020.
- [49] K. D. Irwin and K. W. Lehnert. Microwave squid multiplexer. *Applied Physics Letters*, 85(11):2107–2109, 2004.
- [50] J. A. B. Mates, G. C. Hilton, K. D. Irwin, L. R. Vale, and K. W. Lehnert. Demonstration of a multiplexer of dissipationless superconducting quantum interference devices. *Applied Physics Letters*, 92(2):023514, 2008.
- [51] Sebastian Kempf, Mathias Wegner, Andreas Fleischmann, Loredana Gastaldo, Felix Herrmann, Maximilian Papst, Daniel Richter, and Christian Enss. Demonstration of a scalable frequency-domain readout of metallic magnetic calorimeters by means of a microwave squid multiplexer. *AIP Advances*, 7(1):015007, 2017.
- [52] L. Frunzio, A. Wallraff, D. Schuster, J. Majer, and R. Schoelkopf. Fabrication and characterization of superconducting circuit qed devices for quantum computation. *IEEE Transactions on Applied Superconductivity*, 15(2):860–863, 2005.
- [53] Matthew Reagor, Wolfgang Pfaff, Christopher Axline, Reinier W. Heeres, Nissim Ofek, Katrina Sliwa, Eric Holland, Chen Wang, Jacob Blumoff, Kevin Chou, Michael J. Hatridge, Luigi Frunzio, Michel H. Devoret, Liang Jiang, and Robert J. Schoelkopf. Quantum memory with millisecond coherence in circuit qed. *Phys. Rev. B*, 94:014506, Jul 2016.
- [54] A. Bruno, G. de Lange, S. Asaad, K. L. van der Eenden, N. K. Langford, and L. DiCarlo. Reducing intrinsic loss in superconducting resonators by surface treatment and deep etching of silicon substrates. *Applied Physics Letters*, 106(18):182601, 2015.