

Minimax Q-learning Control for Linear Systems Using the Wasserstein Metric

Feiran Zhao, Keyou You *

Department of Automation, Beijing National Research Center for Information Science and Technology, Tsinghua University, Beijing 100084, China

Abstract

Stochastic optimal control usually requires an explicit dynamical model with probability distributions, which are difficult to obtain in practice. In this work, we consider the linear quadratic regulator (LQR) problem of unknown linear systems and adopt a Wasserstein penalty to address the distribution uncertainty of additive stochastic disturbances. By constructing an equivalent deterministic game of the penalized LQR problem, we propose a Q-learning method with convergence guarantees to learn an optimal minimax controller.

Key words: Minimax control; Wasserstein metric; Zero-sum game; Q-learning; Distributional robustness guarantee.

1 Introduction

Stochastic control is a well-studied framework for dynamical systems with known probability distributions of uncertain variables (Åström 2012), which is usually difficult to obtain in practice. Directly using an approximated distribution is not always reliable and may even lead to system instability (Nilim & El Ghaoui 2005). To tackle distribution errors, it is natural to use the idea of distributionally robust (DR) optimization with an appropriate distribution metric (Gao & Kleywegt 2022, Wiesemann et al. 2014). Since the Wasserstein metric can well combine the distribution prior knowledge and sampled data (Chen & Paschalidis 2020), it has been recently adopted to the stochastic control. Unfortunately, they require an explicit dynamical model of the control system (Yang 2021, Kim & Yang 2020, 2021).

Reinforcement learning (RL), as a learning-based method to approximately solve Markov decision processes (MDPs), has achieved tremendous progresses in the continuous control (Lillicrap et al. 2016). Since the RL based controller is usually trained over a simulator, it may fail to generalize to practical applications if the

simulator cannot generate samples with probability distributions that correctly reflect the physical system. To tackle it, robust RL algorithms are devised to enhance the robustness of the resulting control policy (Pinto et al. 2017, Abdullah et al. 2019). For example, Abdullah et al. (2019) uses the idea of over-fitting to training environments by minimizing a long-term cost function over a Wasserstein ambiguity set. However, they only focus on the generic MDPs and may require a large number of samples, and the stability of the closed-loop system cannot be guaranteed.

This work takes advantages of both the DR optimization and RL to address the distribution uncertainty in an empirical measure of disturbance samples for unknown linear stochastic systems. Without explicitly identifying the explicit linear model, we aim to solve the minimax linear quadratic regulator (LQR) problem with a Wasserstein penalty via Q-learning. The major challenge lies in that the Q-function cannot be directly evaluated as it involves an expectation over the random disturbance, which is resolved by proposing an equivalent *deterministic* zero-sum game. Then, we apply Al-Tamimi et al. (2007, Section 3) to design an efficient Q-learning method with convergence guarantees to learn an optimal minimax controller.

The rest of the presentation is structured as follows. In Section 2, we describe the minimax control problem with a Wasserstein penalty and provide its closed-form solution. Section 3 designs a Q-learning algorithm to learn

* This research was supported by National Natural Science Foundation of China under Grant no. 62033006, and Tsinghua-Foshan Innovation Special Fund (TFISF).

* Corresponding author

Email addresses: zhaofr18@mails.tsinghua.edu.cn (Feiran Zhao), youky@tsinghua.edu.cn (Keyou You).

the minimax controller by establishing an equivalent deterministic game. Section 4 validates the convergence of the Q-learning algorithm via simulations. We draw some concluding remarks in Section 5.

2 Wasserstein minimax control

In this section, we formulate the LQR problem with a Wasserstein penalty and provide its closed-form solution.

2.1 Problem formulation

We consider a time-invariant linear stochastic system

$$x_{k+1} = Ax_k + Bu_k + Ew_k \quad (1)$$

where (A, B, E) are unknown model parameters, $x_k \in \mathbb{R}^n$ is the state and $u_k \in \mathbb{R}^m$ is the control. The disturbance $\{w_k\} \subseteq \mathbb{R}^d$ is i.i.d. with an unknown probability distribution ν . Moreover, we have collected a finite number of disturbance samples $\{v^j\}_{j=1}^N$. Then, it is natural to use the empirical distribution, i.e., $\nu = \frac{1}{N} \sum_{j=1}^N \delta_{v^j}$ where the Dirac delta measure δ_{v^j} is concentrated at v^j .

To measure the distance between two probability distributions, we adopt the following Wasserstein metric (Gao & Kleywegt 2022)

$$W(\mu_1, \mu_2) = \inf_{\kappa} \left(\int_{\mathbb{R}^d \times \mathbb{R}^d} \|w_1 - w_2\|^2 \kappa(dw_1, dw_2) \right)^{1/2},$$

where $\|\cdot\|$ denotes the standard l_2 -norm, $\kappa \in \Gamma(\mu_1, \mu_2)$, and $\Gamma(\mu_1, \mu_2)$ denotes the set of the joint distributions with marginal distributions μ_1 and μ_2 .

To address the distributional uncertainty in ν , we consider a zero-sum Markov game where the controller is the minimizing player and the disturbance is the maximizing player with distributions as inputs to the game. Particularly, we only focus on the deterministic policies. Let the control policy be $\{\pi_k\}$ that maps the history trajectory $h_k = \{x_0, u_0, \dots, x_k\}$ to the control input, i.e., $u_k = \pi_k(h_k)$. Let the adversarial policy (distribution) be $\{\gamma_k\}$ which maps h_k and u_k to a distribution μ_k , i.e., $\mu_k = \gamma_k(h_k, u_k)$.

Without identifying model (A, B, E) , this work aims to design a Q-learning algorithm via the simulator in Fig. 1 to solve a minimax control problem (Yang 2021)

$$\min_{\{\pi_k\}} \max_{\{\gamma_k\}} \mathbb{E}^{\{\pi_k\}, \{\gamma_k\}} \left[\sum_{k=0}^{\infty} \alpha^k c(x_k, u_k, \mu_k) \right], \quad (2)$$

where $0 < \alpha < 1$ is a discount factor and $c(x_k, u_k, \mu_k) = x_k^\top Q x_k + u_k^\top R u_k - \lambda \cdot W^2(\mu_k, \nu)$ with $Q \geq 0$ and $R > 0$.




Fig. 1. The simulator (a black-box to the control designer) produces the output of (1), which together with the input serve as samples for our learning algorithm.

The tunable hyperparameter $\lambda > 0$ reflects our confidence in the empirical distribution ν . Specifically, the larger λ , the more we trust ν .

2.2 Wasserstein minimax controller

In this work, we make the following assumptions.

Assumption 1 $\Lambda = BR^{-1}B^\top - EE^\top/\lambda > 0$, and (A, \sqrt{Q}) is observable.

Assumption 2 $\lambda > \lambda$ where $\lambda = \inf\{\lambda | \lambda I - \alpha E^\top P E > 0\}$, where P is a positive semi-definite solution to

$$P = H_{xx} - \begin{bmatrix} H_{xu} & H_{xw} \end{bmatrix} \begin{bmatrix} H_{uu} & H_{uw} \\ * & H_{ww} \end{bmatrix}^{-1} \begin{bmatrix} H_{xu}^\top \\ H_{xw}^\top \end{bmatrix} \quad (3)$$

with $H_{xx} = Q + \alpha A^\top P A$, $H_{xu} = \alpha A^\top P B$, $H_{xw} = \alpha A^\top P E$, $H_{uu} = R + \alpha B^\top P B$, $H_{uw} = \alpha B^\top P E$, $H_{ww} = \alpha E^\top P E - \lambda I$.

For simplicity, define g and z as

$$g = G_x - \begin{bmatrix} H_{xu} & H_{xw} \end{bmatrix} \begin{bmatrix} H_{uu} & H_{uw} \\ * & H_{ww} \end{bmatrix}^{-1} \begin{bmatrix} G_u \\ G_w \end{bmatrix},$$

$$z = \alpha z - \lambda \|\bar{w}\|^2 - \text{tr}\{H_{ww}^{-1}(\lambda^2 \Sigma + \frac{1}{4} G_w G_w^\top)\} \quad (4)$$

$$- \frac{1}{4} (G_u^\top - G_w^\top H_{ww}^{-1} H_{uw}^\top) (H_{uu} - H_{uw} H_{ww}^{-1} H_{uw}^\top)^{-1}$$

$$\times (G_u - H_{uw} H_{ww}^{-1} G_w)$$

with $G_x = \alpha A^\top g$, $G_u = \alpha B^\top g$, $G_w = \alpha E^\top g + 2\lambda \bar{w}$, $G_w^j = \alpha E^\top g + 2\lambda v^j$.

Via a simple extension of Kim & Yang (2020), we then obtain a closed-form solution to (2).

Lemma 3 (a) The value function $V(x) = x^\top P x + g^\top x + z$ solves the following Bellman equation

$$V(x_k) = \min_{\{\pi_k\}} \max_{\{\gamma_k\}} \mathbb{E}^{\{\pi_k\}, \{\gamma_k\}} [c(x_k, u_k, \mu_k) + \alpha V(x_{k+1})].$$

(b) The minimax controller for (2) is stationary and has

an affine structure, i.e., $\pi_k(x) = Kx + r$ where

$$\begin{aligned} K &= (H_{uu} - H_{uw}H_{ww}^{-1}H_{uw}^\top)^{-1}(H_{uw}H_{ww}^{-1}H_{xw}^\top - H_{ux}^\top), \\ r &= -\frac{1}{2}(H_{uu} - H_{uw}H_{ww}^{-1}H_{uw}^\top)^{-1}(G_u - H_{uw}H_{ww}^{-1}G_w). \end{aligned} \quad (5)$$

(c) One of the least favorable adversarial policy to solve (2) is discrete and stationary. Specifically, let $w^j(x) = Lx + l^j$ with

$$\begin{aligned} L &= (H_{ww} - H_{uw}^\top H_{uu}^{-1} H_{uw})^{-1}(H_{uw}^\top H_{uu}^{-1} H_{xw}^\top - H_{xw}^\top), \\ l^j &= \frac{1}{2N}(H_{ww} - H_{uw}^\top H_{uu}^{-1} H_{uw})^{-1}(H_{uw}^\top H_{uu}^{-1} G_u - G_w^j). \end{aligned} \quad (6)$$

Then, $\gamma_k(x, u) = \frac{1}{N} \sum_{j=1}^N \delta_{w^j}$ is a least favorable adversarial policy.

For a sufficiently large discount factor α , it can be shown that the minimax controller in (5) can also stabilize the system; see e.g., Başar & Bernhard (2008).

Computing the minimax controller in (5) explicitly requires to know the model matrices (A, B). In the sequel, we design a Q-learning algorithm to learn it via the simulator in Fig. 1.

3 The Q-learning method and convergence

In this section, we first propose a new deterministic game which has the same minimax controller as (5). Then, we develop a Q-learning algorithm with convergence guarantees to learn the minimax controller by solving the proposed deterministic game.

3.1 An equivalent deterministic game

The Q-function $Q(x_k, u_k, \mu_k)$ of (2) is given by

$$\begin{aligned} Q(x_k, u_k, \mu_k) &= x_k^\top Qx_k + u_k^\top Ru_k - \lambda W^2(\mu_k, \nu) \\ &\quad + \alpha \mathbb{E}_{w_k \sim \mu_k} [V(x_{k+1})]. \end{aligned} \quad (7)$$

Once Q-function is determined, an optimal controller can be easily obtained. However, it is ineffective to evaluate $Q(x_k, u_k, \mu_k)$ in (7) as it involves an expectation operator. We use the Kantorovich duality (Gao & Kleywegt 2022) and the quadratic form of $V(x)$ to resolve it. Since

$$\begin{aligned} \min_{u_k} \max_{\mu_k} Q(x_k, u_k, \mu_k) &= \min_{u_k} \{x_k^\top Qx_k + u_k^\top Ru_k \\ &\quad + \frac{1}{N} \sum_{j=1}^N \max_w \{\alpha V(x_{k+1}) - \lambda \|w - v^j\|^2\}\} \\ &= \min_{u_k} \{x_k^\top Qx_k + u_k^\top Ru_k + \max_{w_k} \{\alpha V(x_{k+1}) \\ &\quad - \lambda \|w_k - \bar{w}\|^2\}\} + z_0 \end{aligned} \quad (8)$$

where z_0 is a constant, the expectation issue in (7) can be avoided via the following deterministic zero-sum game

$$\min_{\{\tilde{\pi}_k\}} \max_{\{\tilde{\gamma}_k\}} \sum_{k=0}^{\infty} \alpha^k (x_k^\top Qx_k + u_k^\top Ru_k - \lambda \|w_k - \bar{w}\|^2), \quad (9)$$

where $\{\tilde{\pi}_k\}$ is a control policy sequence in the form $u_k = \tilde{\pi}_k(h_k)$ and $\{\tilde{\gamma}_k\}$ is a disturbance policy sequence in the form $w_k = \tilde{\gamma}_k(h_k, u_k)$.

Particularly, we show in the following theorem that the minimax controller of (2) and (9) are the same.

Theorem 4 Consider the deterministic zero-sum game in (9). We obtain the following results.

(a) The value function $V^d(x_k) = \min_{u_k} \max_{w_k} (x_k^\top Qx_k + u_k^\top Ru_k - \lambda \|w_k - \bar{w}\|^2 + \alpha V^d(x_{k+1}))$ is given by

$$V^d(x) = x^\top Px + g^\top x + z - z_0,$$

where P, g and z are defined in (3) and (4).

(b) The Q-function $Q(x_k, u_k, w_k) = x_k^\top Qx_k + u_k^\top Ru_k - \lambda \|w_k - \bar{w}\|^2 + \alpha V^d(x_{k+1})$ is given by

$$Q(x, u, w) = \begin{bmatrix} x \\ u \\ w \end{bmatrix}^\top H \begin{bmatrix} x \\ u \\ w \end{bmatrix} + G^\top \begin{bmatrix} x \\ u \\ w \end{bmatrix} + s, \quad (10)$$

where s is a constant scalar,

$$H = \begin{bmatrix} H_{xx} & H_{xu} & H_{xw} \\ & H_{uu} & H_{uw} \\ * & & H_{ww} \end{bmatrix}, \text{ and } G^\top = [G_x^\top, G_u^\top, G_w^\top].$$

(c) A minimax controller of (9) is given by (5) and a maximizing policy is given by $w(x) = Lx + l$, where L is given by (6) and

$$l = \frac{1}{2}(H_{ww} - H_{uw}^\top H_{uu}^{-1} H_{uw})^{-1}(H_{uw}^\top H_{uu}^{-1} G_u - G_w).$$

PROOF. The proof is similar to that of Başar & Bernhard (2008, Theorem 3.7) and is omitted for saving space. ■

The major advantage of (9) lies in that the adversarial input is no longer a sequence of distributions.

3.2 Online Q-learning algorithm to solve (2)

By (7)-(10), we now apply the results in Al-Tamimi et al. (2007, Section 3) to provide a Q-learning algorithm to learn $Q(x, u, w)$ in (10) via the simulator in Fig. 1. We first reformulate $Q(x, u, w)$ as a linear function with a parameter vector θ . Let $e = [x^\top, u^\top, w^\top]^\top \in \mathbb{R}^q$ with $q = n + m + d$, $\bar{e} = [e_1^2, \dots, e_1 e_q, e_2^2, e_2 e_3, \dots, e_{q-1} e_q, e_q^2]^\top$, h be the vector formed by stacking the columns of H and then removing the redundant terms introduced by the symmetry of H . Then, the Q-function can be written as

$$Q(x, u, w|\theta) = [h^\top, G^\top, s] [\bar{e}^\top, e^\top, 1]^\top = \theta^\top \bar{e} \quad (11)$$

with $\theta = [h^\top, G^\top, s]^\top$ and $\bar{e} = [\bar{e}^\top, e^\top, 1]^\top$.

Let $d(x_k, \theta) = x_k^\top Q x_k + u_k^{*\top} R u_k^* - \lambda \|w_k^* - \bar{w}\|^2 + \alpha Q(x_{k+1}, u_{k+1}^*, w_{k+1}^*|\theta)$, which can be computed via the sample $\{x_k, u_k^*, w_k^*, x_{k+1}\}$ from the simulator. Then, it follows from the Bellman equation that

$$Q(x_k, u_k^*, w_k^*|\theta) = d(x_k, \theta). \quad (12)$$

Next, we find θ by designing an iterative learning algorithm to solve (12). Suppose that at the i -th iteration, the parameter vector is denoted as θ_i and the resulting pair of policies are $u^i(x) = K_i x + r_i$, $w^i(x) = L_i x + l_i$. With the sampled trajectory $\{x_k^i, u_k^i, w_k^i, x_{k+1}^i\}_{k=0}^{M-1}$ of length M from the simulator, θ_{i+1} is obtained by solving a least-squares problem

$$\begin{aligned} \theta_{i+1} &= \arg \min_{\theta} \sum_{k=0}^{M-1} |Q(x_k^i, u_k^i, w_k^i|\theta) - d(x_k^i, \theta_i)|^2 \\ &= \arg \min_{\theta} \sum_{k=0}^{M-1} |\theta^\top \bar{e}(x_k^i) - d(x_k^i, \theta_i)|^2. \end{aligned} \quad (13)$$

Since u_k^i and w_k^i are linearly dependent on $[x_k^{i\top} \ 1]^\top$, solving (13) yields an infinite number of solutions. To this end, we manually add exploration noises to the control and disturbance inputs, i.e., $u_k^i = K_i x_k + r_i + o_k^1$, $w_k^i = L_i x_k + l_i + o_k^2$, where $o_k^1 \sim \mathcal{N}(0, I_m)$ and $o_k^2 \sim \mathcal{N}(0, I_d)$. This ensures that if $M > \frac{1}{2}(q+1)(q+2)$, there is a unique solution to (13), i.e.,

$$\theta_{i+1} = \left(\sum_{k=0}^{M-1} \bar{e}(x_k^i) \bar{e}(x_k^i)^\top \right)^{-1} \sum_{k=0}^{M-1} \bar{e}(x_k^i) d(x_k^i, \theta_i). \quad (14)$$

We provide the detailed Q-learning algorithm in Algorithm 1 which terminates if the increment of θ_i is smaller than a user-defined threshold.

For simplicity, let $W = \text{diag}(Q, R, -\lambda I)$, $c_i = [0, r_i^\top, l_i^\top]^\top$ and $U_i = [I, K_i^\top, L_i^\top]^\top$. Then, we prove the convergence of Algorithm 1.

Algorithm 1 The Q-learning algorithm

Input: Penalty parameter λ , discount factor α , disturbance samples $\{v^j\}_{j=1}^N$, length of a trajectory M .

Output: a minimax controller $u(x) = K_\infty x + r_\infty$.

- 1: Initialize $\theta_0 = 0$, $K_0 = 0$, $r_0 = 0$, $L_0 = 0$ and $l_0 = 0$.
 - 2: **for** $i = 0, 1, \dots$ **do**
 - 3: Sample a trajectory $\{x_k^i, u_k^i, w_k^i, x_{k+1}^i\}_{k=0}^{M-1}$ with a fixed initial state x_0 from the simulator.
 - 4: Update θ_{i+1} by (14).
 - 5: Update the policy pair (K_{i+1}, r_{i+1}) and (L_{i+1}, l_{i+1}) from θ_{i+1} .
 - 6: **end for**
-

Theorem 5 *If $M > \frac{1}{2}(q+1)(q+2)$, then $\{\theta_i\}$ in Algorithm 1 converges to θ .*

PROOF. We first show that $\theta_{i+1} = [h_{i+1}^\top \ G_{i+1}^\top \ s_{i+1}]^\top$ in (14) is given by

$$H_{i+1} = W + \alpha \begin{bmatrix} A & B & E \\ K_i A & K_i B & K_i E \\ L_i A & L_i B & L_i E \end{bmatrix}^\top H_i \begin{bmatrix} A & B & E \\ K_i A & K_i B & K_i E \\ L_i A & L_i B & L_i E \end{bmatrix}, \quad (15)$$

$$G_{i+1}^\top = \alpha(G_i^\top + 2c_i^\top H_i)U_i[A, B, E] + [0, 0, 2\lambda\bar{w}^\top], \quad (16)$$

$$s_{i+1} = \alpha(s_i + G_i^\top c_i + c_i^\top H_i c_i) - \lambda\|\bar{w}\|^2.$$

To this end, define $V_i = [\bar{e}(x_0^i), \bar{e}(x_1^i), \dots, \bar{e}(x_{M-1}^i)]$ and $Y_i = [d(x_0^i, \theta_i), d(x_1^i, \theta_i), \dots, d(x_{M-1}^i, \theta_i)]^\top$. It follows from (14) that $\theta_{i+1} = (V_i V_i^\top)^{-1} V_i Y_i$. Next, we show that $Y_i = V_i^\top y(\theta_i)$, where $y(\theta_i)$ is a function of θ_i . By the definition of $d(x_k, \theta_i)$, we obtain

$$\begin{aligned} d(x_k, \theta_i) &= e(x_k)^\top W e(x_k) + [0, 0, 2\lambda\bar{w}^\top] e(x_k) - \lambda\|\bar{w}\|^2 \\ &\quad + \alpha(e(x_{k+1})^\top H_i e(x_{k+1}) + G_i^\top e(x_{k+1}) + s_i). \end{aligned} \quad (17)$$

Moreover, the term $e(x_{k+1})$ in (17) can be written as

$$\begin{aligned} e(x_{k+1}) &= e([A, B, E]e(x_k)) \\ &= e([A, B, E](U_i x_k + c_i)) \\ &= U_i [A, B, E](U_i x_k + c_i) + c_i \\ &= U_i [A, B, E]e(x_k) + c_i. \end{aligned} \quad (18)$$

Inserting (18) into (17), $d(x_k, \theta_i)$ can be written as a quadratic function with respect to $e(x_k)$. Hence, $d(x_k, \theta_i)$ is linear in $\bar{e}(x_k)$ by the definition of \bar{e} , i.e., $d(x_k, \theta_i) = \bar{e}^\top(x_k) y(\theta_i)$. Then, we have that $\theta_{i+1} = (V_i V_i^\top)^{-1} V_i Y_i = y(\theta_i)$. Based on the derivation in (17) and (18), it is straightforward to write the expression of $y(\theta_i)$, which leads to (15) and (16).

Then, define $P_i = U_i^\top H_i U_i$. We note that (15) can be

written as

$$\begin{aligned}
H_{i+1} &= W + [A, B, E]^\top P_i [A, B, E] \\
&= \begin{bmatrix} \alpha A^\top P_i A + Q & \alpha A^\top P_i B & \alpha A^\top P_i E \\ & \alpha B^\top P_i B + R & \alpha B^\top P_i E \\ * & & \alpha E^\top P_i E - \lambda I \end{bmatrix}.
\end{aligned} \tag{19}$$

Similarly, define $g_i^\top = (G_i^\top + 2c_i^\top H_i)U_i$ and $z_i = s_i + G_i^\top c_i + c_i^\top H_i c_i$. Then, (16) can be written as

$$\begin{aligned}
G_{i+1}^\top &= [\alpha g_i^\top A, \alpha g_i^\top B, \alpha g_i^\top E + 2\lambda \bar{w}^\top], \\
s_{i+1} &= \alpha z_i - \lambda \|\bar{w}\|^2.
\end{aligned} \tag{20}$$

By the definition of P_i , we have that

$$P_{i+1} = U_{i+1}^\top H_{i+1} U_{i+1}. \tag{21}$$

Inserting (19) into (21), it is straightforward to show that the iteration (21) on P_i converges to the solution of (3) as i tends to infinity, i.e., $\lim_{i \rightarrow \infty} P_i = P$ with P given by (3). The iterations on g_{i+1} and z_{i+1} can be analogously derived. Thus, the parameters θ_i converge to a solution determined by (3) and (4). Specifically,

$$\begin{aligned}
\lim_{i \rightarrow \infty} H_i &= \begin{bmatrix} \alpha A^\top P A + Q & \alpha A^\top P B & \alpha A^\top P E \\ & \alpha B^\top P B + R & \alpha B^\top P E \\ * & & \alpha E^\top P E - \lambda I \end{bmatrix} \\
\lim_{i \rightarrow \infty} G_i^\top &= [\alpha g^\top A, \alpha g^\top B, \alpha g^\top E + 2\lambda \bar{w}^\top] \\
\lim_{i \rightarrow \infty} s_i &= \alpha z - \lambda \|\bar{w}\|^2,
\end{aligned}$$

where P, g, z are given by (3) and (4). The proof is completed. \blacksquare

4 Numerical examples

This section validates the convergence of the proposed Q-learning method via a numerical example.

Consider a quadrotor that operates on a 2-D horizontal plane with the following dynamics

$$x_{k+1} = \begin{bmatrix} 1 & 0 & T & 0 \\ 0 & 1 & 0 & T \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} x_k + \begin{bmatrix} \frac{T^2}{2} & 0 \\ 0 & \frac{T^2}{2} \\ T & 0 \\ 0 & T \end{bmatrix} (u_k + w_k),$$

where $T = 0.1$, $[x_{k,1}, x_{k,2}]$ denotes the position coordinates, $[x_{k,3}, x_{k,4}]$ is the corresponding velocities, and the

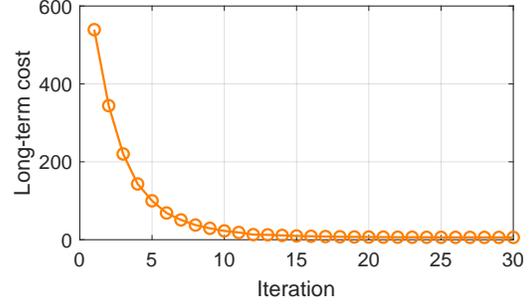


Fig. 2. The long-term cost J_i converges within 30 iterations.

input u_k is the acceleration. The disturbance $w_{k,1}$ is subject to a Gaussian mixture distribution of $\mathcal{N}(1, 0.1)$ and $\mathcal{N}(0.6, 0.1)$ with equal weights. The independent noise $w_{k,2}$ is sampled from $\mathcal{N}(0, 0.1)$. We set $Q = I$ and $R = 0.2I$. The discount factor α is set to $\alpha = 0.99$. The length of the sampled trajectory is set to $M = 900$. We randomly generate a set of samples $\{v^j\}_{j=1}^{10}$ from its groundtruth distribution and obtain the sample mean $\bar{w} = [0.681, 0.132]^\top$.

By Assumption 2, the penalty factor should satisfy $\lambda I - \alpha E^\top P E > 0$, which in our experiments is $\lambda > 0.22$. For demonstration, we select the penalty factor to $\lambda = 0.9$ and apply Algorithm 1 to learn a minimax controller. We select the long-term cost at the i -th iteration

$$J_i = \sum_{k=0}^{M-1} \alpha^k ((x_k^i)^\top Q x_k^i + (u_k^i)^\top R u_k^i - \lambda \|w_k^i - \bar{w}\|^2)$$

as an indicator for convergence, where $u_k^i = K_i x_k^i + r_i$ and $w_k^i = L_i x_k^i + l_i$ are the pair of optimal solutions at the i -th iteration. The result is displayed in Fig. 2. As indicated by Theorem 5, J_i converges exponentially, which implies that the Algorithm 1 returns an optimal Q-function.

5 Conclusion

We have proposed a Q-learning algorithm with convergence guarantees to learn a minimax controller with robustness to disturbance distribution errors. Recent years have witnessed the tremendous success in the policy gradient methods, which can be used to solve the zero-sum game (Zhang et al. 2019). We shall study this topic in the future work.

References

Abdullah, M. A., Ren, H., Ammar, H. B., Milenkovic, V., Luo, R., Zhang, M. & Wang, J. (2019), ‘Wasserstein robust reinforcement learning’, *arXiv preprint arXiv:1907.13196*.

- Al-Tamimi, A., Lewis, F. L. & Abu-Khalaf, M. (2007), ‘Model-free Q-learning designs for linear discrete-time zero-sum games with application to \mathcal{H}_∞ control’, *Automatica* **43**(3), 473–481.
- Åström, K. J. (2012), *Introduction to stochastic control theory*, Courier Corporation.
- Başar, T. & Bernhard, P. (2008), *\mathcal{H}_∞ optimal control and related minimax design problems: a dynamic game approach*, Springer Science & Business Media.
- Chen, R. & Paschalidis, I. C. (2020), ‘Distributionally robust learning’, *Foundations and Trends® in Optimization* **4**(1-2), 1–243.
- Gao, R. & Kleywegt, A. J. (2022), ‘Distributionally robust stochastic optimization with wasserstein distance’, *Mathematics of Operations Research*.
- Kim, K. & Yang, I. (2020), Minimax control of ambiguous linear stochastic systems using the wasserstein metric, in ‘59th IEEE Conference on Decision and Control (CDC)’, pp. 1777–1784.
- Kim, K. & Yang, I. (2021), ‘Distributional robustness in minimax linear quadratic control with wasserstein distance’, *arXiv preprint arXiv:2102.12715*.
- Lillicrap, T. P., Hunt, J. J., Pritzel, A., Heess, N., Erez, T., Tassa, Y., Silver, D. & Wierstra, D. (2016), Continuous control with deep reinforcement learning., in ‘International Conference on Learning Representations’.
- Nilim, A. & El Ghaoui, L. (2005), ‘Robust control of markov decision processes with uncertain transition matrices’, *Operations Research* **53**(5), 780–798.
- Pinto, L., Davidson, J., Sukthankar, R. & Gupta, A. (2017), Robust adversarial reinforcement learning, in ‘International Conference on Machine Learning’, PMLR, pp. 2817–2826.
- Wiesemann, W., Kuhn, D. & Sim, M. (2014), ‘Distributionally robust convex optimization’, *Operations Research* **62**(6), 1358–1376.
- Yang, I. (2021), ‘Wasserstein distributionally robust stochastic control: A data-driven approach’, *IEEE Transactions on Automatic Control* **66**(8), 3863–3870.
- Zhang, K., Yang, Z. & Basar, T. (2019), Policy optimization provably converges to nash equilibria in zero-sum linear quadratic games, in ‘Advances in Neural Information Processing Systems’, pp. 11598–11610.