

# Enhanced Secure Wireless Transmission Using IRS-aided Directional Modulation

Yeqing Lin, Rongen Dong, Peng Zhang, Feng Shu, and Jiangzhou Wang, *Fellow, IEEE*

**Abstract**—As an excellent aided communication tool, intelligent reflecting surface (IRS) can make a significant rate enhancement and coverage extension. In this paper, we present an investigation on beamforming in an IRS-aided directional modulation (DM) network. To fully explore the advantages of IRS, two beamforming methods with enhanced secrecy rate (SR) performance are proposed. The first method of maximizing secrecy rate (Max-SR) alternately optimizes confidential message (CM) beamforming vector, artificial noise (AN) beamforming vector and phase shift matrix. The first optimization vector is directly computed by the Rayleigh ratio and the last two are solved with generalized power iteration (GPI). This method is called Max-SR-GPI. To reduce the computational complexity, a new method of maximizing receive power with zero-forcing constraint (Max-RP-ZFC) of only reflecting CM and no AN is proposed. Simulation results show that the proposed two methods harvest about 30 percent rate gains over the cases of random-phase IRS and no IRS, and the proposed Max-SR-GPI performs slightly better than the Max-RP-ZFC in terms of SR, particularly in the small-large IRS.

**Index Terms**—Intelligent reflecting surface, directional modulation, artificial noise, confidential message, secrecy rate

## I. INTRODUCTION

With the development of the sixth generation of mobile communications, intelligent reflecting surface (IRS) has been promised as a key technology to enhance rate, extend coverage and remove blind areas [1]–[4]. IRS is becoming increasingly important in such diverse communication areas as multiple input and multiple output (MIMO) [5], spatial and directional modulation networks [6], relay [7], and covert [8]. To utilize IRS to increase the achievable rate of the downlink, the authors proposed the joint optimization of transmitter beamforming, IRS phase shift, IRS orientation, and position in IRS-assisted multiple-input-single-output (MISO) free-space wireless transmission systems in [4]. In [5], the authors confirmed that the cell-edge user performance can be improved by using IRS in the case of downlink multi-user MISO. In [6], IRS was proposed to assist spatial modulation that maximizes secrecy rate

This work was supported in part by the National Natural Science Foundation of China (Nos. 62071234, 62071289, and 61972093), the Hainan Province Science and Technology Special Fund (ZDKJ2021022), the Scientific Research Fund Project of Hainan University under Grant KYQD(ZR)-21008, and the National Key R&D Program of China under Grant 2018YFB180110. (Corresponding authors: Feng Shu and Rongen Dong)

Yeqing Lin, Rongen Dong, Peng Zhang, and Feng Shu are with the School of Information and Communication Engineering, Hainan University, Haikou, 570228, China. (Email: shufeng0101@163.com)

Feng Shu is with the School of Electronic and Optical Engineering, Nanjing University of Science and Technology, 210094, China. (Email: shufeng0101@163.com)

Jiangzhou Wang is with the School of Engineering, University of Kent, Canterbury CT2 7NT, U.K. (Email: j.z.wang@kent.ac.uk)

(SR) by adjusting the switching state of the IRS reflecting elements by power control. However, the transmission behavior of the transmitter, once detected by a malicious node, exposed the network to a security risk, in [8], the authors designed IRS-assisted and AN-enhanced wireless covert communication to achieve covert transmission rate multiplication, and more importantly proved the existence of perfect covertness under perfect channel state information (CSI). In [9], considering a more realistic scenario without Eve's CSI, which jointly optimized beamforming and interference to satisfy the quality of service for Bob and emitted artificial noise (AN) to interfere with Eve. In [10], the authors demonstrated that using AN can be an effective way to help improve the security. In addition to using one IRS, the authors used two or more IRSs to further enhance the system performance in [11], [12].

As an advanced physical layer security technique, directional modulation (DM) was well suited for line-of-sight channel and implemented secure precise wireless transmission with the help of AN, random subcarrier selection, and beamforming in [13], [14]. In [15], with the aid of IRS, DM can achieve two-way independent CM streams from Alice to Bob in multipath channel, here IRS may control the phases of path gains. However, the proposed two methods required high computational amounts. In [16], a single CM symbol was transmitted from Alice to Bob using two symbol periods, which results in a significant SR loss. In this paper, we still focus on a single CM stream transmission with transmitting one CM symbol per symbol period. Two low-complexity methods are proposed to strike a good balance between complexity and performance. The main contributions of this paper are summarized as follows:

- 1) A system of combining IRS and DM is established to realize an enhanced single CM stream by fully making use of the advantages of DM and IRS. To achieve an improved SR performance, a method of maximizing the SR is proposed to alternately optimize the CM beamforming vector, AN beamforming vector, and IRS phase shift matrix. The first optimization vector (OV) is computed by the Rayleigh ratio, and the last two OVs are solved by converting their optimization problem into the GPI canonical forms. Since the OVs of the latter two are solved by the GPI algorithm, and the optimal SR obtained by this method is related to the initial value. Therefore, this method has high complexity.
- 2) To reduce the high complexity of the above method, the new method is proposed as follows: IRS only reflects CM and no AN. In other words, the AN beamforming

vector is orthogonal to both channels from Alice to IRS and from Alice to Bob. Under the zero-forcing constraint (ZFC), maximizing the receive power (Max-RP) is proposed to compute the CM beamforming vector, IRS phase matrix and AN beamforming vector, respectively. Hence, this method is called Max-RP-ZFC. Compared with Max-SR-GPI method, the proposed Max-RP-ZFC method has lower computational complexity. However, the latter performs slightly worse than the former in the case of small-scale IRS. As the number of IRS elements tends to large-scale, the SR difference between them becomes trivial.

The remainder is organized as follows. Section II presents the system model and two methods are proposed in Section III. In Section IV, numerical simulations are presented, and Section V draws our conclusion.

*Notations:* In this paper, bold lowercase and uppercase letters represent vectors and matrices, respectively. Signs  $(\cdot)^H$ ,  $(\cdot)^{-1}$ ,  $\text{tr}(\cdot)$ , and  $\|\cdot\|$  denote the conjugate transpose operation, inverse operation, trace operation, and 2-norm operation, respectively. The notation  $\mathbf{I}_N$  is the  $N \times N$  identity matrix. The sign  $\mathbb{E}\{\cdot\}$  represents the expectation operation, and  $\text{diag}(\cdot)$  denotes the diagonal operator.

## II. SYSTEM MODEL

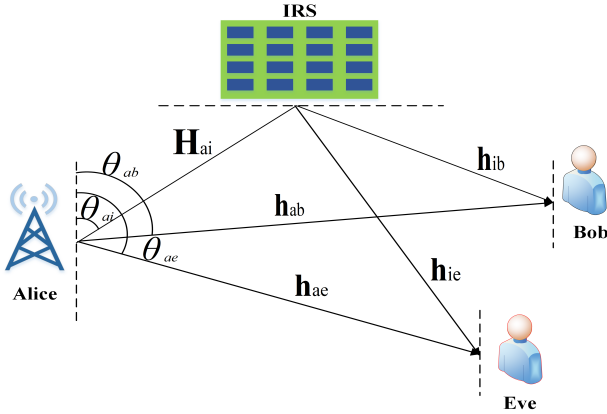


Fig. 1. System model diagram of IRS-aided DM.

In Fig. 1, an IRS-aided DM network is presented. Alice is equipped with  $N_a$  antennas, IRS has  $N_r$  reflecting elements, and Bob and Eve are employed with single antenna.

The transmit baseband signal is in the form

$$\mathbf{x} = \sqrt{\beta_1 P_t} \mathbf{v}_a s_a + \sqrt{\beta_2 P_t} \mathbf{v}_{AN} z, \quad (1)$$

where  $P_t$  is the transmit power,  $s_a$  denotes the CM with a constraint  $\mathbb{E}[|s_a|^2] = 1$ ,  $z$  is the AN with the average power constraint  $\mathbb{E}[|z|^2] = 1$ ,  $\mathbf{v}_a$  denotes the precoding vector of CM, and  $\mathbf{v}_{AN}$  is the precoding vector of AN with  $\mathbf{v}_a \in \mathbb{C}^{N_a \times 1}$  and  $\mathbf{v}_{AN} \in \mathbb{C}^{N_a \times 1}$ .  $\beta_1$  and  $\beta_2$  respectively represent the

power allocation (PA) factors of CM and AN with  $\beta_1 + \beta_2 = 1$ . The signal received at Bob can be represented as

$$\begin{aligned} y_b &= (\sqrt{g_{ab}} \mathbf{h}_{ab}^H + \sqrt{g_{aib}} \mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai}) \mathbf{x} + n_b \\ &= \sqrt{g_{ab} \beta_1 P_t} \mathbf{h}_{ab}^H \mathbf{v}_a s_a + \sqrt{g_{aib} \beta_1 P_t} \mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} \mathbf{v}_a s_a + n_b \\ &\quad \sqrt{g_{ab} \beta_2 P_t} \mathbf{h}_{ab}^H \mathbf{v}_{AN} z + \sqrt{g_{aib} \beta_2 P_t} \mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} \mathbf{v}_{AN} z, \end{aligned} \quad (2)$$

where  $g_{ab}$  is the path loss coefficient between Alice and Bob,  $g_{aib} = g_{ai} g_{ib}$  denotes the equivalent path loss coefficient of Alice-to-IRS channel and IRS-to-Bob channel,  $\mathbf{h}_{ab} \in \mathbb{C}^{N_a \times 1}$  represents the Alice-to-Bob channel,  $\mathbf{h}_{ib} \in \mathbb{C}^{N_r \times 1}$  represents the IRS-to-Bob channel,  $\Theta = \text{diag}(e^{j\phi_1}, \dots, e^{j\phi_m}, \dots, e^{j\phi_{N_r}})$  is a diagonal matrix with the phase shift  $\phi_m$  incurred by the  $m$ -th reflecting element of the IRS,  $\Theta = \text{diag}(\theta)$  with  $\theta \in \mathbb{C}^{N_r \times 1}$ ,  $\mathbf{H}_{ai} = \mathbf{h}(\theta_{ai,r}) \mathbf{h}^H(\theta_{ai,t}) \in \mathbb{C}^{N_r \times N_a}$  represents the Alice-to-IRS channel, and  $n_b \sim \mathcal{CN}(0, \sigma_b^2)$  is the additive white Gaussian noise (AWGN) at Bob.

Similarly, the signal received at Eve can be expressed as

$$\begin{aligned} y_e &= (\sqrt{g_{ae}} \mathbf{h}_{ae}^H + \sqrt{g_{aie}} \mathbf{h}_{ie}^H \Theta \mathbf{H}_{ai}) \mathbf{x} + n_e \\ &= \sqrt{g_{ae} \beta_1 P_t} \mathbf{h}_{ae}^H \mathbf{v}_a s_a + \sqrt{g_{aie} \beta_1 P_t} \mathbf{h}_{ie}^H \Theta \mathbf{H}_{ai} \mathbf{v}_a s_a + n_e \\ &\quad \sqrt{g_{ae} \beta_2 P_t} \mathbf{h}_{ae}^H \mathbf{v}_{AN} z + \sqrt{g_{aie} \beta_2 P_t} \mathbf{h}_{ie}^H \Theta \mathbf{H}_{ai} \mathbf{v}_{AN} z, \end{aligned} \quad (3)$$

where  $g_{ae}$  is the path loss coefficient between Alice and Eve,  $g_{aie} = g_{ai} g_{ie}$  denotes the equivalent path loss coefficient of Alice-to-IRS channel and IRS-to-Eve channel,  $\mathbf{h}_{ae} \in \mathbb{C}^{N_a \times 1}$  represents the Alice-to-Eve channel,  $\mathbf{h}_{ie} \in \mathbb{C}^{N_r \times 1}$  represents the IRS-to-Eve channel, and  $n_e \sim \mathcal{CN}(0, \sigma_e^2)$  is the AWGN at Eve. The normalized steering vector  $\mathbf{h}(\theta)$  is defined as

$$\mathbf{h}(\theta) = \frac{1}{\sqrt{N}} [e^{j2\pi\Phi_\theta(1)}, \dots, e^{j2\pi\Phi_\theta(n)}, \dots, e^{j2\pi\Phi_\theta(N)}]^H, \quad (4)$$

where the phase shift  $\Phi_n(\theta)$  is defined as

$$\Phi_n(\theta) = -\frac{d}{\lambda} \left( n - \frac{N+1}{2} \right) \cos \theta, \quad n = 1, \dots, N, \quad (5)$$

where  $\lambda$  is the wavelength,  $n$  is the index of antenna,  $d$  represents the element spacing in the transmit antenna array, and  $\theta$  is the direction of departure.

The signal received at IRS can be expressed as

$$y_i = \mathbf{H}_{ai} \mathbf{x} = \mathbf{H}_{ai} (\sqrt{\beta_1 P_t} \mathbf{v}_a s_a + \sqrt{\beta_2 P_t} \mathbf{v}_{AN} z). \quad (6)$$

In terms of (2), the signal-to-interference and noise ratio (SINR) at Bob is

$$\gamma_b = \frac{\beta_1 P_t |\sqrt{g_{ab}} \mathbf{h}_{ab}^H \mathbf{v}_a + \sqrt{g_{aib}} \mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} \mathbf{v}_a|^2}{\beta_2 P_t |\sqrt{g_{ab}} \mathbf{h}_{ab}^H \mathbf{v}_{AN} + \sqrt{g_{aib}} \mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} \mathbf{v}_{AN}|^2 + \sigma_b^2}. \quad (7)$$

From (3), the SINR of Eve is

$$\gamma_e = \frac{\beta_1 P_t |\sqrt{g_{ae}} \mathbf{h}_{ae}^H \mathbf{v}_a + \sqrt{g_{aie}} \mathbf{h}_{ie}^H \Theta \mathbf{H}_{ai} \mathbf{v}_a|^2}{\beta_2 P_t |\sqrt{g_{ae}} \mathbf{h}_{ae}^H \mathbf{v}_{AN} + \sqrt{g_{aie}} \mathbf{h}_{ie}^H \Theta \mathbf{H}_{ai} \mathbf{v}_{AN}|^2 + \sigma_e^2}. \quad (8)$$

The corresponding rates at Bob and Eve are as follows

$$R_b = \log_2(1 + \gamma_b), \quad (9)$$

and

$$R_e = \log_2(1 + \gamma_e), \quad (10)$$

respectively, which directly give the secrecy rate as

$$R_s = [R_b - R_e]^+ = \log_2\left(\frac{1 + \gamma_b}{1 + \gamma_e}\right), \quad (11)$$

where  $[x]^+ \triangleq \max\{0, x\}$ .

### III. TWO PROPOSED BEAMFORMING METHODS WITH ENHANCED PERFORMANCE

In what follows, to harvest the SR performance gain available by IRS, two iterative methods, called Max-SR-GPI and Max-RP-ZFC, are proposed. The former is high-performance while the latter is low-complexity.

#### A. Proposed Max-SR-GPI

The optimization problem of maximizing the SR can be casted as

$$\max_{\mathbf{v}_a, \mathbf{v}_{AN}, \Theta} R_s(\mathbf{v}_a, \mathbf{v}_{AN}, \Theta) \quad (12a)$$

$$\text{s.t. } \mathbf{v}_a^H \mathbf{v}_a = 1, \mathbf{v}_{AN}^H \mathbf{v}_{AN} = 1, |\Theta_i| = 1. \quad (12b)$$

The rate of Bob in the above SR can be rewritten as

$$R_b = \log_2\left(1 + \frac{\mathbf{v}_a^H \mathbf{h}_{B1}^H \mathbf{h}_{B1} \mathbf{v}_a}{\mathbf{v}_{AN}^H \mathbf{h}_{B2}^H \mathbf{h}_{B2} \mathbf{v}_{AN} + \sigma_b^2}\right), \quad (13)$$

where

$$\begin{aligned} \mathbf{h}_{B1} &= \left(\sqrt{\beta_1 P_t g_{ab}} \mathbf{h}_{ab}^H + \sqrt{\beta_1 P_t g_{aib}} \mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai}\right), \\ \mathbf{h}_{B2} &= \left(\sqrt{\beta_2 P_t g_{ab}} \mathbf{h}_{ab}^H + \sqrt{\beta_2 P_t g_{aib}} \mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai}\right). \end{aligned} \quad (14)$$

Similarly, the rate of Eve can be rewritten as

$$R_e = \log_2\left(1 + \frac{\mathbf{v}_a^H \mathbf{h}_{E1}^H \mathbf{h}_{E1} \mathbf{v}_a}{\mathbf{v}_{AN}^H \mathbf{h}_{E2}^H \mathbf{h}_{E2} \mathbf{v}_{AN} + \sigma_e^2}\right), \quad (15)$$

where

$$\begin{aligned} \mathbf{h}_{E1} &= \left(\sqrt{\beta_1 P_t g_{ae}} \mathbf{h}_{ae}^H + \sqrt{\beta_1 P_t g_{aie}} \mathbf{h}_{ie}^H \Theta \mathbf{H}_{ai}\right), \\ \mathbf{h}_{E2} &= \left(\sqrt{\beta_2 P_t g_{ae}} \mathbf{h}_{ae}^H + \sqrt{\beta_2 P_t g_{aie}} \mathbf{h}_{ie}^H \Theta \mathbf{H}_{ai}\right). \end{aligned} \quad (16)$$

According to (13) and (15), given  $\Theta$  and  $\mathbf{v}_{AN}$ , the optimization problem in (12) is converted into

$$\max_{\mathbf{v}_a} \frac{\mathbf{v}_a^H ((a + \sigma_b^2) \mathbf{I}_{N_a} + \mathbf{h}_{B1}^H \mathbf{h}_{B1}) \mathbf{v}_a}{\mathbf{v}_a^H ((b + \sigma_e^2) \mathbf{I}_{N_a} + \mathbf{h}_{E1}^H \mathbf{h}_{E1}) \mathbf{v}_a} \quad \text{s.t. } \mathbf{v}_a^H \mathbf{v}_a = 1, \quad (17)$$

where  $a = \mathbf{v}_{AN}^H \mathbf{h}_{B2}^H \mathbf{h}_{B2} \mathbf{v}_{AN}$ , and  $b = \mathbf{v}_{AN}^H \mathbf{h}_{E2}^H \mathbf{h}_{E2} \mathbf{v}_{AN}$  due to the fact that the logarithm function is a monotonically increasing function.

Therefore, using the Rayleigh-Ritz ratio theorem,  $\mathbf{v}_a$  is the eigenvector corresponding to the largest eigenvalue of the following matrix

$$\left((b + \sigma_e^2) \mathbf{I}_{N_a} + \mathbf{h}_{E1}^H \mathbf{h}_{E1}\right)^{-1} \left((a + \sigma_b^2) \mathbf{I}_{N_a} + \mathbf{h}_{B1}^H \mathbf{h}_{B1}\right). \quad (18)$$

Similarly, given  $\Theta$  and  $\mathbf{v}_a$ , the optimization problem in (12) is converted into

$$\max_{\mathbf{v}_{AN}} \frac{\mathbf{v}_{AN}^H \mathbf{E} \mathbf{v}_{AN}}{\mathbf{v}_{AN}^H \mathbf{F} \mathbf{v}_{AN}} \times \frac{\mathbf{v}_{AN}^H \mathbf{M} \mathbf{v}_{AN}}{\mathbf{v}_{AN}^H \mathbf{N} \mathbf{v}_{AN}} \quad \text{s.t. } \mathbf{v}_{AN}^H \mathbf{v}_{AN} = 1, \quad (19)$$

where

$$\begin{aligned} c &= \mathbf{v}_a^H \mathbf{h}_{B1}^H \mathbf{h}_{B1} \mathbf{v}_a, d = \mathbf{v}_a^H \mathbf{h}_{E1}^H \mathbf{h}_{E1} \mathbf{v}_a, \\ \mathbf{E} &= (c + \sigma_b^2) \mathbf{I}_{N_a} + \mathbf{h}_{B2}^H \mathbf{h}_{B2}, \mathbf{F} = \sigma_b^2 \mathbf{I}_{N_a} + \mathbf{h}_{B2}^H \mathbf{h}_{B2}, \\ \mathbf{M} &= \sigma_e^2 \mathbf{I}_{N_a} + \mathbf{h}_{E2}^H \mathbf{h}_{E2}, \mathbf{N} = (d + \sigma_e^2) \mathbf{I}_{N_a} + \mathbf{h}_{E2}^H \mathbf{h}_{E2}. \end{aligned} \quad (20)$$

Therefore,  $\mathbf{v}_{AN}$  can be solved by using GPI algorithm in [17].

Given  $\mathbf{v}_{AN}$  and  $\mathbf{v}_a$ , let us define a new optimization variable  $\bar{\boldsymbol{\theta}} = [1, \boldsymbol{\theta}^H]^H$ . Accordingly, the rate of Bob can be rewritten as

$$R_b = \log_2\left(1 + \frac{P_t (\bar{\boldsymbol{\theta}}^H \mathbf{w}^H \mathbf{w} \bar{\boldsymbol{\theta}})}{P_t (\bar{\boldsymbol{\theta}}^H \mathbf{v}^H \mathbf{v} \bar{\boldsymbol{\theta}}) + \sigma_b^2}\right), \quad (21)$$

where

$$\begin{aligned} \mathbf{w} &= [\sqrt{\beta_1 g_{ab}} \mathbf{h}_{ab}^H \mathbf{v}_a \quad \sqrt{\beta_1 g_{aib}} \mathbf{h}_{ib}^H \text{diag}(\mathbf{H}_{ai} \mathbf{v}_a)], \\ \mathbf{v} &= [\sqrt{\beta_2 g_{ab}} \mathbf{h}_{ab}^H \mathbf{v}_{AN} \quad \sqrt{\beta_2 g_{aib}} \mathbf{h}_{ib}^H \text{diag}(\mathbf{H}_{ai} \mathbf{v}_{AN})]. \end{aligned} \quad (22)$$

Similarly, the rate of Eve can be rewritten as

$$R_e = \log_2\left(1 + \frac{P_t (\bar{\boldsymbol{\theta}}^H \mathbf{m}^H \mathbf{m} \bar{\boldsymbol{\theta}})}{P_t (\bar{\boldsymbol{\theta}}^H \mathbf{n}^H \mathbf{n} \bar{\boldsymbol{\theta}}) + \sigma_e^2}\right), \quad (23)$$

where

$$\begin{aligned} \mathbf{m} &= [\sqrt{\beta_1 g_{ae}} \mathbf{h}_{ae}^H \mathbf{v}_a \quad \sqrt{\beta_1 g_{aie}} \mathbf{h}_{ie}^H \text{diag}(\mathbf{H}_{ai} \mathbf{v}_a)], \\ \mathbf{n} &= [\sqrt{\beta_2 g_{ae}} \mathbf{h}_{ae}^H \mathbf{v}_{AN} \quad \sqrt{\beta_2 g_{aie}} \mathbf{h}_{ie}^H \text{diag}(\mathbf{H}_{ai} \mathbf{v}_{AN})]. \end{aligned} \quad (24)$$

Therefore, the optimization problem in (12) is converted into

$$\max_{\bar{\boldsymbol{\theta}}} \frac{\bar{\boldsymbol{\theta}}^H \mathbf{Q} \bar{\boldsymbol{\theta}}}{\bar{\boldsymbol{\theta}}^H \mathbf{K} \bar{\boldsymbol{\theta}}} \times \frac{\bar{\boldsymbol{\theta}}^H \mathbf{T} \bar{\boldsymbol{\theta}}}{\bar{\boldsymbol{\theta}}^H \mathbf{R} \bar{\boldsymbol{\theta}}} \quad \text{s.t. } \bar{\boldsymbol{\theta}}^H \bar{\boldsymbol{\theta}} = N_r + 1, \quad (25)$$

where

$$\begin{aligned} \mathbf{Q} &= (P_t \mathbf{v}^H \mathbf{v} + P_t \mathbf{w}^H \mathbf{w} + \frac{\mathbf{I}_{N_r+1}}{N_r+1} \sigma_b^2), \\ \mathbf{K} &= (P_t \mathbf{v}^H \mathbf{v} + \frac{\mathbf{I}_{N_r+1}}{N_r+1} \sigma_b^2), \mathbf{T} = (P_t \mathbf{n}^H \mathbf{n} + \frac{\mathbf{I}_{N_r+1}}{N_r+1} \sigma_e^2), \\ \mathbf{R} &= (P_t \mathbf{n}^H \mathbf{n} + P_t \mathbf{m}^H \mathbf{m} + \frac{\mathbf{I}_{N_r+1}}{N_r+1} \sigma_e^2). \end{aligned} \quad (26)$$

Finally, the  $\bar{\boldsymbol{\theta}}$  in (25) can be solved via GPI in [17]. The whole procedure is summarized in the following Table.

The complexity of Max-SR-GPI method is  $\mathcal{O}(L_1(L_2(3(N_r+1)^3+7(N_r+1)^2) + L_3(3N_a^3+7N_a^2) + 2N_a^3+4N_a^2))$  float-point operations (FLOPs), where  $L_1$ ,  $L_2$ , and  $L_3$  denote the iterative numbers of optimization variables  $\mathbf{v}_a$ ,  $\mathbf{v}_{AN}$ , and  $\boldsymbol{\theta}$ .

---

**Algorithm 1** Proposed Max-SR-GPI method
 

---

- 1: Set initial solution  $\Theta^{(0)}$ ,  $\mathbf{v}_a^{(0)}$  and  $\mathbf{v}_{AN}^{(0)}$ . Randomly take the value of  $\Theta$ , and calculate the initial  $R_s^{(0)}$  multiple times based on formula (11).
  - 2: Set  $p=0$ , threshold  $\epsilon$ .
  - 3: **repeat**
  - 4: Given  $(\Theta^{(p)}, \mathbf{v}_{AN}^{(p)})$ , according to (18) to get  $\mathbf{v}_a^{(p+1)}$ .
  - 5: Given  $(\Theta^{(p)}, \mathbf{v}_a^{(p+1)})$ , according to (19) to get  $\mathbf{v}_{AN}^{(p+1)}$ .
  - 6: Given  $(\mathbf{v}_a^{(p+1)}, \mathbf{v}_{AN}^{(p+1)})$ , according to (25) to get  $\Theta^{(p+1)}$ .
  - 7: Compute  $R_s^{(p+1)}$  using  $\mathbf{v}_a^{(p+1)}, \mathbf{v}_{AN}^{(p+1)}$  and  $\Theta^{(p+1)}$ .
  - 8:  $p=p+1$ ;
  - 9: **until**  $R_s^{(p)} - R_s^{(p-1)} \leq \epsilon$ , and record the maximum SR value  $R_s^{(p)}$ .
- 

### B. Proposed Max-RP-ZFC

In the previous subsection, the optimization variables  $\mathbf{v}_{AN}$  and  $\theta$  are computed by the iterative method GPI. The corresponding computational complexity is a linearly increasing function of their numbers of iterations. To reduce the part complexity, a low-complexity method Max-RP-ZFC is proposed to solve  $\mathbf{v}_{AN}$  by ZF and  $\theta$  by maximizing RP in closed-form.

First, we optimize the AN beamforming vector  $\mathbf{v}_{AN}$ , which is independent of  $\theta$  and  $\mathbf{v}_a$ . Below, maximize the receive AN power along the direct channel from Alice to Eve at Eve with respect to  $\mathbf{v}_{AN}$  is formalized as

$$\max_{\mathbf{v}_{AN}} \mathbf{v}_{AN}^H \mathbf{h}_{ae} \mathbf{h}_{ae}^H \mathbf{v}_{AN} \quad (27a)$$

$$\text{s.t.} \quad (\mathbf{h}_{ab} \ \mathbf{H}_{ai}^H)^H \mathbf{v}_{AN} = \mathbf{0}, \quad \mathbf{v}_{AN}^H \mathbf{v}_{AN} = 1. \quad (27b)$$

Let us define  $\mathbf{G} = (\mathbf{h}_{ab} \ \mathbf{H}_{ai}^H)^H$ ,  $\mathbf{T}_{-ae} = [\mathbf{I}_{N_a} - \mathbf{G}^H (\mathbf{G}\mathbf{G}^H)^\dagger \mathbf{G}]$ , and  $\mathbf{v}_{AN} = \mathbf{T}_{-ae} \mathbf{u}_{AN}$ , then, problem (27) can be simplified as

$$\max_{\mathbf{u}_{AN}} \mathbf{u}_{AN}^H \mathbf{T}_{-ae}^H \mathbf{h}_{ae} \mathbf{h}_{ae}^H \mathbf{T}_{-ae} \mathbf{u}_{AN} \quad \text{s.t.} \quad \mathbf{u}_{AN}^H \mathbf{u}_{AN} = 1. \quad (28)$$

which directly gives

$$\mathbf{v}_{AN} = \mathbf{T}_{-ae} \mathbf{h}_{ae} / \|\mathbf{T}_{-ae} \mathbf{h}_{ae}\| \quad (29)$$

due to the fact that matrix  $\mathbf{T}_{-ae}$  is a rank-one matrix. Now, we establish a joint two-variable ( $\mathbf{v}_a$  and  $\theta$ ) optimization problem of maximizing RP at Bob as follows

$$\max_{\mathbf{v}_a, \theta} \mathbf{v}_a^H (\mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} + \mathbf{h}_{ab}^H)^H (\mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} + \mathbf{h}_{ab}^H) \mathbf{v}_a \quad (30a)$$

$$\text{s.t.} \quad \mathbf{h}_{ae}^H \mathbf{v}_a = 0, \quad \mathbf{v}_a^H \mathbf{v}_a = 1, \quad \theta^H \theta = N_r. \quad (30b)$$

Similar to (28), fixing  $\Theta$ , we have

$$\mathbf{v}_a = \mathbf{P} (\mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} + \mathbf{h}_{ab}^H)^H / \left\| \mathbf{P} (\mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} + \mathbf{h}_{ab}^H)^H \right\|, \quad (31)$$

where  $\mathbf{P} = \mathbf{I}_{N_a} - \mathbf{h}_{ae} \mathbf{h}_{ae}^H$ . Then, fixing  $\mathbf{v}_a$ , (30) can be rewritten as

$$\max_{\theta} \mathbf{u}_a^H \mathbf{P} (\mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} + \mathbf{h}_{ab}^H)^H (\mathbf{h}_{ib}^H \Theta \mathbf{H}_{ai} + \mathbf{h}_{ab}^H) \mathbf{P} \mathbf{u}_a \quad (32a)$$

$$\text{s.t.} \quad \theta^H \theta = N_r, \quad (32b)$$

where  $\mathbf{u}_a^H \mathbf{u}_a = 1$ . The objective function of (32) can be expressed in the following quadratic form

$$\begin{aligned} & \theta^H \text{diag} (\mathbf{u}_a^H \mathbf{P}^H \mathbf{H}_{ai}^H) \mathbf{h}_{ib} \mathbf{h}_{ib}^H \text{diag} (\mathbf{H}_{ai} \mathbf{P} \mathbf{u}_a) \theta + \\ & \theta^H \text{diag} (\mathbf{u}_a^H \mathbf{P}^H \mathbf{H}_{ai}^H) \mathbf{h}_{ib} \mathbf{h}_{ab}^H \mathbf{P} \mathbf{u}_a + \mathbf{u}_a^H \mathbf{P}^H \mathbf{h}_{ab} \mathbf{h}_{ib}^H \cdot \\ & \text{diag} (\mathbf{H}_{ai} \mathbf{P} \mathbf{u}_a) \theta + \mathbf{u}_a^H \mathbf{P}^H \mathbf{h}_{ab} \mathbf{h}_{ab}^H \mathbf{P} \mathbf{u}_a. \end{aligned} \quad (33)$$

Substituting the above expression in (32) yields

$$\max_{\theta} \theta^H \mathbf{A} \theta + \theta^H \mathbf{b} + \mathbf{b}^H \theta + C \quad \text{s.t.} \quad \theta^H \theta = N_r, \quad (34)$$

where

$$\begin{aligned} \mathbf{A} &= \text{diag} (\underbrace{\mathbf{u}_a^H \mathbf{P}^H \mathbf{H}_{ai}^H}_{\mathbf{a}}) \mathbf{h}_{ib} \mathbf{h}_{ib}^H \text{diag} (\underbrace{\mathbf{H}_{ai} \mathbf{P} \mathbf{u}_a}_{\mathbf{a}^H}), \\ \mathbf{b} &= \text{diag} (\mathbf{u}_a^H \mathbf{P}^H \mathbf{H}_{ai}^H) \mathbf{h}_{ib} \mathbf{h}_{ab}^H \mathbf{P} \mathbf{u}_a, \\ C &= \mathbf{u}_a^H \mathbf{P}^H \mathbf{h}_{ab} \mathbf{h}_{ab}^H \mathbf{P} \mathbf{u}_a. \end{aligned} \quad (35)$$

The Lagrangian function of (34) can be expressed as

$$f(\theta, \lambda) = \theta^H \mathbf{A} \theta + \theta^H \mathbf{b} + \mathbf{b}^H \theta + C + \lambda (\theta^H \theta - N_r). \quad (36)$$

whose partial derivative with respect to  $\theta$  is set to 0 to obtain the following equation

$$\frac{\partial f(\theta, \lambda)}{\partial \theta} = \mathbf{A} \theta + \lambda \theta + \mathbf{b} = 0. \quad (37)$$

which generates

$$\theta = -(\mathbf{A} + \lambda \mathbf{I}_{N_r})^{-1} \mathbf{b}. \quad (38)$$

Since  $\mathbf{A} = \mathbf{a} \mathbf{a}^H$  is a matrix of rank-one, using the Sherman-Morrison formula, the constraint of (34) can be expressed as

$$\mathbf{b}^H \left( \frac{\mathbf{I}_{N_r}}{\lambda^2} + \frac{(\mathbf{a} \mathbf{a}^H)^2 - 2\mathbf{a} \mathbf{a}^H}{\lambda^2 (\lambda + \mathbf{a}^H \mathbf{a})^2} \right) \mathbf{b} = N_r, \quad (39)$$

which can be simplified as

$$\begin{aligned} & N_r \lambda^4 + 2N_r a_1 \lambda^3 + (N_r a_1^2 - b_1) \lambda^2 - \\ & 2c_1 \lambda - a_1^2 b_1 - d_1 + 2e_1 = 0, \end{aligned} \quad (40)$$

where

$$\begin{aligned} a_1 &= \mathbf{a}^H \mathbf{a}, \quad b_1 = \mathbf{b}^H \mathbf{b}, \quad c_1 = \mathbf{b}^H \mathbf{b} \mathbf{a}^H \mathbf{a}, \\ d_1 &= \mathbf{b}^H \mathbf{a} \mathbf{a}^H \mathbf{a} \mathbf{a}^H \mathbf{b}, \quad e_1 = \mathbf{b}^H \mathbf{a} \mathbf{a}^H \mathbf{b}. \end{aligned} \quad (41)$$

Observing equation (40), it is a fourth-order polynomial and has a set  $S$  of four roots denoted as:  $\lambda_1, \lambda_2, \lambda_3$ , and  $\lambda_4$ . Finding the optimal value of  $\lambda_0$  is modelled as the following maximum problem

$$\lambda_0 = \arg \max_{\lambda \in \{S\}} \quad (36). \quad (42)$$

Alternating iteration between  $\mathbf{v}_a$  and  $\theta_i$  are repeated until  $R_s^{(p)} - R_s^{(p-1)} \leq \epsilon$ .

The complexity of Max-RP-ZFC is  $\mathcal{O}(L_4(N_r^3 + 7N_r^2 + 2N_r^2 N_a + 14N_a^2 + 6N_a^2 N_r - 4N_r N_a - 6N_a - 2N_r) + 2N_a^2 + N_a)$  FLOPs, where  $L_4$  denotes the alternating iterative number between  $\mathbf{v}_a$  and  $\theta$ .

#### IV. SIMULATION RESULTS AND DISCUSSIONS

In this section, numerical simulation results are presented to evaluate the SR and convergent performance of our proposed methods. Simulation parameters are set as follows:  $P_s = 30$  dBm,  $\sigma_b^2 = \sigma_e^2 = -40$  dBm, and  $N_a = 16$ . The distances and angles are set as  $d_{ai} = 20$  m,  $d_{ab} = 40$  m,  $d_{ae} = 50$  m,  $\theta_{ai} = 29\pi/60$ ,  $\theta_{ab} = 1\pi/2$ , and  $\theta_{ae} = 23\pi/36$ .

Fig. 2 shows the SR versus the number of iterations for three typical number of elements of IRS as follows: 32, 128, and 1024. From Fig. 2, it is very clear that the proposed two methods rapidly converge to the SR ceil with only 3 ~ 5 iterations. Also, we find that the SR performance gain achieved by IRS is very attractive as the number of element of IRS increases from small-scale to large-scale.

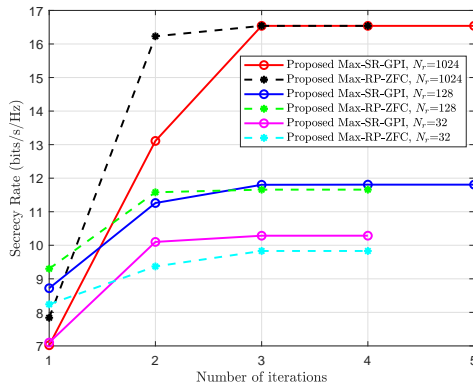


Fig. 2. Convergent curves of proposed algorithms at different numbers of IRS elements

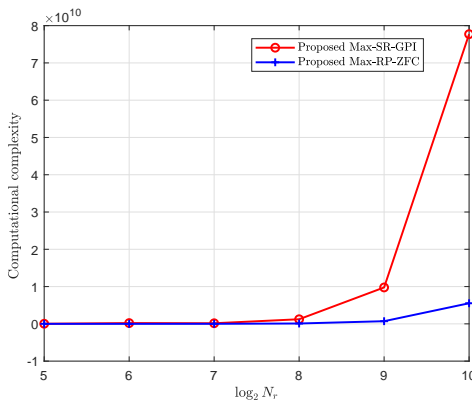


Fig. 3. Computational complexity versus the number of IRS elements

Fig. 3 depicts the curves of computational complexity versus the number of IRS elements. For small-scale or medium-scale IRS, the proposed two methods have the same complexity. Conversely, for large-scale IRS, the complexity of the proposed Max-SR-GPI is far higher than that of Max-RP-ZFC.

Fig. 4 plots the SR versus the number of IRS elements  $N_r$  for our proposed two methods with no IRS and random phase as performance benchmarks. The SR performance of the proposed two methods is much better than those of no IRS, random phase and existing methods and gradually grow

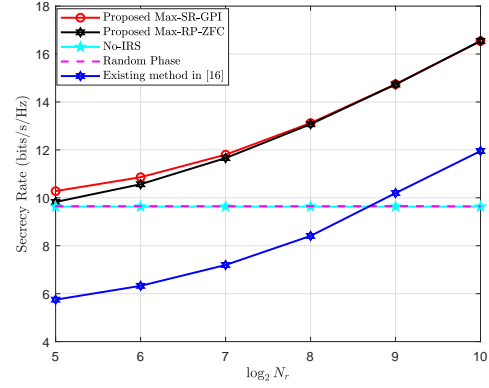


Fig. 4. Secrecy rate versus the number of IRS elements

with  $N_r$ . The proposed Max-SR-GPI performs better than the Max-RP-ZFC in accordance with SR when  $N_r$  is small-scale.

#### V. CONCLUSIONS

In this paper, we have made an investigation of the IRS-assisted DM networks with single-CM-stream transmission. In order to improve the SR performance, two high-performance methods Max-SR-GPI method and Max-RP-ZFC were proposed. Simulation results showed that the proposed two methods harvest obvious SR performance gains over no IRS, random phase, and existing method [16], especially in the case of large-scale IRS. Additionally, they can converge rapidly. The Max-RP-ZFC is far lower than Max-SR-GPI in terms of computational complexity, particularly in the case of large-scale IRS.

#### REFERENCES

- [1] Q. Wu and R. Zhang, "Beamforming optimization for wireless network aided by intelligent reflecting surface with discrete phase shifts," *IEEE Trans Commun*, vol. 68, no. 3, pp. 1838–1851, May. 2020.
- [2] X. Pang, N. Zhao, J. Tang, C. Wu, D. Niyato, and K.-K. Wong, "IRS-assisted secure UAV transmission via joint trajectory and beamforming design," *IEEE Trans Commun*, vol. 70, no. 2, pp. 1140–1152, Feb. 2022.
- [3] Q. Wu and R. Zhang, "Intelligent reflecting surface enhanced wireless network via joint active and passive beamforming," *IEEE Trans. Wirel. Commun.*, vol. 18, no. 11, pp. 5394–5409, Nov. 2019.
- [4] X. Cheng, Y. Lin, W. Shi, J. Li, C. Pan, F. Shu, Y. Wu, and J. Wang, "Joint Optimization for RIS-Assisted Wireless Communications: From Physical and Electromagnetic Perspectives," *IEEE Trans Commun*, vol. 70, no. 1, pp. 606–620, Jan. 2021.
- [5] C. Pan, H. Ren, K. Wang, W. Xu, M. ElKashlan, A. Nallanathan, and L. Hanzo, "Multicell MIMO communications relying on intelligent reflecting surfaces," *IEEE Trans. Wirel. Commun.*, vol. 19, no. 8, pp. 5218–5233, Aug. 2020.
- [6] F. Shu, L. Yang, X. Jiang, W. Cai, W. Shi, M. Huang, J. Wang, and X. You, "Beamforming and transmit power design for intelligent reconfigurable surface-aided secure spatial modulation," *IEEE J. Sel. Topics Signal Process.*, May. 2022.
- [7] X. Wang, F. Shu, W. Shi, X. Liang, R. Dong, J. Li, and J. Wang, "Beamforming Design for IRS-Aided Decode-and-Forward Relay Wireless Network," *IEEE Trans. Green Commun. Netw.*, vol. 6, no. 1, pp. 198–207, Mar. 2022.
- [8] X. Zhou, S. Yan, Q. Wu, F. Shu, and D. W. K. Ng, "Intelligent reflecting surface (IRS)-aided covert wireless communications with delay constraint," *IEEE Trans. Wirel. Commun.*, vol. 21, no. 1, pp. 532–547, Jan. 2022.
- [9] H.-M. Wang, J. Bai, and L. Dong, "Intelligent reflecting surfaces assisted secure transmission without eavesdropper's CSI," *IEEE Signal Process Lett*, vol. 27, pp. 1300–1304, Jul. 2020.

- [10] X. Guan, Q. Wu, and R. Zhang, "Intelligent reflecting surface assisted secrecy communication: Is artificial noise helpful or not?" *IEEE Wireless Commun. Lett.*, vol. 9, no. 6, pp. 778–782, Jun. 2020.
- [11] Y. Han, S. Zhang, L. Duan, and R. Zhang, "Double-IRS aided MIMO communication under LoS channels: Capacity maximization and scaling," *IEEE Trans Commun.*, vol. 70, no. 4, pp. 2820–2837, Apr. 2022.
- [12] L. Yang, P. Li, Y. Yang, S. Li, I. Trigui, and R. Ma, "Performance analysis of RIS-aided networks with co-channel interference," *IEEE Commun. Lett.*, vol. 26, no. 1, pp. 49–53, Jan. 2022.
- [13] F. Shu, X. Wu, J. Li, R. Chen, and B. Vucetic, "Robust synthesis scheme for secure multi-beam directional modulation in broadcasting systems," *IEEE access*, vol. 4, pp. 6614–6623, Oct. 2016.
- [14] B. Qiu, M. Tao, L. Wang, J. Xie, and Y. Wang, "Multi-beam directional modulation synthesis scheme based on frequency diverse array," *IEEE Trans. Inf. Forensics Secur.*, vol. 14, no. 10, pp. 2593–2606, Oct. 2019.
- [15] F. Shu, Y. Teng, J. Li, M. Huang, W. Shi, J. Li, Y. Wu, and J. Wang, "Enhanced secrecy rate maximization for directional modulation networks via irs," *IEEE Trans Commun.*, vol. 69, no. 12, pp. 8388–8401, Dec. 2021.
- [16] L. Lai, J. Hu, Y. Chen, H. Zheng, and N. Yang, "Directional modulation-enabled secure transmission with intelligent reflecting surface," *IEEE Int. Conf. Inf. Commun. Signal Processing., ICICSP*, pp. 450–453, Jul. 2020.
- [17] N. Lee, H. J. Yang, and J. Chun, "Achievable sum-rate maximizing AF relay beamforming scheme in two-way relay channels," *ICC Workshops-2008 IEEE International Conference on Communications Workshops (ICC Workshops)*, pp. 300–305, May. 2008.