

Charge sensitivity of the Inductive Single-Electron Transistor

Mika A. Sillanpää, Leif Roschier, and Pertti J. Hakonen
Low Temperature Laboratory, Helsinki University of Technology,
Otakaari 3 A, Espoo P.O. Box 2200 FIN-02015 HUT Finland

We calculate the charge sensitivity of a recently demonstrated device where the Josephson inductance of a single Cooper-pair transistor is measured. We find that the intrinsic limit to detector performance is set by oscillator quantum noise. Sensitivity better than $10^{-6} e/\sqrt{\text{Hz}}$ is possible with a high Q -value 10^3 , or using a SQUID amplifier. The model is compared to experiment, where charge sensitivity $3 \cdot 10^{-5} e/\sqrt{\text{Hz}}$ and bandwidth 100 MHz are achieved.

PACS numbers: 85.35.Gv, 85.25.Cp, 73.23.Hk

Remarkable quantum operations have been demonstrated in the solid state [1, 2, 3]. As exotic quantum measurements known in quantum optics are becoming adopted for electronic circuits [4], sensitive and desirably non-destructive measurement of the electric charge is becoming even more important.

A new type of fast electrometer, the Inductive Single-Electron Transistor (L-SET) was demonstrated recently [5]. Its operation is based on gate charge dependence of the Josephson inductance of a single Cooper-pair transistor (SCPT). As compared to the famous rf-SET [6], where a high-frequency electrometer is built using the control of single-electron dissipation, the L-SET has several orders of magnitude lower dissipation due to the lack of shot noise, and hence also potentially lower back-action.

Charge sensitivity of the sequential tunneling SET has been thoroughly analyzed. However, little attention has been paid on detector performance of the SCPT, probably because no real electrometer based on SCPT had been demonstrated until invention of the L-SET. Some claims have been presented [5, 7] that performance of SCPT in the L-SET setup could exceed the shot-noise limit of the rf-SET [8], $s_q \sim 10^{-6} e/\sqrt{\text{Hz}}$, but no accurate calculations have appeared.

In this letter we carry out a sensitivity analysis for L-SET in the regime of linear response. We find that (neglecting $1/f$ background charge noise) the intrinsic limit to detector sensitivity is set, unlike by shot noise of electron tunneling in a normal SET, by zero-point fluctuations [9].

A SCPT has the single-junction Josephson energy E_J , and the total charging energy $E_C = e^2/(2C)$, where C is the total capacitance of the island. At the lowest energy band the energy is E_0 , the effective Josephson energy is $E_J = \partial^2 E_0(q; \phi) / \partial \phi^2$, and the effective Josephson inductance is $L_J = (2e/\phi_0)^2 (E_J)^{-1}$. These have a substantial dependence on the (reduced) gate charge $q = C_g V_g / e$ if $E_J = E_C < 1$. Here, ϕ is the phase across the SCPT. With a shunting capacitance C , SCPT forms a parallel oscillator. We further shunt the oscillator, mainly for practical convenience, by an inductor $L' \ll L_J$. Hence we have the resonator as shown in Fig. 1, with the plasma frequency $\omega_p = \sqrt{1/C} = \sqrt{1/(2C)} = \sqrt{1/(2)} (L_{\text{tot}} C)^{-1/2}$

1 GHz, where $L_{\text{tot}} = L + L_J$.

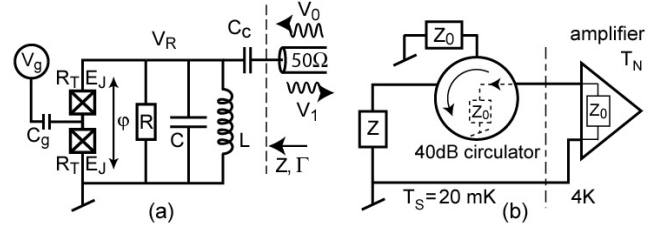


FIG. 1: The L-SET resonator (a), and its equivalent circuit (impedance Z) coupled to cabling (b).

The coupling capacitor, typically $C_c \ll C$, allows, in principle, for an arbitrarily high loaded quality factor Q_L . If directly coupled to feedline, $Q_L = Z_0 C = L_{\text{tot}}^{-1}$, which is clearly intolerable. With a coupling capacitor, however, $Q_L = 1/2Q_i$ in the optimal case (as shown later) of critical coupling $Z = Z_0$ (Q_i is the internal Q -value). The resistor R is a model component for internal losses.

We consider only the linear regime, where the detector works by converting charge to resonant frequency. We do not model the "anharmonic" operation mode [5] where ϕ oscillates in the nonlinear regime of the Josephson potential, yielding in fact better sensitivities in experiment.

Impedance of the L-SET circuit as illustrated in Fig. 1 is

$$Z = \frac{1}{i\omega C_c} + i\omega C + \frac{1}{i\omega L} + \frac{1}{i\omega L_J} + \frac{1}{R} \quad (1)$$

The circuit is probed by measuring the voltage reflection coefficient $\Gamma = j \exp(i \arg(\Gamma)) = (Z - Z_0)/(Z + Z_0)$ to an incoming voltage wave of amplitude V_0 . The reflected wave amplitude is $V_1 = j \Gamma V_0$. Here, $Z_0 = 50 \Omega$ is the wave impedance of coaxial lines.

Spectral density of noise power at the output of the 1st stage amplifier, referred to amplifier input, is $k_B T_N$, where the effective temperature T_N is due to amplifier noise and sample noise: $T_N = T_N + T_S$. Sample is supposed to be critically coupled, and hence its noise is like that of a 50Ω resistor at the temperature T_S

(note that the Josephson effect is a system ground state property and hence it contributes no noise). Typically, $k_B T_S < \hbar \Gamma_p$, and thus sample noise is already in the quantum limit.

Noise of contemporary rf amplifiers, however, remains far from the quantum limit, i.e., $T_N \gg T_S$. The best demonstrated SQUID-based rf amplifiers have reached $T_N \sim 100-200$ mK [10]. Therefore, added noise from the sample can be safely ignored when analyzing detector performance.

Charge sensitivity for amplitude modulation (AM) of the rf-SET was calculated in detail in Ref. [11] assuming detection of one sideband. It was assumed that the sensitivity is limited by general equivalent noise temperature similarly as here, and hence the formula applies as such:

$$s_q = \frac{\partial \langle j \rangle}{\partial q} \frac{1}{2k_B T_N} = \frac{V_0}{V_0} \frac{\partial \langle j \rangle}{\partial q} : \quad (2)$$

In the linear regime, the best sensitivity of the L-SET is clearly at the largest acceptable value of V_0 , where linearity still holds reasonably well. This is the case when an AC current of critical current peak value flows through the SCPT, and the phase swing is π -p. Then, voltage across the SCPT, and resonator (later we discuss important quantum corrections to this expression), $V_R = jZ_R = (Z + Z_0)jV_0$ equals a universal critical voltage of a Josephson junction [12], $V_C = \hbar I_c / (4e) \approx 3$ V at $f_p = 1$ GHz. Here, Z_R is impedance of the parallel resonator.

We decompose the derivative in Eq. (2) into terms due to the circuit and SCPT: $\frac{\partial \langle j \rangle}{\partial q} = \frac{\partial \langle j \rangle}{\partial I_p} \frac{\partial I_p}{\partial L_J} \frac{\partial L_J}{\partial q}$. We define a dimensionless transfer function $g^0 = (\partial L_J / \partial q) (e = L_{J0})$ scaled according to minimum (w.r.t. gate) of L_J . The gate value which yields the maximum of g^0 , denoted g , is the optimum gate DC operation point of the charge detector. In what follows, L_J should be understood as its value at this point. With a given $E_J = E_C$ ratio, we compute the values of g and L_J numerically from the SCPT band structure (g is plotted in Fig. 4 in Ref. [5]). If $E_J = E_C = 1$, one can use the analytical result $L_{J0} = 2 \frac{2}{0} = (E_J)$.

With a general choice of parameters of the tank resonator, Eq. (2) needs to be evaluated numerically. However, when the system is critically coupled, $Z = Z_0$, a simple analytical formula can be derived. Numerical calculations of Eq. (2) over a large range of parameters show that the best sensitivity occurs when $Z = Z_0$. This is reasonable because it corresponds to the best power transfer. All the following results are for critical coupling. Later, we examine effects of detuning from the optimum. Initially, we also suppose the oscillator is classical, i.e., its energy $E \ll \hbar \Gamma_p$.

Optimal value of the coupling capacitor is calculated using $Q_L = 1/2Q_i$, and we get $C_c = \frac{1}{C} = (\Gamma_p Q_i Z_0)$.

Since it was assumed $Z = Z_0$, it holds that $Z_R = Z_0 + i = (\Gamma_p C_c)$. Voltage amplification by the resonator then becomes $V_R = V_0 \frac{1}{Q_i} = (\Gamma_p Z_0 C)$ which

holds for a reasonably large Q_i . We thus have $V_0 = \hbar \Gamma_p^{3/2} \frac{1}{Z_0 C} = (4e \frac{1}{Q_i})$.

With $\Gamma_p = \frac{1}{p} \frac{(L_{tot} C_p)^{1/2}}{C L_J^2}$, we get immediately $(\partial I_p / \partial L_J)^{-1} = 2 \frac{1}{C L_J^2} \frac{1}{1=L+1=L_J}$. Using the fact [13] that FWHM of the loaded resonance absorption dip at critical coupling is $\Gamma_p = (2Q_L)$, we get $\partial \langle j \rangle / \partial I_p = 2Q_L = \Gamma_p = Q_i = \Gamma_p$.

Inserting these results into Eq. (2), we get expression for the AM charge sensitivity in the limit the oscillator is classical:

$$s_q = \frac{8eL_J^2 \frac{1}{L} + \frac{1}{L_J} \frac{1}{2k_B T_N}}{g \hbar L_{J0} \Gamma_p Q_i} \quad (3)$$

in units of $[\frac{1}{e} \text{ Hz}]$. Clearly, the shunting inductor is best omitted, i.e., $L \rightarrow 1$. The classical result, Eq. (3), improves without limit at low $E_J = E_C$.

We will now discuss quantum corrections to Eq. (3). Although spectral density of noise in the resonator is negligible in output, integrated phase fluctuations even due to quantum noise can be large. Integrated phase noise in a high- Q oscillator is $\hbar^{-2} i = 2^2 \hbar L_{tot} \Gamma_p = \frac{2}{0}$ [14]. When $\hbar^{-2} i$ exceeds the linear regime, which happens at high inductance (low $E_J = E_C$), plasma resonance "switches" into nonlinear regime, and the gain due to frequency modulation vanishes. If $L \gg L_J$, and $f_p \gg 1$ GHz, we have ultimate limits of roughly $E_J = E_C \approx 0.06$, or 0.02 , for a SCPT made out of Al or Nb, respectively.

Even before this switching happens, quantum noise in the oscillator $E_Q = \frac{1}{2} \hbar \Gamma_p$ has an adverse effect because less energy can be supplied in the form of drive, that is, V_0 is smaller. This can be calculated in a semiclassical way as follows. Energy of the oscillator is due to drive (E_D) and noise (we stay in the linear regime): $E = (\phi_0')^2 = (8^2 L_{tot}) = E_D + E_Q = (\phi_0')^2 = (8^2 L_{tot}) + \frac{1}{2} \hbar \Gamma_p$, where the phases are in RMS, ϕ_0' is the total phase swing, and ϕ_0' is that due to drive. Solving for the latter, we get $\phi_0' = \frac{1}{\sqrt{2}} \sqrt{4^2 \hbar \Gamma_p L_{tot} = \frac{2}{0}}$. The optimal drive strength $V_R = V_C$ corresponds to $\frac{2}{0} = 2$, and hence the maximum probing voltage V_0 is reduced by a factor $= \frac{1}{1 - 32 \hbar \Gamma_p L_{tot} = \frac{2}{0}}$ due to quantum noise in the oscillator.

The optimal sensitivity is finally

$$s_q^{QL} = \frac{64 \frac{1}{p} \frac{2eL_J^2}{\hbar} \frac{1}{2k_B T_N}}{g \hbar L_{J0} \Gamma_p Q_i}; \quad (4)$$

which depends only weakly on operation frequency. We optimized Eq. (2) (replacing there V_0 by V_0) assuming similar tunnel junction properties as in the experiment, $E_J E_C = 1.8 \text{ K}^2$ (Al) and $E_J E_C = 10 \text{ K}^2$ (Nb). The results are plotted in Fig. 2 together with corresponding power dissipation $(V_C = 2)^2 R = 2^2 \hbar \Gamma_p = (32e^2 Q_i L_J)$.

The optimal sensitivity is reached around $E_J = E_C \approx 0.1::0.3$, where the curves in Fig. 2 almost coincide Eq. (4). C_c should be chosen so that critical coupling

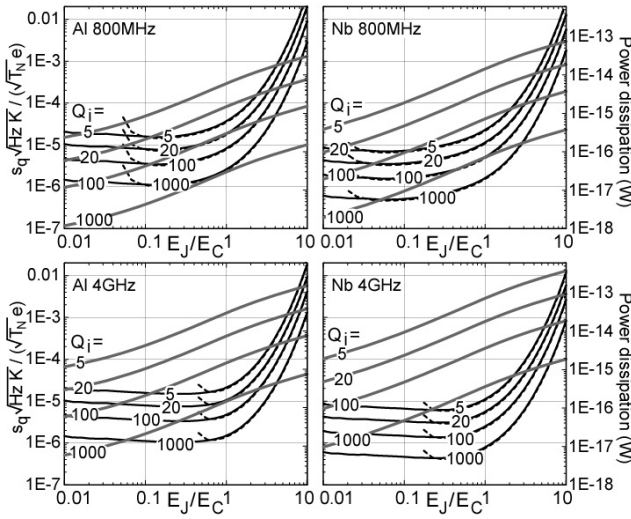


FIG. 2: Charge sensitivity of the L-SET optimized from Eq. (2) (black lines). The analytical result (Eq. (3) multiplied by \sqrt{L}), with $L = 1$, is shown with dashed lines. Gray lines are the corresponding power dissipation. All the graphs have the same scales, which are indicated for s_q (left) and dissipation (right). The curves are for different Q_i as marked. All graphs have $Z' = Z_0$.

results. Typically also it should hold $L \ll L_J$ (see the analytical curve in Fig. 2). However, sensitivity decreases only weakly if these values are detuned from their optimum (Fig. 3).

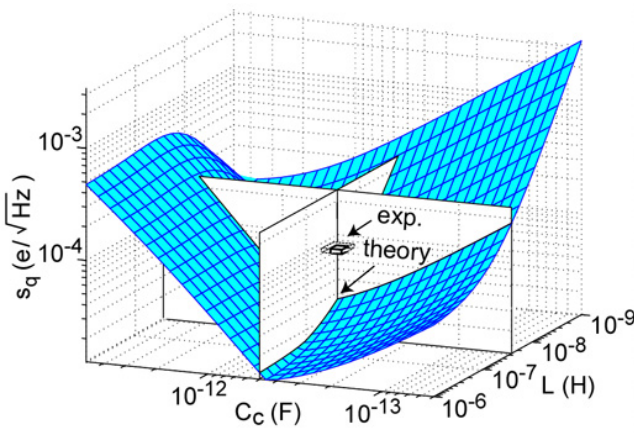


FIG. 3: Measured charge sensitivity (box) compared to calculations. In experiment, $C_c = 0.5$ fF, and $L = 28$ nH. The graph shows also how the sensitivity would change as a function C_c and L according to the model.

By numerical investigation we found that readout of $\arg(\cdot)$, with mixer detection, offers within accuracy of numerics the same numbers than the discussed AM (readout of j).

In experiment, we measured charge sensitivity for the following sample and resonator: $R_T = 11$ k, $E_J = 0.7$ K, $E_C = 2.6$ K, $E_J = E_C = 0.3$, $Q_i = 16$, $L = 28$ nH,

$C = 1.2$ pF, $C_c = 0.5$ pF. In all samples so far, $Q_i < 20$ which is presently not understood. The measurements were done as described in Ref. [5], with $T_N = 5$ K [15]. We measured $s_q = 7 \cdot 10^{-5}$ e/√Hz by AM at 1 MHz, while a prediction with the present parameters is $s_q = 3 \cdot 10^{-5}$ e/√Hz (see also Fig. 3).

Theory and experiment thus agree reasonably. The somewhat lower sensitivity in experiment is likely to be due to external noise which forces a lower V_0 and also smoothes out the steepest modulation. Its origin is not clear. Also the 25% higher values of L_J than expected agree qualitatively with noise.

In the "anharmonic" mode, we measured $s_q = 3 \cdot 10^{-5}$ e/√Hz, with a usable bandwidth of about 100 MHz ($s_q = 10^{-4}$ e/√Hz at 100 MHz). Considering both s_q and band, a performance comparable to the best rf-SETs [6, 16] has been reached with the L-SET, though here at more than two orders of magnitude lower power dissipation (10 fW).

In the linear regime, the power lost P from drive frequency $m = 1$ to higher harmonics is determined by the sum, for $m \geq 2$, of Josephson junction admittance components $Y_m = 2J_m / (2e\hbar V_1)$. At the critical voltage $V_1 = V_C$, this amounts to $Y = Y_1 = P = P_1 = 30\%$. Since charge sensitivity is proportional to square root of power, it thus decreases only 15% due to non-linearity. Further corrections due to slightly non-sinusoidal lowest band of the SCPT, as well as asymmetry due to manufacturing spread in junction resistance, we estimate as insignificant.

Next we discuss non-adiabaticity. Interband Zener transitions might make the SCPT jump from the supposed ground band 0. We make a worst case estimate by assuming that the drive is 2 p-p (partially due to noise). The probability to cross the minimum ϵ_m of band gap $\epsilon = E_1 - E_0$ is: $P_Z = \exp(-\epsilon_m^2 / (2\hbar^2 D))$, where we evaluate the dependence of the band gap on phase $D = \phi = \phi'$ at $\phi' = \pi/2$. $\epsilon_m = 2\epsilon_p$ is determined by the drive.

Zener tunneling is significant if it occurs sufficiently often in comparison to $1/\tau_0$ relaxation. Threshold is when $P_Z = \tau_0 / (2f_0)$, where $\tau_0 > (1/\text{s})^{-1}$ is the relaxation rate. Operation of the L-SET can thus be expected above $P_Z = 10^{-4}$.

Numerical calculations for P_Z show that Zener tunneling is exponentially suppressed, at the L-SET optimal working point, in the interesting case of low $E_J = E_C$ [12]. This is because ϵ_m becomes large and D small. For instance, if $E_J = 1$ K and $f_p = 1$ GHz, we got that Zener tunneling is insignificant below $E_J = E_C = 3$. With $E_J = 0.5$ K and $f_p = 5$ GHz, the threshold is $E_J = E_C = 1$.

We conclude that with sufficiently high Q_i and using a amplifier close to the quantum limit, even $s_q = 10^{-7}$ e/√Hz, order of magnitude better than the shot-noise limit of rf-SET, is intrinsically possible for the L-SET. So far, the sensitivity has been limited by $Q_i < 20$.

Fruitful discussions with M. Feigel'man, U. G. Avish, T.

Heikkilä, R. Lindell, H. Seppä are gratefully acknowledged. This work was supported by the Academy of Finland

and by the Large Scale Installation Program ULTI-3 of the European Union (contract HPR I-1999-CT-00050).

-
- [1] Y. Nakamura, Yu. A. Pashkin, and J. S. Tsai, *Nature* 398, 786 (1999).
 - [2] D. Vion et al., *Science* 296, 886 (2002).
 - [3] Y. Yu, S. Han, X. Chu, S. Chu, and Z. Wang, *Science* 296, 889 (2002).
 - [4] A. Wallra et al., *Nature* 431, 162 (2004).
 - [5] M. A. Sillanpää, L. Roschier, and P. J. Hakonen, *Phys. Rev. Lett.* 93, 066805 (2004).
 - [6] R. J. Schoelkopf et al., *Science* 280, 1238 (1998).
 - [7] M. A. Sillanpää, L. Roschier, and P. J. Hakonen, submitted to *Proceedings of the Vth Rencontres de Moriond in Mesoscopic Physics* (2004).
 - [8] A. N. Korotkov and M. A. Paalanen, *Appl. Phys. Lett.* 74, 4052 (1999).
 - [9] A. B. Zorin, *Phys. Rev. Lett.* 86, 3388 (2001).
 - [10] M.-O. André et al., *Appl. Phys. Lett.* 75, 698 (1999).
 - [11] L. Roschier et al., *J. Appl. Phys.* 95, 1274 (2004).
 - [12] M. A. Sillanpää, Ph.D. thesis, Helsinki University of Technology (2005).
 - [13] D. Kajfež, *Q Factor (Vector Fields)*, Oxford, 1994).
 - [14] M. Devoret, in *Les Houches, Session LXIII*, eds. S. Reynaud, E. G. Jacobino and J. Zinn-Justin (Elsevier, Amsterdam, 1997).
 - [15] L. Roschier and P. Hakonen, *Cryogenics* 44, 783 (2004).
 - [16] A. Aassime, D. Gunnarsson, K. Bladh, P. Delsing, and R. Schoelkopf *Appl. Phys. Lett.* 79, 4031 (2001).