

A framework for public-channel cryptography using chaotic lasers

Noam Gross¹, Einat Klein¹, Michael Rosenbluh¹, Wolfgang Kinzel², Lev Khaykovich¹, Ido Kanter¹

¹*Department of Physics, Bar-Ilan University, Ramat-Gan, 52900 Israel, and*

²*Institut für Theoretische Physik, Universität Würzburg, Am Hubland 97074 Würzburg, Germany*

Two mutually coupled chaotic diode lasers with individual external feedback, are shown to establish chaos synchronization in the low-frequency fluctuations regime. A third laser with identical external feedback but coupled unidirectionally to one of the pair does not synchronize. Both experiments and simulations reveal the existence of a window of parameters for which synchronization by mutual coupling is possible but synchronization by unidirectional coupling is not. This parameter space forms the basis of a proposed public-channel cryptographic scheme and is robust to various possible attacks.

PACS numbers:

A semiconductor (diode) laser subjected to delayed optical feedback is a well known example of a nonlinear oscillator that displays chaotic oscillations. Different regimes of chaos, depending on feedback strength and driving current are obtained in lasers with external feedback. For low driving currents and moderate feedback, characteristic intensity breakdowns known as low-frequency fluctuations (LFFs) are typically observed [1].

Chaos synchronization has attracted a lot of interest recently because of its potential application in optical communication [2]. Chaos synchronization for two external-feedback lasers coupled unidirectionally has been demonstrated experimentally and theoretically in [3, 4]. However, mutually coupled semiconductor lasers were mainly considered in the so called face-to-face configuration where both lasers are solitary (i.e. they are not subjected to individual optical or electronic feedback) [5, 6, 7, 8]. These studies revealed interesting dynamics regimes including anticipated and retarded synchronization and leader-laggard dynamics.

One of the most studied applications of chaos synchronization in communication systems is a private-key cryptographic system, where the two communicating parties have a common secret key prior to the communication process, which they use to encrypt the transmitted messages. In optical communication, unidirectionally coupled lasers are synchronized in a master-slave configuration, and the secret key is the system parameters [2]. The two communicating lasers must have identical (or at least similar) parameters, or else synchronization is impossible. The information is added to the synchronized signal and recovered in a chaos pass filter procedure [9]. If an eavesdropping attacker (a third laser), manages to reveal the parameters, the security of the system is broken.

In many applications, the two communicating parties do not have a common private-key, and for secure communication *must* use public-channel cryptography, where all the information is public. Public-channel cryptographic methods that are used today, such as RSA [10], are based on number theory, and implemented in software. In this paper we present for the first time a frame-

work for all-optical *public*-channel cryptography. The advantages of an all-optical device implemented in hardware is straightforward.

We use two mutually coupled external-feedback lasers to establish chaos synchronization in the LFF regime. Once the two communicating lasers are synchronized, and have identical time varying signals, they can use the signal to mask a message in some sophisticated way. As we are proposing a *public – channel* system, all the macroscopic parameters of the system are public knowledge, and known to the attacker as well. Of course, if all the parameters are known, the parties cannot use the signal itself to hide the message, rather the transmitted signal consists of a non-linear combination of time-delayed values. Such a signal conceals the original signal, but still maintains the synchronization.

An attacker wishing to decrypt the message must manage to synchronize with the parties (using the same parameters), so that he can generate the same decoding signal. We show that a third laser with identical external feedback but coupled unidirectionally to one of the communicating lasers, does not synchronize with the pair. The asymmetry, whereby the two mutually coupled lasers synchronize while the third laser does not, is caused by the fact that the third laser is unidirectionally coupled and does not influence the process [11]. This advantage of mutual coupling over unidirectional coupling appears in a certain window of parameters.

Our experimental setup is shown schematically in Fig. 1. We use 3 single-mode lasers, *A*, *B* and *C*, emitting at 660 nm and operating close to their threshold. The temperature of each laser is stabilized to better than 0.01K and all are subjected to a similar optical feedback. The length of the external feedback path is equal for all lasers and is set to 90 cm (round trip time $\tau_d = 6$ ns). The feedback strength of each laser is adjusted using a $\lambda/4$ wave plate and a polarizing beam splitter and is set to about 10% of the laser's power. Two lasers (*A* and *B*) are mutually coupled by injecting 5% of the output power to each of them. The coupling optical path is set to 8 m ($\tau_c = 27$ ns). The attacker laser (*C*) is fed unidirectionally by one of the mutually coupled lasers. Unidirectionality is ensured by an optical diode (-40 dB) which prevents

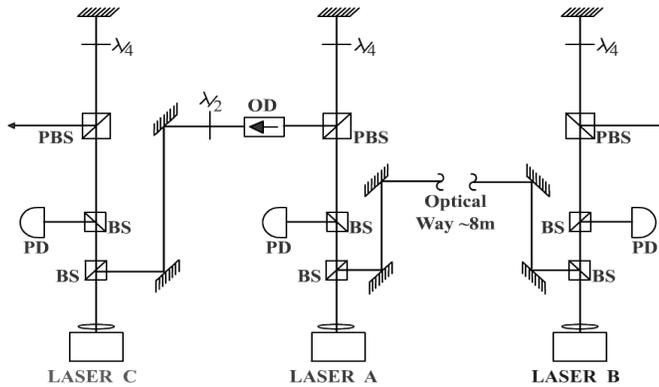


Figure 1: Schematic diagram of the experimental setup. Lasers A and B are mutually coupled, and C is the attacker. BS - beam splitters; PBS - polarization beam splitters; OD - optical isolator; PD - photodetectors.

feedback. Three fast photodetectors (response time < 500 ps) monitor the laser intensities which are simultaneously recorded by a digital oscilloscope.

A typical time sequence of the three laser intensities is shown in Fig. 2. The attacker, is shown in green while the mutually coupled lasers, A and B, are in red and blue. A pronounced time correlation of LFF breakdowns is a manifestation of the synchronization of A and B. A detailed discussion of this mutual synchronization will be given below. Now we concentrate on the striking differences between the signal of laser C and that of lasers A and B. Laser C succeeds in synchronizing with A and B occasionally, but frequently, additional breakdowns, which are absent in A and B appear in the sequence of C. Thus it fails to follow the pair of mutually coupled lasers in a reliable manner. The parameters of laser C, such as temperature, driving current, feedback and coupling strengths were carefully adjusted to be identical to the other two lasers. In practice we exercised the following experimental procedure. We verified that laser C can be synchronized unidirectionally to a single master (either laser A or B). A fine tuning of all laser C parameters was made to achieve the best synchronization possible. Then we allowed the weak mutual coupling of lasers A and B and observed that the synchronization of laser C degrades immediately. Trying to fine tune laser C parameters, so as to obtain better attacker synchronization did not improve the quality of synchronization. We were able to realize a high level of synchronization if either the coupling of laser C to the communicating pair was significantly increased or the feedback to laser C was considerably reduced. But in this situation the C laser parameters were so different from the parameters of A and B that it could not possibly be used to decipher information as discussed below.

To model the single-mode semiconductor lasers we used the Lang Kobayashi differential equations, as defined in [12]. For the dynamics parameters we used the

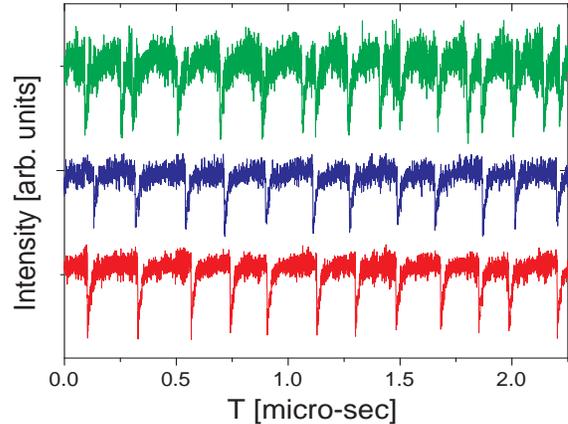


Figure 2: A time sequence of all three laser intensities. Lasers A and B are shown in blue and red while the attacker, laser C, is in green. The attacker shows numerous failures in its attempt to follow the well established correlation in LFF breakdowns between the two parties.

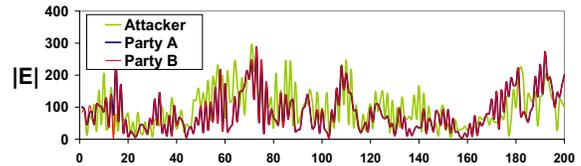


Figure 3: Numeric simulation results. A typical sequence of the amplitude $|E|$, without LFF, for the attacker and the parties with $\kappa = \sigma = 10^{10} \text{ s}^{-1}$. The signals of the parties are overlapping and therefore are indistinguishable.

values in [12]. The external feedback strength is defined by κ and the coupling strength of lasers A and B and the attacker to A or B is defined by σ . The calculated sequences behaved exactly as those observed experimentally in the LFF regime. The interval between breakdowns can be controlled by κ and σ . The synchroniza-

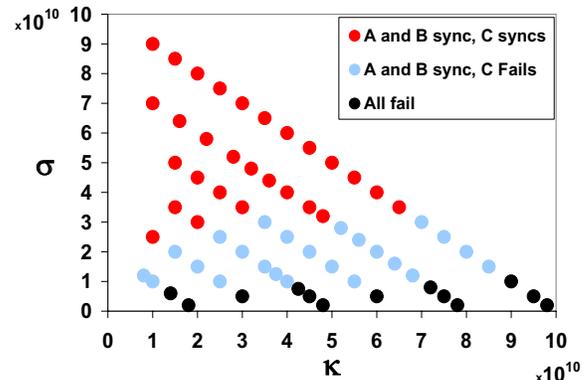


Figure 4: Success or failure of synchronization for the parties and the attacker for a range of parameter values κ and σ .

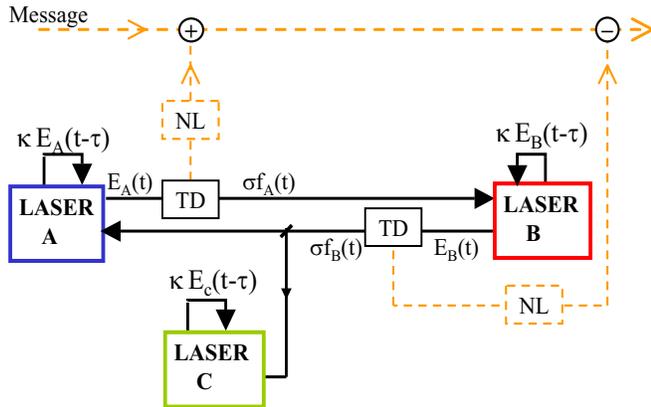


Figure 5: Schematic cryptographic setup. Parties A and B and the attacker, C, receive external feedback of strength κ . The mutual signals, $\sigma f_A(t)$ and $\sigma f_B(t)$, consists of a linear combination of three delayed signals. $\sigma f_B(t)$ is also used as an external input to the attacker C. The naive way to cipher the message, using a linear combination of time delayed signals of laser A and nonlinearity is depicted in orange.

tion of lasers A and B is robust to small differences in the parameters [13]. Furthermore lasers A and B were found to be synchronized in between the LFF breakdowns. For small κ and σ chaotic synchronization is also possible in the regime without LFF breakdowns. Fig. 3 displays a typical sequence of amplitudes of all three lasers in this regime with $\tau_c = \tau_d = 10ns$. Note that lasers A and B are indistinguishable in the picture.

We now discuss the two dimensional phase space, defined by parameters κ and σ . The examined phase space is characterized by the following three regimes as depicted in Fig. 4. The red regime where σ is strong enough in comparison to κ , and all lasers are synchronized. The black regime where the coupling is negligible and there is a lack of synchronization between any of the lasers. Most interesting is the window of the light blue regime where A and B are synchronized, but C fails to synchronize. This regime represents an intermediate window where mutual coupling is superior to a unidirectional coupling [14]. This new effect is at the center of our cryptographic system presented below.

In our cryptographic system, the coupling signal, $f_A(t)$, is a linear combination of time delayed signals of the laser, $E_A(t)$, as defined in Eq. 1 (and similarly for laser B). The initial reason for using a complicated signal, $f_A(t)$, is that in this way the original signal $E_A(t)$ remains secret and can be used to mask a message. Using $f_A(t)$ as the coupling signal serves an additional purpose: the attacker is forced to use *exactly* the same coupling strength σ as the parties. He cannot amplify his coupling so as to force synchronization because when he does so, he only synchronizes with $f_A(t)$ as the output of the laser, instead of $E_A(t)$. Laser C must have the same “heart beats” and the same internal “flows” in all of its internal optical “wires”, as the synchronized lasers, A and B, otherwise the beam it constructs to decrypt the

message is essentially different from $E_A(t)$. The use of a combination of time-delayed values as the coupling signal between the parties thus accomplishes two necessary tasks: it hides the original signal of the laser so that we can use it to mask a message, and it prevents the attacker from using a stronger coupling so as to synchronize.

A prototypical cryptographic setup is shown in Fig. 5. Each of the three lasers has external feedback of strength κ with time delay τ . The transmitted signal of each of the two lasers, $f_A(t)$ and $f_B(t)$, consists of a linear combination of the time delayed laser signals

$$f_A(t) = E_A(t - \tau_1) + E_A(t - \tau_2) + E_A(t - \tau_3) \dots \quad (1)$$

and similarly for laser B. In our simulations we have seen that using a combination of time delays and nonlinearity does not disturb the synchronization of A and B [13, 15]. The attacker, C, tries to imitate one of the mutually coupled lasers, hence it will use as input $\sigma f_B(t)$, for instance, and feedback characterized by κ and τ .

The part of the publicly known setup required to conceal the message, in addition to the synchronization process is marked in orange in Fig. 5. Two (or in general more than two) delayed signals are summed and can be further complicated by optional nonlinear terms. The resulting beam is used to cipher the message, which is subsequently transmitted to the other party. Party B, who is synchronized to party A, can easily generate an identical beam to the one used to cipher the message. Subtracting this beam from the received signal immediately reveals the transmitted message.

A possible attack on the communication channel is via the use of a chaos pass filter on the encrypted signal (the orange dashed line in Fig. 5). In this strategy, the attacker uses the encrypted transmitted message as an external input to a laser whose output is expected to be the chaotic signal without residues of the message [9]. The attacker can then subtract this chaotic signal from the encrypted message and reveal the message. This strategy was shown to work with a simple, single frequency continuous-wave message only [5, 9]. It would fail if a broadband message is used such as a compressed message or alternatively a message which is modulated over a large bandwidth. In addition, if the message is ciphered with a non-linear function of time delayed signals, and not with the simple laser output, $E_A(t)$, it also prevents the successful application of chaos pass filtering.

Another possible attack strategy is to derive the original signal $E_A(t)$ from the transmitted signal $f_A(t)$, by using some mathematical analysis method, such as embedding of the time-delayed values. Such an embedding method was shown to be unsuccessful, especially when stochastic ingredients were added to the dynamics [15]. Here too the lasers are governed by a stochastic process, and thus a mathematical analysis is useless.

Let us now discuss the synchronization of two mutually coupled lasers in detail. A close examination of Fig. 2 (blue and red traces) reveals that the LFF breakdowns

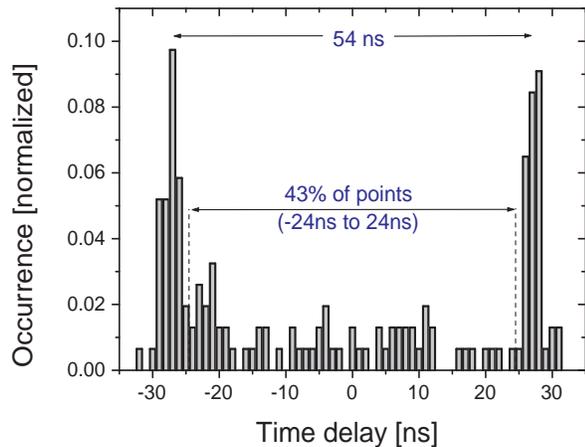


Figure 6: Histogram of time delay/anticipation of power breakdowns of two parties (lasers A and B). Two strong peaks at exactly the coupling time between the two parties ($\tau_c=27$ ns) include 57% of registered events (master/slave configuration). However another 43% of the events fall between the peaks showing synchronization regime beyond the master/slave configuration.

are not perfectly correlated up to the time window of the coupling lengths between the lasers. This intriguing dynamics is summarized in an histogram of power breakdown correlations as shown in Fig. 6. Two different synchronization regimes can be readily distinguished. The first one is characterized by a constant lag/lead time between power breakdowns which corresponds to the coupling time τ_c . In Fig. 6 this corresponds to the two narrow peaks (± 27 ns) which include about 57% of all registered events. This type of synchronization known as a master/slave (leader/laggard) configuration was shown

in unidirectional coupling [3] as well as in mutual coupling without external feedback[5]. The heights of the two peaks are nearly equal which means that the leading role is equally distributed between the lasers (the system is symmetric). The second synchronization regime, which covers another 43% of events is characterized by a lead/lag time which is less than τ_c and equally distributed in the time interval between 0 and $\pm\tau_c$. In this situation neither of the lasers is master or slave and the synchronization enters the regime which is beyond the master/slave treatment. The mutually coupled lasers jump randomly throughout both synchronization regimes. For the communication scheme presented here the mutually coupled lasers have to operate outside the leader/laggard regime. For this the careful mode matching of two lasers achieved by fine tuning of temperature and current is crucial. In our simulations we observed exactly the same synchronization regimes. We saw that when using $\tau_c = \tau_d$ the parties display only the second synchronization (with no leader/laggard) [13].

To conclude, we have presented a framework for a public-channel cryptographic system, based on two mutually coupled lasers. The system proposed here opens a manifold of possibilities. For instance, the extension of our framework to generate secret communication among a group of more than two lasers. There are many details in this systems that deserve further experimental and theoretical research - the sensitivity of the synchronization to the parameters such as time delays, non-linearity, the carefully matched laser parameters and the distance between the lasers. Also the ciphering of the message using the synchronized signal, deserves further investigation and is open to different implementations.

The research is partially supported by the Israel Science Foundation.

-
- [1] I. Fisher, G.H.M. van Tartwijk, A.M. Levine, W. Elsässer, E.O. Göbel, and D. Lenstra, *Phys. Rev. Lett.* **76**, 220 (1996).
- [2] L.M. Pecora and T.L. Carroll, *Phys. Rev. Lett.* **64**, 821 (1990); J.-P. Goedgebuer, L. Larger, and H. Porte, *Phys. Rev. Lett.* **80**, 2249 (1998); G.D. VanWiggeren and R. Roy, *Science* **279**, 1198 (1998).
- [3] S. Sivaprakasam and K.A. Shore, *Opt. Lett.* **24**, 466 (1999).
- [4] A. Locquet, F. Rogister, M. Sciamanna, P. Megret, and M. Blondel, *Phys. Rev. E* **64**, 045203(R) (2001).
- [5] T. Heil, I. Fisher, W. Elsässer, J. Mulet and C. Mirasso, *Phys. Rev. Lett.* **86**, 795 (2001);
- [6] A system where one of the lasers has external feedback was considered in P. Rees, P.S. Spencer, I. Pierce, S. Sivaprakasam, and K.A. Shore, *Phys. Rev. A* **68**, 033818 (2003).
- [7] A. Hohl, A. Gavrielides, T. Erneux, and V. Kovanis, *Phys. Rev. A* **59**, 3941 (1999); J. Mulet C. Masoller, and C.R. Mirasso *ibid* **65**, 063815 (2002); J. Javaloyes, P. Mandel and D. Pieroux, *Phys. Rev. E* **67**, 036201 (2003); N. Fujiwara, Y. Takiguchi and J. Ohtsubo, *Opt. Lett.* **28**, 1677 (2003).
- [8] R. Vicente, S. Tang, J. Mulet, C.R. Mirasso and J.M. Liu, *Phys. Rev. E* **70**, 046216 (2004).
- [9] I. Fischer, Y. Liu and P. Davis, *Phys. Rev. A* **62**, 11801 (2000).
- [10] R.L. Rivest, A. Shamir and L.M. Adleman. *Communications of the ACM*, 21(2):120-126, 1978.
- [11] M. Rosen-Zvi, E. Klein, I. Kanter and W. Kinzel *Phys. Rev. E* **66**, 066135 (2002).
- [12] V. Alhers, U. Parlitz, and W. Lauterborn, *Phys. Rev. E* **58**, 7208 (1998); I.V. Koryukin and P. Mandel, *Phys. Rev. E* **65**, 026201 (2003).
- [13] E. Klein, I. Kanter and W. Kinzel (unpublished).
- [14] In our simulations with two coupled Lorenz systems [15], we have measured the conditional Lyapunov exponent (CLE), and noticed that there is an area for which the CLE is negative for the parties and positive for the attacker. This means that even if the attacker manages to get close to the parties at some point, he will after a short time become very far.
- [15] E. Klein, R. Mislovaty, I. Kanter and W. Kinzel, *Phys. Rev. E* (in press), and cond-mat 0412613 (2005).