

# Age-Limited Capacity of Massive MIMO

Bamelak Tadele, Volodymyr Shyianov, Faouzi Bellili, *Member, IEEE*, Amine Mezghani, *Member, IEEE*, and Ekram Hossain, *Fellow, IEEE*

## Abstract

We investigate the age-limited capacity of the Gaussian many channel with total  $N$  users, out of which a random subset of  $K_a$  users are active in any transmission period and a large-scale antenna array at the base station (BS). In an uplink scenario where the transmission power is fixed among the users, we consider the setting in which both the number of users,  $N$ , and the number of antennas at the BS,  $M$ , are allowed to grow large at a fixed ratio  $\zeta = \frac{M}{N}$ . Assuming perfect channel state information (CSI) at the receiver, we derive the achievability bound under maximal ratio combining. As the number of active users,  $K_a$ , increases, the achievable spectral efficiency is found to increase monotonically to a limit  $\log_2 \left( 1 + \frac{M}{K_a} \right)$ . Using the age of information (AoI) metric, first coined in [1], as our measure of data timeliness or freshness, we investigate the trade-offs between the AoI and spectral efficiency in the context massive connectivity with large-scale receiving antenna arrays. Based on our large system analysis, we provide an accurate characterization of the asymptotic spectral efficiency as a function of the number of antennas and the number of users, the attempt probability, and the AoI. It is found that while the spectral efficiency can be made large, the penalty is an increase in the minimum AoI obtainable. The proposed achievability bound is further compared against recent massive MIMO-based massive unsourced random access (URA) schemes.

## Index Terms

Massive MIMO, Age of Information, Massive Random Access, Internet of Things (IoT)

The authors are with the Department of Electrical and Computer Engineering at the University of Manitoba, Winnipeg, MB, Canada (emails: {tadeleb, shyianov}@myumanitoba.ca, {Faouzi.Bellili, Amine.Mezghani, Ekram.Hossain}@umanitoba.ca). This work was supported by the Discovery Grants Program of the Natural Sciences and Engineering Research Council of Canada (NSERC).

## I. INTRODUCTION

### A. Background and Motivation

Massive random access in which a base station equipped with a large number of antennas is serving a large number of contending users has recently attracted considerable attention. This surge of interest is fuelled by the need to satisfy the soaring demand in wireless connectivity for many envisioned IoT applications such as massive machine-type communication (mMTC). Machine-type communication (MTC) has two distinct features [2] that make them drastically different from human-type communications (HTC) around which previous cellular systems have mainly evolved: *i*) machine-type devices (MTDs) require sporadic access to the network and *ii*) MTDs usually transmit small data payloads using short-packet signaling. The sporadic access leads to the overall mMTC traffic being generated by an unknown and random subset of active MTDs (at any given transmission instant or frame). This calls for the development of scalable random access protocols that are able to accommodate a massive number of MTDs. Short-packet transmissions, however, make the traditional grant-based access (with the associated scheduling overhead) fall short in terms of spectrum efficiency and latency, which are two key performance metrics in next-generation wireless networks. Hence, a number of grant-free random access schemes have been recently investigated within the specific context of massive connectivity (see [3], [4] and references therein). From the information-theoretic point of view, the problem of massive random access is not recent and dates back to the seminal work of Gallager in [5]. However, with an increasing number of possible applications the problem has reappeared in a new context [6], [7]. As opposed to classical treatments of the Gaussian multiple access channel in which the number of users stays fixed, in the new Gaussian many channel formalism the number of users is allowed to grow with the blocklength [6] in a typical massive connectivity setup. Note that when a randomly varying subset of users (with different codebooks) are active over each transmission period, one is bound to sacrifice some of the spectral efficiency for user-identification [6]. However, when all the devices employ the same codebook (aka, unsourced access), the user-identification problem can be separated from the decoding problem as highlighted in [7]. In fact, by letting all the devices employ the same codebook, the system spectral efficiency depends on the number of active users only and not on total number of users, thereby making different multi-user decoders comparable against each other and to the random coding bound. In particular, it was shown in [7] that increasing the number of active users at

a fixed per-user payload renders known solutions such as ALOHA far from the random coding achievability bound. The paradigm in [7] where all users share the same codebook with no need for user identification was later dubbed unsourced random access and now has a number of viable algorithmic solutions. However, most of the existing information-theoretic works on massive connectivity focus on the case of a single receive antenna at the BS. Yet, the idea of using a large-scale antenna array at the BS (i.e. massive MIMO) which was first pioneered in [8], has now become one of the main directions towards which the next-generation of cellular systems are projected to evolve.

From another perspective, in many real-time applications wherein the data is subject to abrupt variations, usefulness of the information when it arrives at the BS is directly related to its freshness. Due to infrequent access to the network, conventional performance metrics, such as delay fall short in characterizing the over-all freshness of the data [9]. In this respect, the AoI concept [1] was introduced to adequately characterize the freshness of the information at the receiver side. While many of the existing works on AoI focus primarily on grant-based access with AoI-constrained scheduling policies [10], [11], some have looked at uncoordinated transmission schemes. Recently, a few information-theoretic works have investigated the trade-off between the AoI and achievable data rates [12], [13]. Surprisingly, apart from the work in [14], the implications of MIMO transmissions in terms of AoI has not yet been investigated by the research community and in particular massive MIMO.

## *B. Contributions*

The major contributions of this paper are summarized as follows.

- We derive a closed-form expression of the outage probability in the finite-user, finite-antenna regime and through use of the central-limit theorem (CLT) we express this outage probability in the asymptotic case where both the number of user and the number of antennas are allowed to grow large at a fixed ratio.
- Under the assumption of perfect CSI at the receiver, we derive an achievability bound using an maximal ratio combining (MRC) receiver. We demonstrate how this achievable bound scales with the number of users in the finite regime (e.g. in Theorem 1 in Section IV) and further elaborate on its behaviour in the limit (e.g. through Theorems 2 and 3 in Section IV).

- We show that fully uncoordinated non-orthogonal access can achieve minimum AoI as long as all the devices are active in each transmission period. Furthermore, our analysis reveals that with a large-scale antenna array at the BS both high spectral efficiency and low AoI can be achieved.
- Finally, using our bound, we gauge the performance of recent massive MIMO unsourced random access (URA) schemes.

### C. Organization of the Paper and Notations

We structure the rest of this paper as follows. In Section II, we introduce the system model. In Section III, we derive the exact packet probability of error and also find its more insightful asymptotic approximation. In Section IV, we state our main results on the trade-off between achievable spectral efficiency and the AoI. These results are further corroborated by computer simulations in Section V. Finally, we draw out some concluding remarks in Section VI and prove our various claims in the Appendices.

We also mention the common notations used in this paper. Lower- and upper-case bold fonts,  $\mathbf{x}$  and  $\mathbf{X}$ , are used to denote vectors and matrices, respectively.  $\mathbf{I}_M$  denotes the  $M \times M$  identity matrix. The symbols  $|\cdot|$  and  $\|\cdot\|_2$  stand for the modulus and Euclidean norm, respectively.  $\{\cdot\}^H$  stands for the Hermitian (transpose conjugate) operator. The shorthand notation  $\mathbf{y} \sim \mathcal{CN}(\mathbf{m}, \mathbf{R})$  means that the random vector  $\mathbf{y}$  follows a complex circular Gaussian distribution with mean  $\mathbf{m}$  and auto-covariance matrix  $\mathbf{R}$ . Likewise,  $S \sim \Gamma(k, \theta)$  means that the random variable  $S$  follows a Gamma distribution with shape parameter  $k$  and scale parameter  $\theta$ . The statistical expectation is denoted as  $\mathbb{E}\{\cdot\}$ , and the notation  $\triangleq$  is used for definitions.

## II. SYSTEM MODEL, ASSUMPTIONS, AND METHODOLOGY OF ANALYSIS

### A. System Model, Assumptions, and Definition of AoI

Consider a single-cell network consisting of  $N$  single-antenna devices transmitting their status packets over an unreliable multiple-access channel to a BS with  $M$  receive antenna elements. To aid synchronization, time is partitioned into slots of equal length  $T$ , which is the maximum amount of time for transmission and reception of a single information packet. This paper assumes sporadic device activity where at the start of every time slot user  $i$  transmits its current status

with probability  $\tau_i$ . We define  $\{\varepsilon_i\}_{i=1}^N$  as the binary activity random variables which indicate whether user  $i$  transmits its packet or remains idle in a given slot:

$$\varepsilon_i = \begin{cases} 1 & \text{if user } i \text{ transmits his packet,} \\ 0 & \text{if user } i \text{ remains idle.} \end{cases} \quad (1)$$

Moreover, we assume  $\{\varepsilon_i\}_{i=1}^N$  are independent in each time slot with marginal distributions  $\Pr(\varepsilon_i = 1) = \tau_i$ .

To maintain timely status updates, in every slot a new packet is generated by each user. In this static macro-cell environment, where the coherence time is on the order of hundreds of milliseconds and delay spread is on the order of microseconds [15], the channel remains fairly constant and thus we assume a quasi-static Rayleigh fading model for the duration of the slot in which  $\mathbf{h}_i \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_M)$  denotes the  $M \times 1$  channel vector between the  $i$ 'th user and the BS. The received signal at the BS at discrete time  $n$  can then be written as:

$$\mathbf{y}_n = \sum_{i=1}^N \sqrt{G_i} \mathbf{h}_i \varepsilon_i x_{i,n} + \mathbf{w}_n, \quad (2)$$

where  $x_{i,n} \sim \mathcal{CN}(0, P_i)$  and  $G_i$  are the transmitted symbol and the large-scale fading parameter of user  $i$ , respectively, while  $\mathbf{w}_n \sim \mathcal{CN}(\mathbf{0}_M, \sigma_w^2 \mathbf{I}_M)$  is the additive white Gaussian noise (AWGN) which is assumed spatially uncorrelated across all receive antennas. In the presence of  $K_a$  active users in a given transmission slot, the above formulation is a  $K_a$ -user single-input multiple-output (SIMO) fading Gaussian multiple access channel (GMAC).

Using  $p_{e,i}$  to denote the slot-wise packet error probability (PEP) of the  $i$ th user, the probability that the latter updates the BS with its current status is then given by:

$$\gamma_i = \tau_i(1 - p_{e,i}). \quad (3)$$

An example of the slotted system with  $N = 3$  users with  $T = 1$  is depicted in Fig. 1.

Under perfect CSI at the receiver<sup>1</sup> we use maximal-ratio combining (MRC)<sup>2</sup> and assume that the blocklength is sufficiently large such that the capacity limit is approached within a packet,

<sup>1</sup>In the scenario where minimizing the age is crucial, users will want to update the BS as much as possible. Thus if the time slots are a fraction of the coherence time, all users can estimate their channel at the beginning of a coherence block. However, if timely updates are not crucial then analysis with pilot overheads will be necessary.

<sup>2</sup>It is important to note that MRC is close to being optimal in the massive MIMO case as the independent Rayleigh channels become near orthogonal to one another in the limit [8].

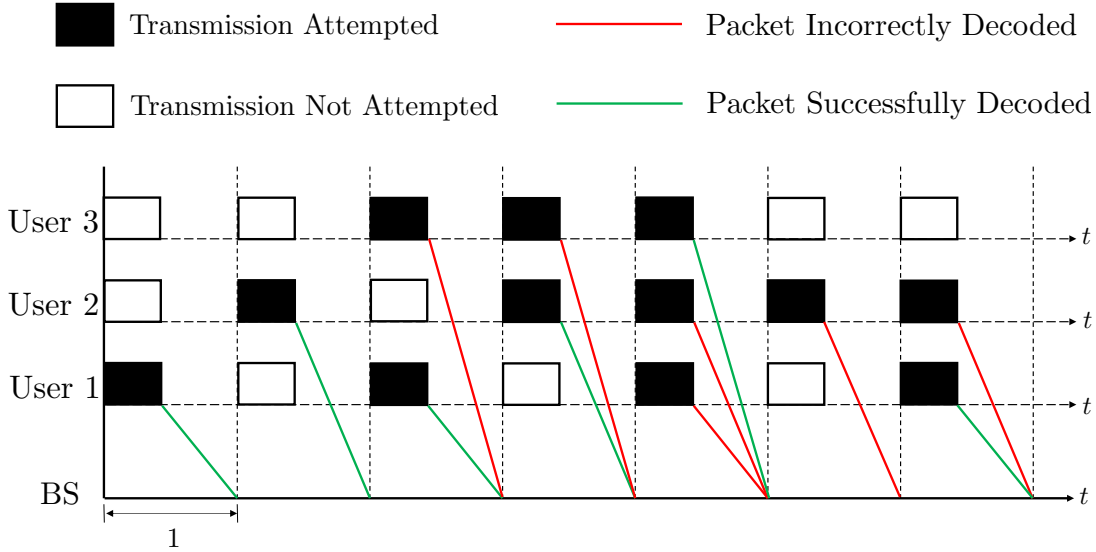


Fig. 1: Slotted system with  $N = 3$  total users and unit slot length.

as justified in [16]. Consequently,  $p_{e,i}$  can be closely approximated by the outage following probability:

$$p_{e,i} = 1 - \Pr \left\{ \rho_i < \log_2 \left( 1 + \frac{\|\mathbf{h}_i\|_2^4 P_i}{\|\mathbf{h}_i\|_2^2 \sigma_w^2 + \sum_{j=1, j \neq i}^N |\mathbf{h}_i^H \mathbf{h}_j|^2 \varepsilon_j P_j} \right) \right\}, \quad (4)$$

in which  $\rho_i$  [bits/channel-use] is the spectral efficiency of the  $i$ th user and wherein it is assumed that  $G_i = 1$  for all  $i$ , as it is easily estimated and removed at the receiver.

Recall that the ultimate goal of each node is to keep the BS updated with its most recent state. If the BS has node  $i$ 's state that was current at time  $t_0$ , the age of that user's state is defined by the random process  $\delta_i(t) \triangleq t - t_0$ . When node  $i$  attempts transmission and gets correctly decoded at the BS we call it an arrival. We denote  $i$ th node's  $j$ th arrival epoch by  $t_{i,j}$ . Between two arrival epochs, the age grows as a stair-case function of time and is reset to  $T$  when an arrival occurs, since this is the amount of time that it took for a packet to be transmitted. We denote by  $Z_{i,j}$  the inter-arrival time between the  $j$ th update and the  $(j+1)$ th update (i.e.  $Z_{i,j} \triangleq t_{i,j+1} - t_{i,j}$ ). Assuming that the total number of users remains constant in each time slot, user  $i$  has a certain success probability,  $\gamma_i$ , that it will update the BS with its state. After normalizing the slotted period to  $T = 1$ , it then follows that each  $Z_{i,j}$  is a geometric random variable with parameter

$\gamma_i$ .

Similar to [17], we define the AoI,  $\Delta_i$ , of each node  $i$  as:

$$\Delta_i \triangleq \lim_{t' \rightarrow \infty} \frac{1}{t'} \int_0^{t'} \delta_i(t) dt. \quad (5)$$

For completeness, we show in **Appendix A** that the limit in (5) exists and that it converges with probability one (WP1) to

$$\Delta_i = \frac{\mathbb{E}[Z_i^2]}{2\mathbb{E}[Z_i]} + \frac{1}{2}, \quad (6)$$

as was done in more general terms in [18]. Since the  $Z_i$ 's are geometric random variables, it follows that  $\mathbb{E}[Z_i] = \frac{1}{\gamma_i}$  and  $\mathbb{E}[Z_i^2] = \frac{2}{\gamma_i^2} - \frac{1}{\gamma_i}$ , thereby leading to:

$$\Delta_i = \gamma_i^{-1}. \quad (7)$$

In the presence of  $N$  total users, we consider the network-wide average AoI, given by:

$$\Delta = \frac{1}{N} \sum_{i=1}^N \Delta_i. \quad (8)$$

### B. Methodology of Analysis

Since the AoI solely depends on the parameter  $\tau_i$  and the outage probability  $p_{e,i}$ , the main objective will be to find the outage probability. In the following, we will first do this in closed-form and thereafter, through use of the central limit theorem, we will find an approximation in the asymptotic regime. This later allows us to find an explicit relationship between the spectral efficiency,  $\tau$ , the ratio  $M/N$ , and the probability of error. To this end, we will illustrate exactly how the spectral efficiency scales in the finite-user, finite-antenna case (e.g. through **Theorem 1** in Section IV). Thereafter, we will take the limit as the number of users and the number of antennas grow large and we will find a phase-transition where the AoI is minimized in one regime and grows unbounded in the other (as will be stated in **Theorem 2** and **Theorem 3** in Section IV).

## III. DERIVATION OF PACKET ERROR PROBABILITY

### A. Derivation of Exact PEP

Recall from (3) that in order for user  $i$  to successfully update the BS with its status in a given slot  $a$ ) it must attempt a transmission in that slot and  $b$ ) the transmitted packet must be decoded correctly. For ease of analysis, we consider a symmetric system wherein the  $N$  users have the

same transmit power (i.e.  $P_i = P \forall i$ ) and the same attempt probability (i.e.  $\tau_i = \tau \forall i$ ). Dividing the second term inside the logarithm in (4) by  $\|\mathbf{h}_i\|_2^2$  and rearranging the terms we obtain:

$$1 - p_{e,i} = \Pr \left\{ (2^\rho - 1) \left( \sigma_w^2 + \sum_{\substack{j=1 \\ j \neq i}}^N |P \varepsilon_j \tilde{\mathbf{h}}_i^H \mathbf{h}_j|^2 \right) \leq \|\mathbf{h}_i\|_2^2 P \right\}, \quad (9)$$

where  $\tilde{\mathbf{h}}_i = \frac{\mathbf{h}_i}{\|\mathbf{h}_i\|_2}$ . For notational compactness we define:

$$\alpha_\rho = \frac{1}{2^\rho - 1}, \quad (10)$$

and we denote the inverse signal-to-noise ratio (SNR) as  $\beta \triangleq \frac{\sigma_w^2}{P}$ . Using these notations and further simplifying (9), we obtain:

$$1 - p_{e,i} = \Pr \left\{ \alpha_\rho \|\mathbf{h}_i\|_2^2 - \sum_{\substack{j=1 \\ j \neq i}}^N |\tilde{\mathbf{h}}_i^H \mathbf{h}_j|^2 \varepsilon_j \geq \beta \right\}. \quad (11)$$

As was shown in [19],  $\tilde{\mathbf{h}}_i^H \mathbf{h}_j \sim \mathcal{CN}(0, 1) \forall i, j$  and they are mutually independent and also independent of  $\|\mathbf{h}_i\|_2^2$ . In order to deal with the random sum in (11), we condition on the event of having  $k$  other users being active with the  $i$ th user. Since the  $\varepsilon_j$ 's are independent and identically distributed (i.i.d) Bernoulli random variables (RVs), the probability that  $k$  users are active out of the remaining  $N - 1$  users (i.e. after excluding user  $i$ ) is the same as having  $k$  successes in  $N - 1$  Bernoulli trials. Thus, the number of active users follows a Binomial distribution with parameters  $N - 1$  and  $\tau$ . In order to calculate  $p_{e,i}$  for each  $i$ th user it is convenient to marginalize over the number of other active users, thereby leading to:

$$p_{e,i} = 1 - \sum_{k=0}^{N-1} \binom{N-1}{k} \tau^k (1 - \tau)^{N-1-k} p_{i|k}, \quad (12)$$

where  $p_{i|k}$  is defined as the conditional probability of successful decoding, conditioned on  $k$  other users being also active. More specifically, we have:

$$p_{i|k} = \Pr \left\{ \alpha_\rho \|\mathbf{h}_i\|_2^2 - \sum_{j=1}^k |\tilde{\mathbf{h}}_i^H \mathbf{h}_j|^2 \geq \beta \right\}, \quad (13)$$

where  $\|\mathbf{h}_i\|_2^2$  follows a gamma distribution with shape parameter  $M$  and scale parameter 1 (i.e.,  $\|\mathbf{h}_i\|_2^2 \sim \Gamma(M, 1)$ ). Similarly, the second term in (13) is a sum of  $k$  complex normal RVs squared and hence follows a  $\Gamma(k, 1)$  distribution. By defining  $H \triangleq \alpha_\rho \|\mathbf{h}_i\|_2^2$  and  $X_k \triangleq \sum_{j=1}^k |\tilde{\mathbf{h}}_i^H \mathbf{h}_j|^2$ , we see that  $p_{i|k}$  in (13) is the complementary distribution function of the RV  $Z \triangleq H - X_k$ , as



a function of the inverse SNR. In the case there are no other active users (i.e.  $k = 0$ ),  $p_{i|k}$  is given by the complementary distribution of a gamma RV<sup>3</sup>. For  $k > 0$ , however, one can find the probability density function (pdf) of  $Z$  through convolution, thereby leading to:

$$f_Z(z) = \begin{cases} \frac{e^{-\frac{z}{\alpha\rho}}}{(k-1)!(M-1)!\alpha^M} \int_0^z (-x)^{k-1}(z-x)^{M-1}e^{2\rho x} dx & \text{if } z < 0 \\ \frac{e^{-\frac{z}{\alpha\rho}}}{(k-1)!(M-1)!\alpha^M} \int_{-\infty}^0 (-x)^{k-1}(z-x)^{M-1}e^{2\rho x} dx & \text{if } z \geq 0. \end{cases} \quad (14)$$

Since we are primarily interested in the probability that  $Z$  is greater than<sup>4</sup>  $\beta > 0$ , we are only concerned with  $f_Z(z)$  for non-negative values of  $z$ . By further manipulating the integral (14), it can be shown that the pdf for  $z \geq 0$  can be written as:

$$f_Z(z) = \frac{z^{\left(\frac{M+k-2}{2}\right)}}{(M-1)!\alpha^M 2^{\frac{M}{2}(M+k)}} \exp\left(-\frac{z}{2}(2^\rho - 2)\right) \widetilde{W}_{\frac{M-k}{2}, \frac{1-M-k}{2}}(2^\rho z), \quad (15)$$

where  $\widetilde{W}(\cdot)$  denotes the Whittaker function. Averaging  $p_{i|k}$  over the number of active users and incorporating everything together we can finally write  $p_{e,i}$  as follows:

$$p_{e,i} = 1 - (1 - \tau)^{N-1} (1 - \Pr\{H \leq \beta\}) - \sum_{k=1}^{N-1} \binom{N-1}{k} \tau^k (1 - \tau)^{N-1-k} \int_{\beta}^{\infty} f_Z(z) dz. \quad (16)$$

### B. Asymptotic Approximation of PEP

While (16) is an exact expression for PEP, it does not provide insights into the scaling law of error probability as the total number of users and the number of BS antenna branches both increase at a fixed ratio. In this Section, we derive an asymptotic approximation of PEP which becomes increasingly exact in the large system limit. More specifically, we will let the number of users  $N$  and the number of antennas  $M$  grow large, while keeping their ratio,  $\zeta \triangleq \frac{M}{N}$ , constant.

The analysis technique utilized in what follows capitalizes on the Berry-Esseen theorem. Proofs of the various claims introduced in this Section are detailed in **Appendix B**. Using symmetry arguments, it can be seen that  $p_{e,i}$  does not depend on  $i$  and after omitting that index it follows from (12) that:

$$p_e = 1 - \sum_{k=0}^{N-1} \Pr\{\varepsilon_1 + \dots + \varepsilon_{N-1} = k\} \Pr\left\{\sum_{m=1}^{2M} S_m + \sum_{l=1}^{2k} V_l \geq \beta\right\}, \quad (17)$$

<sup>3</sup>A gamma RV, with scale parameter  $\theta$ , multiplied by a real number  $\alpha_\rho$ , is another gamma RV with scale parameter  $\alpha_\rho\theta$ .

<sup>4</sup>Recall here that  $\beta$  is the inverse SNR which is a positive quantity.

in which  $S_m \sim \Gamma(\frac{1}{2}, \alpha_\rho)$  and  $V_l \sim \Gamma(\frac{1}{2}, 1)$ . Using Berry-Essen central limit theorem (BE-CLT), the inverse cumulative distribution function (CDF) of the sum of gamma RVs in (17) converges uniformly to the standard normal inverse CDF (see Lemma A.1 in **Appendix B**), i.e.

$$\Pr \left\{ \sum_{m=1}^{2M} S_m + \sum_{l=1}^{2k} V_l \geq \beta \right\} = Q(w(k)) + \mathcal{O} \left( \frac{1}{\sqrt{M+k}} \right), \quad (18)$$

where  $w(k) = \frac{\beta - \alpha_\rho M + k}{\sqrt{\alpha_\rho^2 M + k}}$  and  $Q(\cdot)$  is the standard Q-function, (i.e., the tail of the normal distribution):

$$Q(x) = \frac{1}{\sqrt{2\pi}} \int_x^{+\infty} e^{-\frac{t^2}{2}} dt. \quad (19)$$

Now incorporating the result in (18) into (17) and then using the CLT on  $\Pr\{\varepsilon_1 + \dots + \varepsilon_{N-1} = k\}$ , (17) can be re-written as (see Lemma A.2 in **Appendix B**):

$$p_e = 1 - \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} Q(w(s)) e^{-\frac{s^2}{2}} ds + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right), \quad (20)$$

where

$$w(s) = \frac{\beta - \alpha_\rho M + s\sqrt{(N-1)\tau(1-\tau)} + (N-1)\tau}{\sqrt{\alpha_\rho^2 M + s\sqrt{(N-1)\tau(1-\tau)} + (N-1)\tau}}. \quad (21)$$

For large  $N$ , we approximate  $N-1$  by  $N$  (see Lemma A.3 in **Appendix B**) thereby leading to:

$$w(s) = \frac{\beta - \alpha_\rho M + s\sqrt{N\tau(1-\tau)} + N\tau}{\sqrt{\alpha_\rho^2 M + s\sqrt{N\tau(1-\tau)} + N\tau}} + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right). \quad (22)$$

Then by substituting  $\zeta = \frac{M}{N}$  and multiplying both the numerator and denominator by  $\frac{1}{\sqrt{N}}$  we obtain:

$$w(s) = \frac{\frac{\beta}{\sqrt{N}} - \alpha_\rho \zeta \sqrt{N} + s\sqrt{\tau(1-\tau)} + \sqrt{N}\tau}{\sqrt{\alpha_\rho^2 \zeta + \frac{s}{\sqrt{N}}\sqrt{\tau(1-\tau)} + \tau}} + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right). \quad (23)$$

We further neglect the terms which vanish for large  $N$  in (23), thereby leading to (see Lemma A.4 in **Appendix B**),

$$w(s) = \frac{\sqrt{N}(\tau - \alpha_\rho \zeta) + s\sqrt{\tau(1-\tau)}}{\sqrt{\alpha_\rho^2 \zeta + \tau}} + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right). \quad (24)$$

We can also neglect the second term in the numerator of (24) that involves the integration variable  $s$ . In fact, although  $s$  grows large inside the integral, the exponential makes the integrand function vanish for large-magnitude values of  $s$ . Small values of  $s$ , however, can also be neglected for large values of  $N$  (i.e. in the asymptotic regime). Finally, our approximation for  $w(s)$  makes it independent of  $s$  (see Lemma A.5 in **Appendix B**):

$$w = \frac{\sqrt{N}(\tau - \alpha_\rho \zeta)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} + \mathcal{O}(1). \quad (25)$$

Consequently, one can take  $Q(w(s))$  outside of the integral in (20) (see Lemma A.6 in **Appendix B**):

$$p_e = 1 - Q(w) \int_{-\infty}^{\infty} \frac{1}{\sqrt{2\pi}} e^{-\frac{s^2}{2}} ds + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right), \quad (26)$$

which simplifies to:

$$p_e = 1 - Q(w) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (27)$$

#### IV. TRADE-OFF BETWEEN AOI AND SPECTRAL EFFICIENCY

In this Section, we characterize the trade-off between the achievable spectral efficiency and the AoI in multiuser systems with a large-scale antenna array at the BS. It is shown that as the number of users,  $N$ , and the number of antennas,  $M$ , increase while keeping their ratio constant (i.e.  $\zeta = \frac{M}{N}$ ) the maximum achievable spectral efficiency approaches a well-characterized limit for any fixed AoI. The trade-off is manifested by making an observation that spectral efficiencies above the established limit can only be achieved by increasing the overall system AoI. To that end, we rewrite (8) more explicitly as a function of the system parameters (see Lemma A.7 in **Appendix B**):

$$\Delta(\zeta, N, \rho, \tau) = \frac{1}{\tau \left(1 - Q\left(\frac{\sqrt{N}(\alpha\rho\zeta - \tau)}{\sqrt{\alpha\rho^2\zeta + \tau}}\right)\right)} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right), \quad (28)$$

from which it follows, in the limit, that the minimum AoI for a given attempt probability  $\tau$  is given by:

$$\Delta_{\min}(\tau) = \frac{1}{\tau}. \quad (29)$$

We start by defining, for a given  $N$ ,  $\tau$ , and  $\epsilon > 0$ , the set:

$$\Psi_\epsilon \triangleq \{\rho \in \mathfrak{R}^+ \mid p_e < \epsilon\}, \quad (30)$$

as the set of all achievable spectral efficiencies for which the probability of error is less than  $\epsilon$ . Note also that the condition  $p_e < \epsilon$  implies that  $\Delta(\zeta, N, \rho, \tau) < \frac{1}{\tau(1-\epsilon)} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right)$ . We illustrate fundamental trade-offs in finite user case in the following theorem.

**Theorem 1.** *For any  $\zeta > 0$ ,  $0 < \tau < 1$ , and  $N$  large enough, if  $\epsilon$  is greater than some threshold,  $\epsilon_0(N, \zeta)$ , that decays with  $N$  the set  $\Psi_\epsilon$  is non-empty with a supremum*

$$\rho_N^* \triangleq \sup_{\rho} \Psi_\epsilon = \log_2 \left( 1 + \frac{\zeta - \frac{Q^{-1}(\epsilon)^2}{N}}{\tau + \sqrt{\tau^2 + \tau \left(1 - \frac{Q^{-1}(\epsilon)^2}{N\zeta}\right) \left(\frac{Q^{-1}(\epsilon)^2}{N} - \tau\right)}} \right) + \mathcal{O}\left(\frac{1}{N^{1.5}}\right). \quad (31)$$

*Proof.* As shown in **Appendix C**, the condition that  $p_e < \epsilon$  leads to  $\alpha_\rho > \alpha_\rho^+(\epsilon_1)$  where:

$$\alpha_\rho^+(\epsilon_1) = \frac{\tau + \sqrt{\tau^2 - \tau\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)\left(\tau - \frac{Q^{-1}(\epsilon_1)^2}{N}\right)}}{\zeta - \frac{Q^{-1}(\epsilon_1)^2}{N}}, \quad (32)$$

and  $\epsilon_1 = \epsilon + \mathcal{O}(1/\sqrt{N})$ . Due to the differentiability of  $Q^{-1}$ , the error term can be taken out of  $Q^{-1}$  in (32) thereby leading to:

$$\alpha_\rho^+(\epsilon_1) = \frac{\tau + \sqrt{\tau^2 - \tau\left(1 - \frac{Q^{-1}(\epsilon)^2}{N\zeta} + \mathcal{O}\left(\frac{1}{N^{1.5}}\right)\right)\left(\tau - \frac{Q^{-1}(\epsilon)^2}{N} + \mathcal{O}\left(\frac{1}{N^{1.5}}\right)\right)}}{\zeta - \frac{Q^{-1}(\epsilon)^2}{N} + \mathcal{O}\left(\frac{1}{N^{1.5}}\right)}. \quad (33)$$

Recalling the definition of  $\alpha_\rho$ , we see that  $\alpha_\rho > \alpha_\rho^+(\epsilon_1)$  is equivalent to:

$$\rho < \log_2\left(1 + \frac{1}{\alpha_\rho^+(\epsilon_1)}\right). \quad (34)$$

Again, due to the differentiability of the logarithm and due to  $\epsilon$  being greater than  $\epsilon_0(N, \zeta)$  the error term can be taken out of the logarithm and we have:

$$\rho < \log_2\left(1 + \frac{1}{\alpha_\rho^+(\epsilon)}\right) + \mathcal{O}\left(\frac{1}{N^{1.5}}\right). \quad (35)$$

Therefore,  $\Psi_\epsilon$  can be re-written as:

$$\Psi_\epsilon = \left\{ \rho \in \mathbb{R}^+ \mid \rho < \log_2\left(1 + \frac{1}{\alpha_\rho^+(\epsilon)}\right) + \mathcal{O}\left(\frac{1}{N^{1.5}}\right) \right\}. \quad (36)$$

Note that the upper bound on  $\rho$  is always positive as we assume  $\epsilon > \epsilon_0(N, \zeta)$  and hence  $\Psi_\epsilon$  is non-empty and its supremum is given by (31).  $\square$

A special case of **Theorem 1** wherein the error probability vanishes in the limit is described in the following two theorems.

**Theorem 2.** (*Achievability*) For any  $0 < \tau < 1$  and  $\zeta > 0$ , we define the age-limited capacity as

$$C_{\tau, \zeta} = \log_2\left(1 + \frac{\zeta}{\tau}\right), \quad (37)$$

such that for any spectral efficiency,  $\rho < C_{\tau, \zeta}$ , the error probability,  $p_e \rightarrow 0$ , and the AoI,  $\Delta(\zeta, N, \rho, \tau) \rightarrow \Delta_{\min}(\tau)$ , as  $N \rightarrow \infty$ .

*Proof.* Note that the second term in (28) goes to zero in the limit as  $N \rightarrow \infty$  and so the AoI is determined by the first term. Given the parameters  $\tau$  and  $\zeta$ , we see that the AoI in (28) is monotonically increasing with  $p_e$ . Therefore, as  $p_e \rightarrow 0$  the AoI  $\Delta(\zeta, N, \rho, N) \rightarrow \Delta_{\min}(\tau)$ .

Now, fix  $\delta > 0$  and  $\rho = C_{\tau, \zeta} - \delta$ . The probability of error is determined by the Q-function or equivalently its argument. Hence, for a given  $N$  and a given value of

$$\varphi(\rho) \triangleq \frac{\alpha_\rho \zeta - \tau}{\sqrt{\alpha_\rho^2 \zeta + \tau}}, \quad (38)$$

the probability of error is well specified. Plugging  $\rho$  in (38), it follows that:

$$\varphi(C_{\tau, \zeta} - \delta) = \frac{(\zeta + \tau)(1 - 2^{-\delta})}{\sqrt{\zeta + \tau(2^{(C_{\tau, \zeta} - \delta)} - 1)^2}}, \quad (39)$$

which is always positive. Therefore, as  $N \rightarrow \infty$  the argument inside the Q-function approaches  $+\infty$ ; hence  $p_e \rightarrow 0$  and  $\Delta(\zeta, N, \rho, \tau) \rightarrow \Delta_{\min}(\tau)$ .  $\square$

**Theorem 3.** *Given  $\tau, \zeta$  and any spectral efficiency  $\rho > C_{\tau, \zeta}$ , the error probability,  $p_e \rightarrow 1$ , and the AoI  $\Delta(\zeta, N, \rho, \tau) \rightarrow \infty$  as,  $N \rightarrow \infty$ .*

*Proof.* We prove this in a similar way as we did for **Theorem 2**. In fact, we choose an arbitrary  $\delta > 0$  and set  $\rho = C_{\tau, \zeta} + \delta$ . Plugging the latter in (38) and simplifying we obtain:

$$\varphi(C_{\tau, \zeta} + \delta) = - \frac{(\zeta + \tau)(2^\delta - 1)}{\sqrt{\zeta + \tau(2^{(C_{\tau, \zeta} + \delta)} - 1)^2}}. \quad (40)$$

Now, the argument inside the Q-function is negative for all values of  $N$  and approaches  $-\infty$  as  $N \rightarrow \infty$ , from which it follows that  $p_e \rightarrow 1$  and  $\Delta(\zeta, N, \rho, \tau) \rightarrow \infty$ .  $\square$

**Corollary 3.1.** *For any  $\epsilon > 0$ , the age-limited capacity defined in (37) is given by*

$$C_{\tau, \zeta} = \lim_{N \rightarrow \infty} \rho_N^*. \quad (41)$$

*Proof.* We see that as  $N \rightarrow \infty$  the threshold,  $\epsilon_0(N, \zeta)$  goes to zero as it decays with  $N$ . Therefore, for any  $\epsilon > 0$ ,  $\rho_N^*$  is well defined. As the function  $\log_2 x$  is continuous at  $x = 1 + \frac{\zeta}{\tau}$ , one can take the limit inside its argument in  $\rho_N^*$ , from which the corollary follows.  $\square$

**Remark 1.** *It is interesting to observe the similarity between the age-limited capacity and the capacity of the AWGN channel. In the age-limited capacity, the ratio  $\frac{\zeta}{\tau}$  plays the role of the SNR in the AWGN Capacity. In working with asymptotic scenarios where we have both a large number of users and a large number of antennas, the noise variance becomes negligible. In this asymptotic interference-limited scenario the decoding error probability is dominated by  $\tau$ . It is insightful in this case to view  $\tau$  as the noise variance. Similarly, the ratio,  $\zeta$ , of the number of antennas to the number of users plays the role of the transmit power.*

**Remark 2.** Note also, that the age-limited capacity,  $C_{\tau,\zeta} = \log_2 \left(1 + \frac{\zeta}{\tau}\right)$ , is parameterized by  $\tau$  and  $\zeta$  and can be increased by decreasing the value of  $\tau$ . Now, for any spectral efficiency below  $C_{\tau,\zeta}$  our analysis reveals that the age-limited capacity can be approached as  $N \rightarrow \infty$  in which case the minimum achievable AoI is given by (29). Thus, while the aggregate spectral efficiency can be made large by decreasing  $\tau$ , the price is an undesired increase in the AoI. This should be expected on intuitive grounds since as  $\tau$  becomes small, the users that are lucky to transmit in a given slot can be easily separated in the spatial domain by making use of a large-scale antenna array at the BS.

## V. NUMERICAL RESULTS AND DISCUSSION

We now illustrate the results found in the previous section and further compare recent URA schemes against our bound.

### A. Trade-Off Between AoI and Spectral Efficiency

In order to determine the direct relationship between the spectral efficiency and the AoI, we start by re-writing (28) as a function of the spectral efficiency for a given probability of error,  $p_e = \epsilon$ . In this case, the AoI reduces simply to:

$$\Delta(\zeta, N, \rho, \tau) = \frac{1}{\tau_\epsilon(1-\epsilon)} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right), \quad (42)$$

where  $\tau_\epsilon$  is found by solving for  $\tau$  in the Q-function in (28) and is given by

$$\tau_\epsilon = \alpha_\rho \zeta + \frac{Q^{-1}(\epsilon)^2}{2N} - \sqrt{\left(\alpha_\rho \zeta + \frac{Q^{-1}(\epsilon)^2}{2N}\right)^2 + \alpha_\rho^2 \left(\frac{Q^{-1}(\epsilon)^2 \zeta}{N} - \zeta^2\right)}. \quad (43)$$

The identity in (43) is valid for  $\rho \geq \rho_{\min}(\epsilon)$  where  $\rho_{\min}(\epsilon)$  is given in (31) evaluated at  $\tau = 1$  (this is seen when solving for  $\tau$  from the Q-function and observing where the solution is valid). In Fig. 2, we plot (42), ignoring the error terms, for  $p_e = 10^{-2}$ ,  $\zeta = 0.7$ , and  $N = \{10^2, 10^3, 10^4, 10^5\}$ . We also plot the case of infinite number of users with  $p_e = 0$  whose curve is obtained by taking  $N \rightarrow \infty$  in (43), i.e.:

$$\lim_{N \rightarrow \infty} \tau_\epsilon = \alpha_\rho \zeta. \quad (44)$$

Each spectral efficiency on the  $N = \infty$  curve is the age-limited capacity for a given set of  $\tau$  and  $\zeta$ . In both the finite- and infinite-number-of-users scenarios, the AoI is minimized by setting  $\tau$

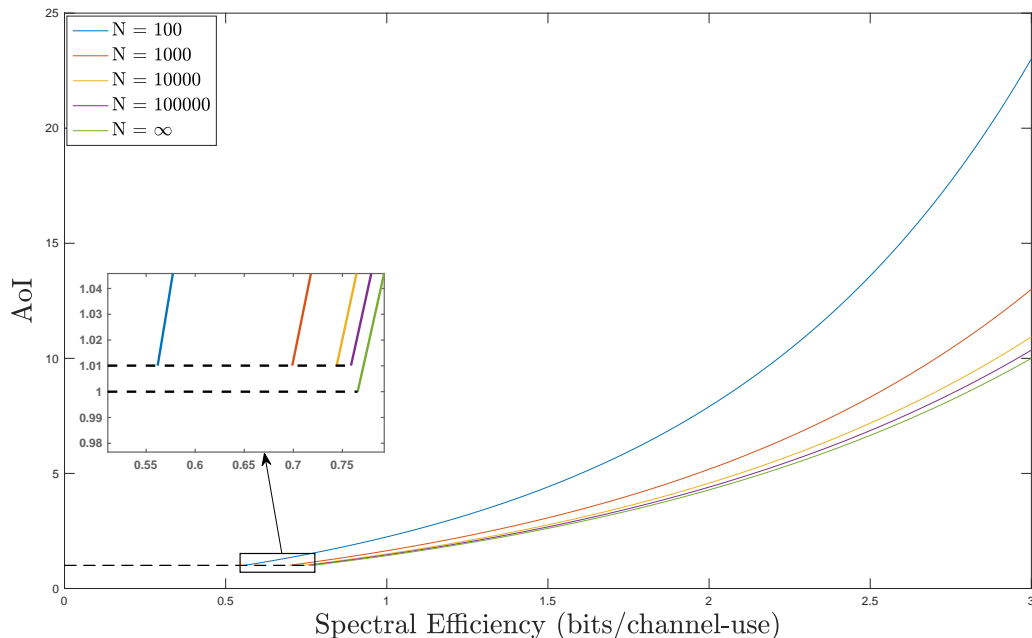


Fig. 2: AoI vs Spectral Efficiency at  $p_e = 10^{-2}$  and  $\zeta = 0.7$

to 1, as seen in (42). In the finite case, however, the minimum AoI is limited by the probability of error and is given by:

$$\Delta_\epsilon = \frac{1}{1-\epsilon} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (45)$$

On the other hand, in the infinite-number-of-users regime the probability of error is driven to zero and the AoI takes the minimum value possible,  $\Delta = 1$ . This is clearly seen in the zoomed portion of Fig. 2.

### B. Application to Unsourced Random Access (URA)

The URA paradigm, initially analyzed in [7], in which the base station is tasked with providing multiple access to a large number of uncoordinated users, has attracted considerable attention. In [7], the random coding achievability bound was derived and compared against popular multiple-access schemes. A number of algorithmic solutions for URA were proposed in [20]–[23]. However, all of the above theoretical and algorithmic works focused on the case of a single receive antenna at the BS. To date, the only two algorithmic solutions for the URA paradigm that have so far investigated the use of the massive MIMO technology are [24], [25] whose

performances have not been gauged against any achievability bound. We will refer to these two massive MIMO-based URA schemes in [24], [25] as “clustering-based” and “covariance-based”, respectively.

In Fig. 3, we use computer simulations to compare both schemes to the new achievability bound established in **Theorem 1** as well as to the exact expression established in (16). For both

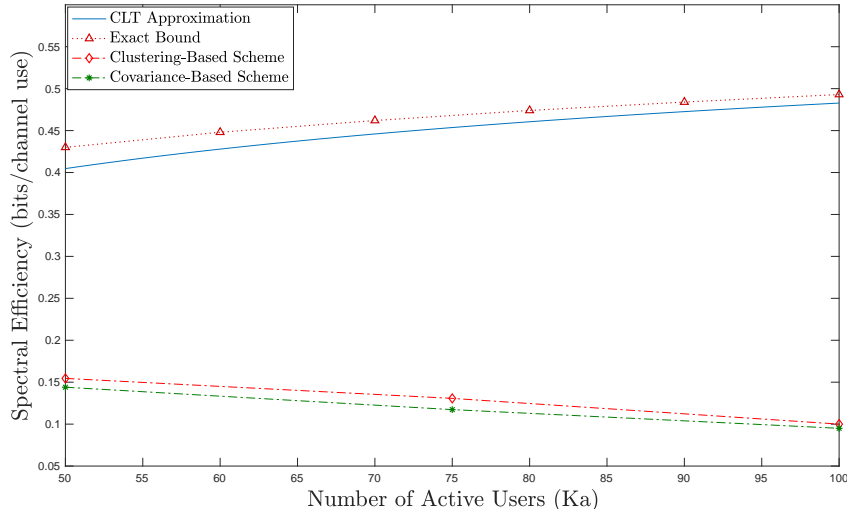


Fig. 3: Performance of two recent URA schemes against the newly established achievability bound in (31) with  $p_e = 10^{-2}$ .

the schemes, we fix the bandwidth to  $W = 10$  MHz and the noise variance to  $\sigma_w^2 = 10^{-19.9} \times W$  [Watts] and then calculate the required transmit power that yields the SNR,  $\beta^{-1} = 30$  dB. For the clustering-based URA scheme, we use a Gaussian prior for HyGAMP-based compressed sensing (CS) and communicate  $B = 102$  information bits per user/packet over  $L = 6$  slots. For the covariance-based scheme, we fix the number of information bits per user/packet to  $B = 104$  bits which are communicated over  $L = 17$  slots. The parity bit allocation for the outer tree code is set to  $p = [0, 8, 8, \dots, 14]$ . We also use  $J = 14$  coded bits per slot which leads to the total rate of the outer code  $R_{\text{out}} = 0.437$ . For both the schemes, we simulate 3 data points with  $K_a = [50, 75, 100]$  active users and  $M = [30, 45, 60]$  antennas at the base station in which case the achievable spectral efficiency in (37) is given by  $\log_2 \left( 1 + \frac{M}{K_a} \right)$ . Note that even though the achievable spectral efficiency does not depend on the total number of users, as is the case in [7], the AoI does. In fact, as the total number of users increases, the AoI grows unbounded for



any fixed number of active users.

In the plots of Fig. 3, apart from the gap between the newly established bound and the existing algorithmic solutions, it is seen that the achievable spectral efficiency of both schemes decreases as the number of active users increases. Actually, it should be possible to rigorously prove this limitation for any CS-based decoding scheme. Roughly speaking, as the number of active users grows, increasing the per-user spectral efficiency requires one to decrease the blocklength thereby rendering the CS-based support recovery task more challenging. In fact, the fundamental limitation of support recovery requires (see Chapter 7 of [26]) the blocklength  $L = \mathcal{O}(K_a \log(\frac{2^{B/L}}{K_a}))$  to scale a little faster than the number of active users with a single antenna at the BS. On the contrary, in [25], [27], it was shown that the covariance-based URA scheme with a large-scale antenna array at the BS can recover the support perfectly as long as  $K_a \log^2(\frac{2^{B/L}}{K_a}) = \mathcal{O}(L^2)$  and  $\frac{K_a}{M} = o(1)$ . However, in this case, the achievable spectral efficiency goes to infinity and the achievable performance with respect to **Theorem 1** has to be investigated carefully. In particular, a sharper characterization of the  $\frac{K_a}{M} = o(1)$  term is required.

## VI. CONCLUSION

We have established achievability and converse results in the  $K_a$ -user GMAC with a large-scale antenna array at the BS. We have defined the age-limited capacity as the maximum spectral efficiency achievable such that the AoI is finite in asymptotic system limits. In this case, we have shown that in order to minimize the system AoI all devices must be active in every transmission period. This is also the case in finite system sizes in which the AoI is, however, limited by the probability of error. We have used our bound to compare the two most recent massive MIMO URA algorithms, thereby revealing a huge gap between their performance and the overall spectral efficiency that can be potentially achieved in practice. One underlying assumption in our analysis was that users aim to update the BS as frequently as possible. If this is not the case, then analysis using pilot overheads will be necessary and can be a fruitful direction to explore.

## APPENDIX

## A. Derivation of the AoI

Recall from (5) the definition of AoI. The latter is a limit of a time-average of the age sample function as the time horizon grows large. Instead of computing the integral in (5) directly, we can express it as a function of the inter-update times, as shown pictorially in Fig. 4.

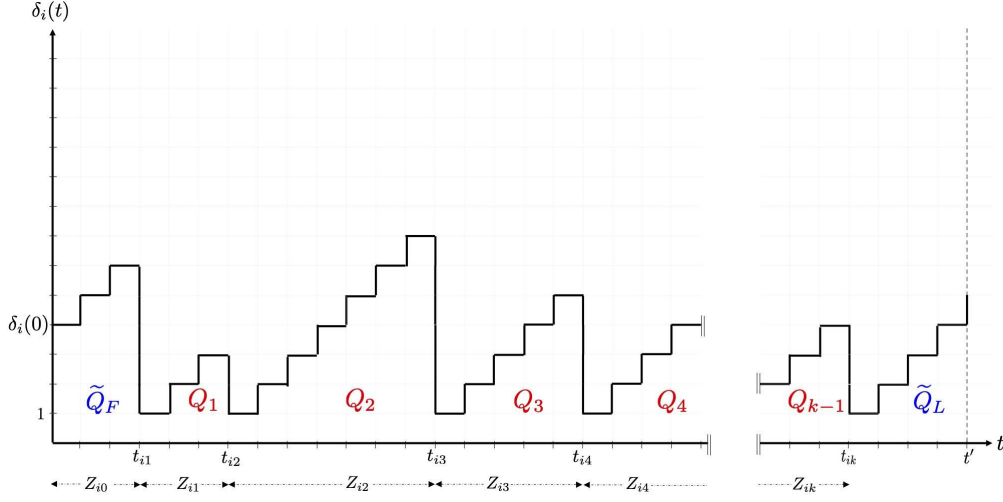


Fig. 4: Decomposition of a sample function of the AoI.

The area below the sample function shown in Fig. 4 consists of a rectangular base of width  $t'$  and unit height, jagged triangular structures, and boundary pieces (both above the base rectangle). We denote the area of the triangular pieces by  $Q_l$  and the first and last boundary pieces by  $\tilde{Q}_F$  and  $\tilde{Q}_L$ , respectively. Now (5) can be re-written as:

$$\int_0^{t'} \delta_i(t) dt = t' + \tilde{Q}_F + \tilde{Q}_L + \sum_{k=1}^{N(t')-1} Q_k, \quad (46)$$

where  $N(t')$  denotes the number of arrivals by time  $t'$ . The  $Q_l$ 's can be written in terms of the inter-update intervals as:

$$Q_l = \frac{Z_{il}(Z_{il} - 1)}{2}. \quad (47)$$

Dividing the right-hand side of (46) by  $t'$  and taking the limit (as  $t'$  goes to  $+\infty$ ) we have:

$$\Delta_i = \lim_{t' \rightarrow \infty} \left( 1 + \frac{\tilde{Q}_F + \tilde{Q}_L}{t'} + \sum_{k=1}^{N(t')-1} \frac{Z_{ik}(Z_{ik} - 1)}{2t'} \right). \quad (48)$$

The first term can be taken out of the limit and the second term goes to 0 WP1. We re-write the last term in (48) as follows:

$$\lim_{t' \rightarrow \infty} \left( \frac{N(t')}{2t'} - \frac{1}{2t'} \right) \sum_{k=1}^{N(t')-1} \frac{Z_{ik}(Z_{ik} - 1)}{N(t') - 1}. \quad (49)$$

As the Bernoulli process is a renewal process, we have  $\frac{N(t')}{2t'} \rightarrow \frac{1}{2\mathbb{E}[Z_i]}$  WP1 [28]. Also, from the strong law of large numbers (SLLN) the sum in the limit converges to  $\mathbb{E}[Z_i^2] - \mathbb{E}[Z_i]$  WP1. Therefore, we have:

$$\Delta_i = \frac{\mathbb{E}[Z_i^2]}{2\mathbb{E}[Z_i]} + \frac{1}{2}. \quad (50)$$

### B. Proofs of the Various Approximations

**Lemma A.1.** *The inverse CDF of the sum of random variables,  $\sum_{m=1}^{2M} S_m + \sum_{l=1}^{2k} V_l$ , converges uniformly to the standard normal inverse CDF, where the convergence rate is bounded above by  $\mathcal{O}\left(\frac{1}{\sqrt{M+k}}\right)$ ,*

$$\Pr \left\{ \sum_{m=1}^{2M} S_m + \sum_{l=1}^{2k} V_l \geq \beta \right\} = Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{M+k}}\right), \quad (51)$$

in which  $w(k) = \frac{\beta - \alpha_\rho M + k}{\sqrt{\alpha_\rho^2 M + k}}$

*Proof.* Let  $B_{2M+2k}$  be the following normalized RV:

$$B_{2M+2k} \triangleq \frac{1}{\sqrt{\alpha_\rho^2 M + k}} \left[ \sum_{m=1}^{2M} S_m + \sum_{l=1}^{2k} V_l - (M\alpha_\rho - k) \right], \quad (52)$$

whose inverse CDF is denoted as  $F_{2M+2k}(x)$ . From the Berry-Essen inequality for non identically distributed random variables, the difference between  $F_{2M+2k}(x)$  and the standard normal inverse CDF is bounded uniformly, i.e.

$$\sup_{x \in \mathbb{R}} |F_{2M+2k}(x) - Q(x)| \leq K \phi_1(2M+2k) \phi_2(2M+2k), \quad (53)$$

where  $K$  is a constant, and

$$\phi_1(2M+2k) = \left( \sum_{m=1}^{2M} \mathbb{E}[|S_m - \mathbb{E}[S_m]|^2] + \sum_{m=1}^{2k} \mathbb{E}[|V_l - \mathbb{E}[V_l]|^2] \right)^{-\frac{3}{2}}, \quad (54)$$

$$\phi_2(2M+2k) = \left( \sum_{m=1}^{2M} \mathbb{E}[|S_m - \mathbb{E}[S_m]|^3] + \sum_{l=1}^{2k} \mathbb{E}[|V_l - \mathbb{E}[V_l]|^3] \right). \quad (55)$$

Since  $S_m \sim \Gamma(\frac{1}{2}, \alpha_\rho)$  and  $V_l \sim \Gamma(\frac{1}{2}, 1)$ , it can be verified by computing the fourth central moment that the second- and third-order central moments are finite. Let  $\mathbb{E}[|S_m - \mathbb{E}[S_m]|^3] = \frac{C_1}{2} > 0$ ,  $\mathbb{E}[|V_l - \mathbb{E}[V_l]|^3] = \frac{C_2}{2} > 0$ ,  $\mathbb{E}[|S_m - \mathbb{E}[S_m]|^2] = \frac{C_3}{2} > 0$ , and  $\mathbb{E}[|V_l - \mathbb{E}[V_l]|^2] = \frac{C_4}{2} > 0$ . Using these notations, we rewrite (53) as follows:

$$|F_{2M+2k}(x) - Q(x)| \leq \frac{C_1M + C_2k}{(C_3M + C_4k)^{\frac{3}{2}}} \quad \forall x. \quad (56)$$

Since  $C_1M + C_2k < \max\{C_1, C_2\}(M+k)$  and  $C_3M + C_4k > \min\{C_3, C_4\}(M+k)$  we obtain:

$$|F_{2M+2k}(x) - Q(x)| \leq \frac{\max\{C_1, C_2\}(M+k)}{\min\{C_3, C_4\}(M+k)^{\frac{3}{2}}} = \frac{C}{\sqrt{M+k}} \quad \forall x, \quad (57)$$

where  $C = \frac{\max\{C_1, C_2\}}{\min\{C_3, C_4\}}$ . This implies:

$$F_{2M+2k}(x) - Q(x) = \mathcal{O}\left(\frac{1}{\sqrt{M+k}}\right) \quad \forall x.$$

This can be used to show that:

$$\Pr\left\{\sum_{m=1}^{2M} S_m + \sum_{l=1}^{2k} V_l \geq \beta\right\} = F_{2M+2k}(w(k)) = Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{M+k}}\right). \quad (58)$$

□

**Lemma A.2.** *The probability of error in (17) is given by,*

$$p_e = 1 - \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} e^{-\frac{s^2}{2}} Q(w(s)) ds + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (59)$$

*Proof.* We begin by noting that the expression in (17) is the expected value of (18) with respect to a Binomial distribution with parameters  $N-1$  and  $\tau$ . Here, we show that this expected value can be instead taken with respect to a Gaussian distribution with  $\mathcal{O}\left(\frac{1}{\sqrt{N}}\right)$  error term. To start with, since the Binomial distribution does not admit a density function it is more convenient to use Stieltjes integrals over a compact interval before going to infinity. First, we show that  $\mathcal{O}\left(\frac{1}{\sqrt{M+k}}\right) = \mathcal{O}\left(\frac{1}{\sqrt{N}}\right)$  by noticing that:

$$\left|\mathcal{O}\left(\frac{1}{\sqrt{M+k}}\right)\right| < \frac{C}{\sqrt{M+k}} = \frac{C}{\sqrt{N(\zeta + \delta)}} = \frac{\tilde{C}(\delta)}{\sqrt{N}}, \quad (60)$$

where  $0 < \delta = \frac{k}{N} < 1$ . We also write the error resulting from integrating with respect to different CDFs as follows:

$$\left|\int_{-x}^x \left(Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right)\right) dF(k) - \int_{-x}^x \left(Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right)\right) d\tilde{F}(k)\right|, \quad (61)$$

where  $F(k)$  is the CDF of a Binomial RV with mean  $(N-1)\tau$  and variance  $(N-1)\tau(1-\tau)$  and  $\tilde{F}(k)$  is the CDF of the approximating Gaussian distribution with the same mean and variance. Since both  $F(k)$  and  $\tilde{F}(k)$  are non-decreasing on any compact interval  $[-x, x]$ , the difference  $F(k) - \tilde{F}(k)$  is of bounded variation, and hence the Stieltjes integral with respect to  $F(k) - \tilde{F}(k)$  is defined for any continuous function. Since  $Q(w(k))$  is continuous at  $w(k)$ , we can re-write (61) as follows:

$$\left| \int_{-x}^x \left( Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) d\left(F(k) - \tilde{F}(k)\right) \right|. \quad (62)$$

Furthermore, since  $Q(w(k))$  is of bounded variation on  $[-x, x]$ , the integral in (62) can be integrated by parts to yield:

$$\left| \int_{-x}^x \left( Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) d\left(F(k) - \tilde{F}(k)\right) \right| = |M_1(x) - M_2(x) - M_3(x)|, \quad (63)$$

with

$$M_1(x) = \left( Q(x) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) \left( F(x) - \tilde{F}(-x) \right) \quad (64)$$

$$M_2(x) = \left( Q(-x) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) \left( F(-x) - \tilde{F}(-x) \right) \quad (65)$$

$$M_3(x) = \int_{-x}^x \left( F(k) - \tilde{F}(k) \right) dQ(w(k)). \quad (66)$$

Now, by the triangle inequality, it follows from (63) that:

$$\left| \int_{-x}^x \left( Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) d\left(F(k) - \tilde{F}(k)\right) \right| \leq |M_1(x)| + |M_2(x)| + |M_3(x)|. \quad (67)$$

Then, since  $0 < Q(x) < 1$ , (67) can be further bounded by:

$$K_1 \left| F(x) - \tilde{F}(x) \right| + K_2 \left| \tilde{F}(-x) - F(-x) \right| + \sup_{k \in [-x, x]} \left| F(k) - \tilde{F}(k) \right| V_{-x}^x(Q), \quad (68)$$

where  $V_{-x}^x(Q) < \infty$  is the total variation of the Q-function over  $[-x, x]$ . Recall, also that  $F(x)$  represents the CDF of a large sum of  $N-1$  binary random variables. Consequently, upon appropriate normalization and by applying the Berry-Essen inequality for i.i.d random variables we see that (68) is less than:

$$\frac{A_1}{\sqrt{N}} + \frac{A_2}{\sqrt{N}} + \frac{A_3}{\sqrt{N}} = \mathcal{O}\left(\frac{1}{\sqrt{N}}\right), \quad (69)$$

for some positive constants  $A_1, A_2$  and  $A_3$ . Now, coming back to (61) we see that:

$$\int_{-x}^x \left( Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) dF(k) = \int_{-x}^x \left( Q(w(k)) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) d\tilde{F}(k) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right), \quad (70)$$

where the  $\mathcal{O}(\frac{1}{\sqrt{N}})$  on the left- and right-hand sides can be safely dropped since both CDFs are bounded, thereby yielding:

$$\int_{-x}^x Q(w(k))dF(k) = \int_{-x}^x Q(w(k))d\tilde{F}(k) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (71)$$

The right-hand side integral in (71) is with respect to a Gaussian CDF and can now be explicitly written in terms of a density by making the substitution  $s = \frac{k-(N-1)\tau}{\sqrt{(N-1)\tau(1-\tau)}}$

$$\int_{-x}^x Q(w(k))d\tilde{F}(k) = \frac{1}{\sqrt{2\pi}} \int_{-x'}^{x'} Q(w(s))e^{-\frac{s^2}{2}} ds. \quad (72)$$

Since the approximation is uniform in  $x$  and the integrals are convergent, we can go to the limit in (71) and obtain:

$$\int_{-\infty}^{\infty} Q(w(k))dF(k) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} Q(w(s))e^{-\frac{s^2}{2}} ds + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (73)$$

By further noticing that the left-hand side of (70) is nothing but the expression of  $1 - p_e$ , we finally obtain:

$$p_e = 1 - \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} Q(w(s))e^{-\frac{s^2}{2}} ds + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (74)$$

□

**Lemma A.3.**  $w(s)$  in (21) can be approximated as follows,

$$w(s) = \frac{\beta - \alpha_\rho M + s\sqrt{N\tau(1-\tau)} + N\tau}{\sqrt{\alpha_\rho^2 M + s\sqrt{N\tau(1-\tau)} + N\tau}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (75)$$

*Proof.* We denote the first term in (75) by  $w_a(s)$  and start by re-writing (21) as:

$$w(s) = \frac{\beta - \alpha_\rho M + s\sqrt{N\tau(1-\tau)} + N\tau}{\sqrt{\alpha_\rho^2 M + s\sqrt{(N-1)\tau(1-\tau)} + (N-1)\tau}} + \frac{s\sqrt{\tau(1-\tau)}(\sqrt{N-1} - \sqrt{N}) - \tau}{\sqrt{\alpha_\rho^2 M + s\sqrt{(N-1)\tau(1-\tau)} + (N-1)\tau}}. \quad (76)$$

Dividing and multiplying the first term in (76) by the denominator of the first term in (75) yields:

$$w(s) = w_a(s) \frac{\sqrt{\alpha_\rho^2 M + s\sqrt{N\tau(1-\tau)} + N\tau}}{\sqrt{\alpha_\rho^2 M + s\sqrt{(N-1)\tau(1-\tau)} + (N-1)\tau}} + \frac{s\sqrt{\tau(1-\tau)}(\sqrt{N-1} - \sqrt{N}) - \tau}{\sqrt{\alpha_\rho^2 M + s\sqrt{(N-1)\tau(1-\tau)} + (N-1)\tau}}. \quad (77)$$

Recall that  $M$  grows proportionally to  $N$  with proportionality coefficient  $\zeta$  (i.e.  $M = \zeta N$ ). Therefore, after multiplying and dividing the second term in (77) by  $\frac{1}{\sqrt{N}}$ , one can see it is  $\mathcal{O}\left(\frac{1}{\sqrt{N}}\right)$ . Using this fact and simplifying the first term, (77) can be written as:

$$w(s) = w_a(s) \left( 1 + \frac{s\sqrt{\tau(1-\tau)}(\sqrt{N} - \sqrt{N-1}) + \tau}{\alpha_\rho^2 \zeta N + s\sqrt{(N-1)\tau(1-\tau)} + (N-1)\tau} \right)^{\frac{1}{2}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (78)$$

Taking a first order Taylor expansion of the coefficient of  $w_a(s)$  in (78) we obtain the desired result.  $\square$

**Lemma A.4.** *By neglecting the terms  $\frac{\beta}{\sqrt{N}}$  and  $\frac{s}{\sqrt{N}}\sqrt{\tau(1-\tau)}$  in (23) we obtain:*

$$w(s) = \frac{\sqrt{N}(\tau - \alpha_\rho \zeta) + s\sqrt{\tau(1-\tau)}}{\sqrt{\alpha_\rho^2 \zeta + \tau}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (79)$$

*Proof.* We denote the first term in (79) by  $w'_a(s)$ . Factoring out  $\frac{\beta}{\sqrt{N}}$  from the first term in (23) and resorting to some simplifications, (23) is re-written as follows:

$$w(s) = \frac{\sqrt{N}(\tau - \alpha_\rho \zeta) + s\sqrt{\tau(1-\tau)}}{\sqrt{\alpha_\rho^2 \zeta + \frac{s}{\sqrt{N}}\sqrt{\tau(1-\tau)} + \tau}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (80)$$

Then, multiplying and dividing the first term in (80) by  $\sqrt{\alpha_\rho^2 \zeta + \tau}$  leads to:

$$w(s) = w'_a(s) \frac{\sqrt{\alpha_\rho^2 \zeta + \tau}}{\sqrt{\alpha_\rho^2 \zeta + \frac{s}{\sqrt{N}}\sqrt{\tau(1-\tau)} + \tau}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right), \quad (81)$$

which is equivalent to:

$$w(s) = w'_a(s) \left( 1 + \frac{s\sqrt{\tau(1-\tau)}}{(\alpha_\rho^2 \zeta + \tau)\sqrt{N}} \right)^{-\frac{1}{2}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (82)$$

Taking a first order Taylor expansion of the coefficient of  $w'_a(s)$  in (82) we obtain the desired result.  $\square$

**Lemma A.5.** *By ignoring the term  $s\sqrt{\tau(1-\tau)}$  in (24), we obtain:*

$$w = \frac{\sqrt{N}(\tau - \alpha_\rho \zeta)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} + \mathcal{O}(1), \quad (83)$$

*Proof.* Since the term  $\frac{s\sqrt{\tau(1-\tau)}}{\sqrt{\alpha_\rho^2 \zeta + \tau}}$  is independent of  $N$  we make a constant error in neglecting it from (24).  $\square$

**Lemma A.6.** Taking  $Q(w(s))$  outside of the integral in (20) leads to

$$p_e = 1 - Q(w) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (84)$$

*Proof.* We first rewrite  $w(s)$ , given in (24), as follows:

$$w(s) = \frac{\sqrt{N}(\tau - \alpha_\rho \zeta)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} + s \sqrt{\frac{\tau(1-\tau)}{\alpha_\rho^2 \zeta + \tau}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right), \quad (85)$$

and denote the first term by  $w$ . We denote the error probability in (20) by  $p_t$  and the one in (26) by  $p_a$ . The absolute error between  $p_t$  and  $p_a$  is then given by:

$$|p_t - p_a| = \left| \frac{1}{\sqrt{2\pi}} \left( \int_{-\infty}^{\infty} (Q(w) - Q(w(s))) e^{-\frac{s^2}{2}} ds \right) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right|. \quad (86)$$

Using the definition of the Q-function in (19) we can rewrite (86) as follows:

$$|p_t - p_a| = \left| \frac{1}{2\pi} \left( \int_{-\infty}^{\infty} \left( \int_w^{w(s)} e^{-\frac{t'^2}{2}} dt' \right) e^{-\frac{s^2}{2}} ds \right) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right|. \quad (87)$$

Since  $e^{-\frac{t'^2}{2}} \leq 1 \forall t'$  we can replace the inner integrand function by 1 thereby leading to:

$$|p_t - p_a| \leq \left| \frac{1}{2\pi} \left( \int_{-\infty}^{\infty} (w(s) - w) e^{-\frac{s^2}{2}} ds \right) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right|. \quad (88)$$

$$= \left| \frac{1}{2\pi} \left( \int_{-\infty}^{\infty} \left( s \sqrt{\frac{\tau(1-\tau)}{\alpha_\rho^2 \zeta + \tau}} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right) e^{-\frac{s^2}{2}} ds \right) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right|. \quad (89)$$

$$= \left| \frac{1}{\sqrt{2\pi}} \left( \sqrt{\frac{\tau(1-\tau)}{\alpha_\rho^2 \zeta + \tau}} \int_{-\infty}^{\infty} \frac{s}{\sqrt{2\pi}} e^{-\frac{s^2}{2}} ds \right) + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right) \right|. \quad (90)$$

The remaining integral in (90) is nothing but the expected value of a zero-mean Gaussian RV and therefore we have:

$$|p_t - p_a| \leq \frac{K}{\sqrt{N}}, \quad (91)$$

for some positive constant  $K$ . Since the absolute error is  $\mathcal{O}\left(\frac{1}{\sqrt{N}}\right)$  we obtain the desired result.  $\square$

**Lemma A.7.** The  $\mathcal{O}\left(\frac{1}{\sqrt{N}}\right)$  term in (27) can be taken out of the denominator in the AoI expression and the AoI expression becomes

$$\Delta(\zeta, N, \rho, \tau) = \frac{1}{\tau \left( 1 - Q\left(\frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}}\right) \right)} + \mathcal{O}\left(\frac{1}{\sqrt{N}}\right). \quad (92)$$



*Proof.* We denote the first term in (92) by  $\Delta_a$  and define  $\Delta_t$  as:

$$\Delta_t \triangleq \frac{1}{\tau \left( 1 - Q \left( \frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} \right) + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right) \right)}. \quad (93)$$

The absolute error between  $\Delta_t$  and  $\Delta_a$  is given by,

$$|\Delta_t - \Delta_a| = \left| \frac{1}{\tau \left( 1 - Q \left( \frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} \right) + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right) \right)} - \frac{1}{\tau \left( 1 - Q \left( \frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} \right) \right)} \right|. \quad (94)$$

Combining the two terms and resorting to some simplifications we obtain:

$$|\Delta_t - \Delta_a| = \left| \frac{\mathcal{O} \left( \frac{1}{\sqrt{N}} \right)}{\tau \left( 1 - Q \left( \frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} \right) + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right) \right) \left( 1 - Q \left( \frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} \right) \right)} \right|. \quad (95)$$

$$= \mathcal{O} \left( \frac{1}{\sqrt{N}} \right). \quad (96)$$

The fact that the absolute error between  $\Delta_t$  and  $\Delta_a$  is  $\mathcal{O} \left( \frac{1}{\sqrt{N}} \right)$  implies the desired result in (92).  $\square$

### C. Finding the Spectral Efficiency from the Packet Error Probability

From (27), we see that the condition  $p_e < \epsilon$  leads to:

$$Q \left( \frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} \right) < \epsilon_1, \quad (97)$$

where  $\epsilon_1 = \epsilon + \mathcal{O} \left( \frac{1}{\sqrt{N}} \right)$ . Inverting the Q-function and re-arranging the terms yields:

$$\zeta \left( \zeta - \frac{Q^{-1}(\epsilon_1)^2}{N} \right) \alpha_\rho^2 - (2\zeta\tau)\alpha_\rho + \tau \left( \tau - \frac{Q^{-1}(\epsilon_1)^2}{N} \right) > 0. \quad (98)$$

The left-hand side of (97) equation is a quadratic form of  $\alpha_\rho$  whose zeroes are given by:

$$\alpha_\rho^+ = \tau \frac{1 + \sqrt{1 - \left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right) \left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right)}}{\zeta - \frac{Q^{-1}(\epsilon_1)^2}{N}}, \quad (99)$$

and

$$\alpha_\rho^- = \tau \frac{1 - \sqrt{1 - \left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right) \left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right)}}{\zeta - \frac{Q^{-1}(\epsilon_1)^2}{N}}, \quad (100)$$

Recall that  $\alpha_\rho = \frac{1}{2^{\rho-1}}$  and since  $\rho \geq 0$  then  $\alpha_\rho$  is nonnegative.

**Case 1:**  $\zeta > \frac{Q^{-1}(\epsilon_1)^2}{N}$

In the case that  $\zeta > \frac{Q^{-1}(\epsilon_1)^2}{N}$ , the parabola in (98) is convex with real roots and, therefore, the inequality in (98) is satisfied whenever  $\alpha_\rho < \alpha_\rho^-$  or  $\alpha_\rho > \alpha_\rho^+$ . Note that  $\alpha_\rho^+$  is always positive and any  $\alpha_\rho > \alpha_\rho^+$  is a valid solution. However, if  $\tau \leq \frac{Q^{-1}(\epsilon_1)^2}{N}$ ,  $\alpha_\rho^-$  will be non-positive and solutions  $\alpha_\rho < \alpha_\rho^-$  are invalid as  $\alpha_\rho$  must be non-negative. Yet, even in the case  $\tau > \frac{Q^{-1}(\epsilon_1)^2}{N}$ ,  $\alpha_\rho < \alpha_\rho^-$  leads to incorrect solutions for small  $\epsilon_1$ . Re-writing (97), we have:

$$\frac{\sqrt{N}(\alpha_\rho \zeta - \tau)}{\sqrt{\alpha_\rho^2 \zeta + \tau}} > Q^{-1}(\epsilon_1). \quad (101)$$

Now if  $\epsilon_1$  is small, i.e. smaller than  $\frac{1}{2}$ , then  $Q^{-1}(\epsilon_1) > 0$  and hence the term on the left-hand side of (101) should be positive as well. In this case,  $\alpha_\rho^-$  should be greater than  $\frac{\tau}{\zeta}$  and re-writing  $\alpha_\rho^-$  as:

$$\alpha_\rho^- = \frac{\tau}{\zeta} \left( \frac{1 - \sqrt{1 - \left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right)}}{1 - \frac{Q^{-1}(\epsilon_1)^2}{\zeta N}} \right), \quad (102)$$

we see that this is equivalent to the term inside the brackets in (102) being greater than 1. In that case, we have:

$$1 - \sqrt{1 - \left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right)} > 1 - \frac{Q^{-1}(\epsilon_1)^2}{\zeta N}. \quad (103)$$

This implies:

$$\begin{aligned} \left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)^2 &> 1 - \left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right), \\ &= \left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right) + \frac{Q^{-1}(\epsilon_1)^2}{N\tau}. \end{aligned} \quad (104)$$

Dividing both sides of (104) by  $\left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)$  and rearranging the terms, we obtain:

$$\left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)\left(1 + \frac{\zeta}{\tau}\right) > \left(1 + \frac{\zeta}{\tau}\right), \quad (105)$$

from which it follows that:

$$\zeta < \frac{Q^{-1}(\epsilon_1)^2}{N}. \quad (106)$$

As we are assuming  $\zeta > \frac{Q^{-1}(\epsilon_1)^2}{N}$  we have a contradiction and thus  $\alpha_\rho < \alpha_\rho^-$  is an invalid solution.

**Case 2:**  $\zeta < \frac{Q^{-1}(\epsilon_1)^2}{N}$

In this case, the quadratic form involved in (98) is concave. Its zeroes are still given by (99) and (100) and solutions to (98) are  $\alpha_\rho^+ < \alpha_\rho < \alpha_\rho^-$ . In this case,  $\alpha_\rho^+$  is always negative and only when  $\tau > \frac{Q^{-1}(\epsilon_1)^2}{N}$ ,  $\alpha_\rho^-$  is positive. Since  $\alpha_\rho$  must always be non-negative, valid solutions to (98) are  $0 < \alpha_\rho < \alpha_\rho^-$  under the condition that  $\tau > \frac{Q^{-1}(\epsilon_1)^2}{N}$ . Yet, even we will show that this leads to invalid solutions. If  $\epsilon_1$  is small, i.e. less than  $\frac{1}{2}$ , then  $Q^{-1}(\epsilon_1)$  is positive and so  $\alpha_\rho\zeta - \tau$  must be greater than 0 or we have a contradiction. Assuming that  $\alpha_\rho^-\zeta - \tau$  is positive, it follows that:

$$\alpha_\rho^-\zeta - \tau > 0, \quad (107)$$

which is equivalent to:

$$\alpha_\rho^- > \frac{\tau}{\zeta}, \quad (108)$$

$$\frac{\tau}{\zeta} \left( \frac{\sqrt{1 + \left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta} - 1\right)\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right)} - 1}{\frac{Q^{-1}(\epsilon_1)^2}{N\zeta} - 1} \right) > \frac{\tau}{\zeta}, \quad (109)$$

where in (109) we multiplied the numerator and denominator of  $\alpha_\rho^-$  given in (100) by  $\frac{1}{\zeta}$ .

Simplifying (109) further leads to:

$$\begin{aligned} \sqrt{1 + \left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta} - 1\right)\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right)} - 1 &> \frac{Q^{-1}(\epsilon_1)^2}{N\zeta} - 1, \\ 1 + \left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta} - 1\right)\left(1 - \frac{Q^{-1}(\epsilon_1)^2}{N\tau}\right) &> \left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)^2, \\ \frac{Q^{-1}(\epsilon_1)^2}{N\zeta} + \frac{Q^{-1}(\epsilon_1)^2}{N\tau} - \frac{Q^{-1}(\epsilon_1)^4}{N^2\zeta\tau} &> \left(\frac{Q^{-1}(\epsilon_1)^2}{N\zeta}\right)^2, \\ 1 + \frac{\zeta}{\tau} - \frac{Q^{-1}(\epsilon_1)^2}{N\tau} &> \frac{Q^{-1}(\epsilon_1)^2}{N\zeta}, \end{aligned} \quad (110)$$

$$\begin{aligned} 1 + \frac{\zeta}{\tau} &> \frac{Q^{-1}(\epsilon_1)^2}{N} \left(\frac{1}{\zeta} + \frac{1}{\tau}\right), \\ \zeta &> \frac{Q^{-1}(\epsilon_1)^2}{N}, \end{aligned} \quad (111)$$

where in (110) we divided both sides by  $\frac{Q^{-1}(\epsilon_1)^2}{N\zeta}$ . As we are assuming that  $\zeta < \frac{Q^{-1}(\epsilon_1)^2}{N}$ , we arrive at a contradiction. Therefore, if  $\zeta < \frac{Q^{-1}(\epsilon_1)^2}{N}$  there are no valid solutions.

## REFERENCES

- [1] S. Kaul, M. Gruteser, V. Rai, and J. Kenney, "Minimizing age of information in vehicular networks," in *2011 8th Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks*, 2011, pp. 350–358.

- [2] E. Dutkiewicz, X. Costa-Perez, I. Z. Kovacs, and M. Mueck, "Massive machine-type communications," *IEEE Network*, vol. 31, no. 6, pp. 6–7, 2017.
- [3] Y. Yuan, Z. Yuan, G. Yu, C.-h. Hwang, P.-k. Liao, A. Li, and K. Takeda, "Non-orthogonal transmission technology in lte evolution," *IEEE Communications Magazine*, vol. 54, no. 7, pp. 68–74, 2016.
- [4] L. Liu, E. G. Larsson, W. Yu, P. Popovski, C. Stefanovic, and E. De Carvalho, "Sparse signal processing for grant-free massive connectivity: A future paradigm for random access protocols in the internet of things," *IEEE Signal Processing Magazine*, vol. 35, no. 5, pp. 88–99, 2018.
- [5] R. Gallager, "A perspective on multiaccess channels," *IEEE Transactions on information Theory*, vol. 31, no. 2, pp. 124–142, 1985.
- [6] X. Chen, T.-Y. Chen, and D. Guo, "Capacity of gaussian many-access channels," *IEEE Transactions on Information Theory*, vol. 63, no. 6, pp. 3516–3539, 2017.
- [7] Y. Polyanskiy, "A perspective on massive random-access," in *2017 IEEE International Symposium on Information Theory (ISIT)*, 2017, pp. 2523–2527.
- [8] T. L. Marzetta, "Noncooperative cellular wireless with unlimited numbers of base station antennas," *IEEE Transactions on Wireless Communications*, vol. 9, no. 11, pp. 3590–3600, 2010.
- [9] S. Kaul, R. Yates, and M. Gruteser, "Real-time status: How often should one update?" in *2012 Proceedings IEEE INFOCOM*. IEEE, 2012, pp. 2731–2735.
- [10] Z. Jiang, B. Krishnamachari, X. Zheng, S. Zhou, and Z. Niu, "Timely status update in wireless uplinks: Analytical solutions with asymptotic optimality," *IEEE Internet of Things Journal*, vol. 6, no. 2, pp. 3885–3898, 2019.
- [11] I. Kadota, A. Sinha, and E. Modiano, "Scheduling algorithms for optimizing age of information in wireless networks with throughput constraints," *IEEE/ACM Transactions on Networking*, vol. 27, no. 4, pp. 1359–1372, 2019.
- [12] M. Bastopcu and S. Ulukus, "Partial updates: Losing information for freshness," in *2020 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2020, pp. 1800–1805.
- [13] A. Baknina, S. Ulukus, O. Oze, J. Yang, and A. Yener, "Sening information through status updates," in *2018 IEEE International Symposium on Information Theory (ISIT)*, 2018, pp. 2271–2275.
- [14] H. Chen, Q. Wang, Z. Dong, and N. Zhang, "Multiuser scheduling for minimizing age of information in uplink mimo systems," in *2020 IEEE/CIC International Conference on Communications in China (ICCC)*. IEEE, 2020, pp. 1162–1167.
- [15] R. W. Heath Jr and A. Lozano, *Foundations of MIMO Communication*. Cambridge University Press, 2018.
- [16] W. Yang, G. Durisi, T. Koch, and Y. Polyanskiy, "Quasi-static multiple-antenna fading channels at finite blocklength," *IEEE Transactions on Information Theory*, vol. 60, no. 7, pp. 4232–4265, 2014.
- [17] R. D. Yates and S. K. Kaul, "Status updates over unreliable multiaccess channels," in *2017 IEEE International Symposium on Information Theory (ISIT)*, 2017, pp. 331–335.
- [18] B. Li, R. Li, and A. Eryilmaz, "Throughput-optimal scheduling design with regular service guarantees in wireless networks," *IEEE/ACM Transactions on Networking*, vol. 23, no. 5, pp. 1542–1552, 2014.
- [19] A. Shah and A. M. Haimovich, "Performance analysis of maximal ratio combining and comparison with optimum combining for mobile radio communications with cochannel interference," *IEEE Transactions on Vehicular Technology*, vol. 49, no. 4, pp. 1454–1463, 2000.
- [20] V. K. Amalladinne, A. Vem, D. K. Soma, K. R. Narayanan, and J.-F. Chamberland, "A coupled compressive sensing scheme for unsourced multiple access," in *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2018, pp. 6628–6632.
- [21] R. Calderbank and A. Thompson, "Chirrup: a practical algorithm for unsourced multiple access," *Information and Inference: A Journal of the IMA*, vol. 9, no. 4, pp. 875–897, 2020.

- [22] A. Pradhan, V. Amalladinne, A. Vem, K. R. Narayanan, and J.-F. Chamberland, "A joint graph based coding scheme for the unsourced random access gaussian channel," in *2019 IEEE Global Communications Conference (GLOBECOM)*. IEEE, 2019, pp. 1–6.
- [23] A. K. Pradhan, V. K. Amalladinne, K. R. Narayanan, and J.-F. Chamberland, "Polar coding and random spreading for unsourced multiple access," in *ICC 2020-2020 IEEE International Conference on Communications (ICC)*. IEEE, 2020, pp. 1–6.
- [24] V. Shyianov, F. Bellili, A. Mezghani, and E. Hossain, "Massive unsourced random access based on uncoupled compressive sensing: Another blessing of massive mimo," *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 3, pp. 820–834, 2020.
- [25] A. Fengler, G. Caire, P. Jung, and S. Haghghatshoar, "Massive mimo unsourced random access," *arXiv preprint arXiv:1901.00828*, 2019.
- [26] M. J. Wainwright, *High-dimensional statistics: A non-asymptotic viewpoint*. Cambridge University Press, 2019, vol. 48.
- [27] A. Fengler, S. Haghghatshoar, P. Jung, and G. Caire, "Non-bayesian activity detection, large-scale fading coefficient estimation, and unsourced random access with a massive mimo receiver," *IEEE Transactions on Information Theory*, vol. 67, no. 5, pp. 2925–2951, 2021.
- [28] R. G. Gallager, *Stochastic Processes: Theory for Applications*. Cambridge University Press, 2013.