

Uplink NOMA For STAR-RIS Networks

Jiakuo Zuo, Yuanwei Liu, *Senior Member, IEEE*, Zhiguo Ding, *Fellow, IEEE*, and Xianbin Wang, *Fellow, IEEE*

Abstract—A simultaneously transmitting and reflecting reconfigurable intelligent surfaces (STAR-RISs) enhanced uplink non-orthogonal multiple access (NOMA) communication system is proposed. A total power consumption minimization problem is formulated by jointly optimizing the transmit-power of users, receive-beamforming vectors at the base station (BS), STAR-beamforming vectors at the STAR-RIS and time slots. Here, the STAR-beamforming introduced by STAR-RIS consists of transmission- and reflection-beamforming. To solve the formulated non-convex problem, an efficient penalty-based alternating optimization (P-AltOp) algorithm is proposed. Simulation results validate the effectiveness of the proposed scheme and reveal the effect of various system parameters on the total power consumption.

Index Terms—beamforming, non-orthogonal multiple access, reconfigurable intelligent surfaces, simultaneous transmission and reflection.

I. INTRODUCTION

Recently, reconfigurable intelligent surfaces (RISs) have been proposed as a cost-effective technology to enhance the communication signal coverage [1]. By smartly adjusting the amplitude and phase response of the reflecting elements, RIS can effectively reconfigure the wireless propagation environment. Nevertheless, in existing research, conventional RISs can only reflect incident signals within limited angular range. To overcome this limitation, a novel RIS, namely, simultaneously transmitting and reflecting RISs (STAR-RISs) [2] has been proposed. Distinctively different from traditional reflection-only RISs, STAR-RISs can simultaneously enable transmission and reflection of the incident signals at different sides of RIS, which leads to enhanced *full-space* coverage. The incident signals can be divided into two parts by a STAR-RIS. One part is reflected to the reflection space and the other part is transmitted into transmission space. In addition, STAR-RIS can independently control the angles of transmitted and reflected signals via its transmission- and reflection-beamforming (referred to as STAR-beamforming) [2]. In a word, STAR-RISs can bring a 360° communication coverage into reality.

Although there are many advantages of STAR-RIS, the research on STAR-RIS assisted wireless communication is still in its infancy. In the initial work [2], three practical operating protocols for STAR-RISs, namely, energy splitting (ES), mode switching (MS), and time switching (TS), were proposed, and

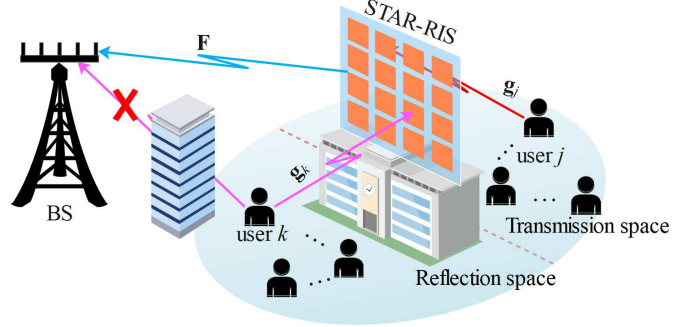


Fig. 1: STAR-RIS empowered uplink NOMA communication system

their representative benefits and drawbacks were analyzed. The sum coverage range maximization problems for a STAR-RIS aided downlink non-orthogonal multiple access (NOMA) and orthogonal multiple access (OMA) systems were studied in [3]. In [4], a STAR-RIS assisted secrecy multiple input single-output (MISO) network was exploited and the weighted sum secrecy rate maximization problem was formulated by jointly designing the beamforming and the transmitting and reflecting coefficients.

Different from the above mentioned works [2–4], which mainly focus on the downlink communication systems, we consider STAR-RIS empowered uplink communication systems here. To the best of our knowledge, this is the first work to consider STAR-RIS empowered uplink multi-antenna communication systems. This letter advocates a unified framework to solve the joint optimization problem over receive-beamforming and STAR-beamforming for the considered system.

Notations: $\text{diag}(\mathbf{x})$ denotes a diagonal matrix whose diagonal elements are the corresponding elements in vector \mathbf{x} . $[\mathbf{x}]_m$ is the m -th element of vector \mathbf{x} . $\|\mathbf{x}\|_2$ is the ℓ_2 -norm of vector \mathbf{x} . The (m, n) -th element of matrix \mathbf{X} is denoted as $[\mathbf{X}]_{m,n}$. \mathbf{x}^H denotes the conjugate transpose of vector \mathbf{x} . The notations $\text{Tr}(\mathbf{X})$ and $\text{rank}(\mathbf{X})$ denote the trace and rank of matrix \mathbf{X} , respectively. $\|\mathbf{X}\|_*$ and $\|\mathbf{X}\|_2$ denote the nuclear norm and spectral norm of matrix \mathbf{X} , respectively.

II. SYSTEM MODEL AND PROBLEM FORMULATION

A. System Model

As shown in Fig 1, a STAR-RIS is deployed in a typical uplink NOMA wireless network, where K single-antenna users are communicating with a N_T -antenna BS. Suppose that the STAR-RIS has M elements. Since the STAR-RIS divides the full space of signal propagation into two parts, namely, reflection space and transmission space. We refer to the users that are located in the reflection space and transmission space as R users and T users, respectively. We further assume that the direct communication links between the R/T users and the BS are blocked by obstacles. The number of R users and T

J. Zuo is with the School of Internet of Things, Nanjing University of Posts and Telecommunications, Nanjing 210003, China, and also with China Information Consulting and Designing Institute CO., LTD, Nanjing 210019, China, (e-mail: zuojiakuo@njupt.edu.cn).

Y. Liu is with the School of Electronic Engineering and Computer Science, Queen Mary University of London, London E1 4NS, U.K. (e-mail: yuanwei.liu@qmul.ac.uk).

Z. Ding is with the School of Electrical and Electronic Engineering, University of Manchester, Manchester, U.K. (email: zhiguo.ding@manchester.ac.uk).

X. Wang is with the Department of Electrical and Computer Engineering, Western University, London, ON N6A 5B9, Canada (e-mail: xianbin.wang@uwo.ca).

users are K_r and K_t , respectively. Furthermore, the sets of R users and T users are denoted by $\mathcal{K}_r = \{1, \dots, K_r\}$ and $\mathcal{K}_t = \{1, \dots, K_t\}$, respectively.

B. STAR-RIS Employing Time Switching Protocol

By employing time switching protocol [2], STAR-RIS periodically switches all elements between the reflection mode and transmission mode (referred to as R mode and T mode) in two orthogonal time slots, namely R period and T period. Let $0 \leq \lambda_r \leq 1$ denote the percentage of time slot allocated to the R period. Thus, the time slot allocated to the T period is $\lambda_t = 1 - \lambda_r$. The corresponding reflection- and transmission-beamforming vectors are given by $\mathbf{v}_r = [e^{j\theta_1^r} \ e^{j\theta_2^r} \ \dots \ e^{j\theta_M^r}]^T$ and $\mathbf{v}_t = [e^{j\theta_1^t} \ e^{j\theta_2^t} \ \dots \ e^{j\theta_M^t}]^T$, where $\theta_m^r, \theta_m^t \in [0, 2\pi)$, $m \in \{1, 2, \dots, M\}$.

C. Signal Model and Problem Formulation

We denote the channel link from the k -th T/R user to the STAR-RIS as $\mathbf{g}_{q,k}$, the channel link from the STAR-RIS to the BS as \mathbf{F} , where $k \in \mathcal{K}_q$, $q \in \{t, r\}$. During the T/R period, the received signal at the BS for T/R user k is

$$y_{q,k} = \mathbf{w}_{q,k}^H \left\{ \sum_{j=1}^{K_q} \mathbf{F} \Theta_q \mathbf{g}_{q,j} \sqrt{p_{q,j}} x_{q,j} + \mathbf{z}_q \right\}, \quad (1)$$

where $x_{q,j}$ is the transmitted signal, $\mathbf{w}_{q,k}$ is the receive-beamforming vector, $p_{q,j}$ is the transmit power, $\Theta_q = \text{diag}\{\mathbf{v}_q\}$, $\mathbb{E}[|x_{q,j}|^2] = 1$ and $\mathbf{z}_q \in \mathcal{CN}(\mathbf{0}, \sigma^2 \mathbf{I})$ is the additive white Gaussian noise with zero mean and a covariance matrix of $\sigma^2 \mathbf{I}$.

To facilitate NOMA transmission, the K_q T/R users are ordered as [5]

$$\left| \mathbf{w}_{q,1}^H \mathbf{F} \Theta_q \mathbf{g}_{q,1} \right|^2 \geq \dots \geq \left| \mathbf{w}_{q,K_q}^H \mathbf{F} \Theta_q \mathbf{g}_{q,K_q} \right|^2. \quad (2)$$

After successfully canceling the signals intended for users $\{1, 2, \dots, k-1\}$, the signal-to-interference-plus-noise ratio (SINR) of user k is given by

$$\text{SINR}_{q,k} = \frac{p_{q,k} \left| \mathbf{w}_{q,k}^H \mathbf{h}_{q,k} \right|^2}{\sum_{j=k+1}^{K_q} p_{q,j} \left| \mathbf{w}_{q,k}^H \mathbf{h}_{q,j} \right|^2 + \sigma^2}, \quad k \in \mathcal{K}_q, \quad (3)$$

where $\mathbf{h}_{q,j} = \mathbf{F} \Theta_q \mathbf{g}_{q,j}$ is the equivalent combined channel. The corresponding achievable data rate is given by

$$R_{q,k} = \lambda_q \log(1 + \text{SINR}_{q,k}). \quad (4)$$

Then, the considered total power consumption minimization problem is formulated as

$$\min_{p_{q,k} \geq 0, \mathbf{w}_{q,k}, \mathbf{v}_q, \lambda_r} \sum_{k=1}^{K_r} p_{r,k} + \sum_{k=1}^{K_t} p_{t,k}, \quad (5a)$$

$$\text{s.t. } \lambda_q \log(1 + \text{SINR}_{q,k}) \geq R_{q,k}^{\min}, \quad (5b)$$

$$\lambda_t = 1 - \lambda_r, \lambda_r \in [0, 1], \quad (5c)$$

$$\|\mathbf{w}_{q,k}\|^2 = 1, \quad (5d)$$

$$\|[\mathbf{v}_q]_m\| = 1, \quad (5e)$$

$$(2), \quad (5f)$$

where $R_{q,k}^{\min}$ is the minimum quality-of-service (QoS) requirement, $k \in \mathcal{K}_q$, $q \in \{t, r\}$, $m \in \{1, 2, \dots, M\}$.

III. PROPOSED SOLUTION

A. Equivalent Transformation of Problem (5)

To facilitate the design, we first define $\mathbf{V}_q \triangleq \mathbf{v}_q \mathbf{v}_q^H \succcurlyeq \mathbf{0}$ and $\mathbf{W}_{q,k} \triangleq \mathbf{w}_{q,k} \mathbf{w}_{q,k}^H \succcurlyeq \mathbf{0}$, where $\text{rank}(\mathbf{V}_q) = 1$ and $\text{rank}(\mathbf{W}_{q,k}) = 1$. Let us proceed to define the variable $\mathbf{A}_{q,k} \triangleq \mathbf{F} \text{diag}(\mathbf{g}_{q,k})$. Using the new variables as defined above, the term $\left| \mathbf{w}_{q,k}^H \mathbf{F} \Theta_q \mathbf{g}_{q,j} \right|^2$ in problem (5) can be written as

$$\left| \mathbf{w}_{q,k}^H \mathbf{F} \Theta_q \mathbf{g}_{q,j} \right|^2 = \text{Tr}(\mathbf{A}_{q,j} \mathbf{V}_q \mathbf{A}_{q,j}^H \mathbf{W}_{q,k}) \triangleq H_{j,k}^q \quad (6)$$

Plugging (6) into the original problem (5), we have:

$$\min_{p_{q,k} \geq 0, \mathbf{W}_{q,k}, \mathbf{V}_q \succcurlyeq \mathbf{0}, \lambda_r} \sum_{k=1}^{K_r} p_{r,k} + \sum_{k=1}^{K_t} p_{t,k}, \quad (7a)$$

$$\text{s.t. } \lambda_q \log_2 \left(1 + \frac{p_{q,k} H_{k,k}^q}{\sum_{j=k+1}^{K_q} p_{q,j} H_{j,k}^q + \sigma^2} \right) \geq R_{q,k}^{\min}, \quad (7b)$$

$$H_{1,1}^q \geq H_{2,2}^q \geq \dots \geq H_{K_q, K_q}^q, \quad (7c)$$

$$\lambda_t = 1 - \lambda_r, \lambda_r \in [0, 1], \quad (7d)$$

$$\text{Tr}(\mathbf{W}_{q,k}) = 1, \quad (7e)$$

$$[\mathbf{V}_q]_{m,m} = 1, \quad (7f)$$

$$\text{rank}(\mathbf{W}_{q,k}) = 1, \quad (7g)$$

$$\text{rank}(\mathbf{V}_q) = 1, \quad (7h)$$

where $q \in \{r, t\}$, $k \in \mathcal{K}_q$ and $m \in \{1, 2, \dots, M\}$.

Before solving problem (7), we formulate a new optimization problem as follows

$$\min_{\bar{p}_{q,k}, P_{\text{sum}}^q \geq 0, \mathbf{W}_{q,k}, \mathbf{V}_q \succcurlyeq \mathbf{0}} P_{\text{sum}}^r + P_{\text{sum}}^t, \quad (8a)$$

$$\text{s.t. } \lambda_q \log_2 \left(1 + \frac{P_{\text{sum}}^q \bar{p}_{q,k} H_{k,k}^q}{\sum_{j=k+1}^{K_q} P_{\text{sum}}^q \bar{p}_{q,j} H_{j,k}^q + \sigma^2} \right) \geq R_{q,k}^{\min}, \quad (8b)$$

$$\sum_{k=1}^{K_q} \bar{p}_{q,k} = 1, \quad (8c)$$

$$(7c), (7d), (7e), (7f), (7g), (7h), \quad (8d)$$

Theorem 1. By defining sum transmit-power $P_{\text{sum}}^q \triangleq \sum_{k=1}^{K_q} p_{q,k}$ and normalized transmit-power $\bar{p}_{q,k} \triangleq \frac{p_{q,k}}{P_{\text{sum}}^q}$ with constraint $\sum_{k=1}^{K_q} \bar{p}_{q,k} = 1$, solving problem (7) is equivalently to solving the problem (8).

Proof: see Appendix A.

However, problem (8) is still non-convex. In the following, we propose a penalty-based alternating optimization (P-AltOp) algorithm to solve problem (8) by exploiting penalty-based semidefinite programming (P-SDP), successive convex approximation (SCA) and alternating optimization.

B. STAR-Beamforming Optimization

In this subsection, we focus on the joint optimization problem over transmission- and reflection-beamforming vectors with given $\{\bar{p}_{q,k}\}$, $\{\mathbf{W}_{q,k}\}$ and $\{\lambda_q\}$, which is formulated as:

$$\min_{P_{\text{sum}}^q \geq 0, \mathbf{V}_q \succcurlyeq \mathbf{0}} P_{\text{sum}}^q, \quad (9a)$$

$$\text{s.t. } (7c), (7f), (7h), (8b) \quad (9b)$$

For clarity of problem formulation, rearranging the QoS constraint (8b) leads to

$$\bar{p}_{q,k} H_{k,k}^q \geq r_{q,k}^{\min} \left(\sum_{j=k+1}^K \bar{p}_j H_{j,k}^q + \frac{\sigma^2}{P_{\text{sum}}} \right) \quad (10)$$

where $r_{q,k}^{\min} = 2^{\frac{R_{q,k}^{\min}}{\lambda_q}} - 1$, $k \in \mathcal{K}_q$, $q \in \{r, t\}$.

Now, the remaining non-convexity in problem (9) lies in the rank-one constraint (7h). According to [6], $\text{rank}(\mathbf{V}_q) = 1$ can be transformed equivalently as: $\|\mathbf{V}_q\|_* - \|\mathbf{V}_q\|_2 = 0$. Furthermore, according to the SCA method, by utilizing first-order Taylor approximation to $\|\mathbf{V}_q\|_2$, we have:

$$\begin{aligned} \|\mathbf{V}_q\|_2 &\geq \left\| \mathbf{V}_q^{(\tau_1)} \right\|_2 + \text{Tr} \left(\mathbf{e}_q^{(\tau_1)} \left(\mathbf{e}_q^{(\tau_1)} \right)^H \left(\mathbf{V}_q - \mathbf{V}_q^{(\tau_1)} \right) \right) \\ &\triangleq \bar{\mathbf{V}}_q^{(\tau_1)} \end{aligned} \quad (11)$$

where $\mathbf{V}_q^{(\tau_1)}$ is the solution obtained in the τ_1 -th iteration and $\mathbf{e}_q^{(\tau_1)}$ denotes the eigenvector corresponding to the maximum eigenvalue of matrix $\mathbf{V}_q^{(\tau_1)}$.

By adding $\left(\|\mathbf{V}_q\|_* - \bar{\mathbf{V}}_q^{(\tau_1)} \right)$ as a penalized function to the objective function of problem (9), we obtain the following optimization problem:

$$\min_{P_{\text{sum}} \geq 0, \mathbf{V}_q \succeq \mathbf{0}} P_{\text{sum}} + \frac{1}{\mu_1} \left(\|\mathbf{V}_q\|_* - \bar{\mathbf{V}}_q^{(\tau_1)} \right), \quad (12a)$$

$$\text{s.t. (7c), (7f), (10).} \quad (12b)$$

where μ_1 is a penalty factor.

Problem (12) is an SDP problem and can be solved by the CVX tool [7]. The details of the proposed P-SDP algorithm to solve problem (9) is presented in **Algorithm 1**, which comprises two loops. The outer-layer iteration is used to update the penalty factor and the inner-layer iteration is used to iteratively solve problem (12). The constraint violation is defined as $\mathcal{E}_{\text{erro}} = \|\mathbf{V}_q\|_* - \|\mathbf{V}_q\|_2$. The proposed P-SDP algorithm is guaranteed to converge to a stationary point of the original problem [6].

Algorithm 1 Proposed P-SDP Algorithm to Solve Problem (9)

- 1: Initialize $\mathbf{V}_q^{(0)}$ and μ_1 . Set $0 < \Delta_1 < 1$ and convergence tolerance $0 < \mathcal{E}_1 \ll 1$.
 - 2: **repeat**
 - 3: Set inner-iteration index $\tau_1 = 0$;
 - 4: **repeat**
 - 5: Update $\mathbf{V}_q^{(\tau_1+1)}$ by solving problem (12);
 - 6: $\tau_1 \leftarrow \tau_1 + 1$;
 - 7: **until** the objective value of problem (12) converges;
 - 8: Update $\mathbf{V}_q^{(0)} = \mathbf{V}_q^{(\tau_1)}$;
 - 9: Update $\mu_1 \leftarrow \mu_1 \Delta_1$;
 - 10: **until** constraint violation $\mathcal{E}_{\text{erro}} \leq \mathcal{E}_1$;
-

C. Receive-Beamforming Optimization

The receive-beamforming optimization problem can be formulated as

$$\min_{P_{\text{sum}} \geq 0, \mathbf{W}_{q,k} \succeq \mathbf{0}} P_{\text{sum}}^q, \quad (13a)$$

$$\text{s.t. (7b), (7e), (7g), (8c)} \quad (13b)$$

Problem (13) is non-convex and has rank-one constraints, which can be solved similarly to problem (9) and thus omitted for simplicity.

D. Transmit-Power Optimization

For given $\{\mathbf{W}_{q,k}\}, \{\mathbf{V}_q\}$, and $\{\lambda_q\}$, combing with the definition $\bar{p}_{q,k} \triangleq \frac{p_{q,k}}{P_{\text{sum}}^q}$, the transmit-power optimization problem in problem (8) can be expressed as

$$\min_{p_{q,k} \geq 0} \sum_{k=1}^{K_q} p_{q,k}, \quad (14a)$$

$$\text{s.t. (7b)} \quad (14b)$$

Theorem 2. *The optimal transmit-power solution of problem (14) is given by*

$$\begin{cases} p_{q,K_q}^{\text{opt}} = \frac{r_{q,K_q}^{\min} \sigma^2}{H_{K_q,K_q}^q}, \\ p_{q,K_q-1}^{\text{opt}} = \frac{r_{q,K_q-1}^{\min} \left(p_{q,K_q}^{\text{opt}} H_{K_q,K_q-1}^q + \sigma^2 \right)}{H_{K_q-1,K_q-1}^q}, \\ p_{q,K_q-2}^{\text{opt}} = \frac{r_{q,K_q-1}^{\min} \left(\sum_{j=K_q-1}^{K_q} p_{q,j}^{\text{opt}} H_{j,K_q-2}^q + \sigma^2 \right)}{H_{K_q-2,K_q-2}^q}, \\ \vdots \\ p_{q,1}^{\text{opt}} = \frac{r_{q,1}^{\min} \left(\sum_{j=2}^{K_q} p_{q,j}^{\text{opt}} H_{j,1}^q + \sigma^2 \right)}{H_{1,1}^q}. \end{cases} \quad (15)$$

Proof: See Appendix B.

E. Time Slot Optimization

The time slot optimization problem in (8) with fixed $\{\bar{p}_{q,k}\}, \{\mathbf{W}_{q,k}\}, \{\mathbf{V}_q\}$ is reduced to

$$\min_{\lambda_r, P_{\text{sum}}^r \geq 0} \left(P_{\text{sum}}^r + P_{\text{sum}}^t \right), \quad (16a)$$

$$\text{s.t. } \lambda_t = 1 - \lambda_r, \lambda_r \in [0, 1], \quad (16b)$$

$$(8b). \quad (16c)$$

To obtain the optimal solution of problem (16), we have the following Theorem.

Theorem 3. *Problem (16) can be equivalently transformed to the following optimization problem*

$$\min_{\lambda_r} \left(\mathcal{P}_{\text{sum}}^{r,\min}(\lambda_r) + \mathcal{P}_{\text{sum}}^{t,\min}(\lambda_t) \right), \quad (17a)$$

$$\text{s.t. } \lambda_r^{\min} \leq \lambda_r \leq \lambda_r^{\max}, \quad (17b)$$

$$\lambda_t = 1 - \lambda_r \quad (17c)$$

with

$$P_{\text{sum}}^{q,\min}(\lambda_q) = \max_{k \in \mathcal{K}_q} \left\{ \sigma^2 \left(\frac{\bar{p}_{q,k} H_{k,k}^q}{2^{\frac{R_{q,k}^{\min}}{\lambda_q}} - 1} - \sum_{j=k+1}^{K_q} \bar{p}_{q,j} H_{j,k}^q \right)^{-1} \right\} \quad (18)$$

$$\lambda_r^{\min} = \max_{k \in \mathcal{K}_r} \left\{ \frac{R_{r,k}^{\min}}{\tilde{R}_{r,k}} \right\}, \lambda_r^{\max} = 1 - \max_{k \in \mathcal{K}_t} \left\{ \frac{R_{t,k}^{\min}}{\tilde{R}_{t,k}} \right\} \quad (19)$$

where $\tilde{R}_{q,k} = \log_2 \left(1 + \frac{\bar{p}_{q,k} H_{k,k}^q}{\sum_{j=k+1}^{K_q} \bar{p}_{q,j} H_{j,k}^q} \right)$.

Proof: See Appendix C.

It is easy to observe that problem (17) is a non-convex optimization problem with one dimensional variable λ_r . The

optimal λ_r^{opt} can be obtained by invoking the exhaust search method.

F. Overall Algorithm, Convergence and Complexity Analysis

Based on the above analysis, the proposed P-AltOp algorithm is summarized in **Algorithm 2**. In each iteration, the computational complexity for solving the SDP problem (12) and (13) are $\mathcal{O}(8M^6 + 2KM^2)$ and $\mathcal{O}(K^3N_T^6 + K^2N_T^2)$, respectively. Note that the convergence is guaranteed since the total power consumption decreases at each iteration and the total power consumption clearly has a lower bound.

Algorithm 2 Proposed P-AltOp Algorithm to Solve Problem (5)

- 1: Initialize a decoding order, $\mathbf{V}_q^{(0)}$, $\mathbf{W}_{q,k}^{(0)}$ and $\bar{p}_{q,k}^{(0)}$, $k \in \mathcal{K}_q$, $q \in \{r, t\}$. Set the iteration index $\tau_2 = 1$.
- 2: **repeat**
- 3: Update $\lambda_q^{(\tau_2)}$ by using one-dimension search method;
- 4: Update $\mathbf{V}_q^{(\tau_2)}$ via **Algorithm 1** ;
- 5: Update $\mathbf{W}_{q,k}^{(\tau_2)}$ by using the proposed P-SDP algorithm;
- 6: Update $p_{q,k}^{(\tau_2)}$ according to (15) and calculate $\bar{p}_{q,k}^{(\tau_2)} = \frac{p_{q,k}^{(\tau_2)}}{\sum_{k=1}^{K_q} p_{q,k}^{(\tau_2)}}$;
- 7: $\tau_2 \leftarrow \tau_2 + 1$;
- 8: **until** the objective value of problem (8) converge.

IV. NUMERICAL RESULTS

In this section, the simulation and the performance results are evaluated to the performance of the STAR-RIS-NOMA empowered uplink NOMA system with the proposed algorithm. The BS and the STAR-RIS are located at (0 m, 0 m, 10 m) and (0 m, 50 m, 10 m), respectively. We set $K_r = K_t = 2$ and assume that the T/R users are randomly and uniformly distributed in a half-circle centered at the STAR-RIS with a radius of 10 m. The distance-dependent channel path loss is modeled as $\mathcal{P}(d) = \varepsilon(d)^{-\rho}$, where ε is the path loss at the reference distance $d_0 = 1$ m, d denotes the link distance and ρ denotes the path loss exponent. We adopt Rician fading to model small-scale fading for all channels involved. Specifically, we set $\varepsilon = -30$ dB, the path loss exponents and Rician factors for the channels are set to be 2.2 and 1, respectively. The noise power is -90 dBm.

In order to validate the effectiveness of our proposed algorithm, three benchmark schemes are considered, namely, Eq-PAltOp, Fixed-PAltOp and RIS-OMA. In the Eq-PAltOp algorithm, we set $\lambda_r = \lambda_t = 0.5$. For Fixed-PAltOp algorithm, the elements of the STAR-beamforming vectors are set to one. For RIS-OMA algorithm, the BS serves all the users through time division multiple access with the aid of one traditional reflection-only RIS and one traditional transmission-only RIS, the receive-beamforming vectors are obtained via the maximum-ratio transmission (MRT) beamformer and the STAR-beamforming vectors are solved by the successive refinement algorithm [8].

Fig. 2 depicts the convergence of the proposed P-AltOp algorithm. It is observed that the convergence of our proposed algorithm is confirmed in multiple cases, i.e., $M = 10, 15, 20$. In Fig. 3, the total power consumption versus the number of STAR-RIS elements M under different number

of BS antennas N_T is plotted. We observe that the total power consumption decreases as M and N_T increasing. This is expected since larger M enables higher reflection- and transmission-beamforming gains, which in turn reduces the total power consumption. Furthermore, larger N_T can also achieve a higher receive-beamforming gain. Fig. 4 compares the proposed P-AltOp algorithm with benchmark schemes. It is observed that the proposed algorithm always outperforms the benchmark schemes. In addition, the proposed STAR-RIS enhanced NOMA system can achieve a lower total power consumption than the traditional RIS-OMA system. This is because, compared with RIS-OMA system, the users can be served simultaneously through the NOMA protocol in our proposed system.

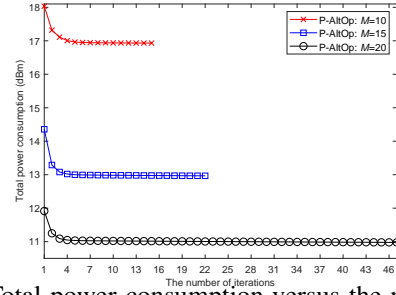


Fig. 2: Total power consumption versus the number of iterations, $N_T = 4$ and $R_{q,k}^{\min} = 0.2$ bit/s/Hz

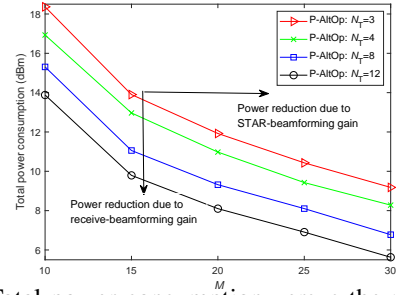


Fig. 3: Total power consumption versus the number of STAR-RIS elements M under different number of BS antennas N_T , $R_{q,k}^{\min} = 0.2$ bit/s/Hz

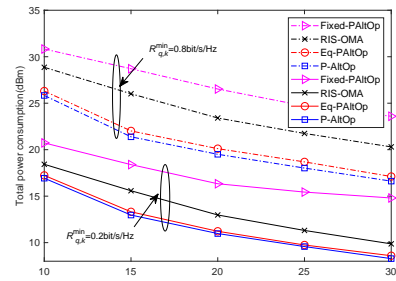


Fig. 4: Total power consumption achieved by various schemes under different QoS requirements, $N_T = 4$

V. CONCLUSIONS

In this paper, we investigated a STAR-RIS empowered uplink NOMA communication system to achieve full-space coverage. We formulated an optimization problem to minimize the total power consumption and proposed an efficient algorithm to jointly optimize the transmit-power of the users, receive-beamforming vectors at the BS, STAR-beamforming vectors at the STAR-RIS and time slots. Numerical results have shown that the proposed algorithm can achieve better performance than benchmark schemes and the proposed system outperforms traditional RIS-OMA system.

APPENDIX A: PROOF OF THEOREM 1

Since $\sum_{k=1}^{K_q} p_{q,k} = P_{\text{sum}}^q$, by substituting this equation into the objective function of problem (7), then problem (7) and problem (8) have the same objective function. Furthermore, according to the definitions of $\bar{p}_{q,k}$, we have $p_{q,k} = P_{\text{sum}}^q \bar{p}_{q,k}$ and $\sum_{k=1}^{K_q} \bar{p}_{q,k} = 1$. As a result, the QoS constraint (7b) can be equivalently rewritten as (8b). Therefore, problem (7) is equivalent to problem (8). Assume that $\{\bar{p}_{q,k}^{\text{opt}}, P_{\text{sum}}^{q,\text{opt}}, \mathbf{V}_q^{\text{opt}}, \mathbf{W}_{q,k}^{\text{opt}}\}$ is the optimal solution of problem (8), then with $p_{q,k}^{\text{opt}} = P_{\text{sum}}^{q,\text{opt}} \bar{p}_{q,k}^{\text{opt}}$, $\{p_{q,k}^{\text{opt}}, \mathbf{V}_q^{\text{opt}}, \mathbf{W}_{q,k}^{\text{opt}}\}$ is the optimal solution of problem (7).

APPENDIX B: PROOF OF THEOREM 2

Let $p_{q,k}^{\min}$ denote the minimum transmit-power for user k . If the users transmit their signal to the BS with $\{p_{q,k}^{\min}\}$, then all the users will achieve their minimum QoS requirements $\{R_{q,k}^{\min}\}$ [9]. Thus, we have the following equations:

$$\begin{cases} \log_2 \left(1 + \frac{p_{q,k}^{\min} H_{k,k}^q}{\sigma^2} \right) = R_{q,K_q}^{\min}, \\ \log_2 \left(1 + \frac{p_{q,k}^{\min} H_{k,k}^q}{\sum_{j=k+1}^{K_q} p_j^{\min} H_{j,k}^q + \sigma^2} \right) = R_{q,k}^{\min}, k \in \mathcal{K}_q / K_q. \end{cases} \quad (\text{B.1})$$

By solving the above equations, we can obtain the minimum transmit-power which is expressed as (15).

Note that the SINR of user k in (3) can be rewritten as

$$\text{SINR}_{q,k} = \frac{p_{q,k} H_{k,k}^q}{\sum_{j=k+1}^{K_q} p_{q,j} H_{j,k}^q + \sigma^2} \quad (\text{B.2})$$

It is easy to observe that the SINR function $\text{SINR}_{q,k}$ is strictly monotonically increasing in $p_{q,k}$, and monotonically decreasing in $p_{q,j}$ with $j > k$. In addition, the user k sees interference only from users with index $j > k$.

Denote by $\{p_{q,k}^{\text{opt}}\}$ the optimal solution of problem (14). Since user K_q is decoded last and sees no interference after decoding. Therefore, the minimum transmit-power P_{q,K_q}^{\min} is required to achieve the target R_{q,K_q}^{\min} . Then, the optimal transmit-power is $P_{q,K_q}^{\text{opt}} = P_{q,K_q}^{\min}$. If this equation is not true, there are two cases, namely, $P_{q,K_q}^{\text{opt}} < P_{q,K_q}^{\min}$ and $P_{q,K_q}^{\text{opt}} > P_{q,K_q}^{\min}$. The first case can be easily ruled out because it violates the minimum QoS requirement constrain in (7b). For the second case, since user $K_q - 1$ sees interference only from user K_q , the interference of user $K_q - 1$ introduced by user K_q becomes larger with P_{q,K_q}^{opt} compared that with P_{q,K_q}^{\min} . To achieve the target R_{q,K_q-1}^{\min} , more transmit-power is needed, which implies $P_{q,K_q-1}^{\text{opt}} > P_{q,K_q-1}^{\min}$. Obviously, this is contradicted with our assumption. The contradiction $p_{q,k}^{\text{opt}} > p_{q,k}^{\min}$ for any other user k ($\forall k \in \mathcal{K}_q$) can also be shown.

In the same way, the optimality can be proved for all the other users. As a result, the optimal solution of problem (14) is unique and is given by $p_{q,k}^{\text{opt}} = p_{q,k}^{\min}$, $k \in \mathcal{K}_q$.

APPENDIX C: PROOF OF THEOREM 3

To facilitate the analysis, we first rewrite the minimum QoS requirement in constraint (8b) as follows

$$\frac{\bar{p}_{q,k} H_{k,k}^q}{2^{\frac{R_{q,k}^{\min}}{\lambda_q}} - 1} - \sum_{j=k+1}^{K_q} \bar{p}_{q,j} H_{j,k}^q \geq \frac{\sigma^2}{P_{\text{sum}}^q} \quad (\text{C.1})$$

We can easily deduce from (C.1) that the following inequality holds

$$\frac{\bar{p}_{q,k} H_{k,k}^q}{2^{\frac{R_{q,k}^{\min}}{\lambda_q}} - 1} - \sum_{j=k+1}^{K_q} \bar{p}_{q,j} H_{j,k}^q > 0 \quad (\text{C.2})$$

By keeping the condition (C.2) satisfied, (C.1) can be rewritten as

$$P_{\text{sum}}^q \geq \frac{\sigma^2}{\frac{\bar{p}_{q,k} H_{k,k}^q}{2^{\frac{R_{q,k}^{\min}}{\lambda_q}} - 1} - \sum_{j=k+1}^{K_q} \bar{p}_{q,j} H_{j,k}^q}, k \in \mathcal{K}_q \quad (\text{C.3})$$

Then, (C.3) can be further reduced as

$$P_{\text{sum}}^q \geq \max_{k \in \mathcal{K}_q} \left\{ \sigma^2 \left(\frac{\bar{p}_{q,k} H_{k,k}^q}{2^{\frac{R_{q,k}^{\min}}{\lambda_q}} - 1} - \sum_{j=k+1}^{K_q} \bar{p}_{q,j} H_{j,k}^q \right)^{-1} \right\} \triangleq \mathcal{P}_{\text{sum}}^{q,\min}(\lambda_q) \quad (\text{C.4})$$

where $\mathcal{P}_{\text{sum}}^{q,\min}(\lambda_q)$ is the minimum value achieved by P_{sum}^q and is a function of the time slot λ_q .

In addition, inequality (C.2) can be equivalently transformed to $\lambda_q > \frac{R_{q,k}^{\min}}{R_{q,k}}$, $k \in \mathcal{K}_q$, which can be further reexpressed as

$$\lambda_q > \max_{k \in \mathcal{K}_q} \left\{ \frac{R_{q,k}^{\min}}{R_{q,k}} \right\} \triangleq \lambda_q^{\min} \quad (\text{C.5})$$

Since $\lambda_r = 1 - \lambda_t$ and $\lambda_t > \lambda_t^{\min}$, we have:

$$\lambda_r \leq 1 - \lambda_t^{\min} \triangleq \lambda_r^{\max} \quad (\text{C.6})$$

As a result, combing with (C.4), (C.5), (C.6) and $\lambda_r = 1 - \lambda_t$, problem (16) can be equivalently reformulated as problem (17), which completes the proof.

REFERENCES

- [1] M. Di Renzo, A. Zappone, M. Debbah, M.-S. Alouini, C. Yuen, J. de Rosny, and S. Tretyakov, "Smart radio environments empowered by reconfigurable intelligent surfaces: how it works, state of research, and the road ahead," *IEEE J. Sel. Areas Commun.*, vol. 38, no. 11, pp. 2450–2525, July 2020.
- [2] Y. Liu, X. Mu, J. Xu, R. Schober, Y. Hao, H. V. Poor, and L. Hanzo, "STAR: Simultaneous transmission and reflection for 360° coverage by intelligent surfaces," 2021, accept to appear. Available: <https://arxiv.org/abs/2103.09104>.
- [3] C. Wu, Y. Liu, X. Mu, X. Gu, and O. A. Dobre, "Coverage characterization of STAR-RIS networks: NOMA and OMA," *IEEE Commun. Lett.*, vol. 25, no. 9, pp. 3036–3040, Sept. 2021.
- [4] H. Niu, Z. Chu, F. Zhou, and Z. Zhu, "Simultaneous transmission and reflection reconfigurable intelligent surface assisted secrecy MISO networks," *IEEE Commun. Lett.*, 2021 (Early Access).
- [5] Y. Liu, Z. Qin, M. El-kashlan, Z. Ding, A. Nallanathan, and L. Hanzo, "Non-orthogonal multiple access for 5G and beyond," *Proceedings of the IEEE*, vol. 105, no. 12, pp. 2347–2381, Dec. 2017.
- [6] X. Yu, D. Xu, D. W. K. Ng, and R. Schober, "IRS-assisted green communication systems: provable convergence and robust optimization," *IEEE Trans. Commun.*, 2021 (Early Access).
- [7] M. Grant and S. Boyd, "CVX: Matlab software for disciplined convex programming, version 2.1," <http://cvxr.com/cvx>, Mar. 2014.
- [8] Q. Wu and R. Zhang, "Beamforming optimization for wireless network aided by intelligent reflecting surface with discrete phase shifts," *IEEE Trans. Commun.*, vol. 68, no. 3, pp. 1838–1851, March 2020.
- [9] M. Schubert and H. Boche, "Iterative multiuser uplink and downlink beamforming under SINR constraints," *IEEE Trans. Signal Process.*, vol. 53, no. 7, pp. 2324–2334, July 2005.