

# Optimal Sensor Fusion Method for Active Vibration Isolation Systems in Ground-Based Gravitational-Wave Detectors

T.T.L. Tsang\* and T.G.F. Li†  
*The Chinese University of Hong Kong*

T. Dehaeze‡ and C. Collette§  
*Precision Mechatronics Laboratory, University of Liege, Belgium*  
(Dated: December 1, 2021)

Sensor fusion is a technique used to combine sensors with different noise characteristics into a super sensor that has superior noise performance. To achieve sensor fusion, complementary filters are used in current gravitational-wave detectors to combine relative displacement sensors and inertial sensors for active seismic isolation. Complementary filters are a set of digital filters, which have transfer functions that are summed to unity. Currently, complementary filters are shaped and tuned manually rather than optimized, which can be suboptimal and hard to reproduce for future detectors. In this paper, an optimization-based method called  $\mathcal{H}_\infty$  synthesis is proposed for synthesizing optimal complementary filters according to the sensor noises themselves. The complementary filter design problem is converted into an optimization problem that seeks minimization of an objective function equivalent to the maximum difference between the super sensor noise and the lower bound in logarithmic scale. The method is exemplified by synthesizing complementary filters for sensor fusion of 1) a relative displacement sensor and an inertial sensor, 2) a relative displacement sensor coupled with seismic noise and an inertial sensor, and 3) hypothetical displacement sensor and inertial sensor, which have slightly different noise characteristics compared to the typical ones. In all cases, the method produces complementary filters that suppress the super sensor noise equally close to the lower bound at all frequencies in logarithmic scale. The synthesized filters contain features that better suppress the sensor noises compared to the pre-designed complementary filters. Overall, the proposed method allows the synthesis of optimal complementary filters according to the sensor noises themselves and is a better and versatile method for solving sensor fusion problems.

## I. INTRODUCTION

Vibration noise, such as seismic noise, is one of the major noise sources for ground-based large-scale scientific instruments like interferometric gravitational wave detectors. Current gravitational-wave detectors, such as interferometric gravitational-wave detector like LIGO [1], Virgo [2], and KAGRA [3, 4], use multi-stage pendulums to suspend the core optics of the interferometers, passively isolating them from high-frequency external vibration in the detection band (10-1000 Hz) [5–9]. On top of that, the pendulums are typically mounted on isolation platforms equipped with sensors and actuators to actively isolating the vibration noise at lower frequencies (<10 Hz) and damping the resonances of the pendulums [7, 9, 10]. External seismic disturbance, such as the microseism [11], at lower frequencies can cause the suspended optics to move excessively. This will cause the instruments to misalign, and in severe cases, result in the temporary shutdown of the detectors. In fact, low frequency seismic noise has ultimately limited the duty cycle of the LIGO and KAGRA detectors [12, 13]. Therefore, active isolation is extremely important in these large-

scale instruments and it remains as an active research topic in the field of experimental physics.

Active isolation comes with the price of control noise addition. Control noise can be injected to the detector, compromising the sensitivity of the detector, and must be limited. One way to reduce the control noise is to lower the noises of the sensors used for feedback control in active isolation. Recent research has been made to develop low-noise inertial sensors for active isolation systems in gravitational-wave detectors [14–16]. Inertial sensor can be used to achieve active isolation. They have good noise performance at higher frequencies but have poor performance at lower frequencies and could cause isolation platforms to drift. On the other hand, relative displacement sensors, such as linear variable differential transformers (LVDTs) used in Ref. [9], have lower noise at low frequencies. But they only measure relative displacement so they cannot be used for active isolation. However, it's possible to utilize both sensors together via a control strategy called sensor fusion. This way, active seismic noise isolation can be achieved using the inertial sensors without drift

Sensor fusion is a technique that combines two or more sensors to form a so-called “super sensor” that can have superior noise characteristics than the individual sensors. In this case, we assume the sensors to measure a common signal but have individual uncorrelated intrinsic sensor noises. There are multiple ways to achieve sensor fusion, such as the use of Kalman filters [17, 18] and comple-

---

\* [ttltsang@link.cuhk.edu.hk](mailto:ttltsang@link.cuhk.edu.hk)

† [tgfli@cuhk.edu.hk](mailto:tgfli@cuhk.edu.hk); KU Leuven

‡ [thomas.dehaeze@esrf.fr](mailto:thomas.dehaeze@esrf.fr)

§ [christophe.collette@uliege.be](mailto:christophe.collette@uliege.be)

mentary filters [19]. In particular, complementary filters have been widely used in active isolation platforms in gravitational wave detectors [10, 13, 20–26]. Complementary filters are a set of digital filters that can take almost any arbitrary shape so long as their transfer functions are summed to unity. The design of their shapes is important as it determines the final noise of the super sensor. Although the technique was used previously for gravitational-wave detectors, the design methodology was not thoroughly discussed and the filters designed were either suboptimal and hardly reproducible. While the method will still be adopted by future detectors like KAGRA [9] and the Einstein Telescope [27], it would be convenient to have a method to optimize complementary filters and minimize the sensor noise of the super sensor.

Recently, a complementary filter shaping method using  $\mathcal{H}_\infty$  synthesis was proposed [28]. In the work, it was shown that  $\mathcal{H}_\infty$  methods can be used to design complementary filters that satisfy frequency-dependent filter shape specifications. In this paper, we will extend the idea and propose to use  $\mathcal{H}_\infty$  methods to synthesize optimal complementary filters in such a way the super sensor noise is minimized.

This paper is structured as follows. Sec. II gives an overview to the sensor fusion technique using complementary filters and its optimization using  $\mathcal{H}_\infty$  methods is discussed. In Sec. III, the optimization of complementary filters for the fusion of typical sensors used in active isolation platforms of gravitational-wave detectors is demonstrated. In Sec. IV, some discussions regarding the proposed method and future works are noted. In Sec. V, a summary of this paper is given.

## II. METHODOLOGY

### A. Sensor Fusion using Complementary Filters

Without loss of generality, let's define complementary filters to be a set of filters whose transfer functions are summed to unity, i.e.

$$\sum_i H_i(s) = 1, \quad (1)$$

where  $H_i$  is the transfer function of the  $i^{\text{th}}$  filter, and  $s$  is a complex variable. Each complementary filter is filtering the output of the individual sensors and the filtered signals are summed. The super sensor readout  $X_{\text{super}}(s)$  is therefore given by

$$X_{\text{super}}(s) = \sum_i H_i(s) X_i(s), \quad (2)$$

where  $X_i(s)$  is the sensor readout of the  $i^{\text{th}}$  sensor. Each sensor is modeled as having additive sensing noise  $N_i(s)$ . So, each sensor readout  $X_i(s)$  reads

$$X_i(s) = X(s) + N_i(s), \quad (3)$$

where  $X(s)$  is the common signal that the sensors are all measuring. Substituting Eqn. (1) and Eqn. (3) into Eqn. (2), we get

$$X_{\text{super}}(s) = X(s) + \sum_i H_i(s) N_i(s). \quad (4)$$

The super sensor readout  $X_{\text{super}}(s)$  is then equal to the common signal  $X(s)$  plus the noise of each sensor filtered out by the complementary filters. As the sensors have intrinsic noise  $N_i(s)$  with different frequency content, the goal of sensor fusion is to design a set of complementary filters  $H_i(s)$  that achieve optimal trade-off between these sensor noises at different frequencies.

### B. $\mathcal{H}_\infty$ Synthesis

In  $\mathcal{H}_\infty$  methods [29], a system is specified in the generalized plant representation as shown in Fig. 1. The aug-

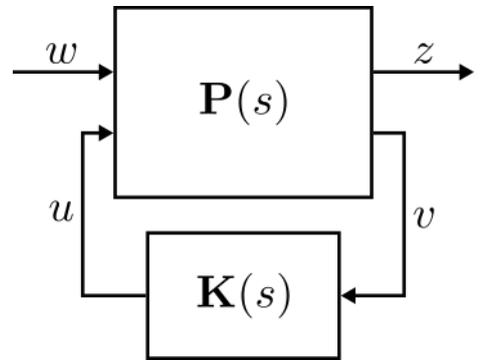


FIG. 1. Generalized plant representation

mented plant  $\mathbf{P}$  has two inputs and two outputs. The inputs  $w$  and  $u$  are the exogenous inputs and the manipulated variables respectively. And, the outputs  $z$  and  $v$  are the error signals and the measurements respectively. Note that these variables are vector valued in general.

In the open loop configuration, the input-output relation reads

$$\begin{pmatrix} z \\ v \end{pmatrix} = \mathbf{P}(s) \begin{pmatrix} w \\ u \end{pmatrix} = \begin{bmatrix} P_{11}(s) & P_{12}(s) \\ P_{21}(s) & P_{22}(s) \end{bmatrix} \begin{pmatrix} w \\ u \end{pmatrix}. \quad (5)$$

When the loop is closed, the manipulated inputs  $u$  are generated from the measured output  $v$  via a regulator  $\mathbf{K}(s)$ ,

$$u = \mathbf{K}(s)v. \quad (6)$$

In such configuration, the input-output relation becomes

$$z = \left[ P_{11}(s) + P_{12}(s) (I - P_{22}(s)\mathbf{K}(s))^{-1} P_{21}(s) \right] w, \quad (7)$$

and the closed loop transfer function matrix is defined as

$$\mathbf{G}(s; \mathbf{K}(s)) \equiv P_{11}(s) + P_{12}(s) (I - P_{22}(s)\mathbf{K}(s))^{-1} P_{21}(s), \quad (8)$$

where  $I$  is the identity matrix.

$\mathcal{H}_\infty$  methods are used to synthesize  $\mathcal{H}_\infty$ -optimal controllers for feedback systems.  $\mathcal{H}_\infty$ -optimal controller are stabilizing regulator that minimizes the  $\mathcal{H}_\infty$  norm of the close-loop transfer function  $\mathbf{G}(s; \mathbf{K}(s))$ . So, the  $\mathcal{H}_\infty$  optimal controller can be seen as

$$\mathbf{K}_\infty(s) = \arg \min_{\mathbf{K}(s) \in \mathcal{K}} \|\mathbf{G}(s; \mathbf{K}(s))\|_\infty, \quad (9)$$

where  $\mathcal{K}$  is the set of all controllers such that the closed-loop transfer function is stable and  $\|\cdot\|_\infty$  denotes the  $\mathcal{H}_\infty$  norm of a transfer function. The  $\mathcal{H}_\infty$  norm is defined as

$$\|\mathbf{G}(s; \mathbf{K}(s))\|_\infty = \sup_{\omega} \bar{\sigma}(\mathbf{G}(j\omega; \mathbf{K}(s))), \quad (10)$$

where  $\omega$  is the angular frequency,  $j$  is the imaginary number, and  $\bar{\sigma}(\cdot)$  denotes the maximum singular value.

There are a few ways to approach  $\mathcal{H}_\infty$ -optimal controller, including Riccati-based methods [30] and LMI-based (linear matrix inequality) methods [31]. In this work, the  $\mathcal{H}_\infty$  problems are solved using  $\mathcal{H}_\infty$  synthesis function `control.hinfscn()` in the Python Control Systems library `control` [32]. This function is a Python wrapper for SLICOT [33] Fortran subroutine SB10AD, which is a function that computes  $\mathcal{H}_\infty$  optimal controller using a modified version of the Riccati-based method [34]. The complementary filter synthesis method is also made available with an open-source Python package called `Kontrol` [35].

### C. Complementary Filter Problem as an $\mathcal{H}_\infty$ Synthesis Problem

Consider a two sensors configuration shown in Fig. 2. Two sensors are reading the same signal  $X(s)$  but with different sensing noises, i.e.  $N_1(s)$  and  $N_2(s)$ . The two sensor readouts are filtered by complementary filters  $H_1(s)$  and  $H_2(s)$ , respectively. The filtered signals are summed eventually to become a super sensor which has the noise term

$$N_{\text{super}}(s) = H_1(s)N_1(s) + H_2(s)N_2(s), \quad (11)$$

where  $N_{\text{super}}(s)$  is the sensing noise of the super sensor.

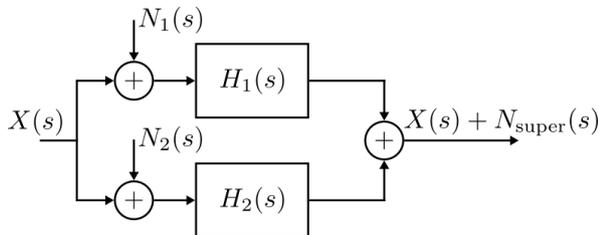


FIG. 2. Block diagram of a two-sensor complementary filter configuration.

To convert the complementary filter synthesis problem to an  $\mathcal{H}_\infty$  problem, it has to be expressed with the generalized plant representation as shown in Fig. 1. The generalized plant representation of a two-sensor complementary filter configuration is shown in Fig. 3.

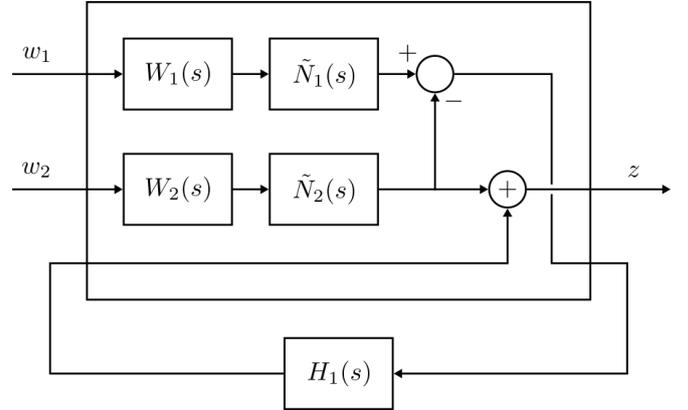


FIG. 3. Complementary filter configuration augmented as a generalized plant.

The exogenous inputs  $w = (w_1, w_2)^T$  in Fig. 3 are arbitrary Gaussian processes that have flat unitary amplitude spectral density.  $\tilde{N}_1(s)$  and  $\tilde{N}_2(s)$  are transfer functions used to model the sensor noises  $N_1(s)$  and  $N_2(s)$  respectively. The amplitude spectral densities of  $\tilde{N}_1(s)$  and  $\tilde{N}_2(s)$  are represented by the magnitude of these transfer functions, i.e.

$$N_1^{\text{ASD}}(\omega) = \left| \tilde{N}_1(j\omega) \right|, \quad (12a)$$

$$N_2^{\text{ASD}}(\omega) = \left| \tilde{N}_2(j\omega) \right|, \quad (12b)$$

where  $N_1^{\text{ASD}}(\omega)$  and  $N_2^{\text{ASD}}(\omega)$  are the amplitude spectral densities (ASDs) of the sensor noises  $N_1(s)$  and  $N_2(s)$ .  $W_1(s)$  and  $W_2(s)$  are pre-compensators, which can be shaped to specify the frequency-dependent specifications of the filtered sensor noises. Here, the regulator of the plant is  $H_1(s)$ , which is the complementary filter for filtering the sensor noise  $N_1(s)$ . The open-loop transfer matrix of the augmented plant is

$$\mathbf{P}(s) = \begin{bmatrix} 0 & \tilde{N}_1(s)W_1(s) & 1 \\ \tilde{N}_2(s)W_2(s) & -\tilde{N}_1(s)W_1(s) & 0 \end{bmatrix}. \quad (13)$$

And, the closed-loop transfer function matrix is

$$\mathbf{G}(s) = \begin{bmatrix} H_1(s)\tilde{N}_1(s)W_1(s) & (1 - H_1(s))\tilde{N}_2(s)W_2(s) \end{bmatrix}. \quad (14)$$

Consider the simplest case with  $W_1(s) = W_2(s) = 1$ , and noting that  $H_2(s) = 1 - H_1(s)$ , the output of the augmented plant in Fig. 3 has an amplitude spectral density equal to that of the super sensor noise in Eqn. (11). Using the plant with  $W_1(s) = W_2(s) = 1$  for  $\mathcal{H}_2$  synthesis will give complementary filters that minimize the expected root mean square (RMS) value of the sensor

noise. This application may not be particularly useful as the RMS of the sensor noise is usually dominated by the low-frequency intrinsic sensor noise of the inertial sensor. While this configuration can be useful for some applications, we're seeking for optimal complementary filters that can reduce both sensor noises at all frequencies.

One cost function that would be interesting in particular is

$$J(H_1(j\omega)) = \max_{\omega} (\log N_{\text{super}}^{\text{ASD}}(\omega; H_1(j\omega)) - \log N_{\text{min}}^{\text{ASD}}(\omega)), \quad (15)$$

where  $N_{\text{super}}^{\text{ASD}}(\omega; H_1(s))$  is the ASD of the super sensor noise and  $N_{\text{min}}^{\text{ASD}}(\omega)$  is the ASD of the lower bound of the super sensor noise, defined as

$$N_{\text{min}}^{\text{ASD}}(\omega) \equiv \min(N_1^{\text{ASD}}(\omega), N_2^{\text{ASD}}(\omega)). \quad (16)$$

Minimization of the cost function Eqn. (15) would give optimal complementary filters  $H_1(s)$  and  $H_2(s) \equiv 1 - H_1(s)$  that best suppress the super sensor noise equally close to the lower bound at all frequencies in logarithmic scale.

To convert this cost function to the objective of the  $\mathcal{H}_{\infty}$  problem, consider the frequency region where  $N_1^{\text{ASD}}(\omega) \gg N_2^{\text{ASD}}(\omega)$ . In this case, the super sensor noise in Eqn. (15) could be approximated by

$$N_{\text{super}}^{\text{ASD}}(\omega) \approx |H_1(j\omega)| |\tilde{N}_1(j\omega)|, \quad (17)$$

and the lower bound of the sensor noise is

$$N_{\text{min}}^{\text{ASD}}(\omega) = |\tilde{N}_2(j\omega)|. \quad (18)$$

Substituting Eqn. (17) and Eqn. (18) into Eqn. (15), we get

$$J(H_1(s)) \approx \max_{\omega} \left( \log \frac{|H_1(j\omega)| |\tilde{N}_1(j\omega)|}{|\tilde{N}_2(j\omega)|} \right). \quad (19)$$

Minimizing this is equivalent to minimizing a similar cost function without the logarithm, i.e.

$$J'(H_1(j\omega)) = \max_{\omega} \left( \frac{|H_1(j\omega)| |\tilde{N}_1(j\omega)|}{|\tilde{N}_2(j\omega)|} \right). \quad (20)$$

Now, let's find pre-compensators  $W_1(s)$  and  $W_2(s)$  such that the  $\mathcal{H}_{\infty}$  synthesis applied on the generalized in Fig. 3 is equivalent as to minimizing the cost function (20). Assuming that  $W_1(s)$  and  $W_2(s)$  are set such that the magnitude of the first term in Eqn. (14) is much greater than the second term, the  $\mathcal{H}_{\infty}$  norm of the closed-loop transfer function  $\mathbf{G}(s)$  could be approximated as

$$\|\mathbf{G}(s)\|_{\infty} \approx \max_{\omega} \left( |H_1(j\omega)| |\tilde{N}_1(j\omega)| |W_1(j\omega)| \right). \quad (21)$$

Comparing Eqn. (20) and Eqn. (21), it's obvious that if  $W_1(s) = \frac{1}{N_2(s)}$ , the two cost functions become equivalent

to each other. A similar argument can be made for the case  $N_2^{\text{ASD}}(\omega) \gg N_1^{\text{ASD}}(\omega)$ , which gives  $W_2(s) = \frac{1}{N_1(s)}$ . Therefore, by setting the weighting functions  $W_1(s) = \frac{1}{N_2(s)}$  and  $W_2(s) = \frac{1}{N_1(s)}$ , the  $\mathcal{H}_{\infty}$  norm of the plant in Fig. 3 is approximately equal to maximum difference between the ASD of the super sensor noise and its lower bound, as described by Eqn. (15). It follows that  $\mathcal{H}_{\infty}$  synthesis will give an optimal filter  $H_1(s)$  while its complementary filter can be obtained from the complementary condition, i.e.  $H_2(s) \equiv 1 - H_1(s)$ .

There's another simpler explanation behind these weighting functions  $W_1(s) = \frac{1}{N_2(s)}$  and  $W_2(s) = \frac{1}{N_1(s)}$ . The weighting functions  $W_1(s)$  and  $W_2(s)$  can be thought as inverse frequency-dependent specification of the sensor noises  $N_1(s)$  and  $N_2(s)$ , respectively [28]. When  $|N_1(j\omega)| > |N_2(j\omega)|$ , the target specification for  $N_1(s)$  is  $N_2(s)$  but not lower. Any specification lower than that would be over-compensating and hence suboptimal. Again, the same argument can be made for  $N_2(s)$ . And, it follows that the weighting functions should be set as  $W_1(s) = \frac{1}{N_2(s)}$  and  $W_2(s) = \frac{1}{N_1(s)}$ , if there's no specific requirements for the sensor noises.

#### D. Sensor Noise Modeling

To fully specify the generalized plant for a complementary filter sensor fusion configuration shown in Fig. 3,  $\tilde{N}_1(s)$  and  $\tilde{N}_2(s)$  must be defined. They are the transfer function models whose norms are shaped to fit the amplitude spectral densities of the sensor noises  $N_1^{\text{ASD}}(\omega)$  and  $N_2^{\text{ASD}}(\omega)$ , as in Eqn. (12a). This problem can be as simple as a curve fitting problem but with one caveat. That is, the transfer function models must be stable, minimum-phase, and proper transfer functions as their inverse will be invoked. This restricts the transfer function models to acquire the same number of zeros and poles, all with negative real parts. Also, they should have flat responses at very low and very high frequencies. This shouldn't be a problem so long as the features of the sensor noises are modeled within a frequency of interest.

There are a few ways to model noise spectral densities but this is not the main purpose of this paper. For the completeness of the complementary filter method, a simple method is provided to model the sensor noises. But, readers are free to model the sensor noises using their own method as long as the method results in transfer function models with norms that fit well with the amplitude spectral densities of the sensor noises in question. Also note that, as is the case for any  $\mathcal{H}_{\infty}$  problems, the solution to the  $\mathcal{H}_{\infty}$  synthesis problem is only optimal relative to the cost function specified. This means that the complementary filters synthesized this way will be optimal relative to the modeled sensor noises, but not necessarily the real sensor noises.

We begin with a generic polynomial transfer function

model

$$F(s; a_i, b_i) = \frac{\sum_{i=0}^n b_i s^i}{\sum_{i=0}^n a_i s^i}, \quad (22)$$

where  $a_i$  and  $b_i$  are the coefficients of the polynomial and  $n$  is the order of the transfer function. The goal is to find optimal parameters that minimizes a cost function

$$J_{\text{noise}}(a_i, b_i) = \sum_{m=1}^M (\log |F(j\omega_m; a_i, b_i)| - \log N(\omega_m))^2, \quad (23)$$

where  $m = 1, 2, 3, \dots, M$ ,  $M$  is the number of data points,  $\omega_m$  are the frequency values of the sensor noise data, and  $N(\omega_m)$  is the ASD of the sensor noise. As is mentioned, the transfer function models need to have flat responses at very low and very high frequencies. It's useful to pad the data with flat lines below and above the measurement frequencies.

To minimize the cost function in Eqn. (23), local minimization methods are recommended because the parameters  $a_i$  and  $b_i$  are usually not well bounded. For the same reason, it's recommended to replace  $a_i$  and  $b_i$  with  $10^{\log a_i}$  and  $10^{\log b_i}$  in Eqn. (22) and optimize  $\log a_i$  and  $\log b_i$  instead, as the parameters could vary with large orders of magnitude. Local minimization methods, such as the Nelder-Mead method [36] and Powell's method [37], require initial specifications of the parameters, which can be hard to obtain.

As an intermediate step, consider a zero-pole-gain (ZPK) model

$$F_{\text{ZPK}}(s; z_i, p_i, k) = k \frac{\prod_{i=1}^n s - z_i}{\prod_{i=1}^n s - p_i}, \quad (24)$$

where  $z_i$  and  $p_i$  are negative real-valued zeros and poles of the transfer function, and  $k$  is the gain of the transfer function. These zeros and poles are corner-frequencies where the amplitude frequency response changes slope by 20 decibels per decade. They can be easily added and tuned manually to lay out the general shape of the model that fits the sensor noise data. Alternatively, it's possible to replace  $F(s; a_i, b_i)$  in Eqn. (23) with the ZPK model  $F_{\text{ZPK}}(s; z_i, p_i, k)$  and use global optimization methods, such as differential evolution [38], to find the zeros and poles. This is possible since the zeros and poles are expected to be bounded within frequency space of the measured sensor noise data. Again, it's recommended to fit  $\log z_i$  and  $\log p_i$  instead due to their large dynamic range. After obtaining a ZPK model, it can be expanded to the polynomial form to obtain the initial coefficients for the transfer function model Eqn. (22) used for the local minimization of Eqn. (23). At last, all non-negative real parts of the zeros and poles must be negated to obtain the final stable, minimum-phase, proper transfer function that fits the ASD of the sensor noise.

### III. RESULTS

In this section, the proposed  $\mathcal{H}_\infty$  method is used to synthesize three different pairs of sensors. The sensors to be considered are linear variable differential transformers (LVDTs) and geophones, which are commonly used in active isolation systems in current gravitational-wave detectors. The three pairs of sensors are

1. LVDT and geophone with sensor noises estimated from Ref. [23].
2. LVDT coupled with seismic noise, and geophone with noises estimated from Ref. [23].
3. Hypothetical LVDT-like and geophone-like sensors.

#### A. Sensor Fusion of a Relative Displacement Sensor and an Inertial Sensor

In this section, the proposed method will be demonstrated by synthesizing complementary filters for blending an LVDT and a geophone, referred to as sensor 1 and sensor 2, respectively. The sensors noises are taken from Figure 5.8 in Ref. [23], and can be well described by Eqn. (25).

$$N^{\text{ASD}}(f; n_a, n_b, a, b) = \left[ \left( \frac{n_a}{f^a} \right)^2 + \left( \frac{n_b}{f^b} \right)^2 \right]^{\frac{1}{2}} \frac{\mu\text{m}}{\sqrt{\text{Hz}}}, \quad (25)$$

where  $f$  is frequency in Hz,  $n_a$ ,  $n_b$ ,  $a$ , and  $b$  are some parameters of the model. For demonstration, the parameters are chosen by a graphical estimation from a figure shown in Ref. [23]. The parameters for the two sensors are summarized in table. I.

Sensor	$n_a$	$n_b$	$a$	$b$
LVDT	$10^{-2.07}$	$10^{-2.3}$	0.5	0
Geophone	$10^{-5.46}$	$10^{-5.23}$	3.5	1

TABLE I. LVDT and geophone intrinsic noise parameters.

The amplitude spectral densities of the sensor noises and their transfer function models are shown in Fig. 4. In this case, sensor noise 1 is fitted with a 3<sup>rd</sup>-order transfer function while sensor noise 2 is fitted with a 4<sup>th</sup>-order one. As shown in Fig. 4, the amplitude responses of the transfer functions fit well to the ASD of the sensor noises.

The transfer functions are used to synthesize complementary filters according to the proposed method. The complementary filters synthesized using  $\mathcal{H}_\infty$  method are shown in Fig. 5. Using the synthesized filters  $H_1(s)$  and  $H_2(s) \equiv 1 - H_1(s)$ , the amplitude spectral density of super sensor noise is predicted by

$$N_{\text{super}}^{\text{ASD}}(\omega) = \left[ |H_1(j\omega)N_1^{\text{ASD}}(\omega)|^2 + |H_2(j\omega)N_2^{\text{ASD}}(\omega)|^2 \right]^{\frac{1}{2}}. \quad (26)$$

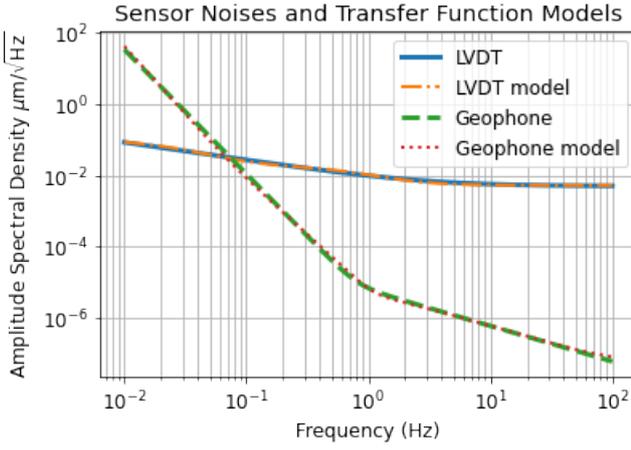


FIG. 4. Amplitude spectral densities of the sensor noises and the transfer function models. Blue solid: LVDT intrinsic noise. Yellow dash-dot: transfer function model of the LVDT noise. Green dashed: geophone intrinsic noise. Red dotted: transfer function model of geophone noise.

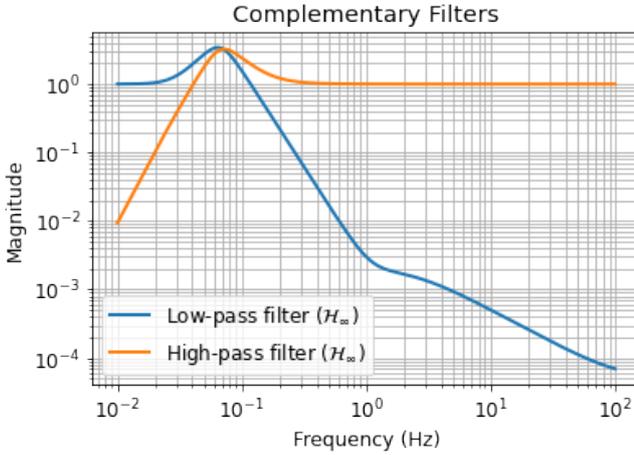


FIG. 5. Complementary filters. Blue: low-pass filter for LVDT. Yellow: high-pass filter for geophone.

The predicted ASD of the super sensor noise is shown in Fig. 6. As can be seen, the super sensor noise is equally close to the lower bound in logarithmic sense at all frequencies, as expected.

### B. Sensor Fusion for a Seismic Noise-coupled Relative Displacement Sensor and an Inertial Sensor

In this section, the sensor fusion of a seismic-noise coupled displacement sensor (LVDT) and an inertial sensor (geophone) is demonstrated and compared. The complementary filters to be compared with are 7<sup>th</sup>-order filters with 4<sup>th</sup>-order roll-off pre-designed specifically to use with this sensor fusion configuration. The filters were chosen to suppress the inertial sensing noise, which has

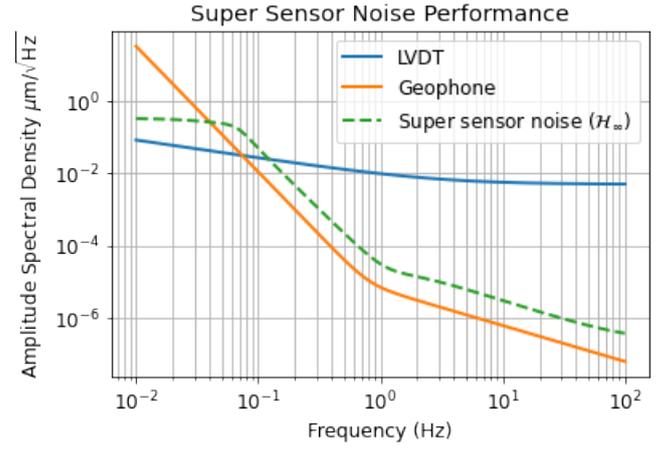


FIG. 6. Amplitude spectral densities of the sensor noises. Blue solid: LVDT. Yellow: geophone 2. Green dashed: predicted super sensor noise.

a frequency dependency of  $f^{-3.5}$  at low frequency [23]. There's only one design parameter for the pre-designed filter, that is, the blending frequency. The blending frequency in this case is chosen to be at the crossover frequency between the LVDT and geophone noise, as advised in Ref. [23].

Since LVDTs are relative displacement sensors, when used on the first stage of an active isolation platform, they are expected to be coupled with the seismic noise. Therefore, the sensor noise of the first sensor will be taken as the quadrature sum of the intrinsic LVDT noise and a pretended seismic noise that features a microseismic peak to demonstrate the adaptiveness of this method, which is a quality that pre-designed filter lacks. The ASD of the seismic noise has a peak of around  $1 \frac{\mu\text{m}}{\sqrt{\text{Hz}}}$  at around 0.1-0.3 Hz and is modeled as the amplitude response of the transfer function

$$F_{\text{seis}}(s) = \frac{k_{\text{seis}} s^2}{\left(\frac{1}{\omega_l} s + 1\right)^4 \left(\frac{1}{\omega_h} s + 1\right)^2} \prod_{i=1}^3 \frac{\frac{1}{\omega_i^2} s^2 + \frac{1}{\omega_i} s + 1}{\frac{1}{\omega_i^2} s^2 + \frac{1}{\omega_i q_i} s + 1}, \quad (27)$$

where  $k_{\text{seis}} = 5 \times 10^{-1}$ ,  $\omega_h = 0.1 \times 2\pi$ ,  $\omega_l = 0.3 \times 2\pi$ ,  $\omega_i = \{0.15 \times 2\pi, 0.2 \times 2\pi, 0.25 \times 2\pi\}$ , and  $q_1 = q_2 = q_3 = 3$ . The sensor noises and the transfer function models of this configuration are shown in Again, as shown in Fig. 7, the transfer function models fit well with the sensor noises without issue.

Fig. 8 shows the complementary filters for the seismic noise-coupled LVDT and the geophone sensors. The pre-designed complementary filters have a blending frequency of 74.3 mHz, which is the cross-over frequency of the LVDT and geophone intrinsic sensor noises. As can be seen, the low-pass filter (Blue solid) generated using the proposed  $\mathcal{H}_\infty$  method has a notch feature around 0.1-0.3 Hz, whereas this is missing from the pre-designed filter. The notches in the  $\mathcal{H}_\infty$  low-pass filter effectively filter out the microseism as seen in the LVDT noise in Fig. 7.

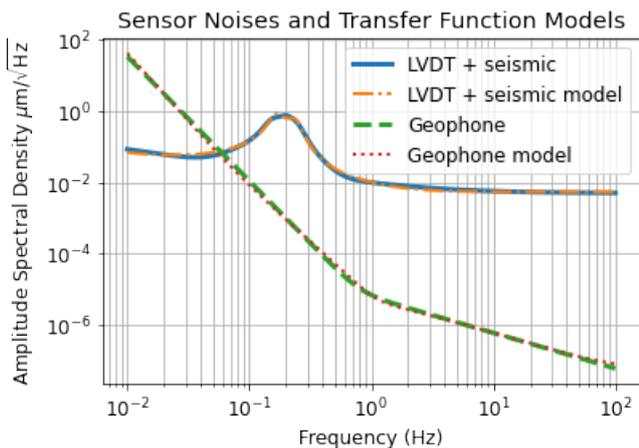


FIG. 7. Amplitude spectral densities of the sensor noises and the transfer function models. Blue solid: LVDT noise coupled with seismic noise featuring a microseismic peak. Yellow dash-dot: the transfer function model of the seismic-noise coupled LVDT sensor noise. Green dashed: geophone. Red dotted: transfer function model of geophone noise.

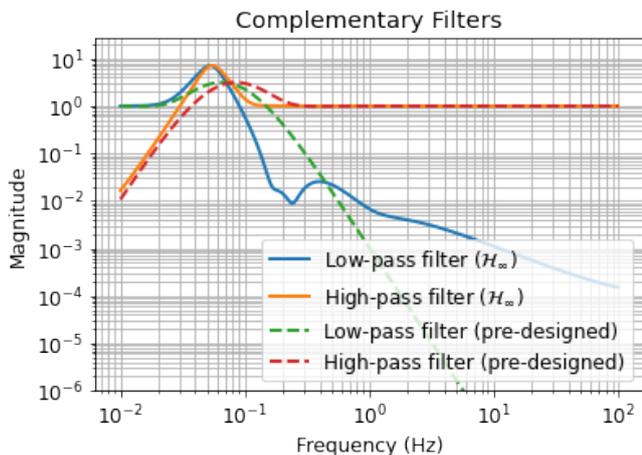


FIG. 8. Complementary filters. Blue solid: low-pass filter for seismic noise-coupled LVDT, synthesized using  $\mathcal{H}_\infty$  method. Yellow solid: high-pass filter for geophone, synthesized using  $\mathcal{H}_\infty$  method. Green dashed: pre-designed low-pass filter for the seismic noise-coupled LVDT. Red dashed: pre-designed high-pass filter for the geophone.

This is a feature that naturally arose from  $\mathcal{H}_\infty$  synthesis, which is different from artificially added ones like that from Refs. [10, 25]. The  $\mathcal{H}_\infty$  filters also have a high noise amplification around the blending frequency. This can be seen as a cost for the additional notches attenuating the seismic noise.

Fig. 9 shows the predicted noise performances of the super sensors. As can be seen, the super sensor using  $\mathcal{H}_\infty$ -optimal filters has an amplitude spectral density close to the lower bound at all frequencies, including the frequency range of the seismic noise peak. The pre-

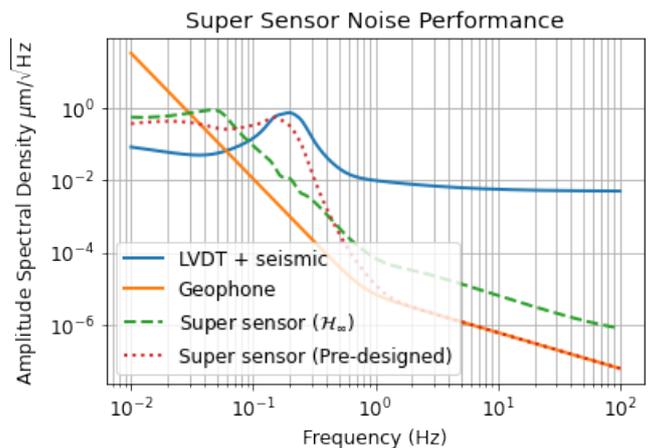


FIG. 9. Sensor sensor noise. Green dashed: super sensor with  $\mathcal{H}_\infty$ -optimal complementary filters. Red dotted: super sensor with pre-designed complementary filters.

designed filters don't filter the seismic noise at 0.1-0.3 Hz and this means that they cannot be used for active isolation of seismic noise.

As mentioned in Sec. II, if the RMS value of the super sensor noise were to be minimized,  $\mathcal{H}_2$  synthesis would be used instead of  $\mathcal{H}_\infty$  synthesis. But, this does not necessarily mean that the  $\mathcal{H}_\infty$  filters would give unreasonable RMS values, despite the  $\mathcal{H}_\infty$  synthesis minimizes a weighted  $\mathcal{H}_\infty$  norm. The noises of the super sensors have RMS values of  $0.01137 \mu\text{m}$  and  $0.01176 \mu\text{m}$  for the  $\mathcal{H}_\infty$  case and the pre-designed case, respectively. There's no significant difference between the two sets of complementary filters in this case, given that the pre-designed filter was chosen for this exact scenario.

### C. Sensor Fusion of Hypothetical Relative Displacement Sensor and Inertial Sensors

In this section, the parameters of the LVDT and geophone sensor noises as shown in table. I are modified slightly to mimic a change in environment, e.g. using different types of sensors in a new gravitational-wave detector. The hypothetical sensor noises are modeled by Eqn. (25) and the modified parameters are shown in table. II. The main highlight of the modifications would be the frequency dependencies,  $a$ .

Sensor	$n_a$	$n_b$	$a$	$b$
Sensor 1	$10^{-2.07}$	$10^{-2.3}$	1	0
Sensor 2	$10^{-3}$	$10^{-5.23}$	2	1

TABLE II. Hypothetical sensor noise parameters.

Fig. 10 shows the amplitude spectral densities of the hypothetical sensor noises.

Complementary filters were synthesized using the pro-

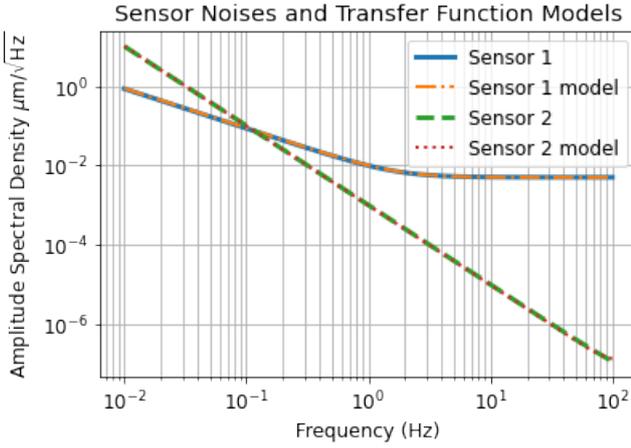


FIG. 10. Sensor noise. Blue solid: sensor 1. Yellow dash-dot: transfer function model of sensor 1 noise. Green dashed: sensor 2. Red dotted: transfer function model of sensor 2.

posed  $\mathcal{H}_\infty$  method and they are shown in Fig. 11 together with the pre-defined filters. The pre-designed filters have the same shape as those in Fig. 8 but with a new blending frequency at 117 mHz, i.e. where the two sensor noises meet. As shown in the figure, the  $\mathcal{H}_\infty$ -optimal filters have

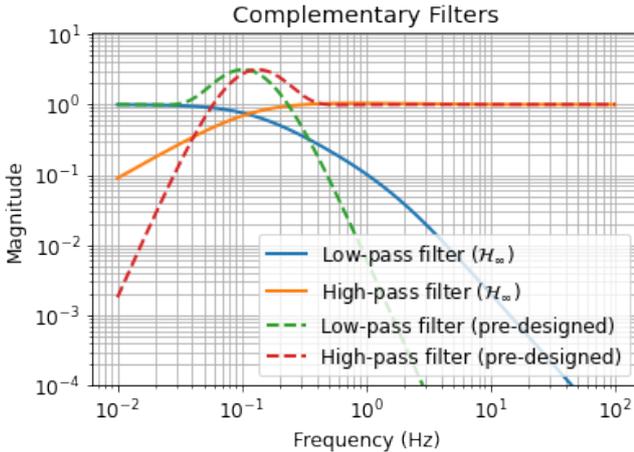


FIG. 11. Complementary filters. Blue solid: low-pass filter for sensor 1, synthesized using  $\mathcal{H}_\infty$  method. Yellow solid: high-pass filter for sensor 2, synthesized using  $\mathcal{H}_\infty$  method. Green dashed: pre-designed low-pass filter. Red dashed: pre-designed high-pass filter.

a milder roll-off and with no noise amplification around the blending frequency.

The predicted noise performances of the super sensors are shown in Fig. 12. As can be seen, the super sensor fused with  $\mathcal{H}_\infty$ -optimal filter has sensor noise almost indistinguishable from the lower bound at all frequencies. Meanwhile, the super sensor fused with the pre-designed filter has a noise peaked at around the blending frequency, making it relatively unsuitable for this particular sensor configuration. The RMS values for the two

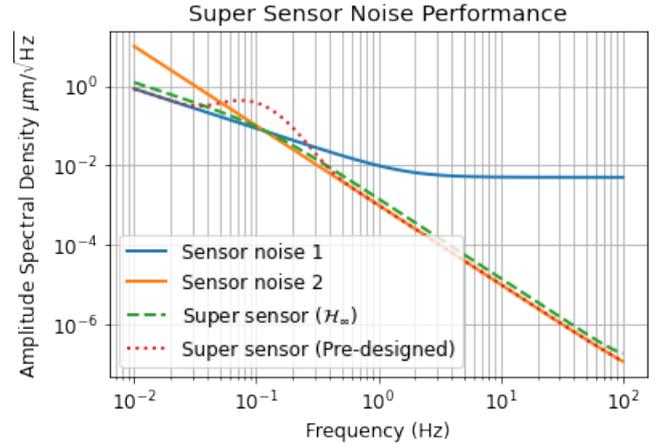


FIG. 12. Sensor sensor noise. Green dashed: super sensor with  $\mathcal{H}_\infty$ -optimal complementary filters. Red dotted: super sensor with pre-designed complementary filters.

super sensor noises are  $0.0075 \mu\text{m}$  and  $0.0093 \mu\text{m}$  for the  $\mathcal{H}_\infty$  case and the pre-designed case, respectively. As is expected, the complementary filters generated from  $\mathcal{H}_\infty$  optimization resulted in a significant RMS noise reduction compared to that of the pre-designed ones, which is clearly not optimized for this configuration. This shows the universality of this method.

#### IV. DISCUSSIONS

Using the proposed method, it is possible to synthesize optimal complementary filters that best suppress the super sensor noise equally close to the lower bound at all frequencies in logarithmic scale. Unlike pre-designed filters, the method allows one to make complementary filters that work with any arbitrary sensor, as long as the sensor noise can be modeled. Optimal complementary filters can be generated from only the sensor noises themselves. In all the results shown, the complementary filters generated from  $\mathcal{H}_\infty$  performed similarly in noise performance, if not better, compared to the pre-designed ones.

The method is able to produce complementary filters with special features, such as notches, to cope with the noise characteristics in sensors. In a conventional filter shaping process, these special features would need to be added manually by experienced control engineers simply using heuristics. This would make the filters arguably suboptimal, and most importantly, not reproducible. But, with the proposed method, the features automatically appear in a natural way as a result of optimization. None or little human intervention is required in the whole synthesis process. Also because of this, this opens up the possibility of rolling-update of control filters where filters are synthesized automatically in real-time according to changes in the environment, e.g. changes in

seismic noise.

The proposed  $\mathcal{H}_\infty$  method complements some existing control strategies in active isolation systems in current gravitational-wave detectors. A control strategy was used in LIGO called “earthquake mode” where a pre-designed filter is swapped with another one when there’s an earthquake [13, 22]. These filters were made without any information of the upcoming earthquake or seismic noise, which means the filters could again be suboptimal. But with the proposed method, the filters can be synthesized in real-time, making the active isolation truly adaptive to the environment and ultimately increasing the duty cycle of the detector.

In an active isolation system, there are many digital filters other than complementary filters that affect the performances of the active isolation system. Some examples would be sensor correction filter, seismometer feedforward filter, and feedback controller, which are all used in LIGO [10]. Sensor correction filter is a filter used in LIGO that applies on a seismometer, which is used to remove seismic noise coupling from relative displacement sensors, making them available for seismic isolation via feedback control. Seismometer feedforward filter is a similar filter but is used for cancellation of the seismic noise by feeding seismometer signal to actuators. Feedback controllers are digital filters that convert sensing signals to actuation signals to achieve feedback control, which minimizes the displacement level of a controlled platform to achieve active isolation. While not shown in this paper, we claim that all of these filter design problems can be seen as a complementary filter design problem because they are all two-quantity trade-off problems. So, they can all be solved using the method provided for synthesizing complementary filters. These problems will be solved and demonstrated in future work.

Although it is shown that optimal complementary filters can be synthesized for a sensor fusion configuration with 2 sensors, active isolation systems can utilize even

more sensors. For example, some active isolation platforms in LIGO are equipped with relative displacement sensors, geophones, and seismometers [10]. This requires a low-pass filter, a band-pass filter, and a high-pass filter for sensor fusion of these three sensors. Although it was shown that  $\mathcal{H}_\infty$  methods can be used for synthesizing complementary filters for any arbitrary number of sensors if frequency-dependent specifications are given [28], the minimization of super sensor noise in a 3-sensor configuration was not. Therefore, it remains as a future work and will be studied as an extension of this paper.

## V. CONCLUSION

Sensor fusion is a technique that combines multiple sensors into one super sensor that has better noise performance. Complementary filters are used for sensor fusion in active isolation systems in gravitational-wave detectors. While conventional designs of complementary filters can be suboptimal and irreproducible, a method is proposed to synthesize complementary filters in the  $\mathcal{H}_\infty$ -optimal sense. The generated complementary filters minimize the noise of the super sensor at all frequencies, making it equally close to the lower bound at all frequencies in the logarithmic sense. The proposed method only uses information of the sensor noise and requires minimal human intervention. The effectiveness of the synthesis was demonstrated in sensor fusion application using typical noises of sensors used in current gravitational wave detectors. It was shown that the method gives complementary filters that perform better than a pre-designed one and necessary features in the filters, such as notches, can be generated naturally as a result of optimization. It was shown that pre-designed filters cannot be reused in a new environment while this method adapts and makes new complementary filters that are optimized for the new environment.

- 
- [1] J. Aasi et al. Advanced LIGO. *Classical and Quantum Gravity*.
  - [2] F Acernese et al. Advanced virgo: a second-generation interferometric gravitational wave detector. *Classical and Quantum Gravity*, 32(2):024001, dec 2014.
  - [3] T Akutsu et al. Construction of KAGRA: an underground gravitational-wave observatory. *Progress of Theoretical and Experimental Physics*, 2018(1), 01 2018. 013F01.
  - [4] T Akutsu et al. First cryogenic test operation of underground km-scale gravitational-wave observatory KAGRA. *Classical and Quantum Gravity*, 36(16):165008, jul 2019.
  - [5] N Robertson, Cagnoli Gianpietro, D Crooks, E Elliffe, J. Faller, P Fritschel, S Goßler, A Grant, A Heptonstall, James Hough, Harald Lück, R Mittleman, Michael Perreur-Lloyd, M Plissi, S Rowan, David Shoemaker, P Sneddon, K Strain, C Torrie, and P Willems. Quadruple suspension design for advanced ligo. *Classical and Quantum Gravity*, 19:4043, 07 2002.
  - [6] S M Aston, M A Barton, A S Bell, N Beveridge, B Bland, A J Brummitt, G Cagnoli, C A Cantley, L Carbone, A V Cumming, L Cunningham, R M Cutler, R J S Greenhalgh, G D Hammond, K Haughian, T M Hayler, A Heptonstall, J Heefner, D Hoyland, J Hough, R Jones, J S Kissel, R Kumar, N A Lockerbie, D Lodhia, I W Martin, P G Murray, J O’Dell, M V Plissi, S Reid, J Romie, N A Robertson, S Rowan, B Shapiro, C C Speake, K A Strain, K V Tokmakov, C Torrie, A A van Veggel, A Vecchio, and I Wilmut. Update on quadruple suspension design for advanced LIGO. 29(23):235004, oct 2012.
  - [7] S. Braccini, C. Casciano, V. Dattilo, F. Frasconi, A. Gaddi, A. Giazotto, G. Losurdo, R. Passaquieti, P. Ruggi, and A. Vicere. Performances Of The R&D Super-attenuator (SA) Chain Of The VIRGO Experiment. In *34th Rencontres de Moriond: Gravitational*

- Waves and Experimental Gravity*, pages 189–198, Hanoi, 2000. The Gioi world Publishers.
- [8] Y. Akiyama et al. Vibration isolation system with a compact damping system for power recycling mirrors of KAGRA. *Class. Quant. Grav.*, 36(9):095015, 2019.
- [9] T Akutsu et al. Vibration isolation systems for the beam splitter and signal recycling mirrors of the KAGRA gravitational wave detector. 38(6):065011, mar 2021.
- [10] F. Matichard et al. Seismic isolation of Advanced LIGO: Review of strategy, instrumentation and performance. *Class. Quant. Grav.*, 32(18):185003, 2015.
- [11] Fabrice Ardhuin and Lucia Gualtieri. How ocean waves rock the Earth: Two mechanisms explain microseisms with periods 3 to 300 s. *Geophysical Research Letters*, 42, 01 2015.
- [12] Shinji Miyoki. Current status of KAGRA. In *Ground-based and Airborne Telescopes VIII*, volume 11445, pages 192–204. SPIE, December 2020. <https://www.spiedigitallibrary.org/conference-proceedings-of-spie/11445/114450Z/Current-status-of-KAGRA/10.1117/12.2560824.full> ; <https://ui.adsabs.harvard.edu/abs/2020SPIE11445E..0ZM/abstract>.
- [13] E. Schwartz et al. Improving the robustness of the advanced LIGO detectors to earthquakes. *Class. Quant. Grav.*, 37(23):235007, 2020.
- [14] N. Azaryan, Julian Budagov, V. Glagolev, M. Lyablin, Andrei Pluzhnikov, A. Seletsky, G. Trubnikova, Beniamino Di Girolamo, Jean-Christophe Gayde, and D. Mergelkuhlb. Professional Precision Laser Inclinometer: the Noises Origin and Signal Processing. *Physics of Particles and Nuclei Letters*, 16:264–276, 05 2019.
- [15] S J Cooper, C J Collins, A C Green, D Hoyland, C C Speake, A Freise, and C M Mow-Lowry. A compact, large-range interferometer for precision measurement and inertial sensing. 35(9):095007, mar 2018.
- [16] C M Mow-Lowry and D Martynov. A 6D interferometric inertial isolation system. 36(24):245006, nov 2019.
- [17] Patrick Y. C. Hwang Robert Grover Brown. *Introduction to Random Signals and Applied Kalman Filtering with Matlab Exercises*. Wiley, 4 edition, 2012.
- [18] R. G. Brown. Integrated navigation systems and kalman filtering: a perspective. *Navigation*, 19(4):355–362, 1972.
- [19] A. R. Plummer. Optimal complementary filters and their application in motion measurement. *Proceedings of the Institution of Mechanical Engineers, Part I: Journal of Systems and Control Engineering*, 220(6):489–507, 2006.
- [20] Wensheng Hua. *Low frequency vibration isolation and alignment system for advanced LIGO*. PhD thesis, stanford university, 2005.
- [21] Wensheng Hua, Dan B. Debra, Corwin T. Hardham, Brian T. Lantz, and Joseph A. Giaime. Polyphase FIR Complementary Filters for Control Systems. In *Proceedings of ASPE Spring Topical Meeting on Control of Precision Systems*, pages 109–114, 2004.
- [22] Sebastien Biscans, Jim Warner, Richard Mittleman, Christopher Buchanan, Michael Coughlin, Matthew Evans, Hunter Gabbard, Jan Harms, Brian Lantz, Nikhil Mukund Menon, Arnaud Pele, Charles Pezerat, Pascal Picart, Hugh Radkins, and Thomas Shaffer. Control strategy to limit duty cycle impact of earthquakes on the ligo gravitational-wave detectors. *Classical and Quantum Gravity*, 35, 07 2017.
- [23] Takaori Sekiguchi. *A Study of Low Frequency Vibration Isolation System for Large Scale Gravitational Wave Detectors*. PhD thesis, Tokyo U., 2016.
- [24] Joris van Heijningen. *Turn up the bass!: Low-frequency performance improvement of seismic attenuation systems and vibration sensors for next generation gravitational wave detectors*. PhD thesis, 2018.
- [25] Lucia Trozzo. *Low Frequency Optimization and Performance of Advanced Virgo Seismic Isolation System*. PhD thesis, 2018.
- [26] Yoshinori Fujii. *Fast localization of coalescing binaries with gravitational wave detectors and low frequency vibration isolation for KAGRA*. PhD thesis, 2019.
- [27] ET Editorial Team. Design report update 2020 for the einstein telescope. ET Docs: ET-0007B-20. Available at <https://apps.et-gw.eu/tds/?content=3&r=17245>.
- [28] Thomas Dehaeze, Mohit Vermat, and Collette Christophe. Complementary filters shaping using  $\mathcal{H}_\infty$  synthesis. In *7th International Conference on Control, Mechatronics and Automation (ICCMA)*, pages 459–464, 2019.
- [29] G. Zames. Feedback and optimal sensitivity: Model reference transformations, multiplicative seminorms, and approximate inverses. *IEEE Transactions on Automatic Control*, 26(2):301–320, 1981.
- [30] Keith Glover and John C. Doyle. State-space formulae for all stabilizing controllers that satisfy and  $H_\infty$  norm bound and relations to risk sensitivity. *Systems & Control Letters*, 11:167–172, 1988.
- [31] Andy Packard, Kemin Zhou, Pradeep Pandey, Jorn Leonhardson, and Gary Balas. Optimal, constant I/O similarity scaling for full-information and state-feedback control problems. *Systems & Control Letters*, 19(4):271–280, 1992.
- [32] Python Control Systems Library. <http://python-control.org>.
- [33] Peter Benner, Volker Mehrmann, Vasile Sima, Sabine Van Huffel, and Andras Varga. *SLICOT—A Subroutine Library in Systems and Control Theory*, pages 499–539. Birkhäuser Boston, Boston, MA, 1999.
- [34] Petko Petkov, Da-Wei Gu, and M.M. Konstantinov. Fortran 77 Routines for  $H_\infty$  and  $H_2$  Design of Discrete-Time Linear Control Systems. 06 1999.
- [35] Kontrol. [kontrol.readthedocs.io](http://kontrol.readthedocs.io).
- [36] J. A. Nelder and R. Mead. A Simplex Method for Function Minimization. *The Computer Journal*, 7(4):308–313, 01 1965.
- [37] M. J. D. Powell. An efficient method for finding the minimum of a function of several variables without calculating derivatives. *The Computer Journal*, 7(2):155–162, 01 1964.
- [38] R. Storn and K. Price. Differential Evolution – A Simple and Efficient Heuristic for global Optimization over Continuous Spaces. *Journal of Global Optimization*, 11:341–359, 12 1997.