

Aluminum air bridges for superconducting quantum devices realized using a single step electron-beam lithography process

N. Janzen,^{1, a)} M. Kononenko,¹ S. Ren,¹ and A. Lupascu^{1, b)}

Institute for Quantum Computing, Department of Physics and Astronomy, and Waterloo Institute for Nanotechnology, University of Waterloo, Waterloo, ON, Canada N2L 3G1

(Dated: 22 June 2022)

In superconducting quantum devices, air bridges enable increased circuit complexity and density as well as mitigate the risk of microwave loss arising from mode mixing. We implement aluminum air bridges using a simple process based on single-step electron-beam gradient exposure. The resulting bridges have sizes ranging from 20 μm to 100 μm , with a yield exceeding 99 % for lengths up to 36 μm . When used to connect ground planes in coplanar waveguide resonators, the induced loss contributed to the system is negligible, corresponding to a reduction of the quality factor exceeding 1.0×10^8 per bridge. The bridge process is compatible with Josephson junctions and allows for the simultaneous creation of low loss bandages between superconducting layers.

Superconducting circuits have emerged as one of the primary candidates for the implementation of quantum computing^{1,2}. One of the primary advantages of superconducting circuits is the flexibility in design and scalability resulting from their realization as microfabricated circuits on a chip. As the complexity and scale of superconducting circuits increases, microfabrication methods that enable increased density and quantum coherence are essential. Relevant approaches for scalability include multi-chip fabrication³⁻⁶ and three dimensional wiring integration^{7,8}.

Air bridges are one of the most relevant components of high-complexity superconducting circuits. They enhance functionality by enabling increased circuit density and by enhancing coherence in distributed resonators and qubits by prevention of mode mixing^{9,10}. Several methods have been developed to date to implement air bridge crossovers for superconducting circuits. These processes are carried out using techniques including using a photo resist scaffold followed by etching of the excess aluminum to separate the bridge^{10,11}, employing resist stacks that use different resists to define both a scaffold as well as a resist window above the scaffold with an undercut for liftoff^{12,13}, and forming a dielectric scaffold that is etched after Al deposition¹⁴. In this paper, we present a method to fabricate aluminum air bridges that uses a simple single-step fabrication process that relies on gradient exposure electron-beam lithography (EBL). This process produces bridges with lengths ranging from 20 μm to 100 μm , with a yield exceeding 99 % for bridges of lengths up to 36 μm . We characterize coplanar waveguide resonators with integrated air bridges and find that negligible microwave loss is introduced when these bridges are used to connect ground planes. The process is compatible with fabrication of Josephson junctions for superconducting qubits and it has the additional desirable feature

that it allows for fabrication of bandage-style contacts between different superconducting layers¹⁵.

We start by first presenting the key elements of the process, shown schematically in Fig. 1(a). The starting configuration is a chip that contains the relevant metallic layers, suitably patterned, that require connection through air bridges. Next, a layer of electron-beam resist is spun, with a thickness corresponding to the target elevation of air bridges. A gradient exposure pattern using EBL, followed by development and reflow, is used to create a smooth resist profile. This forms the support of the bridge, with a sharp separation from the top surface of the unexposed resist. After evaporation of Al and liftoff of the resist, air bridges are formed, which connect relevant points of the metallic base circuit. We note that grayscale based exposure for formation of metallic air bridges were explored in previous work^{16,17}. Here we develop a single step air bridge process that is integrated into existing superconducting circuit processes.

Next, we discuss our complete fabrication process, which is formed of four main layers. The substrate is p-doped high-resistivity silicon (resistivity larger than 10 k Ω ·cm). *Layer 1 - alignment markers.* Alignment markers for subsequent lithography steps are defined using dry etching through an S1811 resist mask, patterned with optical lithography. *Layer 2 - base circuit layer.* The base circuit layer is used to define circuit components including ground planes, waveguides, and capacitor pads. It is made with negative lithography using a layer of ma-N 1410 resist with a thickness of 1275 nm, followed by evaporation of 100 nm of aluminum and liftoff in Remover PG. *Layer 3 - Josephson junctions.* Josephson junctions are generated by a standard double-angle evaporation process using a resist bi-layer consisting of 110 nm of PMMA 950K A3 on 410 nm of PMGI, followed by evaporating 40 nm and 70 nm of Al at $\pm 20^\circ$ respectively. *Layer 4 - air bridges.* Three layers of PMMA 950K A6 are spun at 1000 RPM onto the sample to create a 3 μm resist stack. Hard baking at 180 $^\circ\text{C}$ is performed for 1/1/3 min for each layer respectively. Grayscale EBL is performed using the dose map shown in Fig. 1(b) with

^{a)}Electronic mail: noah.janzen@uwaterloo.ca

^{b)}Electronic mail: alupascu@uwaterloo.ca

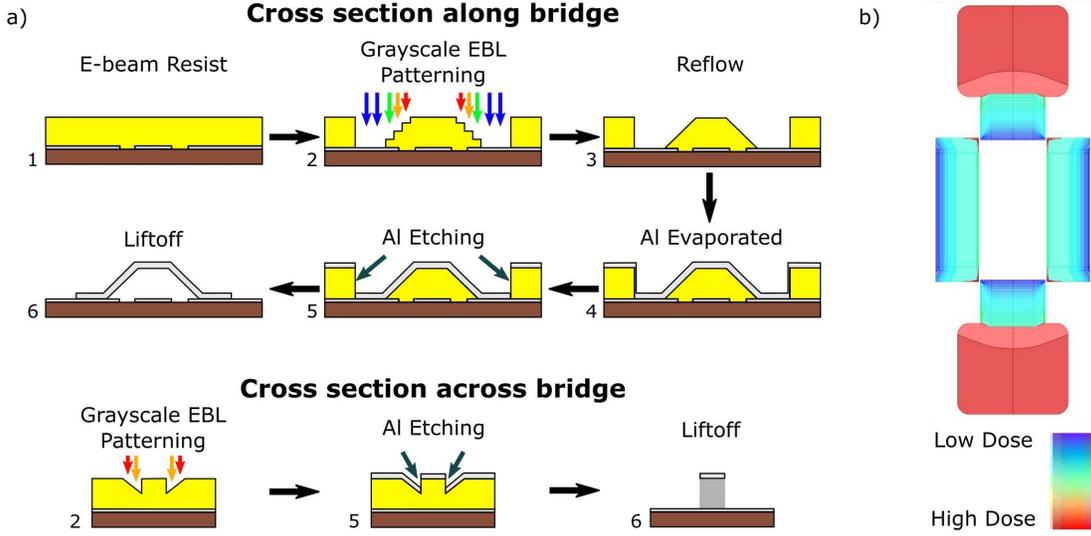


FIG. 1. a) The process key steps, showing cross sectional views along the bridge (top) and across the bridge (bottom). The step numbers in the two views correspond, with only a subset of the steps for the view across the bridge. The substrate, resist, and aluminum layers are shown in brown, yellow, and gray respectively. b) Dose pattern used to define gradient exposure for a suspended bridge.

a development in MIBK:IPA 3:1 solution for 180 s followed by selective reflow on a hotplate at 110°C for 5 min. Next, argon milling is used to etch the circuit aluminum layer to enable low-resistance contacts. A 450 nm thick layer of Al is evaporated onto the scaffold. The sample is etched for 80 s in Transene Al etchant Type A to improve bridge separation before lifting off the excess metal in Remover PG. In Fig. 2(a) a scanning electron microscope picture (SEM) of a typical bridge is shown.

In the course of process development, the optimization of some key parameters is essential for achieving a high process yield. Optimization of the bridge dose map, including consideration of proximity exposure effects, is critical to ensure flat bridge surfaces and create the necessary separation for liftoff. We use selective reflow¹⁸ to smooth the incline of the bridge to increase its strength. Selective reflow relies on the fact that partially exposed PMMA has a lower glass transition temperature than unexposed resist. Baking the sample at 110°C for 5 min allows the partially exposed PMMA at the bridge incline to reflow, while the unexposed sidewalls of the bridge pads remain vertical. Further, we include an Al etching step to remove any residual Al that builds up on the vertical sidewalls of the bridge profile during evaporation. While these build-ups are very thin and did not impact yield, a brief Al etching step removes these without any etching the previous metal layers.

The process can be used to produce bridges with lengths ranging from 20 μm to 100 μm . This flexibility is demonstrated in Fig. 2(b) which shows SEM images of bridges over a range of dimensions. In particular, we note that these bridges can be fabricated across coplanar waveguide resonator with signal line width of 16 μm and signal ground plane gaps of 8 μm , as shown in Fig. 2 (c),

which are typical in the fabrication of high quality factor resonators ($Q > 10^5$). Process yield and electrical resistance are key indicators of reliability. A test is performed where arrays of n_b bridges of a size suitable for coplanar waveguides are fabricated to measure the yield and the resistance at room temperature across the entire array (see Fig. 2(d)). After a careful subtraction of the connecting wires based on Al sheet resistance measurements on the same chip, the resistance corresponding to bridges shows a linear scaling with the number of bridges, with a best fit that is within 1% of the calculated value. This result confirms uniformity and is an indicator that there are no open contacts. These arrays are also a measure of yield for nominal sized bridges. Based on optical inspection and the resistance measurements, all 456 bridges of this devices were successful providing a yield with a lower bound of 99.2 % within a 95 % confidence interval.

Next, we discuss experiments in which the quality factor of coplanar waveguide resonators, fabricated with air bridges, is characterized at low temperatures. The device, shown in Fig. 3(a), consists of five quarter-wavelength coplanar waveguide resonators, coupled to a common feedline, with resonance frequencies designed to be distributed uniformly between 4.6 GHz and 5.4 GHz. The large separation between the resonance frequencies allows for the measurement of transmission through each resonator to be done in a multiplexed way. Experiments are performed in a dilution refrigerator, at a temperature of 30 mK. The transmission through each resonator, after subtraction of the background transmission, is given by^{19,20}

$$S_{21}(\omega) = \frac{1 + 2iQ_i \frac{\omega - \omega_0}{\omega_0}}{1 + \frac{Q_e}{Q_c} + i\frac{Q_i}{Q_\alpha} + 2iQ_i \frac{\omega - \omega_0}{\omega_0}}, \quad (1)$$

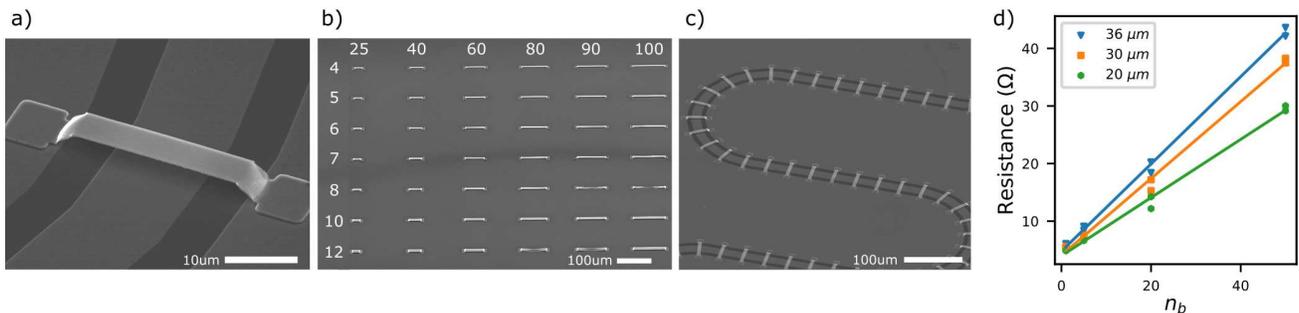


FIG. 2. a) SEM picture with a tilted angle of a bridge with a length of $36 \mu\text{m}$ and a width of $6 \mu\text{m}$. b) SEM pictures of bridges of varying sizes, ranging in length from $25 \mu\text{m}$ to $100 \mu\text{m}$ and width from $4 \mu\text{m}$ to $12 \mu\text{m}$. Long and wide bridges have a lower yield shown by 4 collapsed bridges toward the lower right of the array. c) SEM picture showing an array of bridges of length $36 \mu\text{m}$ separated by $40 \mu\text{m}$ along a coplanar waveguide. d) Corrected resistance for bridge arrays of versus the number of bridges n_b . The bridges have a width of $6 \mu\text{m}$, a thickness of 300 nm , and lengths of $20 \mu\text{m}$, $30 \mu\text{m}$, and $36 \mu\text{m}$.

where ω is the probe frequency, ω_0 is the resonant frequency, Q_i is the internal quality factor, Q_c is the external quality factor resulting from capacitive coupling to the feedline, and Q_α is a parameter that characterizes the asymmetry of S_{21} that arises due to transmission line non-idealities²⁰. Figure 3(b) shows the internal quality factor versus driving power. For each resonator, the internal quality factor has a minimum at low powers corresponding to the loss due to two-level-system defects in the desaturated limit²¹, which occurs at power less than -30 dBm in our setup. The low power limit quality factors, ranging between 130k and 160k are relatively modest compared to optimized high quality factor aluminum resonators^{22,23}. We emphasize that our process does not incorporate important elements, such as substrate cleaning and optimized etching based processes²³, required for fabrication of high-quality factor aluminum resonators, given that the focus in this work is the development and optimization of the bridge process. However, the dependence of the intrinsic quality factor on number of bridges, shown in Fig. 3(c), gives a quantitative indicator of the microwave loss associated with a single bridge. We note that the bridges are uniformly distributed along the resonator, and therefore both electric field (voltage) and magnetic field (current) related loss mechanisms are captured. With an assumed linear dependence of loss on the number of bridges, our experiments allow us to estimate a loss per bridge with an upper bound of 1.0×10^{-8} . This is an excellent figure of merit, given that it is expected that several bridges at the scale of a resonator are sufficient to mitigate slotline modes⁹ and improve ground plane uniformity.

The integration of air bridges with high-quality Josephson junctions in the same process is essential for fabrication of superconducting circuits including qubits. We chose a process implementation where the Josephson junctions are fabricated in a layer prior to the air bridges. The processing of the chip required to make the bridges is found to have an effect on the resistance of Josephson junctions. In Fig. 4(a) we plot the resistance

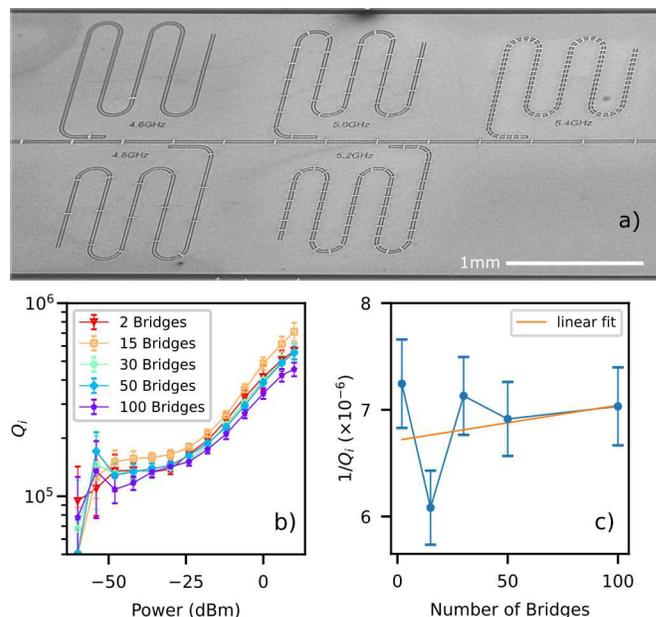


FIG. 3. a) SEM picture with a tilted angle of a device formed of five resonators coupled to a common feedline. b) Quality factor versus microwave power for each resonator (dots, with lines as guide to the eye). The number of bridges fabricated on the resonators range from 2 to 100. c) Loss (inverse quality factor) versus number of bridges at -30 dBm where the system enters the desaturated limit (dots) and a linear fit (continuous line).

of a set of junctions versus inverse area, for areas ranging from $0.06 \mu\text{m}^2$ to $0.21 \mu\text{m}^2$ before and after bridge processing. The dependence is linear and it shows a systematic increase in resistance of approximately 30% that arises from the 5 min of total bake time at 180°C , consistent with previous studies²⁴. We note that the estimated critical current density after the bridge process is $2.6 \mu\text{A}/\mu\text{m}^2$, compatible with flux qubits²⁵ and larger than typical critical current densities used in transmons. A device for controlled light-matter interactions experi-

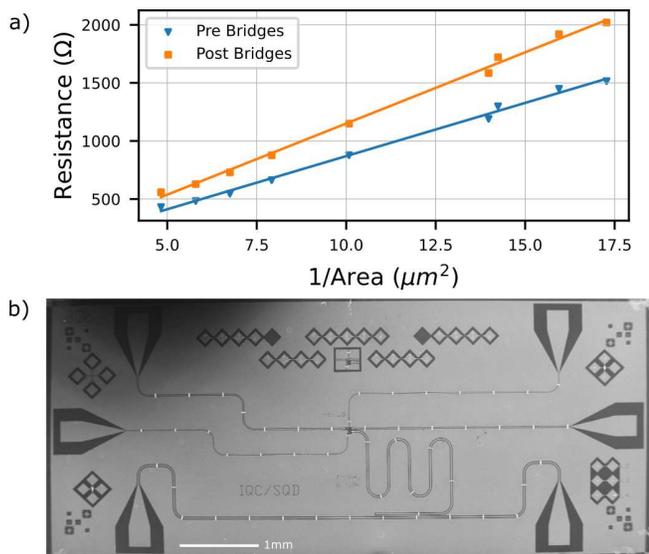


FIG. 4. a) Resistance of Josephson junctions plotted as a function of the inverse overlap area, measured before and after inclusion of the bridge layer. b) SEM picture of a device for light-matter interaction experiments.

ments implemented with a flux qubit coupled to a transmission line has been recently realized using this process (see Fig. 4(b))²⁶. This device contains six Josephson junctions and its operation confirmed expected target critical current values for these junctions. These results are promising in view of integration of the bridge process with coherent devices. One interesting feature of our process is that the bridge layer can also be used to create bandage connections between Josephson junctions and other circuit layers¹⁵, eliminating the need of an additional processing step.

In conclusion, we demonstrated a new air bridge process for superconducting quantum devices. In comparison with previous work, our process has a simple implementation based on a single-layer electron beam lithography gradient exposure. The process has a high yield and allows to fabricate bridges with sizes from 20 μm to 100 μm, allowing for a wide range of applications. We found that the induced microwave loss is negligible and the process has a reproducible effect on the Josephson junction resistance. Further work will focus on the investigation of the properties of bridges in the presence of currents and on optimizing the contacts for high critical currents, as well as realization of high coherence devices.

ACKNOWLEDGMENTS

We are grateful to Ali Yurtalan for advice during the early stages of the project and to Xi Dai for commenting on the manuscript. We acknowledge support from NSERC through Discovery and RTI grants, Canada Foundation for Innovation, Ontario Ministry of Research

and Innovation, and Industry Canada. We would like to acknowledge support from CMC Microsystems and Canada's National Design Network (CNDN). We would like to thank the staff of the University of Waterloo's QNFCF for assistance during fabrication and in particular Greg Holloway who provided insight on many technical problems. The University of Waterloo's QNFCF facility was used for this work. This infrastructure would not be possible without the significant contributions of CFREF-TQT, CFI, ISED, the Ontario Ministry of Research & Innovation and Mike & Ophelia Lazaridis.

Author contributions

Noah Janzen: Fabrication process development; cryogenic experiment setup, data acquisition and analysis. Michal Kononenko: Contribution to fabrication data analysis; contributions to cryogenic experiment setup data acquisition system. Shaun Ren: Cryogenic experiment data acquisition and analysis. Adrian Lupascu Project supervision; contributions to process development and cryogenic experiments.

REFERENCES

- M. Kjaergaard, M. E. Schwartz, J. Braumüller, P. Krantz, J. I.-J. Wang, S. Gustavsson, and W. D. Oliver, *Annual Review of Condensed Matter Physics* **11**, 369 (2020).
- P. Krantz, M. Kjaergaard, F. Yan, T. P. Orlando, S. Gustavsson, and W. D. Oliver, *Applied Physics Reviews* **6**, 021318 (2019).
- D. Rosenberg, D. Kim, R. Das, D. Yost, S. Gustavsson, D. Hover, P. Krantz, A. Melville, L. Racz, G. O. Samach, S. J. Weber, F. Yan, J. L. Yoder, A. J. Kerman, and W. D. Oliver, *npj Quantum Information* **3**, 1 (2017).
- S. Kosen, H.-X. Li, M. Rommel, D. Shiri, C. Warren, L. Grönberg, J. Salonen, T. Abad, J. Biznárová, M. Caputo, L. Chen, K. Grigoras, G. Johansson, A. F. Kockum, C. Krizan, D. P. Lozano, G. J. Norris, A. Osman, J. Fernández-Pendás, A. Ronzani, A. F. Roudsari, S. Simbierowicz, G. Tancredi, A. Wallraff, C. Eichler, J. Govenius, and J. Bylander, *Quantum Science and Technology* **7**, 035018 (2022).
- B. Foxen, J. Y. Mutus, E. Lucero, R. Graff, A. Megrant, Y. Chen, C. Quintana, B. Burkett, J. Kelly, E. Jeffrey, Y. Yang, A. Yu, K. Arya, R. Barends, Z. Chen, B. Chiaro, A. Dunsworth, A. Fowler, C. Gidney, M. Giustina, T. Huang, P. Klimov, M. Neeley, C. Neill, P. Roushan, D. Sank, A. Vainsencher, J. Wenner, T. C. White, and J. M. Martinis, *Quantum Science and Technology* **3**, 014005 (2017).
- A. Gold, J. P. Paquette, A. Stockklauser, M. J. Reagor, M. S. Alam, A. Bestwick, N. Didier, A. Nersisyan, F. Oruc, A. Razavi, B. Scharmann, E. A. Sete, B. Sur, D. Venturelli, C. J. Winkleblack, F. Wudarski, M. Harburn, and C. Rigetti, *npj Quantum Information* **7**, 1 (2021).
- J. Béjanin, T. McConkey, J. Rinehart, C. Earnest, C. McRae, D. Shiri, J. Bateman, Y. Rohanizadegan, B. Penava, P. Breul, S. Royak, M. Zapatka, A. Fowler, and M. Mariani, *Physical Review Applied* **6**, 044010 (2016).
- J. Rahamim, T. Behrle, M. J. Peterer, A. Patterson, P. A. Spring, T. Tsunoda, R. Manenti, G. Tancredi, and P. J. Leek, *Applied Physics Letters* **110**, 222602 (2017).
- G. Ponchak, J. Papapolymerou, and M. Tentzeris, *IEEE Transactions on Microwave Theory and Techniques* **53**, 713 (2005).

- ¹⁰Z. Chen, A. Megrant, J. Kelly, R. Barends, J. Bochmann, Y. Chen, B. Chiaro, A. Dunsworth, E. Jeffrey, J. Y. Mutus, P. J. J. O'Malley, C. Neill, P. Roushan, D. Sank, A. Vainsencher, J. Wenner, T. C. White, A. N. Cleland, and J. M. Martinis, *Applied Physics Letters* **104**, 052602 (2014).
- ¹¹Y. J. Y. Lankwarden, A. Endo, J. J. A. Baselmans, and M. P. Bruijn, *Journal of Low Temperature Physics* **167**, 367 (2012).
- ¹²M. Abuwasib, P. Krantz, and P. Delsing, *Journal of Vacuum Science & Technology B* **31**, 031601 (2013).
- ¹³Y. Jin, M. Moreno, P. M. T. Vianez, W. K. Tan, J. P. Griffiths, I. Farrer, D. A. Ritchie, and C. J. B. Ford, *Applied Physics Letters* **118**, 162108 (2021).
- ¹⁴A. Dunsworth, A. Megrant, R. Barends, Y. Chen, Z. Chen, B. Chiaro, A. Fowler, B. Foxen, E. Jeffrey, J. Kelly, P. V. Klimov, E. Lucero, J. Y. Mutus, M. Neeley, C. Neill, C. Quintana, P. Roushan, D. Sank, A. Vainsencher, J. Wenner, T. C. White, H. Neven, and J. M. Martinis, *Applied Physics Letters* **112**, 063502 (2018).
- ¹⁵A. Dunsworth, A. Megrant, C. Quintana, Z. Chen, R. Barends, B. Burkett, B. Foxen, Y. Chen, B. Chiaro, A. Fowler, R. Graff, E. Jeffrey, J. Kelly, E. Lucero, J. Y. Mutus, M. Neeley, C. Neill, P. Roushan, D. Sank, A. Vainsencher, J. Wenner, T. C. White, and J. M. Martinis, *Applied Physics Letters* **111**, 022601 (2017).
- ¹⁶E. Girgis, J. Liu, and M. L. Benkheadar, *Applied Physics Letters* **88**, 202103 (2006).
- ¹⁷V. Papageorgiou, A. Khalid, and D. R. S. Cumming (2013) conference name: MNE2013: 39th International Conference on Micro and Nano Engineering. London, UK (unpublished).
- ¹⁸A. Schleunitz, V. A. Guzenko, A. Schander, M. Vogler, and H. Schiff, *Journal of Vacuum Science & Technology B* **29**, 06F302 (2011).
- ¹⁹J. Gao, *The Physics of Superconducting Microwave Resonators*, Ph.D., California Institute of Technology, United States – California (2008).
- ²⁰C. Deng, M. Otto, and A. Lupascu, *Journal of Applied Physics* **114**, 054504 (2013).
- ²¹C. Müller, J. H. Cole, and J. Lisenfeld, *Reports on Progress in Physics* **82**, 124501 (2019).
- ²²A. Megrant, C. Neill, R. Barends, B. Chiaro, Y. Chen, L. Feigl, J. Kelly, E. Lucero, M. Mariantoni, P. J. J. O'Malley, D. Sank, A. Vainsencher, J. Wenner, T. C. White, Y. Yin, J. Zhao, C. J. Palmstrøm, J. M. Martinis, and A. N. Cleland, *Applied Physics Letters* **100**, 113510 (2012).
- ²³C. T. Earnest, J. H. Béjanin, T. G. McConkey, E. A. Peters, A. Korinek, H. Yuan, and M. Mariantoni, *Superconductor Science and Technology* **31**, 125013 (2018).
- ²⁴J. Migacz and M. Huber, *IEEE Transactions on Applied Superconductivity* **13**, 1000000 (2003).
- ²⁵M. Yurtalan, J. Shi, G. Flatt, and A. Lupascu, *Physical Review Applied* **16**, 054051 (2021).
- ²⁶N. Janzen, Manuscript in preparation.