

# A Unified Approach for Beam-Split Mitigation in Terahertz Wideband Hybrid Beamforming

Ahmet M. Elbir, *Senior Member, IEEE*

**Abstract**—The sixth generation networks envision the deployment of terahertz (THz) band as one of the key enabling property thanks to its abundant bandwidth. However, the ultra-wide bandwidth in THz causes *beam-split* phenomenon due to the use of a single analog beamformer (AB). Specifically, beam-split makes different subcarriers to observe distinct directions since the same AB is adopted for all subcarriers. Previous works mostly employ additional hardware components, e.g., time-delayer networks to mitigate beam-split by realizing virtual subcarrier-dependent ABs. This paper introduces an efficient and unified approach, called beam-split-aware (BSA) hybrid beamforming. In particular, instead of virtually generating subcarrier-dependent ABs, a single AB is used and the effect of beam-split is computed and passed into the digital beamformers, which are subcarrier-dependent while maximizing spectral efficiency. Hence, the proposed BSA approach effectively mitigates the impact of beam-split and it can be applied to any hybrid beamforming scheme, two of which based on manifold optimization and orthogonal matching pursuit are considered for evaluation in multi-user scenario. Numerical simulations show that significant performance improvement can be achieved as compared to the conventional techniques.

**Index Terms**—Terahertz, beam split, hybrid beamforming, multi-user, massive MIMO.

## I. INTRODUCTION

The sixth generation (6G) wireless networks envision to demonstrate revolutionary enhancement of the data rate ( $> 100\text{Gb/s}$ ), extremely low latency ( $< 1\text{ms}$ ) and ultra reliability (99.999%) [1]. Therefore, terahertz (THz) band (0.1–10 GHz) is one of the key components of 6G thanks to abundant available bandwidth. Although demonstrating the aforementioned advantages, THz band faces several challenges (see the full list in [2, 3]) that should be taken into account accordingly. For instance, path loss is more severe than that of millimeter-wave (mm-Wave) bands (0.03–0.3 THz) due to spreading loss and molecular absorption. In order to overcome path loss, massive number of antennas are employed in multiple-input multiple output (MIMO) configuration for beamforming gain. Nevertheless, massive MIMO architectures require dedicated radio frequency (RF) chains for each antenna element. However this is costly. As a result, hybrid beamforming architectures involving a few digital beamformers and large number of analog beamformers (ABs) are employed [4, 5].

The wideband massive MIMO systems employ subcarrier-dependent (SD) digital beamformers while the ABs are subcarrier-independent (SI) [6]. The single AB assumption causes the generated beams at different subcarriers look at

different directions, which is called *beam-split* phenomenon since the same AB is adopted for all subcarriers. While beam-split does not have notable impact at mm-Wave, it causes significant performance degradation in THz band, at which the bandwidth is relatively wider. Meanwhile, *beam-squint* is the term commonly used for the same effect in mm-Wave, where the generated beams are squinted [7, 8]. In comparison, in case of beam-split, the main lobes of the array gain corresponding to the lowest and highest subcarriers totally split and do not overlap while the squinted beam can still cover the entire bandwidth [7, 9]. For instance, the angular deviation due to beam-split is approximately  $6^\circ$  ( $0.4^\circ$ ) for 0.3 THz with 30 GHz (60 GHz with 1 GHz) bandwidth, respectively for a broadside target (see [10, Fig.4] for illustration). As a result, beam-split should be handled properly for reliable system performance.

Previous works to mitigate beam-split mostly rely on additional hardware components such as time-delayer (TD) networks. Specifically, these approaches employ several TD components between the RF chains and the phase shifters to virtually realize SD ABs. For instance, the authors in [11] devise a wideband channel estimation and combining method based on orthogonal matching pursuit (OMP), wherein the SD dictionaries are used. In [12], a delay-phase precoding (DPP) approach is proposed for hybrid beamforming, which involves time-delayer components. Also in [13], the unconstrained beamformers are optimized for all subcarriers, then hybrid beamformers are computed for each subcarrier, which requires SD ABs. The usage of TD components has high hardware cost and power consumption, especially at THz band. For instance, a single TD consumes approximately 100 mW, which is more than that of a phase shifter (40 mW) in THz [2]. A beam-broadening approach is proposed in [14], wherein a subarrayed configuration of the phase shifters across all subcarriers is employed to generate a beam with evenly distributed array gain across the whole frequency band. Hence, beamforming performance is limited since the generated beam is broadened due to the use of subarrayed phase shifters. By exploiting the full instantaneous channel state information (CSI), authors in [15] project all the subcarriers to the central subcarrier, and construct a common ABs for all subcarriers based on the channel covariance matrix. However, the use of covariance leads performance loss compared to instantaneous CSI-based beamforming. As a result, the existing solutions either have limited performance or necessitate additional hardware components.

This paper introduces a unified approach for beam-split mitigation, called beam-split-aware (BSA) hybrid beamforming. Different than the existing works realizing the SD AB via TD

A. M. Elbir is with the Interdisciplinary Centre for Security, Reliability and Trust at the University of Luxembourg, Luxembourg (e-mail: ahmetmelbir@gmail.com).

networks, a single SI AB is used in the proposed approach. The key idea is that the effect of beam-split is handled by passing it into the digital beamformers which are SD, and the beam-split is effectively corrected without using TD components. To that end, the effect of beam-split is computed for each AB. The phase deviations in the AB weights due to beam-split are computed. Then, the beam-split-corrected beamformer phases are obtained and used to construct a virtual SD beamformer, which is, then, employed to obtain BSA digital beamformer. The proposed BSA hybrid beamforming technique suggests a unified approach and it is applicable to any hybrid beamformer. In this work, the proposed BSA technique is applied to state-of-the-art hybrid beamforming algorithms, i.e., OMP [4] and manifold optimization (MO) [16]. Through numerical simulations, we show that the proposed BSA approach achieves significant improvement in terms of spectral efficiency and effectively mitigates the impact of beam-split.

*Notation:* Throughout the paper,  $(\cdot)^*$ ,  $(\cdot)^T$  and  $(\cdot)^H$  denote the conjugate, transpose and conjugate transpose operations, respectively. For a matrix  $\mathbf{A}$ ;  $[\mathbf{A}]_{ij}$  and  $[\mathbf{A}]_k$  correspond to the  $(i, j)$ -th entry and  $k$ -th column, while  $\mathbf{A}^\dagger$  denotes the Moore-Penrose pseudo-inverse of  $\mathbf{A}$ . A unit matrix of size  $N$  is represented by  $\mathbf{I}_N$ .  $\Sigma(a) = \frac{\sin N\pi a}{N \sin \pi a}$  is the Dirichlet sinc function and  $\otimes$  stands for the Khatri-Rao products.  $\mathcal{P}(\mathbf{A})$  computes the unwrapped angles of constant-modulus  $\mathbf{a} \in \mathbb{C}^N$  as  $\angle \mathbf{a}$  and  $\mathcal{P}^{-1}(\mathcal{P}(\mathbf{a})) = \frac{1}{\sqrt{N}}\mathbf{a}$ . Finally,  $\mathbb{E}\{\cdot\}$  represent the expectation operation.

## II. SIGNAL MODEL

Consider a multi-user wideband THz system with massive MIMO configuration with hybrid analog/digital beamforming over  $M$  subcarriers. The base station (BS) employs  $N_T$  antennas and  $N_{RF}$  RF chains to serve  $K$   $N_R$ -antenna users to convey  $N_S$  data streams. By taking into account a cheaper hardware at each user and low power consumption, it is assumed that the users employ only analog precoder, hence a single data stream, i.e.,  $N_S = 1$ , is received in a single transmission block. In the downlink, the BS first applies SD baseband precoder  $\mathbf{F}_{BB}[m] = [\mathbf{f}_{BB,1}[m], \dots, \mathbf{f}_{BB,K}[m]] \in \mathbb{C}^{N_{RF} \times K}$  ( $m \in \mathcal{M} = \{1, \dots, M\}$ ) to transmit the signal vector  $\mathbf{s}[m] = [s_1[m], \dots, s_K[m]] \in \mathbb{C}^K$ , where  $\mathbb{E}\{\mathbf{s}[m]\mathbf{s}^H[m]\} = \frac{P}{K}\mathbf{I}_K$  for average power  $P$  by assuming equal power allocation among the users. Then, the SI analog precoder  $\mathbf{F}_{RF} \in \mathbb{C}^{N_T \times N_{RF}}$  is used to steer the beams toward  $K$  users. We assume that each user is served by a single analog precoder vector, hence we have  $N_{RF} = K < N_T$ . Since the analog precoders are realized with phase-shifters, they have constant-modulus constraint, i.e.,  $|\mathbf{F}_{RF}[i, j]| = \frac{1}{\sqrt{N_T}}$  as  $i = 1, \dots, N_{RF}$  and  $j = 1, \dots, N_T$ . Then, the transmitted signal, i.e.,  $\mathbf{F}_{RF}\mathbf{F}_{BB}[m]\mathbf{s}[m]$ , is received at the  $k$ th user for the  $m$ th subcarrier as

$$\mathbf{y}_k[m] = \mathbf{w}_{RF,k}^H (\mathbf{H}_k[m] \sum_{i=1}^K \mathbf{F}_{RF} \mathbf{f}_{BB,i}[m] s_i[m] + \mathbf{n}_k[m]) + \mathbf{w}_{RF,k}^H \mathbf{H}_k[m] \mathbf{F}_{RF} \mathbf{F}_{BB}[m] \mathbf{s}[m] + \mathbf{w}_{RF,k}^H \mathbf{n}_k[m], \quad (1)$$

where  $\mathbf{n}_k[m] \in \mathbb{C}^{N_R}$  is the complex additive white Gaussian noise (AWGN) vector with  $\mathbf{n}_k[m] \sim \mathcal{CN}(0, \sigma_n^2 \mathbf{I}_{N_R})$ . In (1),

$\mathbf{w}_{RF,k} \in \mathbb{C}^{N_R}$  represents the SI analog combiner of the  $k$ th user with  $|\mathbf{w}_{RF,k}[i]| = \frac{1}{\sqrt{N_R}}$  for  $i = 1, \dots, N_R$ .

### A. Channel Model

The THz channel can modeled as LoS-dominant NLoS assisting due to limited reflected paths and negligible scattering in THz transmission. In addition, multipath channel models are also widely used, especially for indoor applications [3, 17]. Hence, we consider a general scenario, wherein the  $N_R \times N_T$  channel matrix for the  $k$ th user at the  $m$ th subcarrier is represented by the combination of  $L$  paths as [3]

$$\mathbf{H}_k[m] = \zeta \sum_{l=1}^L \alpha_{k,m,l} \mathbf{a}_R(\theta_{k,m,l}) \mathbf{a}_T^H(\vartheta_{k,m,l}) e^{-j2\pi\tau_{k,l}f_m}, \quad (2)$$

where  $\zeta = \sqrt{\frac{N_R N_T}{L}}$ ,  $\alpha_{k,m,l} \in \mathbb{C}$  denotes the complex path gain and  $\tau_{k,l}$  represents the time delay of the  $l$ th path corresponding to the array origin.  $f_m = f_c + \frac{B}{M}(m-1 - \frac{M-1}{2})$  is the  $m$ th subcarrier frequency, for which  $f_c$  and  $B$  are carrier frequency and bandwidth, respectively. The steering vector  $\mathbf{a}_R(\theta_{k,m,l}) \in \mathbb{C}^{N_R}$  ( $\mathbf{a}_T(\vartheta_{k,m,l}) \in \mathbb{C}^{N_T}$ ) corresponds to the SD spatial direction-of-arrival (DOA) (direction-of-departure (DOD))  $\theta_{k,m,l}$  ( $\vartheta_{k,m,l}$ ), respectively. For a uniform linear array (ULA),  $\mathbf{a}_R(\theta_{k,m,l}) \in \mathbb{C}^{N_R}$  is

$$\mathbf{a}_R(\theta_{k,m,l}) = [1, e^{-j2\pi\frac{d}{\lambda_m}\theta_{k,m,l}}, \dots, e^{-j2\pi\frac{d}{\lambda_m}(N_R-1)\theta_{k,l}}]^T. \quad (3)$$

The SD spatial DOA/DOD angles denote the directions that can be observed in spatial domain. Therefore, the spatial directions  $\theta_{k,m,l}$  and  $\vartheta_{k,m,l}$  differentiate from the physical directions defined as  $\phi_{k,l}$  and  $\varphi_{k,l}$  for DOA and DODs, respectively, where  $\phi_{k,l} = \sin \tilde{\phi}_{k,l}$  and  $\tilde{\phi}_{k,l} \in [-\frac{\pi}{2}, \frac{\pi}{2}]$ . In (3),  $\lambda_m = \frac{c_0}{f_m}$  represents the wavelength corresponding to  $f_m$ ,  $c_0$  is speed of light, and  $d$  is inter-element distance, which is selected as half-wavelength, i.e.,  $d = \frac{c_0}{2f_c}$ . In a similar way,  $\mathbf{a}_T(\vartheta_{k,m,l})$  can also be defined as for  $\mathbf{a}_R(\theta_{k,m,l})$ .

### B. Beam-Split Model

In the beamspace, the physical direction  $\phi_{k,l}$  ( $\varphi_{k,l}$ ) is observed with a deviation to  $\theta_{k,m,l}$  ( $\vartheta_{k,m,l}$ ) as

$$\theta_{k,m,l} = \frac{2f_m}{c_0} d \phi_{k,l} = \frac{f_m}{f_c} \phi_{k,l} = \eta_m \phi_{k,l}, \quad (4)$$

$$\vartheta_{k,m,l} = \frac{2f_m}{c_0} d \varphi_{k,l} = \frac{f_m}{f_c} \varphi_{k,l} = \eta_m \varphi_{k,l}, \quad (5)$$

where  $\eta_m = \frac{f_m}{f_c}$ . Notice that the beam-split for  $\phi_{k,l}$  and  $\varphi_{k,l}$  is the same and defined as the difference of  $\theta_{k,m,l}$  and  $\phi_{k,l}$  ( $\vartheta_{k,m,l}$  and  $\varphi_{k,l}$ ) as

$$\Delta_{k,l}[m] = (\eta_m - 1)\phi_{k,l} = (\eta_m - 1)\varphi_{k,l}. \quad (6)$$

To provide further insight, we examine the array gain for both narrowband and wideband scenarios. Define  $\mathbf{u} \in \mathbb{C}^{N_T}$  and  $\mathbf{v}(\bar{\phi}, m_c) \in \mathbb{C}^{N_T}$  as the RF beamformer and the arbitrary steering vector for direction  $\bar{\phi}$ , respectively, where central frequency index  $m_c = \frac{M-1}{2} - 1$ . Then, the power of the beamformed signal  $\mathbf{u}^H \mathbf{v}(\bar{\phi}, m_c)$  is

$$\frac{|\mathbf{u}^H \mathbf{v}(\bar{\phi}, m_c)|^2}{N_T} = N_T G(\bar{\phi}, m_c), \quad (7)$$

where  $G(\bar{\phi}, m) \triangleq \frac{|\mathbf{u}^H \mathbf{v}(\bar{\phi}, m)|^2}{N_T^2}$  is the normalized array gain. For narrowband case, choosing the SI beamformer as  $\mathbf{u} = \mathbf{v}(\phi, m_c)$  yields  $G(\bar{\phi}, m_c) = 1$  at  $\bar{\phi} = \phi$ , i.e. the maximum gain. Now, consider the wideband case for the same steering vector  $\mathbf{v}(\phi, m_c)$ , for which the array gain varies across the whole bandwidth as

$$\begin{aligned} G(\bar{\phi}, m) &= \frac{|\mathbf{v}^H(\phi, m_c) \mathbf{v}(\bar{\phi}, m)|^2}{N_T^2} \\ &= \frac{1}{N_T^2} \left| \sum_{n=0}^{N_T-1} e^{-j2\pi n d \frac{(f_m \bar{\phi} - f_c \bar{\phi})}{c}} \right|^2 \\ &= \frac{1}{N_T^2} \left| \frac{1 - e^{-j2\pi N_T d \frac{(f_m \bar{\phi} - f_c \bar{\phi})}{c}}}{1 - e^{-j2\pi d \frac{(f_m \bar{\phi} - f_c \bar{\phi})}{c}}} \right|^2 \\ &= \frac{1}{N_T^2} \left| \frac{\sin(\pi N_T \gamma_m)}{\sin(\pi \gamma_m)} \right|^2 \\ &= |\Sigma(\mu_m)|^2, \end{aligned} \quad (8)$$

where  $\mu_m = d \frac{(f_m \bar{\phi} - f_c \bar{\phi})}{c}$ . The array gain in (8) implies that most of the power is focused only on a small portion of the beamspace due to the power-focusing capability of  $\Sigma(a)$ , which substantially reduces across the subcarriers as  $|f_m - f_c|$  increases. Furthermore,  $|\Sigma(\mu_m)|^2$  gives peak when  $\mu_m = 0$ , i.e.,  $f_m \bar{\phi} - f_c \bar{\phi} = 0$ , at  $\bar{\phi} = \eta_m \phi$ , which is the deviated direction in the beamspace.

### C. Problem Formulation

Our aim in this work is to efficiently mitigate the beam-split by using SI AB without any additional hardware components. The hybrid beamforming design problem maximizes the sum-rate of the multi-user system, which is defined as

$$R = \sum_{m=1}^M \sum_{k=1}^K \log_2 \det\{1 + \gamma_k[m]\}, \quad (9)$$

where

$$\gamma_k[m] = \frac{\frac{P}{K} |\mathbf{w}_{\text{RF},k}^H \mathbf{H}_k[m] \mathbf{F}_{\text{RF}} \mathbf{f}_{\text{BB},k}[m]|^2}{\frac{P}{K} \sum_{i \neq k} |\mathbf{w}_{\text{RF},i}^H \mathbf{H}_i[m] \mathbf{F}_{\text{RF}} \mathbf{f}_{\text{BB},i}[m]|^2 + \sigma_n^2}}. \quad (10)$$

Then, the hybrid beamformer design problem can be formulated as

$$\begin{aligned} &\underset{\mathbf{F}_{\text{RF}}, \mathbf{F}_{\text{BB}}[m], \mathbf{W}_{\text{RF}}}{\text{maximize}} \quad R \\ &\text{subject to: } |[\mathbf{F}_{\text{RF}}]_{i,j}| = \frac{1}{\sqrt{N_T}}, \\ &|[\mathbf{W}_{\text{RF}}]_{i,j}| = \frac{1}{\sqrt{N_R}}, \\ &\|\mathbf{F}_{\text{RF}} \mathbf{F}_{\text{BB}}[m]\|_{\mathcal{F}}^2 = K, \end{aligned} \quad (11)$$

where  $\mathbf{W}_{\text{RF}} = [\mathbf{w}_{\text{RF},1}, \dots, \mathbf{w}_{\text{RF},K}] \in \mathbb{C}^{N_R \times K}$  includes the combiners of all user. Various methods have been proposed to solve (11) [5] such as OMP [4] and MO [16]. However, all of these algorithms fail to take into account the impact of beam-split due to the usage of SI AB. In what follows, we introduce our BSA hybrid beamforming approach to efficiently mitigate beam-split by using SI ABs without any additional hardware components.

### III. BSA HYBRID BEAMFORMING

The ABs in the problem formulated in (11) are SI while the aforementioned analysis on beam-split implies that the ABs should be SD so that beam-split can be eliminated. The problem in (11) with SD ABs can be recast as

$$\begin{aligned} &\underset{\bar{\mathbf{F}}_{\text{RF}}[m], \mathbf{F}_{\text{BB}}[m], \bar{\mathbf{W}}_{\text{RF}}[m]}{\text{maximize}} \quad \bar{R} \\ &\text{subject to: } |[\bar{\mathbf{F}}_{\text{RF}}[m]]_{i,j}| = \frac{1}{\sqrt{N_T}}, \\ &|[\bar{\mathbf{W}}_{\text{RF}}[m]]_{i,j}| = \frac{1}{\sqrt{N_R}}, \\ &\|\bar{\mathbf{F}}_{\text{RF}}[m] \mathbf{F}_{\text{BB}}[m]\|_{\mathcal{F}}^2 = K, \end{aligned} \quad (12)$$

where  $\bar{\mathbf{F}}_{\text{RF}}[m] \in \mathbb{C}^{N_T \times N_{\text{RF}}}$  and  $\bar{\mathbf{W}}_{\text{RF}}[m] = [\bar{\mathbf{w}}_{\text{RF},1}[m], \dots, \bar{\mathbf{w}}_{\text{RF},K}[m]] \in \mathbb{C}^{N_R \times N_{\text{RF}}}$  are SD ABs. Also,  $\bar{R} = \sum_{m=1}^M \sum_{k=1}^K \log_2 \det\{1 + \bar{\gamma}_k[m]\}$  and  $\bar{\gamma}_k[m] = \frac{\frac{P}{K} |\bar{\mathbf{w}}_{\text{RF},k}^H \mathbf{H}_k[m] \bar{\mathbf{F}}_{\text{RF}} \mathbf{f}_{\text{BB},k}[m]|^2}{\frac{P}{K} \sum_{i \neq k} |\bar{\mathbf{w}}_{\text{RF},i}^H \mathbf{H}_i[m] \bar{\mathbf{F}}_{\text{RF}} \mathbf{f}_{\text{BB},i}[m]|^2 + \sigma_n^2}$ .

While the problem in (12) eliminates the beam-split since SD ABs are used, it requires  $(M-1)N_T N_{\text{RF}}$  more phase-shifters (each of which consumes approximately 40 mW in THz [2]), hence it is cost-ineffective. Instead, we propose to use SI ABs while the beam-split problem is handled in digital beamformer. In this regard, we define  $\tilde{\mathbf{F}}_{\text{BB}}[m] \in \mathbb{C}^{N_{\text{RF}} \times N_{\text{RF}}}$  as *BSA digital beamformer* in order to achieve SD beamforming performance that can be obtained in (12). Hence, we aim to match the proposed *BSA hybrid beamformer*  $\mathbf{F}_{\text{RF}} \tilde{\mathbf{F}}_{\text{BB}}[m]$  with the SD hybrid beamformer  $\bar{\mathbf{F}}_{\text{RF}}[m] \mathbf{F}_{\text{BB}}[m]$  as

$$\underset{\mathbf{F}_{\text{BB}}[m]}{\text{minimize}} \|\mathbf{F}_{\text{RF}} \tilde{\mathbf{F}}_{\text{BB}}[m] - \bar{\mathbf{F}}_{\text{RF}}[m] \mathbf{F}_{\text{BB}}[m]\|_{\mathcal{F}}^2, \quad (13)$$

for which  $\tilde{\mathbf{F}}_{\text{BB}}[m]$  can be obtained as

$$\tilde{\mathbf{F}}_{\text{BB}}[m] = \mathbf{F}_{\text{RF}}^\dagger \bar{\mathbf{F}}_{\text{RF}}[m] \mathbf{F}_{\text{BB}}[m]. \quad (14)$$

As a result, the proposed BSA hybrid beamformer  $\mathbf{F}_{\text{RF}} \tilde{\mathbf{F}}_{\text{BB}}[m]$  can yield the performance of the SD hybrid beamformer  $\bar{\mathbf{F}}_{\text{RF}}[m]$ . While it may seem (14) still requires the solution of SD problem in (12) for  $m \in \mathcal{M}$ , in what follows, we show that  $\bar{\mathbf{F}}_{\text{RF}}[m]$  can be easily constructed from  $\mathbf{F}_{\text{RF}}$  without solving (12),  $\forall m \in \mathcal{M}$ . To this end, we define the function  $\mathcal{P}(\cdot)$  to compute the unwrapped angles of a vector quantity. For example, from (3), we have

$$\mathcal{P}(\mathbf{a}_R(\theta_{k,m,l})) = [0, -j\xi_m \theta_{k,m,l}, \dots, -j\xi_m (N_R - 1) \theta_{k,m,l}]^T, \quad (15)$$

where  $\xi_m = 2\pi \frac{d}{\lambda_m}$ . Then, one can show that  $\mathbf{a}_R(\theta_{k,m,l})$  can be obtained from  $\mathbf{a}_R(\phi_{k,l})$  for any  $m \in \mathcal{M}$  as

$$\begin{aligned} \mathbf{a}_R(\theta_{k,m,l}) &= \frac{1}{\sqrt{N_R}} \mathcal{P}^{-1}(\mathcal{P}(\mathbf{a}_R(\phi_{k,l})) \eta_m), \\ &= \frac{1}{\sqrt{N_R}} \mathcal{P}^{-1}([0, -j\xi_m \phi_{k,l} \eta_m, \dots, -j\xi_m (N_R - 1) \phi_{k,l} \eta_m]^T) \\ &= \frac{1}{\sqrt{N_R}} \mathcal{P}^{-1}([0, -j\xi_m \theta_{k,m,l}, \dots, -j\xi_m (N_R - 1) \theta_{k,m,l}]^T) \\ &= \frac{1}{\sqrt{N_R}} [1, e^{-j\xi_m \theta_{k,m,l}}, \dots, e^{-j\xi_m (N_R - 1) \theta_{k,m,l}}]^T, \end{aligned} \quad (16)$$

---

**Algorithm 1 OMP-based hybrid beamforming**


---

- Input:**  $\mathbf{D}_F, \mathbf{D}_W, \mathbf{F}_{\text{opt}}[m], \mathbf{W}_{\text{opt}}[m], \eta_m, m \in \mathcal{M}$ .  
**Output:**  $\mathbf{F}_{\text{RF}}, \mathbf{F}_{\text{BB}}[m]$ .
- 1:  $\mathbf{F}_{\text{RF}} = \text{Empty}, \mathbf{F}_{\text{res}}[m] = \mathbf{F}_{\text{opt}}[m],$   
 $\mathbf{W}_{\text{RF}} = \text{Empty}, \mathbf{W}_{\text{res}}[m] = \mathbf{W}_{\text{opt}}[m].$
  - 2:  $\tilde{\mathbf{D}}_F[m] = \mathcal{P}(\mathcal{P}^{-1}(\mathbf{D}_F)\eta_m), \tilde{\mathbf{D}}_W[m] = \mathcal{P}(\mathcal{P}^{-1}(\mathbf{D}_W)\eta_m).$
  - 3: **for**  $k = 1, \dots, N_{\text{RF}}$  **do**
  - 4:    $\mathbf{g}_k[m] = \mathbf{f}_{\text{res},k}^*[m] \otimes \mathbf{w}_{\text{res},k}[m], m \in \mathcal{M}.$
  - 5:    $\{p^*, q^*\} = \text{argmax}_{p,q} \sum_{m=1}^M |\mathbf{d}_{p,q}^H[m] \mathbf{g}_k[m]|,$  where  
 $\mathbf{d}_{p,q}[m] = [\tilde{\mathbf{D}}_F[m]]_p^* \otimes [\tilde{\mathbf{D}}_W[m]]_q.$
  - 6:    $\mathbf{F}_{\text{RF}} = [\mathbf{F}_{\text{RF}} | [\mathbf{D}_F]_{p^*}], \mathbf{W}_{\text{RF}} = [\mathbf{W}_{\text{RF}} | [\mathbf{D}_W]_{q^*}].$
  - 7: **end for**
  - 8:  $[\mathbf{H}_{\text{eff}}[m]]_k = \mathbf{w}_{\text{RF},k}^H \mathbf{H}_k[m] \mathbf{F}_{\text{RF}}, k \in \mathcal{K}.$
  - 9:  $\mathbf{F}_{\text{BB}}[m] = \mathbf{H}_{\text{eff}}[m]^\dagger, m \in \mathcal{M}.$
  - 10:  $[\mathbf{F}_{\text{BB}}[m]]_k = [\mathbf{F}_{\text{BB}}[m]]_k / \|\mathbf{F}_{\text{RF}} \mathbf{F}_{\text{BB}}[m]\|_{\mathcal{F}}, k \in \mathcal{K}.$
- 

which utilizes the fact that  $\theta_{k,m,l} = \phi_{k,l}\eta_m$  from (4). Using (16), we can formulate the following useful expression for the relationship between the beamformers  $\tilde{\mathbf{f}}[m_1]$  and  $\mathbf{f}[m_2]$  as

$$\tilde{\mathbf{f}}[m_1] = \frac{1}{\sqrt{N_T}} \mathcal{P}^{-1}(\mathcal{P}(\mathbf{f}[m_2]) \frac{f_{m_1}}{f_{m_2}}), \quad (17)$$

for  $m_1, m_2 \in \mathcal{M}$ . Then, the SD beamformer  $\tilde{\mathbf{F}}_{\text{RF}}[m]$  is

$$\tilde{\mathbf{F}}_{\text{RF}}[m] = \frac{1}{\sqrt{N_T}} \mathcal{P}^{-1}(\mathcal{P}(\mathbf{F}_{\text{RF}})\eta_m), \quad (18)$$

for  $m_1, m_2 \in \mathcal{M}$ . (18) allows us to obtain the SD ABs from the SI AB  $\mathbf{F}_{\text{RF}}$  without solving (12)  $\forall m \in \mathcal{M}$ .

Next, we propose an OMP based approach, wherein the analog precoder  $\mathbf{F}_{\text{RF}}$  and combiner  $\mathbf{W}_{\text{RF}}$  are selected from the dictionary matrices  $\mathbf{D}_F = [\mathbf{a}_T(\varphi_1), \dots, \mathbf{a}_T(\varphi_{N_F})] \in \mathbb{C}^{N_T \times N_F}$  and  $\mathbf{D}_W = [\mathbf{a}_R(\phi_1), \dots, \mathbf{a}_R(\phi_{N_W})] \in \mathbb{C}^{N_R \times N_W}$ , respectively, where  $\phi_n, \varphi_n \in [-1, 1]$ . Then, we define the complete dictionary  $\mathbf{D} \in \mathbb{C}^{N_R N_T \times N}$  ( $N = N_F N_W$ ) as

$$\mathbf{D} = \mathbf{D}_F^* \otimes \mathbf{D}_W, \quad (19)$$

for which the SD dictionaries can be defined as  $\tilde{\mathbf{D}}_F[m] = \mathcal{P}(\mathcal{P}^{-1}(\mathbf{D}_F)\eta_m)$ ,  $\tilde{\mathbf{D}}_W[m] = \mathcal{P}(\mathcal{P}^{-1}(\mathbf{D}_W)\eta_m)$ . Then, the analog precoder/combiner pairs for the  $k$ th user can be found as  $[\mathbf{D}_F]_{p^*}$  and  $[\mathbf{D}_W]_{q^*}$  via

$$\{p^*, q^*\} = \text{argmax}_{p,q} \sum_{m=1}^M |\mathbf{d}_{p,q}^H[m] \mathbf{g}_k[m]|, \quad (20)$$

where  $\mathbf{d}_{p,q}[m] = [\tilde{\mathbf{D}}_F[m]]_p^* \otimes [\tilde{\mathbf{D}}_W[m]]_q$  and  $\mathbf{g}_k[m] = \mathbf{f}_{\text{res},k}^*[m] \otimes \mathbf{w}_{\text{res},k}[m], m \in \mathcal{M}$ .  $\mathbf{f}_{\text{res},k}[m]$  and  $\mathbf{w}_{\text{res},k}[m]$  are the  $k$ th column of the unconstrained precoder/combiners  $\mathbf{F}_{\text{opt}}[m]$  and  $\mathbf{W}_{\text{opt}}[m]$ , respectively. In particular, the  $k$ th column of  $\mathbf{F}_{\text{opt}}[m]$  is  $\mathbf{f}_{\text{opt},k}[m]$  can be obtained from the singular value decomposition (SVD) of  $\mathbf{H}_k[m]$  [4, 18]. Similarly, we have  $\mathbf{w}_{\text{opt},k}[m] = \frac{1}{P} (\mathbf{f}_{\text{opt},k}^H[m] \mathbf{H}_k^H[m] \mathbf{H}_k[m] \mathbf{f}_{\text{opt},k}[m] + \frac{\sigma_n^2}{P})^{-1} \mathbf{f}_{\text{opt},k}^H[m] \mathbf{H}_k[m]$ . Once the ABs are obtained, then the effective channel should be computed to overcome interference from other users. Hence, the  $k$ th column of the effective channel is given by

$$[\mathbf{H}_{\text{eff}}[m]]_k = \mathbf{w}_{\text{RF},k}^H \mathbf{H}_k[m] \mathbf{F}_{\text{RF}}, \quad (21)$$

---

**Algorithm 2 BSA hybrid beamforming**


---

- Input:**  $\mathbf{F}_{\text{RF}}, \mathbf{F}_{\text{BB}}[m], \eta_m, m \in \mathcal{M}$ .  
**Output:**  $\tilde{\mathbf{F}}_{\text{BB}}[m]$ .
- 1:  $\tilde{\mathbf{F}}_{\text{RF}}[m] = \frac{1}{\sqrt{N_T}} \mathcal{P}(\eta_m \mathcal{P}^{-1}(\mathbf{F}_{\text{RF}})).$
  - 2:  $\tilde{\mathbf{F}}_{\text{BB}}[m] = \mathbf{F}_{\text{RF}}^\dagger \tilde{\mathbf{F}}_{\text{RF}}[m] \mathbf{F}_{\text{BB}}[m].$
  - 3:  $[\tilde{\mathbf{F}}_{\text{BB}}[m]]_k = [\tilde{\mathbf{F}}_{\text{BB}}[m]]_k / \|\mathbf{F}_{\text{RF}} \tilde{\mathbf{F}}_{\text{BB}}[m]\|_{\mathcal{F}}, k \in \mathcal{K}.$
- 

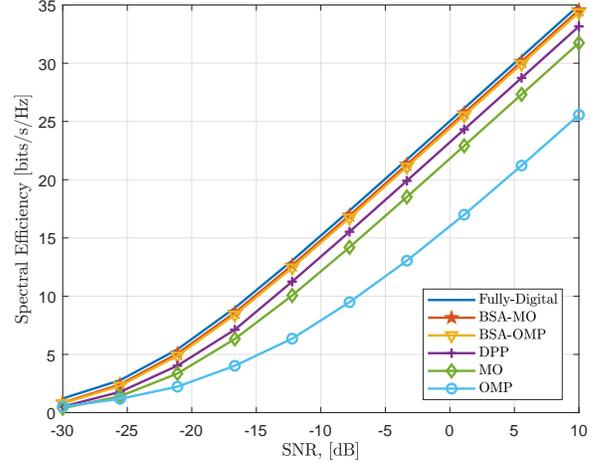


Fig. 1. Spectral efficiency versus SNR.

for which the baseband beamformer can be found as  $\mathbf{F}_{\text{BB}}[m] = \mathbf{H}_{\text{eff}}[m]^\dagger, m \in \mathcal{M}$  whose  $k$ th column is, then, normalized as  $[\mathbf{F}_{\text{BB}}[m]]_k = [\mathbf{F}_{\text{BB}}[m]]_k / \|\mathbf{F}_{\text{RF}} \mathbf{F}_{\text{BB}}[m]\|_{\mathcal{F}}$ . The algorithmic steps of OMP-based hybrid beamforming is presented in Algorithm 1. Notice that the hybrid beamformers obtained in Algorithm 1 are corrupted by beam-split. Next, the BSA hybrid beamformers are computed as shown in Algorithm 2 by using (14) and (18), which can be applied for any hybrid beamforming technique.

#### IV. NUMERICAL EXPERIMENTS

In this part, the performance of the proposed BSA hybrid beamforming approach is evaluated. Throughout the simulations, the THz system model is realized with  $f_c = 300$  GHz,  $B = 30$  GHz,  $M = 128$ ,  $N_T = 256$ ,  $N_R = 8$ ,  $N_{\text{RF}} = K = 8$ ,  $L = 3$  [3, 19, 20]. The DOA/DOD angles are selected uniform randomly from the interval  $[-\frac{\pi}{2}, \frac{\pi}{2}]$ , and 100 Monte Carlo experiments are conducted. We assume the channel matrix  $\mathbf{H}_k[m]$  is obtained via estimation techniques [7, 11, 21] prior to the beamforming stage.

Fig. 1 shows the hybrid beamforming performance of the proposed BSA approach in terms of spectral efficiency (SE) with respect to signal-to-noise ratio (SNR). In order to demonstrate the effectiveness of our BSA approach, we apply BSA hybrid beamforming technique presented in Algorithm 2 to both OMP and MO [16]. In Fig. 1, the fully-digital beamformer with no interference is used as yardstick [4]. We can see that both BSA-OMP and BSA-MO achieves significant SE improvement compared to OMP and MO which do not

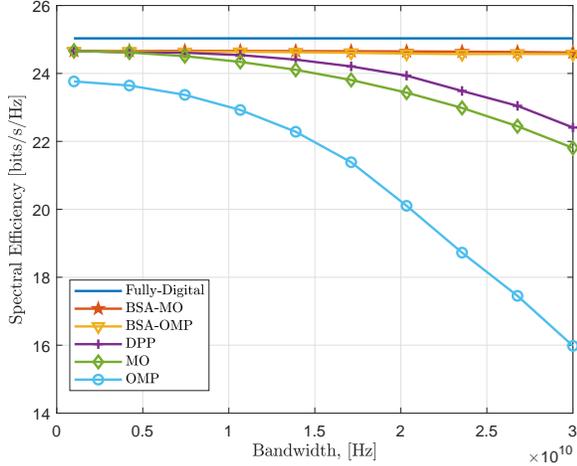


Fig. 2. Spectral efficiency versus system bandwidth.

take into account the effect of beam-split. The proposed BSA-OMP approach also performs better than DPP-based hybrid beamforming [12] which employs TD network to mitigate beam-split. In contrast, our BSA approach does not require TD network, hence, it is more hardware-efficient. Furthermore, it can be applied to any hybrid beamforming algorithm. The effectiveness of the proposed BSA approach is due to the fact that it can accurately mitigate the impact of beam-split. This is done by conveying the beam-split effect from the SI AB to the SD digital beamformers. Hence, it can yield the performance of SD beamformer without the necessity of additional hardware components.

Fig. 2 shows the SE comparison with respect to the system bandwidth up to  $B = 30$  GHz. As it is seen, BSA-OMP and BSA-MO face no performance loss due to increasing bandwidth while the remaining methods fail to provide accurate results. Specifically, due to dealing with beam-split at every subcarrier, the BSA-based approaches yield SD hybrid beamformers without solving SD problem formulated in (12). As a result, BSA beamforming approach is efficient in terms of both computational complexity and hardware cost.

## V. SUMMARY

In this work, we introduce a unified hybrid beamforming technique to effectively mitigate the impact of beam-split. The proposed BSA approach is advantages since it can be applied to any hybrid beamforming algorithm, and it is hardware-efficient since it does not require additional hardware components, e.g., TD network to realize SD ABs. As future work, the analysis of the proposed BSA approach under hardware impairments for wideband THz systems can be investigated.

## REFERENCES

[1] T. S. Rappaport, Y. Xing, O. Kanhere, S. Ju, A. Madanayake, S. Mandal, A. Alkhateeb, and G. C. Trichopoulos, "Wireless Communications and Applications Above 100 GHz: Opportunities and Challenges for 6G and Beyond," *IEEE Access*, vol. 7, pp. 78 729–78 757, Jun. 2019.

[2] A. M. Elbir, K. V. Mishra, S. Chatzinotas, and M. Bennis, "Terahertz-Band Integrated Sensing and Communications: Challenges and Opportunities," *arXiv*, Aug. 2022.

[3] H. Sarrieddeen, M.-S. Alouini, and T. Y. Al-Naffouri, "An overview of signal processing techniques for Terahertz communications," *Proceedings of the IEEE*, vol. 109, no. 10, pp. 1628–1665, 2021.

[4] A. Alkhateeb, G. Leus, and R. W. Heath, "Limited Feedback Hybrid Precoding for Multi-User Millimeter Wave Systems," *IEEE Trans. Wireless Commun.*, vol. 14, no. 11, pp. 6481–6494, Jul. 2015.

[5] R. W. Heath, N. González-Prelcic, S. Rangan, W. Roh, and A. M. Sayeed, "An Overview of Signal Processing Techniques for Millimeter Wave MIMO Systems," *IEEE J. Sel. Top. Signal Process.*, vol. 10, no. 3, pp. 436–453, Feb. 2016.

[6] A. Alkhateeb and R. W. Heath, "Frequency selective hybrid precoding for limited feedback millimeter wave systems," *IEEE Trans. Commun.*, vol. 64, no. 5, pp. 1801–1818, 2016.

[7] B. Wang, M. Jian, F. Gao, G. Y. Li, and H. Lin, "Beam Squint and Channel Estimation for Wideband mmWave Massive MIMO-OFDM Systems," *IEEE Trans. Signal Process.*, vol. 67, no. 23, pp. 5893–5908, Oct. 2019.

[8] M. Wang, F. Gao, N. Shlezinger, M. F. Flanagan, and Y. C. Eldar, "A Block Sparsity Based Estimator for mmWave Massive MIMO Channels With Beam Squint," *IEEE Trans. Signal Process.*, vol. 68, pp. 49–64, Nov 2019.

[9] A. M. Elbir, K. V. Mishra, and S. Chatzinotas, "Terahertz-Band Joint Ultra-Massive MIMO Radar-Communications: Model-Based and Model-Free Hybrid Beamforming," *IEEE J. Sel. Top. Signal Process.*, vol. 15, no. 6, pp. 1468–1483, Oct. 2021.

[10] J. Tan and L. Dai, "THz Precoding for 6G: Challenges, Solutions, and Opportunities," *IEEE Wireless Commun.*, pp. 1–8, May 2022.

[11] K. Dovelos, M. Matthaiou, H. Q. Ngo, and B. Bellalta, "Channel Estimation and Hybrid Combining for Wideband Terahertz Massive MIMO Systems," *IEEE J. Sel. Areas Commun.*, vol. 39, no. 6, pp. 1604–1620, Apr. 2021.

[12] L. Dai, J. Tan, Z. Chen, and H. V. Poor, "Delay-Phase Precoding for Wideband THz Massive MIMO," *IEEE Trans. Wireless Commun.*, p. 1, Mar. 2022.

[13] L. You, X. Qiang, C. G. Tsinos, F. Liu, W. Wang, X. Gao, and B. Ottersten, "Beam Squint-Aware Integrated Sensing and Communications for Hybrid Massive MIMO LEO Satellite Systems," *IEEE J. Sel. Areas Commun.*, vol. 40, no. 10, pp. 2994–3009, Aug. 2022.

[14] F. Gao, B. Wang, C. Xing, J. An, and G. Y. Li, "Wideband Beamforming for Hybrid Massive MIMO Terahertz Communications," *IEEE J. Sel. Areas Commun.*, vol. 39, no. 6, pp. 1725–1740, Apr. 2021.

[15] Y. Chen, Y. Xiong, D. Chen, T. Jiang, S. X. Ng, and L. Hanzo, "Hybrid Precoding for WideBand Millimeter Wave MIMO Systems in the Face of Beam Squint," *IEEE Trans. Wireless Commun.*, vol. 20, no. 3, pp. 1847–1860, Nov. 2020.

[16] X. Yu, J. Shen, J. Zhang, and K. B. Letaief, "Alternating Minimization Algorithms for Hybrid Precoding in Millimeter Wave MIMO Systems," *IEEE J. Sel. Topics Signal Process.*, vol. 10, no. 3, pp. 485–500, April 2016.

[17] S. Tarboush, H. Sarrieddeen, H. Chen, M. H. Loukil, H. Jemaa, M. S. Alouini, and T. Y. Al-Naffouri, "TeraMIMO: A Channel Simulator for Wideband Ultra-Massive MIMO Terahertz Communications," *arXiv*, Apr 2021.

[18] A. M. Elbir and A. Papazafeiropoulos, "Hybrid Precoding for Multi-User Millimeter Wave Massive MIMO Systems: A Deep Learning Approach," *IEEE Trans. Veh. Technol.*, vol. 69, no. 1, p. 552–563, 2020.

[19] H. Yuan, N. Yang, K. Yang, C. Han, and J. An, "Hybrid Beamforming for Terahertz Multi-Carrier Systems Over Frequency Selective Fading," *IEEE Trans. Commun.*, vol. 68, no. 10, pp. 6186–6199, Jul 2020.

[20] J. Tan and L. Dai, "Wideband Beam Tracking in THz Massive MIMO Systems," *IEEE J. Sel. Areas Commun.*, vol. 39, no. 6, pp. 1693–1710, Apr 2021.

[21] A. M. Elbir, W. Shi, A. K. Papazafeiropoulos, P. Kourtessis, and S. Chatzinotas, "Terahertz-Band Channel and Beam Split Estimation via Array Perturbation Model," *arXiv*, Aug. 2022.