

Electromagnetic Information Theory: Fundamentals, Modeling, Applications, and Open Problems

Jieao Zhu, *Student Member, IEEE*, Zhongzhichao Wan, *Student Member, IEEE*, Linglong Dai, *Fellow, IEEE*, Mérouane Debbah, *Fellow, IEEE*, and H. Vincent Poor, *Life Fellow, IEEE*

Abstract—Traditional single-input single-output and multiple-input multiple-output information theory adopt spatially discrete modeling, which does not fully capture the continuous nature of the underlying electromagnetic (EM) fields supporting the physical layer of wireless communication systems. Thus, it is of interest to examine the information-carrying capability of continuous EM fields, which motivates research on EM information theory (EIT). In this article, we systematically investigate the basic ideas and main results of EIT. First, we review the fundamental analytical tools of classical information theory and EM theory. Then, we introduce the modeling and analysis methodologies of EIT, including continuous field modeling, degree of freedom, mutual information, and capacity analyses. After that, several EIT-inspired applications are discussed to illustrate how EIT guides the design of practical wireless systems. Finally, we point out several open problems of EIT, where further research efforts are required for EIT to construct a unified interdisciplinary theory.

Index Terms—Electromagnetic information theory (EIT), electromagnetic channel modeling, random field, degrees of freedom (DoF), capacity.

I. INTRODUCTION

Existing wireless information theory models transceivers as spatially discrete points. For example, single-input single-output (SISO) information theory considers a single point as either a transmitter or a receiver, and multiple-input multiple-output (MIMO) information theory [1] utilizes discrete points in space to represent transceivers. However, this discretization does not fully capture the spatially continuous electromagnetic (EM) fields [2], which are the physical carriers [3] of information in wireless systems. This mismatch may cause a performance gap between systems designed using discrete models and those designed using continuous EM fields. Therefore, a theory that can model and analyze the real wireless information system with continuous EM fields is of interest, which motivates the research of EM information theory (EIT).

EIT is an interdisciplinary subject that integrates deterministic physical theory and statistical mathematical theory to study information transmission mechanism in spatially continuous EM fields. Specifically, EIT unifies the basic laws and methodologies in both classical EM theory and information theory. As

a result, EIT is capable of building a framework for system modeling and performance analysis that incorporates EM propagation in the analysis of wireless information systems.

In this article, we systematically investigate the basics and results of EIT. The basic ideas and main results of this article can be summarized as follows:

- The fundamental mathematical tools for classical information theory and EM theory are briefly reviewed at first. Specifically, degrees of freedom (DoF), prolate spheroidal wave functions (PSWFs), channel capacity, and Maxwell's equations are introduced. To integrate the probabilistic nature of information theory and the continuous property of EM fields, random fields are then introduced into EIT, which enables performance analysis based on EIT.
- The basic EIT modeling methodologies are introduced for EM channels and EM noise. For EM channel modeling, both the deterministic and stochastic modeling approaches are discussed. For EM noise modeling, the noise fields are first categorized according to their different physical origins, and then the spatial correlation characteristics of different kinds of noise fields are discussed separately.
- EIT performance analysis methods are discussed. By applying the EIT modeling methodologies, the DoF, mutual information, and capacity can be derived using mathematical tools including the PSWFs, Karhunen-Loève expansion, and random field theories.
- Moreover, several EIT-inspired applications are provided. For example, to approach the EIT capacity, the continuous aperture MIMO (CAP-MIMO) has been proposed by fully harvesting the mutual information in a limited aperture area. Benefiting from the extra spatial DoF predicted by EIT, the location division multiple access (LDMA) technology has been proposed to provide a new possibility for capacity improvement. In addition, a distance-aware precoding (DAP) scheme has been proposed to take advantage of the extra channel DoF in the near-field region.
- Finally, several open problems of EIT are discussed, including the analog and digital challenges brought by EIT, compatible EM noise modeling, the physically appropriate power constraints, and the achievability of the EM capacity. We explain the meanings of these open problems, and why they are important for future research in EIT.

J. Zhu, Z. Wan, and L. Dai are with the Department of Electronic Engineering, Tsinghua University, Beijing 100084, China, as well as the Beijing National Research Center for Information Science and Technology (BNRist) (e-mails: {zja21, wzcc20}@mails.tsinghua.edu.cn, daill@tsinghua.edu.cn).

M. Debbah is with the Technology Innovation Institute, 9639 Masdar City, Abu Dhabi, United Arab Emirates (email:merouane.debbah@tii.ae) and also with CentraleSupélec, University Paris-Saclay, 91192 Gif-sur-Yvette, France.

H. Vincent Poor is with the Department of Electrical and Computer Engineering, Princeton University, USA (e-mail: poor@princeton.edu).

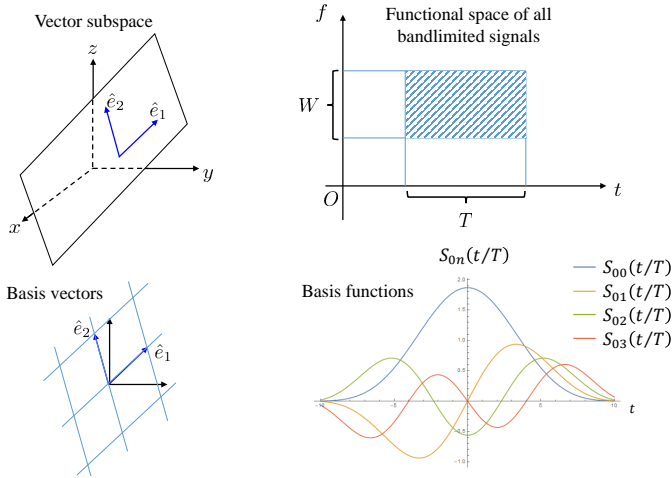


Fig. 1. Illustration of functional spaces (right) and their analogy with finite-dimensional vector spaces (left). The basis of the bandlimited functional space is given by prolate spheroidal wave functions (PSWFs).

II. FUNDAMENTALS OF EIT

In this section, we first distinguish two different definitions of DoF in information theory, i.e., channel DoF and functional DoF. Then, we discuss the concept of channel capacity and its relation to DoF. After that, we introduce Maxwell's equations to describe the propagation of EM fields. Finally, we employ random fields as the EIT foundation for unifying the probabilistic information theory and deterministic field theory.

A. Degree of Freedom

DoF is a mathematical quantity that describes the number of independent parameters in a physical system. In the communication community, the DoF usually refers to the number of orthogonal subchannels that can carry information independently, which is uniquely determined by the channel characteristics. It is usually calculated by counting the significant singular values of a given channel matrix [1]. Thus, we use the term *channel DoF* to describe such a number associated with a channel.

By contrast, in the information theory community, the DoF is defined asymptotically. From a rigorous point of view, the (asymptotic) DoF is defined as the minimum dimension of a finite-dimensional functional subspace that can approximate any function in a larger space with an arbitrarily small error [4]. For example, the DoF of W -bandlimited signals with observation duration T can be derived by finding the finite-dimensional subspace, which contains all the W -bandlimited functions that are most concentrated in the time domain. The problem of finding these most concentrated functions is named Slepian's concentration problem [5], and it has explicit solutions called prolate spheroidal wave functions, as shown in Fig. 1. More interestingly, it is proved that to approximately represent any W -bandlimited function, it suffices to pick out asymptotically $2WT$ prolate spheroidal wave functions as bases. Thus, the functional DoF of the W -bandlimited signals is asymptotically $2WT$ [5]. Since this kind of DoF numerically characterizes the possibility to approximate an *infinite-dimensional* functional space by a *finite-dimensional*

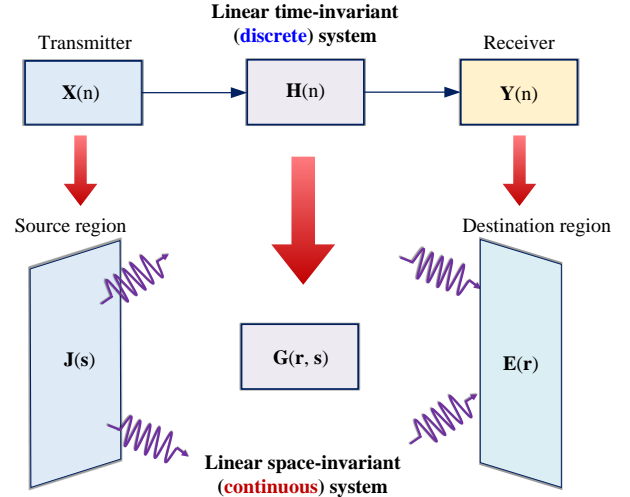


Fig. 2. Linear time-invariant systems described by an impulse response in classical information theory, compared with linear space-invariant systems described by the Green's function in EIT.

subspace, we refer to it as the *functional DoF*. It is worth noting that the functional DoF can be alternatively interpreted as the number of minimal required samples to approximately reconstruct an unknown signal.

B. Channel Capacity

Different from the notion of channel DoF, which characterizes the number of orthogonal subchannels available, the channel capacity measures the error-free information transmission capability of the channel. Since the transmission errors are caused by random channel noise, the channel is information-theoretically defined to be a conditional transition probability that randomly maps the input to the output of the channel. Then, the mutual information between the input and output can be defined, and the channel capacity is derived by taking the supremum of the mutual information over all possible input distributions of the channel.

The operational meaning of the channel capacity is established by Shannon in his seminal paper [6] in 1948. To establish the operational meaning, he proved the *achievability* and *converse* theorem of the channel capacity. The *achievability* states that, for any given error probability and data rate lower than the capacity, there exists a pair of encoder-decoder of sufficient code length to operate below such an error probability. The *converse* theorem states that, for an arbitrary data rate higher than capacity, no matter what kind of code is employed, the error probability is bounded away from zero. This very important result indicates that, it is impossible to realize error-free transmission at a rate higher than the capacity. Thus, the value of channel capacity is established to be the fundamental transmission limit of a given channel.

C. Electromagnetic Theory

EM theory is a branch of physics that studies the EM interaction in four-dimensional spacetime from a field-theoretic point of view. The EM forces are carried by EM vector fields, which are usually described by Maxwell's equations.

Maxwell's equations are four linear partial differential equations that characterize how the electric fields and magnetic fields are altered by each other and by charges and currents. Combining these four equations, a vector wave equation can be obtained that manifests the existence of EM waves.

In wireless communications, to describe the EM response at the receiver induced by the transmitted wave at the transmitter, Green's function is usually introduced as the spatial impulse response of EM systems [7], as is shown in Fig. 2. Since the electric and magnetic field vectors are all three-dimensional time-varying vectors, to describe the mapping between two vectors, Green's function must take the form of a dyadic-valued function. Note that EM theory is a deterministic theory built on partial differential equations and the knowledge of all surroundings, so Green's function is uniquely determined by the boundary conditions of EM problems. As a result, pure EM theory cannot capture the random nature that arises in wireless communications.

D. Random Fields for EIT

In order to apply information-theoretic analysis to EM fields, probabilistic measures should be assigned to the functional space containing all possible EM fields that satisfy Maxwell's equations, which leads to the random field modeling for EIT. Random fields are well-studied mathematical objects, among which the Gaussian random fields (GRFs) are the most widely applied instances.

GRFs are random multivariate functions whose finite-dimensional marginal distributions are Gaussian. Justified by the central limit theorem, many complicated spatially dependent random values that arise in wireless communications can be modeled by GRFs. Inheriting favorable mathematical properties from Gaussian distributions, GRF models exhibit good analytical properties that can facilitate both theoretical deduction and numerical inference.

In EIT, GRFs can be utilized to model both the EM channels [8] and the EM signals [9]. In real-world communication systems, the EM channel response may vary randomly as a function of spacetime, so it is reasonable to model such spatio-temporal variations by a channel GRF. This allows the Bayesian inference of channel entries that are not directly measured. Similarly, in order to capture the randomness of the transmitted and received signals, the current distributions at the transmitter and the electric fields at the receiver can also be modeled by GRFs [9], from which the information-theoretic mutual information can be defined to characterize the information transmission capability of such EM channels.

III. MODELING METHODOLOGIES FOR EIT

In this section, we discuss the continuous modeling schemes for EIT, which include both channel modeling and noise field modeling.

A. Continuous Channel Modeling

In this part, we will discuss the channel models in EIT, which describe the EM channel by a linear transformation from the radiated field to the noiseless received field. Note

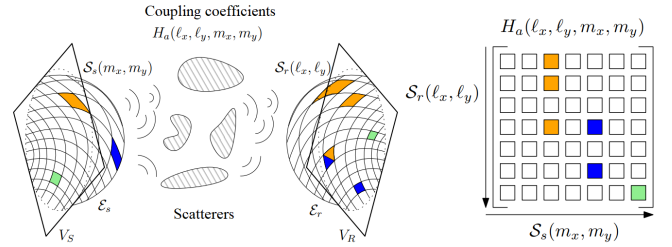


Fig. 3. Continuous stochastic channel modeling, where the linear channel operator is projected onto the Fourier plane-wave basis [8].

that to model a traditional narrowband MIMO channel, a matrix with complex-valued entries is usually utilized, where each entry represents the complex channel between a pair of transceiver antennas. This channel model is, in essence, spatially discrete. However, in EIT, it is reasonably assumed that one can measure the field at an arbitrary point inside the receiver region, where the precision of such measurement is subject to some physical noise limits. This leads to the assumption of EIT that the transceivers operate in a continuum of space.

This idea of continuous modeling, though seems impossible to have its hardware correspondence in reality, is of both theoretical convenience and practical reasons. The theoretical convenience originates from the fact that the fundamental physical laws that rule the EM phenomena are intrinsically continuous. As a result, extensive mathematical tools, including functional analysis, linear operator theory, and complex analysis, have already been well-developed to tackle these continuous linear problems. The practical reason is that, the real-world antenna-based point-to-point transmission models can be viewed as a special case of the continuous model. Mathematically, an antenna acts as a continuous integral operator that weights the incident signal by its EM eigenmode, which corresponds with the continuous modeling in EIT. Thus, the EIT channel is expected to be modelled by a continuous linear operator, where the operator can be either deterministic or stochastic.

For the deterministic channel modeling approach, the simplest channel model is the line-of-sight (LoS) model, which assumes that there is only one direct link without any scatterers between the transceivers. In this scenario, the channel operator is the free-space Green's function. More complex modeling schemes consider the scatterers and group them into clusters. The channel operator is thus dependent on the locations of the clusters.

Another modeling approach is stochastic channel modeling, where some statistical characteristics of the channel are available. As introduced in Subsection II-D, GRFs are suitable to model the randomness of the channel and can provide useful tools such as Bayesian inference for channel estimation. For stochastic channel modeling, a recent novel method is named Fourier plane-wave expansion (see Fig. 3), where the channel is modeled by a GRF, which is provably compatible with the EM Helmholtz equation [8]. Based on such EM-compatible GRF modeling, the spectrum and the autocorrelation function of the stochastic channel can be derived to facilitate further

mutual information and capacity analysis.

B. Noise Field Modeling

After the discussion of the continuous random channel models, we will introduce the noise modeling scheme. Noise is vital in information theory, because it is a key factor to determine the capacity. In classical information theory, the noise is usually modeled by a time-domain additive white Gaussian noise (AWGN), since the AWGN has a flat power spectral density (PSD) and its projection coefficients onto any orthonormal basis are independent and of equal power, which is beneficial to theoretical analysis. Similarly, in EIT, the noise is usually modeled as a spatial AWGN with flat wavenumber PSD. This spatial AWGN implies that the additive noises at any small spatial region are independent and identically distributed (i.i.d.) complex Gaussian random variables, whose variances are proportional to the volume of the small region. The AWGN model is the simplest noise model of EIT, which is convenient for analysis. However, the white spectral assumption is problematic, since it causes an unbounded noise power.

IV. INFORMATION-THEORETIC ANALYSIS FOR EIT

In this section, based on the EIT modeling methodologies above, we discuss the basic performance indicators and the corresponding analysis techniques of EIT, including the functional DoF, the channel DoF, the mutual information, and the capacity.

A. Functional DoF

As we have clarified in Section II-B, the functional DoF in classical information theory represents the minimum number of required samples to reconstruct the signal. Similarly, in EIT, the functional DoF refers to the minimum number of required samples to reconstruct a given EM field. Such a functional DoF is closely related to the transmission capability of the EM system, because the minimum number of required samples to reconstruct an EM field is equivalent to the maximum number of complex values that can be transmitted within a single EM channel use.

The basic analysis technique of such a functional DoF is similar to the application of the Nyquist sampling theorem in classical information theory. Resembling the bandlimited signals in the time-frequency domain, the radiated EM fields also exhibit the wavenumber-limited property in the space-wavenumber domain. Thus, it can be easily proved that a half-wavelength sampling suffices to asymptotically reconstruct an arbitrary EM field, i.e., the EM DoF is at most proportional to the number of half-wavelength grids in the receiver region, given that the receiver region is sufficiently large.

A more refined analysis of the wavenumber-limitedness of the EM fields shows that the EM functional DoF depends on how rapidly the phase of a radiated field changes over space. To describe such phase change, the authors of [10] coined the word ‘‘spatial bandwidth’’ to characterize the degree of wavenumber-limitedness, where they adopted Laplace’s steepest descent method to show the accuracy of such field reconstruction and prove the correctness of the derived functional DoF.

B. Channel DoF

The functional DoF introduced in the previous subsection emphasizes the intrinsic DoF of the received field. However, due to the restrictions of the EM channel, it is possible that some of these functional DoFs at the receiver cannot be excited. For example, an EM propagation environment with rich scatterers can excite almost all angular eigenmodes at the receiver, while an EM channel only composed of LoS paths may not enable all functional DoFs. Thus, evaluating the channel DoF is of practical importance.

As is defined in Subsection II-A, the channel DoF represents the maximum number of independent parallel channels that can be used to transmit information. For the simplest LoS channel, the DoF is solved by expanding the continuous channel on a series of orthogonal sub-channels and counting the number of channel gains that exceed a certain threshold. This procedure can be transplanted into EIT by solving the eigenvalue problem of the continuous channel operator. Specifically, the LoS channel operator is given by the free-space Green’s function, and the corresponding eigenvalue problem can be approximated by Slepian’s concentration problem [12], where the well-investigated prolate spheroidal wave functions are the approximated eigenfunctions. Through this approach, the DoF of LoS channel model has been approximately derived to be proportional to the product of the area of the transceivers [12], [13].

For non-line-of-sight (NLoS) deterministic channel models, the channel DoF can be similarly derived by performing Slepian’s analysis in the angular domain, since the scatterers usually appear in limited solid angular regions. Following Slepian’s analysis, it is proved that the NLoS channel DoF is proportional to both the solid angle of the scatterer cluster and the geometric lengths of the transceivers [4]. If the channel is modeled as a stochastic channel with random scatterer positions, von Mises-Fisher distributions [14] can be used to model the statistical characteristics of the channel. The channel DoF in this stochastic model should be the expected value averaged by probability.

C. Mutual Information and Capacity Analysis

Besides the DoF which reveals the number of sub-channels available, the channel capacity is another important performance indicator showing the maximum information transmission rate of a wireless system. Compared to the traditional MIMO information theory using random vectors as transmitted and received signals, EIT models the EM fields as random fields. The random field modeling follows the statistical approach of mutual information and capacity analysis by Shannon. Each realization of the random field represents a pattern of the radiating field. The ensemble of the realizations, to which a probability measure is assigned, depicts the statistical characteristics of the system.

The mutual information and capacity analysis based on random fields is a continuous extension of the analysis based on random vectors. In parallel with MIMO theory based on matrices, operator theory can be used to represent the autocorrelation properties of the random field. Utilizing the

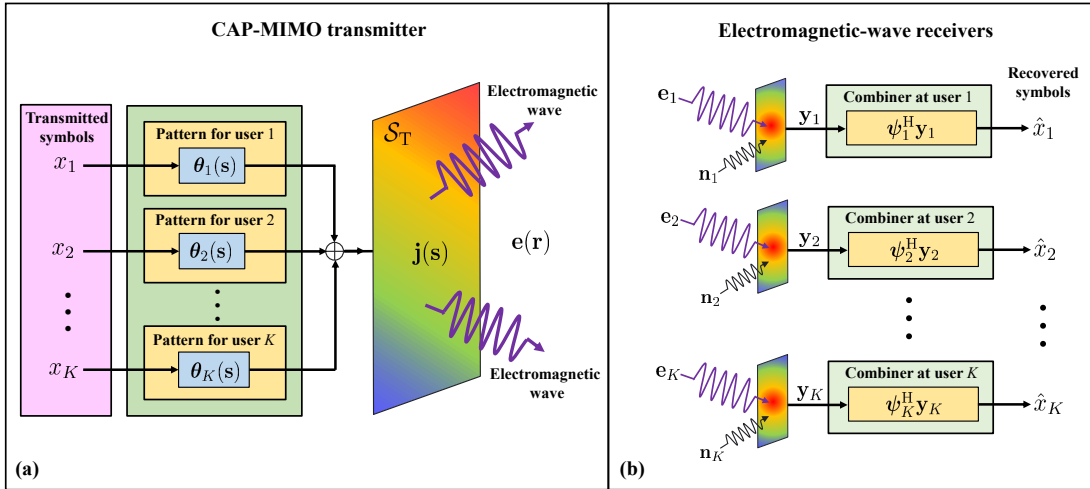


Fig. 4. CAP-MIMO transceivers [11].

Karhunen-Loève (KL) expansion, the continuous channel can be decomposed into parallel sub-channels. Thus, the information obtained from the received random field is evaluated by summing the information over all sub-channels. Different from the matrix determinant form of MIMO mutual information, the EIT information takes a Fredholm determinant form [9], which is the determinant of an autocorrelation operator. This Fredholm determinant form provides a closed-form formula for the EIT mutual information.

V. APPLICATIONS OF EIT

In this section, we present several EIT-inspired applications. These applications either mimic the analysis methodologies of EIT to fully achieve the existing DoF, or try to explore new communication resources predicted by EIT.

A. Continuous Aperture MIMO (CAP-MIMO)

Traditional wireless communication systems deploy finite antennas in a limited aperture at the transceivers. However, the EIT mutual information analysis is built on spatially continuous theoretical frameworks. To bridge the gap between the performance limit in MIMO theory and that in EIT, CAP-MIMO, which is also called holographic MIMO, has attracted increasing research interests recently [11]. CAP-MIMO adopts a hypothetical structure that contains infinitely dense antennas in a limited spatial region, which is capable of continuously generating arbitrary current distribution at the transmitter and detecting arbitrary electric field at the receiver. The current distributions on the transmitter are called patterns of the CAP-MIMO. Different signals are modulated onto different patterns before radiating into the space. These continuous patterns need to be optimized by specially-designed algorithms in order to achieve a higher multi-user data rate [11].

B. Location Division Multiple Access (LDMA)

For the classical MIMO-enabled multiple access scheme called space division multiple access (SDMA), the beams emitted from the base station form a functional space. The

DoF of the functional space represents the resolution of distinguishing users at different locations, which corresponds to the functional DoF analysis in EIT. However, the classical SDMA based on far-field models can only distinguish the users in the angular dimension, but it fails to utilize the functional DoF in the distance dimension. For future wireless communications with extremely large-scale antenna arrays (ELAAs), the more accurate spherical wave model should be used instead of the simple planar wave assumption. With the spherical wave model, in addition to the angular dimension, the users can also be distinguished in the distance dimension. Therefore, a new multiple access scheme called LDMA [15] was recently proposed to fully exploit the extra functional DoF of the beams so as to simultaneously serve users at different angles and distances, as is shown in Fig. 5. In this way, unlike the almost only dominant way of spectrum efficiency enhancement by significantly increasing the number of antennas in 4G and 5G, LDMA provides a new possibility for multi-user capacity improvement by exploiting additional structure of the EM fields for future 6G.

C. Distance-Aware Precoding

As discussed in Subsection IV-A, the channel DoF of an LoS channel model in EIT is approximately proportional to the length of the transceivers and inversely proportional to the distance between the transceivers. Accordingly, only one data stream can be supported in the far-field LoS channel, since the channel DoF is only one in this case. However, in the near-field region, the LoS channel has much higher channel DoFs, so more data streams can be simultaneously supported. To fully utilize the near-field channel DoF, a distance-aware precoding scheme has been recently proposed, which adaptively adjusts the number of radio frequency chains to match the channel DoFs at different distances for single-user capacity improvement.

VI. OPEN PROBLEMS FOR EIT

In this section, we will discuss some open problems for EIT. We will also explain the meanings of these open problems, and

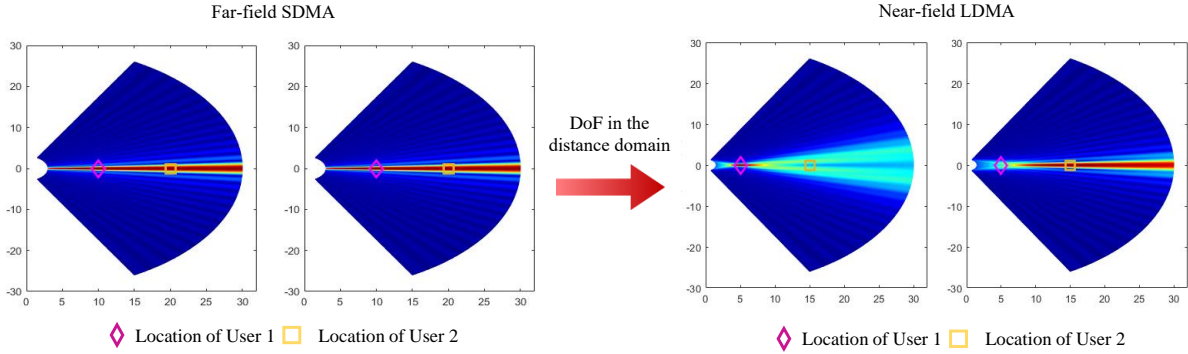


Fig. 5. Comparison between far-field SDMA and near-field LDMA, where the DoF in the distance domain can be exploited to provide a new possibility for capacity improvement [15].

why they are important for the future research of EIT.

A. Digital and Analog Challenges

To achieve the capacity improvement predicted by EIT, transceivers are expected to employ fully-continuous antenna surfaces. However, the implementation of such spatially continuous antenna surfaces will inevitably require the processing of an enormous volume of baseband data and the deployment of a vast amount of electrically small antenna patches. Thus, the exploding number of antennas will bring fundamentally new challenges to both the digital and analog signal processing.

In the digital domain, the optimal current distribution patterns should be frequently updated within a typical timescale of 1 ms to accommodate the fast-varying EIT channel. In addition, the DFT bases have to be further improved since the EIT eigenmodes are generally not sinusoidal [8]. Thus, numerous nearly-continuous bases have to be frequently designed in the digital domain, which is a great challenge even to the state-of-the-art baseband processors.

In the analog domain, there exists a physical tradeoff between the performance and the size of antennas [7]. Thus, it is practically difficult to design near-continuous antennas without sacrificing the radiation efficiency and working bandwidth. Apart from the physical tradeoff, the mutual coupling between adjacent antennas need to be carefully suppressed when the antenna array becomes denser, in order not to churn the designed radiation patterns and degrade the communication performance.

B. Compatible Noise Modeling in Discrete and Continuous Communication Systems

It can be proved that, the purely i.i.d. thermal noise distribution will cause the divergence of the end-to-end capacity of a MIMO transceiver, when the number of receiving antennas increases indefinitely within a constrained aperture size. The reason is that, when the number of receiving antennas increases, the signals can be aggregated coherently within any small spatial region, while the noises add up non-coherently because they are uncorrelated. Thus, in this small region,

the signal energy scales quadratically, while the noise energy scales linearly, resulting in an unbounded linear improvement of the signal-to-noise ratio (SNR). Thus, the capacity will diverge to infinity, which is obviously impossible due to the principle of energy conservation.

This absurdity is, in fact, caused by the improper assumption that the noise is spatially uncorrelated. If we assume a correlated noise, which is possibly the actual correct model, then this capacity divergence naturally disappears. As a result, a correlated noise model is required for the capacity analysis for EIT. On one hand, the noise model may be tuned to exhibit a small enough spatial “coherence length” to be compatible with the independent MIMO noise model with the half wavelength-spaced antennas. On the other hand, the noise model should possess some spatial correlation on a small scale to ensure a finite-valued EIT capacity. The construction of such a kind of noise model that bridges the macro-scale and micro-scale noises is, up to date, an open problem.

C. Power Constraint of Continuous Communication System

For both the classical information theory and EIT, the power constraint is a key factor that affects mutual information and capacity. Therefore, imposing appropriate power constraints on the system is of both theoretical and practical significance. In the classical information theory, the power constraint is imposed on the expectation of the squared norm of the signal vector. Similarly, for EIT, usually the functional \mathcal{L}_2 -norm of the source current is restricted to some pre-determined power values.

However, this form of power constraint causes incompatibility between MIMO information theory and EM theory. In MIMO information theory, the signal vectors are complex-valued mathematical abstractions of the actual physical process, so there is no guarantee that the squared norm of such vectors represents the actually radiated power. However, in EM theory, a more reasonable power constraint is given by calculating the total radiated power from an EM theoretical perspective, rather than calculating the \mathcal{L}_2 -norm of the source current. Unfortunately, these two definitions of power constraints are incompatible and often yield different power values, which is an open problem for EIT.

D. Achievability of the EM Capacity

In classical information theory, to establish a “capacity” value, one needs to prove an achievability theorem and a converse bound. Only when these two values coincide can one claim that such a value can be called as “capacity”. Usually, the proof of the achievability theorem is more difficult than the converse theorem, which requires ingenious mathematical constructions [6].

The EIT capacity defined in [9], [11] still lacks an achievability proof. To prove the achievability of such an EM capacity, Shannon’s stochastic proving techniques should be generalized to continuous spatio-temporal waveform channels, which deserve further research and rigorous mathematical construction.

VII. CONCLUSIONS

In this paper, we have investigated the fundamental mathematical tools, basic modeling methodologies, and theoretical performance analyses that constitute EIT. Furthermore, we have discussed some recent novel applications related to EIT, aiming at designing new wireless communication systems for single-user and multi-user capacity enhancement. The recent progress on EIT has demonstrated its potential to become a unified and widely applicable theory. However, there are still some unresolved open problems that require further study in the future.

REFERENCES

- [1] A. Goldsmith, S. A. Jafar, N. Jindal, and S. Vishwanath, “Capacity limits of MIMO channels,” *IEEE J. Sel. Areas Commun.*, vol. 21, no. 5, pp. 684–702, Jun. 2003.
- [2] C. Huang, S. Hu, G. C. Alexandropoulos, A. Zappone, C. Yuen, R. Zhang, M. Di Renzo, and M. Debbah, “Holographic MIMO surfaces for 6G wireless networks: Opportunities, challenges, and trends,” *IEEE Wireless Commun. Mag.*, vol. 27, no. 5, pp. 118–125, Jul. 2020.
- [3] M. D. Migliore, “Horse (electromagnetics) is more important than horse-man (information) for wireless transmission,” *IEEE Trans. Antennas Propagat.*, vol. 67, no. 4, pp. 2046–2055, Dec. 2018.
- [4] A. S. Poon, R. W. Brodersen, and D. N. Tse, “Degrees of freedom in multiple-antenna channels: A signal space approach,” *IEEE Trans. Inf. Theory*, vol. 51, no. 2, pp. 523–536, Feb. 2005.
- [5] D. Slepian, “On bandwidth,” *Proc. IEEE*, vol. 64, no. 3, pp. 292–300, Mar. 1976.
- [6] C. E. Shannon, “A mathematical theory of communication,” *The Bell System Technical Journal*, vol. 27, no. 3, pp. 379–423, Jul. 1948.
- [7] J. A. Stratton, *Electromagnetic theory*. John Wiley & Sons, 2007.
- [8] A. Pizzo, L. Sanguinetti, and T. L. Marzetta, “Fourier plane-wave series expansion for holographic MIMO communications,” *IEEE Trans. Wireless Commun.*, vol. 21, no. 9, pp. 6890–6905, Sep. 2022.
- [9] Z. Wan, J. Zhu, Z. Zhang, L. Dai, and C.-B. Chae, “Mutual information for electromagnetic information theory based on random fields,” *arXiv preprint arXiv:2111.00496*, Nov. 2021.
- [10] O. Bucci and G. Franceschetti, “On the spatial bandwidth of scattered fields,” *IEEE Trans. Antennas Propagat.*, vol. 35, no. 12, pp. 1445–1455, Dec. 1987.
- [11] Z. Zhang and L. Dai, “Pattern-division multiplexing for continuous-aperture MIMO,” in *Proc. IEEE International Conference on Communications (IEEE ICC’22)*, May 2022, pp. 3287–3292.
- [12] D. A. Miller, “Communicating with waves between volumes: Evaluating orthogonal spatial channels and limits on coupling strengths,” *Applied Optics*, vol. 39, no. 11, pp. 1681–1699, Apr. 2000.
- [13] A. Pizzo, A. de Jesus Torres, L. Sanguinetti, and T. L. Marzetta, “Nyquist sampling and degrees of freedom of electromagnetic fields,” *IEEE Trans. Signal Process.*, vol. 70, pp. 3935–3947, Jun. 2022.
- [14] G. J. Byers and F. Takawira, “Spatially and temporally correlated MIMO channels: Modeling and capacity analysis,” *IEEE Trans. Veh. Technol.*, vol. 53, no. 3, pp. 634–643, Mar. 2004.
- [15] Z. Wu, M. Cui, and L. Dai, “Multiple access for near-field communications: SDMA or LDMA?” *arXiv preprint arXiv:2208.06349*, Aug. 2022.

BIOGRAPHIES

Jieao Zhu is a Ph.D. student from the Department of Electronic Engineering at Tsinghua University, Beijing, China. His research interests include electromagnetic information theory (EIT), coding theory, and quantum computing.

Zhongzhichao Wan is a Ph.D. student from the Department of Electronic Engineering at Tsinghua University, Beijing, China. His research interests include electromagnetic information theory (EIT), coding theory, and channel modeling.

Linglong Dai is an Associate Professor from Tsinghua University. His current research interests include massive MIMO, RIS, Wireless AI, and EIT. He has received the IEEE ComSoc Leonard G. Abraham Prize in 2020, the IEEE ComSoc Stephen O. Rice Prize in 2022, and the IEEE ICC 2022 Outstanding Demo Award. He was listed as a Highly Cited Researcher by Clarivate in 2020 and 2021. He was elevated as an IEEE Fellow in 2022.

Mérouane Debbah is chief research officer at the Technology Innovation Institute in Abu Dhabi. From 2014 to 2021, he was vice-president of the Huawei France Research Center, where he was jointly the director of the Mathematical and Algorithmic Sciences Lab as well as the director of the Lagrange Mathematical and Computing Research Center.

H. Vincent Poor is the Michael Henry Strater University Professor of Electrical Engineering. His research interests are in the areas of information theory and signal processing, and their applications in wireless networks, energy systems and related fields. Dr. Poor is a member of the National Academy of Engineering and the National Academy of Sciences, and is a foreign member of the Chinese Academy of Sciences, the Royal Society and other national and international academies.