

# NETWORK DESIGN WITH PROBABILISTIC CAPACITIES

ALPER ATAMTÜRK AND AVINASH BHARDWAJ

**ABSTRACT.** We consider a network design problem with random arc capacities and give a formulation with a probabilistic capacity constraint on each cut of the network. To handle the exponentially-many probabilistic constraints a separation procedure that solves a nonlinear minimum cut problem is introduced. For the case with independent arc capacities, we exploit the supermodularity of the set function defining the constraints and generate cutting planes based on the supermodular covering knapsack polytope. For the general correlated case, we give a reformulation of the constraints that allows to uncover and utilize the submodularity of a related function. The computational results indicate that exploiting the underlying submodularity and supermodularity arising with the probabilistic constraints provides significant advantages over the classical approaches.

*Keywords.* Probabilistic constraints, submodularity, supermodularity, polymatroids, correlation.

August 2016; April 2017

## 1 Introduction

Designing networks with random components often necessitates building costly extra capacity to satisfy a desired service level. Examples include communication networks, air and ground traffic networks, supply-chain networks. Uncertainties in network capacities may be caused by a variety of natural or artificial factors. In the context of air or ground transportation network infrastructure, the capacity uncertainties are typically due to weather conditions and traffic along with other factors [22]. Similar capacity uncertainties arise in the design and operation of communication network infrastructure, power grid, and related applications [23, 29, 32, 46]. It is of significant interest to policy makers and other stakeholders to understand the trade-off between the network design cost and the service level to assess the value of additional capacity investments. To this end, we give an optimal network design model with probabilistic capacity constraints and propose effective solution methods that exploit the underlying combinatorial properties.

Let  $N(V, A)$  be a network with vertices  $V$  and arcs  $A$  with  $m = |A|$ . Given random arc capacities  $\xi_a$ ,  $a \in A$ , we are interested in the problem of selecting a minimum-cost subset of the arcs to satisfy the demand on the network with a high probability.

---

A. Atamtürk: Department of Industrial Engineering & Operations Research, University of California, Berkeley, CA 94720. [atamturk@berkeley.edu](mailto:atamturk@berkeley.edu)

A. Bhardwaj: Department of Industrial Engineering & Operations Research, University of California, Berkeley, CA 94720. [avinash@ieor.berkeley.edu](mailto:avinash@ieor.berkeley.edu). Currently: CORE, Universit catholique de Louvain, Voie du Roman Pays 34, B-1348 Louvain-la-Neuve, Belgium. [avinash.bhardwaj@uclouvain.be](mailto:avinash.bhardwaj@uclouvain.be)

Without loss of generality, we may assume that there is a single source  $s$  and a single sink  $t$  with demand  $d$ , as one can collate sources and sinks into a single node each respectively via arcs with deterministic bounds. Let  $h_a$  be the fixed “design” cost of arc  $a \in A$  for inclusion in the selected sub-network.

Since the maximum flow on the network is limited by the capacity of a minimum cut, we need to ensure sufficient capacity on each cut of the network. The problem is modeled as finding a minimum-cost subset of the arcs so that all cuts of the network jointly have sufficient capacity to meet the demand with probability at least  $1 - \epsilon$ , where  $0 < \epsilon \leq 0.5$ . Letting  $x_a$  be 1 if arc  $a$  is selected, 0 otherwise, the probabilistic network design problem is formulated as:

$$(\text{PND}) \quad \min_{\mathbf{x} \in \{0,1\}^m} \mathbf{h}'\mathbf{x} : \Pr \left( \sum_{a \in C} \xi_a x_a \geq d, \forall C \in \mathcal{C} \right) \geq 1 - \epsilon, \quad (1)$$

where  $\mathcal{C}$  denotes the set of all  $s - t$  cuts in the network  $N(V, A)$ . The constraint set with joint probabilistic constraints across all the cuts of the network is non-convex and not well-understood even for the continuous relaxation of the problem [39, 42]. Therefore, for efficient computational methods, one often resorts to convex approximations of the joint probabilistic constraints [1, 38].

In this paper, we study an approximate model with a disjoint probabilistic capacity constraint for each cut of the network. That is, we look for a minimum cost subset of the arcs so that each cut of the selected sub-network satisfies the demand with probability at least  $1 - \epsilon$ :

$$(\text{DPND}) \quad \min_{\mathbf{x} \in \{0,1\}^m} \mathbf{h}'\mathbf{x} : \Pr \left( \sum_{a \in C} \xi_a x_a \geq d \right) \geq 1 - \epsilon, \forall C \in \mathcal{C}, \quad (2)$$

where  $\mathcal{C}$  denotes the set of all  $s - t$  cuts in the network  $N(V, A)$ .

If  $\boldsymbol{\xi}$  is normally distributed with mean  $\boldsymbol{\mu}$  and covariance  $\boldsymbol{\Sigma}$ , problem (2) is equivalently stated with conic quadratic constraints:

$$(\text{CQND}) \quad \min_{\mathbf{x} \in \{0,1\}^m} \mathbf{h}'\mathbf{x} : \boldsymbol{\mu}'_C \mathbf{x} - \Omega \parallel \boldsymbol{\Sigma}_C^{1/2} \mathbf{x} \parallel \geq d, \forall C \in \mathcal{C}, \quad (3)$$

where  $\Omega = \phi^{-1}(1 - \epsilon)$  and  $\phi$  is the standard normal c.d.f.,  $\boldsymbol{\mu}_C$  is an  $m$ -vector of mean capacities for the arcs in cut  $C$ , and zero otherwise, and  $\boldsymbol{\Sigma}_C$  is an  $m \times m$ -matrix of covariances for the arcs in  $C$  and zero otherwise. The term  $\Omega \parallel \boldsymbol{\Sigma}_C^{1/2} \mathbf{x} \parallel$  is used to build sufficient slack into the constraint to accommodate the variability of  $\boldsymbol{\xi}$  around its mean  $\boldsymbol{\mu}$ . Problem (3) is  $\mathcal{NP}$ -hard as the deterministic network design problem with  $\Omega = 0$  is  $\mathcal{NP}$ -hard. We use  $\sigma_{ij}$  to denote the  $(ij)$ th coefficient of the covariance matrix  $\boldsymbol{\Sigma}$  and  $\sigma_i^2$  for the  $i$ th variance ( $\sigma_{ii}$ ).

If the distribution of  $\boldsymbol{\xi}$  is unknown, conservative robust versions can be modeled as (3) by using appropriate choices of  $\Omega$ . For example, if  $\xi_i$ 's are known only through their first two moments, then inequalities in (3) with  $\Omega = \sqrt{(1 - \epsilon)/\epsilon}$  imply the probabilistic constraints in (2) [17, 27]. Alternatively, if  $\xi_i$ 's are independent and symmetric with support  $[u_i - \sigma_i, u_i + \sigma_i]$ , then inequalities in (3) with  $\Omega = \sqrt{\ln(1/\epsilon)}$  and diagonal  $\boldsymbol{\Sigma} = \mathbf{D}$ , where  $D_{ii} = \sigma_i^2$ , imply the probabilistic constraints in (2) [15, 16]. Hence, under different assumptions on  $\boldsymbol{\xi}$ , one arrives at different instances of the model (3) with conic quadratic constraints ( $\Omega \geq 0$ ).

*Contributions.* There are two main challenges in solving **(CQND)**. The first one is that the formulation has an exponentially-many conic quadratic constraints — one for each cut of the network. We use a separation approach to generate only a small subset of the conic quadratic inequalities. Finding a violated conic quadratic constraint (3) is modeled as a minimum cut problem with a concave objective, which includes the  $\mathcal{NP}$ -hard max-cut problem as a special case. We give alternative formulations and compare them for the independent and correlated cases. The second challenge is that there is often a large gap between the optimal objective and its convex relaxation. In order to strengthen the convex relaxations, we derive strong cutting planes that make use of submodularity. In particular, we show that when the capacities are independent, under a mild assumption, the feasible set of **(CQND)** is the intersection of monotone supermodular covering knapsacks. For the general correlated case, we give a reformulation to uncover the combinatorial structure of another set function for the underlying constraints. This reformulation allows us to make use of submodularity even if the original constraint function is not submodular. The proposed reformulation is independent from the network structure and, therefore, it can be useful for other combinatorial problems with a risk objective or constraint with correlated random variables.

*Literature review.* By now there is large body of literature on the polyhedral investigations of deterministic capacitated network design [e.g., 3, 4, 7, 8, 12, 18, 34, 35, 45]. While the capacity uncertainty is largely studied in the context of survivable network design that can stand any single link failure [e.g., 13, 14, 19, 28, 40, 44], the treatment of the variability in the capacities is limited. Link capacity variability is well documented in transportation networks. Chen et al. [21] study the capacity reliability of a road network, that is, the probability that a network can support a given demand at a given service level when the link capacities are uncertain. Lo and Tung [33] formulate a probabilistic user equilibrium model for maximizing the network flow capacity while accounting for the effects of travel time reliability due to degradable links in terms of predetermined link performance function (proxy for capacity distributions). We refer the reader to Chen et al. [22] for a survey on the stochastic transportation network design problem. In the context of communication networks, Claßen et al. [23] study a broadband wireless network which uses microwave links to deliver data, where the channel conditions account for uncertainty in link capacities. Yang and Wen [46] consider the transmission expansion problem in a power network for handling uncertainties corresponding to future plant locations in terms of generation expansion and load growth. Fortz and Poss [26] study the commodity packing problem on a network with uncertain capacities and linearize the probabilistic linear constraint (3) when  $\xi_a$ 's are independent and  $\xi_a \sim \mathcal{N}(\mu_a, \lambda\mu_a) \ \forall a \in A$ , i.e., constant coefficient of variation. Song et al. [43] give a scenario-based approach to multi-row probabilistic constraints on binary variables. We do not address joint probabilistic constraints or multiple commodities here. Cutting planes for general conic quadratic mixed 0-1 programs are given in [9, 20, 30, 31].

*Example.* We end this section with a motivating example that highlights the value of model **(CQND)** in constructing a trade-off curve of service level versus design cost. To do so we construct networks with varying service levels and design costs; and with simulations compute the observed service levels. The data for the sample six-node network is presented in Table 8 of Appendix A.1.

First using reformulation **(CQND)** we construct minimum cost networks for six service levels: 50%, 70%, 80%, 97.5%, 99%, 99.9% . The 50% service level is the nominal case corresponding to the deterministic network design with  $\Omega = 0$ . The network configurations obtained for 50%, 80% and 97.5% service levels are shown in Figure 1. Note that the networks are not nested, that is, the arcs used for lower service levels are not necessarily included in the networks with higher service levels. The complete set of network configurations for all service levels are displayed in Appendix A.2.

Next for each network configuration, we generate 10,000 samples from the corresponding arc capacity distributions. For each network sample we check whether that network satisfies the demand, i.e., whether the minimum cut capacity is greater than or equal to the demand to compute the simulated service level. The results of this simulation are summarized in Table 1. The frequency distributions shown in Appendix A.3 indicate that they are skewed and non-normal for all network configurations. Nevertheless, the simulated service levels are reasonably close to the model service levels and increase monotonically with  $1 - \epsilon$ .

TABLE 1. Simulation results.

$1 - \epsilon$	cost	minimum cut			simulated service level
		min	mean	max	
50%	100%	121.9	222.1	274.6	39.81%
70%	104%	124.0	238.4	293.2	70.44%
80%	127%	154.0	249.2	306.5	82.68%
97.5%	135%	195.2	301.4	356.4	99.68%
99%	177%	209.6	303.6	360.2	99.85%
99.9%	186%	209.6	313.4	368.5	99.96%

Figure 2 shows the trade-off between the cost of the network design and the service level. The red curve is for the predicted model service level, whereas the blue curve is for the simulated service level. As expected, the cost of the design increases with the service level, at steeper rates for higher service levels. The trade-off curve is not convex as the network configuration changes in discrete steps.

The remainder of this paper is organized as follows: In Section 2 we give reformulations and strong valid inequalities for the independent and correlated capacities, separately. In Section 3 we discuss the separation problem for the capacity constraints for each case and compare alternative formulations. In Section 4 we present

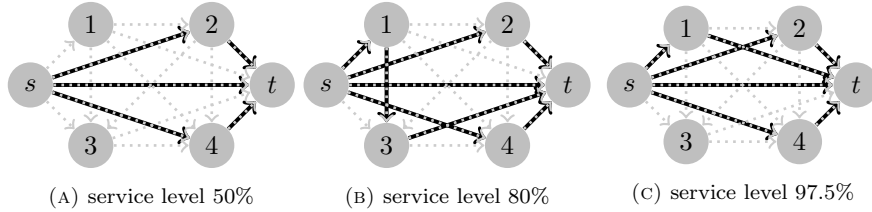


FIGURE 1. Minimum cost networks corresponding to different service levels.

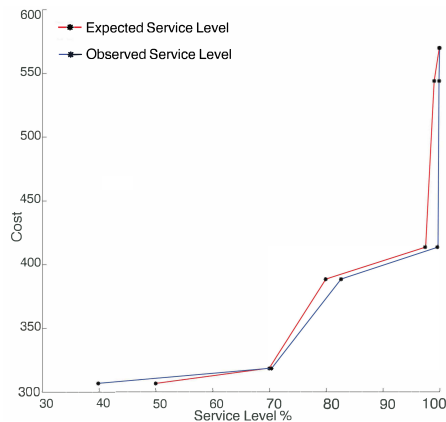


FIGURE 2. Network cost versus service level, model versus simulated.

computational experiments on testing the effectiveness of the valid inequalities in solving the probabilistic network design problem.

## 2 Strengthening the formulation

In this section we describe how to strengthen the convex relaxation of model (CQND). We consider each constraint in (3) separately and, for simplicity of notation, drop the subscript  $C$ . The case with independent arc capacities warrants special consideration as it leads to a specific combinatorial structure. Therefore, we discuss the cases of independent capacities and correlated capacities separately in Sections 2.1 and 2.2.

### 2.1 Independent arc capacities

When the arc capacities of the network are independent, the covariance matrix  $\Sigma$  reduces to a diagonal matrix  $D$  of variances; that is,  $D_{ii} = \sigma_i^2$ . Then, as  $x_i^2 = x_i$  for binary  $\mathbf{x}$ , each constraint in (3) reduces to

$$f(\mathbf{x}) = \boldsymbol{\mu}'\mathbf{x} - \Omega\sqrt{D\mathbf{x}} \geq d.$$

Given a finite ground set  $A$ , a set function  $g : 2^A \rightarrow \mathbb{R}$  is supermodular if its difference function

$$\rho_i(S) := g(S \cup i) - g(S) \text{ for } S \subseteq N \setminus i$$

is non-decreasing on  $N \setminus i$ ; that is,  $\rho_i(S) \leq \rho_i(T)$ ,  $\forall S \subseteq T \subseteq N \setminus i$  and  $i \in N$  [41]. If  $f$  is supermodular, then  $-f$  is submodular and vice-versa.

In a recent paper, Atamtürk and Bhardwaj [6] study the polyhedral structure of the supermodular covering knapsack set

$$K_g := \{\mathbf{x} \in \{0, 1\}^n : g(\mathbf{x}) \geq d\}$$

for a non-decreasing supermodular set function  $g$ . They give strong valid inequalities, referred to as the pack inequalities and the extended pack inequalities. Let  $P \subseteq N$  be a maximal set satisfying  $g(P) < d$ . For such a  $P$  it is easy to see that

the corresponding pack inequality

$$x(N \setminus P) \geq 1 \quad (4)$$

is valid. Extended pack inequalities generalize (4) through sequential lifting.

It is easy to check that  $f(\mathbf{x}) = \boldsymbol{\mu}'\mathbf{x} - \Omega\sqrt{\mathbf{D}\mathbf{x}}$  is supermodular on  $\{0, 1\}^A$  [e.g. 2]. Moreover, it is reasonable to assume that the network capacity increases with the addition of new arcs. In particular,  $f$  is non-decreasing if

$$(CV) \quad \mu_a \geq \Omega\sigma_a \text{ for all } a \in A.$$

For the majority of the paper we will assume that (CV) holds. In order to strengthen the continuous relaxation of **(CQND)** for the independent case, we utilize the extended pack inequalities of Atamtürk and Bhardwaj [6] for  $K_f$ . The computational effectiveness of the pack inequalities and their extensions for the probabilistic network design problem is detailed in Section 4. In Section 4.4, we show that the results can be applied and are useful even if assumption (CV) does not hold for all arcs.

Unfortunately supermodularity is lost once correlations are introduced to the covariance matrix  $\Sigma$ . In the following section we show how to exploit additional combinatorial structure when taking into account the correlations among the arc capacities.

## 2.2 Correlated arc capacities

For a non-diagonal covariance matrix  $\Sigma$ , the probabilistic cut capacity function

$$f(\mathbf{x}) = \boldsymbol{\mu}'\mathbf{x} - \Omega\sqrt{\mathbf{x}'\Sigma\mathbf{x}}$$

is not supermodular and the pack inequalities and their extensions that are valid for the diagonal case are no longer applicable. Nevertheless, we show below that under assumption (CV), we can utilize submodularity of a related function instead of the supermodularity of the original cut capacity function.

First, observe that, since  $\Omega \geq 0$ ,  $f(\mathbf{x}) \geq d$  implies  $\boldsymbol{\mu}'\mathbf{x} \geq d$ . Then, for  $\mathbf{x} : \boldsymbol{\mu}'\mathbf{x} \geq d$ , we have

$$f(\mathbf{x}) \geq d \iff \Omega^2\mathbf{x}'\Sigma\mathbf{x} \leq (\boldsymbol{\mu}'\mathbf{x} - d)^2.$$

Therefore, for  $\mathbf{x} : \boldsymbol{\mu}'\mathbf{x} \geq d$ , instead of the original conic quadratic constraint  $f(\mathbf{x}) \geq d$ , we may use the equivalent quadratic constraint

$$q(\mathbf{x}) := \Omega^2\mathbf{x}'\Sigma\mathbf{x} - (\boldsymbol{\mu}'\mathbf{x} - d)^2 \leq 0, \quad (5)$$

which allows one to exploit submodularity. The function  $q$  is the difference of two convex functions; it is neither convex, not concave. However, as shown below,  $q$  is submodular under assumption (CV).

**Proposition 1.** [37] *Let  $p : \{0, 1\}^n \rightarrow \mathbb{R}$  be the quadratic function*

$$p(\mathbf{x}) := \mathbf{x}'\mathbf{Q}\mathbf{x},$$

*where  $\mathbf{Q}$  is a symmetric matrix.  $p$  is submodular if  $Q_{ij} \leq 0$ ,  $1 \leq i < j \leq n$ .*

**Proposition 2.** *If (CV) holds, then the set function  $q(\mathbf{x}) = \Omega^2\mathbf{x}'\Sigma\mathbf{x} - (\boldsymbol{\mu}'\mathbf{x} - d)^2$  is submodular.*

*Proof.* Note that by observing  $x_i = x_i^2$  for binary  $\mathbf{x}$ ,  $q(\mathbf{x})$  can be written as

$$q(\mathbf{x}) = \sum_{i=1}^n \alpha_i x_i + 2 \sum_{i=1}^n \sum_{j>i}^n \beta_{ij} x_i x_j - d^2, \quad (6)$$

where  $\alpha_i = \Omega^2 \sigma_i^2 + 2\mu_i d - \mu_i^2$  and  $\beta_{ij} = \Omega^2 \sigma_{ij} - \mu_i \mu_j$ . As  $\sigma_{ij} \leq \sigma_i \sigma_j$  and by assumption (CV), we have

$$\beta_{ij} = \Omega^2 \sigma_{ij} - \mu_i \mu_j \leq \Omega^2 \sigma_i \sigma_j - \mu_i \mu_j \leq 0.$$

Then from Proposition 1 it follows that  $q$  is submodular.  $\square$

Submodular pack [6] and cover [11] inequalities and their extensions have been used to strengthen the continuous relaxations of submodular knapsack sets when the underlying set function is monotone. Unfortunately,  $q$  is neither non-increasing nor non-decreasing and, therefore, these inequalities are not applicable. Instead, here we will consider linear underestimates from the extended polymatroid associated with submodular  $q$ .

**Definition 1.** For a submodular set function  $g : \{0, 1\}^A \rightarrow \mathbb{R}$ , the polyhedron

$$EP_g := \{\mathbf{v} \in \mathbb{R}^A : \mathbf{v}(S) \leq g(S), S \subseteq A\}$$

is called the extended polymatroid associated with  $g$ .

**Theorem 3.** [25] For a submodular function  $g$  with  $g(\emptyset) = 0$ , each vertex of the extended polymatroid  $EP_g$  is given by

$$v_j^\pi = g(S_j^\pi) - g(S_{j-1}^\pi)$$

for a permutation  $\pi$  of  $A$ , where  $S_j^\pi$  denotes the set consisting of the first  $j$  elements of the permutation  $\pi$ .

Let  $\mathbf{V}_g$  be the set of all extreme points of  $EP_g$  and consider the discrete epigraph of the set function  $g$

$$B_g := \{(\mathbf{x}, z) \in \{0, 1\}^A \times \mathbb{R} : g(\mathbf{x}) \leq z\}.$$

It follows from polarity that any inequality

$$\mathbf{v}'\mathbf{x} \leq z, \mathbf{v} \in EP_g$$

is valid for  $B_g$  [e.g. 10]. Moreover, inequalities  $\mathbf{v}'\mathbf{x} \leq z$ ,  $\mathbf{v} \in EP_g$  are sufficient to define  $\text{conv}(B_g)$  [25]. Therefore, the discrete lower level set of  $g$  for a fixed value of  $z$  can be stated as follows.

**Proposition 4.** For  $\mathbf{v} \in \mathbf{V}_g$  and fixed  $\gamma \in \mathbb{R}$ , let  $K_{\mathbf{v}} := \{\mathbf{x} \in \{0, 1\}^n : \mathbf{v}'\mathbf{x} \leq \gamma\}$ . Then

$$K_g := \{\mathbf{x} \in \{0, 1\}^n : g(\mathbf{x}) \leq \gamma\} = \bigcap_{\mathbf{v} \in \mathbf{V}_g} K_{\mathbf{v}}.$$

Proposition 4 allows us to linearize the submodular capacity constraint (5) using inequalities from the vertices of the extended polymatroid  $EP_g$ . Although the number of such inequalities is factorial in  $|A|$ , we can use a separation algorithm to generate violated ones on the fly. Given a point  $\bar{\mathbf{x}}$ , we solve

$$\max\{\bar{\mathbf{x}}'\mathbf{v} : \mathbf{v} \in \mathbf{V}_g\}$$

exactly to find the strongest polymatroid knapsack inequality  $\mathbf{v}'\mathbf{x} \leq \gamma$  using the greedy algorithm of Edmonds [25]. Note that each  $K_{\mathbf{v}}$  is a 0–1 knapsack set, for which a large class of valid inequalities are known. To strengthen the formulation further, we generate cover inequalities for  $K_{\mathbf{v}}$  and lift them using the superadditive lifting functions [5]. As an additional step, we aggregate multiple polymatroid knapsack inequalities and generate cover inequalities for the aggregated knapsack set and lift them in the same way. We present our computational analysis of the aforementioned approach in Section 4.

### 3 Separation

As (CQND) contains exponentially many probabilistic capacity constraints, we utilize a cut generation algorithm to add only a small number of such constraints that are necessary. We let the initial relaxation of the problem to be the nominal version using only the mean capacities by ignoring the uncertainties in the capacity. This relaxation can be solved as a standard network design problem. Then we iteratively add violated probabilistic capacity constraints until no such violated inequality exists.

In order to find violated constraints for a given solution  $\bar{\mathbf{x}}$  to a relaxation of the problem, one needs to utilize a separation approach; that is, to find a cut  $C$  of the network for which the corresponding probabilistic capacity constraint is violated:

$$\boldsymbol{\mu}'_C \bar{\mathbf{x}}_C - \Omega \sqrt{\bar{\mathbf{x}}'_C \boldsymbol{\Sigma}_C \bar{\mathbf{x}}_C} < d. \quad (7)$$

We now formalize the separation problem for the probabilistic capacity constraints. Let  $\text{diag}(\bar{\mathbf{x}})$  be the diagonalization of the vector  $\bar{\mathbf{x}}$  and  $\boldsymbol{\mu}_{\bar{\mathbf{x}}} = \text{diag}(\bar{\mathbf{x}})\boldsymbol{\mu}$  and  $\boldsymbol{\Sigma}_{\bar{\mathbf{x}}} = \text{diag}(\bar{\mathbf{x}})\boldsymbol{\Sigma}\text{diag}(\bar{\mathbf{x}})$ . Further, let the binary variable  $z_{ij}$  be 1 if arc  $(ij) \in A$  is in the chosen cut and 0 otherwise; and  $w_i$  be 1 if node  $i$  is on the source ( $s$ ) side and 0 if it is on the sink ( $t$ ) side. Then, a cut  $C$  achieving the smallest left-hand-side for inequality (7) can be found by solving the following nonlinear min-cut problem:

$$\begin{aligned} \min \quad & \Theta(\mathbf{z}) = \boldsymbol{\mu}'_{\bar{\mathbf{x}}} \mathbf{z} - \Omega \sqrt{\mathbf{z}' \boldsymbol{\Sigma}_{\bar{\mathbf{x}}} \mathbf{z}} \\ \text{s.t.} \quad & w_i - w_j \leq z_{ij}, \quad (ij) \in A \end{aligned} \quad (8)$$

$$w_i \geq z_{ij}, \quad (ij) \in A \quad (9)$$

$$(\text{SEP}) \quad w_j \leq 1 - z_{ij}, \quad (ij) \in A \quad (10)$$

$$w_s = 1 \quad (11)$$

$$w_t = 0 \quad (12)$$

$$w_i, w_j \geq 0, \quad (ij) \in A \quad (13)$$

$$z_{ij} \in \{0, 1\}, \quad (ij) \in A. \quad (14)$$

Note that  $\Theta(\mathbf{z})$  is a concave function as  $\Omega \geq 0$  and  $\boldsymbol{\Sigma}_{\bar{\mathbf{x}}}$  is positive semidefinite. Constraints (8)–(10) ensure that only the arcs from the source ( $s$ ) set to the sink ( $t$ ) set are included in the chosen cut. Notice that for the usual (deterministic) min-cut problem with  $\Omega = 0$ , as the objective is nonnegative, inequality (8) is sufficient. However, one needs constraints (9) and (10) to ensure the correctness of the formulation with  $\Omega > 0$ . Observe that (SEP) is  $\mathcal{NP}$ -hard, since for  $\boldsymbol{\mu} = \mathbf{0}$  and diagonal  $\boldsymbol{\Sigma}$  it reduces to the max-cut problem.



In order to have an effective method for solving **(CQND)**, it is imperative to be able generate violated probabilistic capacity inequalities fast. In the following subsections we discuss solving the separation problem **(SEP)** for the independent capacities and correlated capacities separately as the correlations change the structure of the separation problem significantly.

### 3.1 Independent arc capacities

When the arc capacities are independent, the covariance matrix is diagonal; therefore, the separation problem reduces to

$$\begin{aligned} \min \quad & \Theta(\mathbf{z}) = \boldsymbol{\mu}'_{\mathbf{x}} \mathbf{z} - \Omega \sqrt{\sum_{a \in A} \sigma_a^2 \bar{x}_a^2 z_a} \\ \text{(SEP-D)} \quad & \text{s.t. (8) -- (14).} \end{aligned}$$

In this case the objective function  $\Theta$  is convex, moreover, a non-decreasing supermodular function. Nevertheless, minimizing the set function  $\Theta$  over binaries is  $\mathcal{NP}$ -hard [2]. Nemhauser et al. [37] show that any supermodular function minimization problem can be formulated using linear inequalities:

$$\begin{aligned} \min w \quad & \text{s.t.} \\ w \geq & \Theta(S) - \sum_{i \in S} \rho_i(A \setminus i)(1 - z_i) + \sum_{i \in N \setminus S} \rho_i(S)z_i, \quad \forall S \subseteq A \end{aligned} \quad (15)$$

$$w \geq \Theta(S) - \sum_{i \in S} \rho_i(S \setminus i)(1 - z_i) + \sum_{i \in N \setminus S} \rho_i(\emptyset)z_i, \quad \forall S \subseteq A \quad (16)$$

However, the linear mixed 0–1 formulation with inequalities (15)–(16) is computationally ineffective as its convex relaxation is usually weak [2].

Alternatively, **(SEP-D)** can be formulated as a quadratically-constrained mixed 0–1 optimization problem by bringing the nonlinear term in the objective into the constraints and squaring it:

$$\begin{aligned} \min \quad & \Theta(\mathbf{z}, t) = \boldsymbol{\mu}'_{\mathbf{x}} \mathbf{z} - \Omega t \\ \text{(SEP-QCQP)} \quad & \text{s.t.} \quad t^2 \leq \sum_{a \in A} \sigma_a^2 \bar{x}_a^2 z_a \\ & \text{(8) -- (14).} \end{aligned} \quad (17)$$

Note that (17) is a convex constraint with only single quadratic term and can be readily handled by commercial solvers. Table 2 shows a comparison of the solution of the two formulations with **Cplex** version 12.6 on a 2.93GHz Pentium Linux workstation with 8GB main memory. Each row shows the average number of branch-and-bound nodes till optimality and the time to the first feasible solution and the time to proving optimality (in seconds) for five instances with varying network sizes and  $\Omega$ . Observe that **(SEP-QCQP)** is solved to optimality much faster than the linearization of **(SEP-D)** with (15)–(16). For all most all instances it requires no branching at all. Furthermore, in all cases feasible solutions are found much earlier. Therefore, we use formulation **(SEP-QCQP)** for the independent case in the computational experiments presented in Section 4.

TABLE 2. Separation formulations: independent case.

nodes	arcs	$\Omega$	SEP-D with ineqs. (15)–(16)			SEP-QCQP		
			nodes	feasible	optimal	nodes	feasible	optimal
50	1225	1	15	0.4	0.9	0	0.1	0.4
		3	18	0.8	1.1	0	0.2	0.4
		5	21	0.8	1.5	0	0.2	0.4
70	2415	1	12	1.8	3.2	0	0.9	1.4
		3	17	2.9	4.4	0	0.6	1.4
		5	30	5.1	6.4	0	0.9	1.4
100	4950	1	14	9.1	16.9	0	2.7	5.3
		3	25	12.9	20.3	0	2.9	5.6
		5	41	18.4	26.6	0	2.4	5.6
avg			21.4	5.8	9.0	0	1.2	2.4
stdev			9.3	6.4	9.7	0	1.1	2.3

### 3.2 Correlated arc capacities

For the general case with correlated arc capacities, as the covariance matrix is not diagonal, the objective of the separation problem is no longer supermodular nor can it be formulated as **(SEP-QCQP)** due to the bilinear terms. To overcome the difficulty, we present two approaches. The first one is the usual McCormick linearization of the bilinear terms, whereas the second one is a two-step approach that allows one to convert the separation problem into one with a quadratic constraint on binary variables.

#### *McCormick linearization*

The classical approach of McCormick [36] to solving non-convex quadratic optimization problems is to linearize the bilinear terms using additional variables and constraints. In particular, a bilinear term  $z = x_1 x_2$  is re-formulated with the *McCormick inequalities*:

$$z \geq \max(x_1 + x_2 - 1, 0), \quad z \leq \min(x_1, x_2). \quad (18)$$

Now consider the objective function of the separation problem **(SEP)**:

$$\Theta(\mathbf{z}) = \boldsymbol{\mu}'_{\mathbf{x}} \mathbf{z} - \Omega \sqrt{\mathbf{z}' \boldsymbol{\Sigma}_{\mathbf{x}} \mathbf{z}} = \boldsymbol{\mu}'_{\mathbf{x}} \mathbf{z} - \Omega \sqrt{\sum_i (\sigma_i \bar{x}_i)^2 z_i^2 + 2 \sum_i \sum_{j>i} \sigma_{ij} \bar{x}_i \bar{x}_j z_i z_j}. \quad (19)$$

Introducing a new variable  $y_{ij}$  for each distinct pair  $\{i, j\}$ , we formulate the separation problem as

$$\begin{aligned} \min \quad & \Theta(\mathbf{z}, \mathbf{y}, t) = \boldsymbol{\mu}'_{\mathbf{x}} \mathbf{z} - \Omega t \\ \text{s.t.} \quad & t^2 \leq \sum_i (\sigma_i \bar{x}_i)^2 z_i + 2 \sum_i \sum_{j>i} \sigma_{ij} \bar{x}_i \bar{x}_j y_{ij} \end{aligned} \quad (20)$$

$$\textbf{(SEP-MC)} \quad z_i + z_j \leq y_{ij} + 1, \quad i, j \in A \quad (21)$$

$$y_{ij} \leq z_i, \quad i, j \in A \quad (22)$$

$$y_{ij} \leq z_j, \quad i, j \in A \quad (23)$$

$$z_i \in \{0, 1\}, \quad i \in A \quad (24)$$

$$(8) - (14).$$

Observe that while (19) is a concave function in  $z$ , (20) is a convex constraint with a single quadratic term, and, thus, **(SEP-MC)** can be readily solved by conic quadratic MIP solvers. Also note that constraints (21)–(24) implicitly restrict  $y_{ij}$  to be binary. However, a challenge with this McCormick linearization is that it often yields a weak relaxation of the original formulation. Moreover, the large number (quadratic in  $|A|$ ) of auxiliary variables and constraints introduced for the linearization makes it difficult to scale up the dimension of the problem.

#### *A quadratic reformulation*

In this section we give an alternative reformulation of the separation problem that does not require a large number of auxiliary variables. In particular, we reformulate the separation problem with correlations using a quadratic set function as in Section 2.2.

Note that for a given  $\bar{\mathbf{x}}$ , the cut corresponding to a feasible solution  $\mathbf{z}$  to **(SEP)** is satisfied if and only if

$$\boldsymbol{\mu}'_{\bar{\mathbf{x}}}\mathbf{z} - \Omega\sqrt{\mathbf{z}'\boldsymbol{\Sigma}_{\bar{\mathbf{x}}}\mathbf{z}} \geq d. \quad (25)$$

Assuming  $\boldsymbol{\mu}'_{\bar{\mathbf{x}}}\mathbf{z} \geq d$ , this is equivalent to

$$(\boldsymbol{\mu}'_{\bar{\mathbf{x}}}\mathbf{z} - d)^2 \geq \Omega^2 \mathbf{z}'\boldsymbol{\Sigma}_{\bar{\mathbf{x}}}\mathbf{z}. \quad (26)$$

Observe that it is easy to satisfy the condition  $\boldsymbol{\mu}'_{\bar{\mathbf{x}}}\mathbf{z} \geq d$  as it corresponds to solving a standard min-cut problem. Therefore, in the first stage, we ensure that  $\bar{\mathbf{x}}$  satisfies that standard (linear) cut capacity constraints  $\boldsymbol{\mu}'\mathbf{x} \geq d$  and then, in the second stage, we look for a violated probabilistic capacity constraint by solving

$$\begin{aligned} & \text{minimize} && \boldsymbol{\mu}'_{\bar{\mathbf{x}}}\mathbf{z} \\ \text{(SEP-BQC)} & \text{s.t.} && (\boldsymbol{\mu}'_{\bar{\mathbf{x}}}\mathbf{z} - d)^2 \leq \Omega^2 \cdot \mathbf{z}'\boldsymbol{\Sigma}_{\bar{\mathbf{x}}}\mathbf{z} - \epsilon \end{aligned} \quad (27)$$

(8) – (14)

for a sufficiently small  $\epsilon > 0$ . Note that any feasible solution to **(SEP-BQC)** corresponds to a violated probabilistic cut constraint. As (27) is a quadratic constraint on binary variables, it can be readily solved by commercial MIP solvers. Observe that **(SEP-BQC)** is a much smaller formulation than **(SEP-MC)**.

In the following, we compare the computational performance for three solution approaches:

- (1) **(SEP-MC)** with full McCormick linearization
- (2) **(SEP-BQC)** with partial McCormick linearization of only the non-convex right-hand-side of constraint (27).
- (3) **(SEP-BQC)** with no linearization.

Each row of Table 3 shows the average for five randomly generated instances with varying network size and  $\Omega$ . We compare the number of nodes explored in the search tree and the time (in seconds) to the first feasible solution and optimality.

It is evident from the computations displayed in Table 3 that **(SEP-BQC)** reformulation leads to a much better computational performance compared to the partial or full McCormick linearizations. As the separation problem is called many times during the solution of the probabilistic network design problem, shorter separation

TABLE 3. Separation formulations: correlated case.

nodes	arcs	$\Omega$	Full McCormick			Partial McCormick			SEP-BQC		
			nodes	feasible	optimal	nodes	feasible	optimal	nodes	feasible	optimal
20	105	1	2	1.4	3.6	5	1.1	5	0	0	0.2
		3	0	1.8	4.3	14	3.1	10.9	0	0.1	0.2
		5	2	1.7	4.2	31	4.4	12.7	1	0.1	0.2
30	231	1	11	42.1	54.6	32	22.9	61.2	5	0.2	0.6
		3	17	51.7	95.2	366	54.5	88.6	4	0.6	0.6
		5	20	61.6	122.1	1093	36.6	190	3	1.0	5.4
40	432	1	36	65.2	676.7	39	188.9	283	1	4.3	5.3
		3	51	66.7	816.3	150	446.3	498	2	2.0	9.8
		5	25	72.8	736.5	291	447.1	628	5	3.9	11.2
avg			18.2	40.6	279.3	224.6	133.9	197.6	2.3	1.0	3.7
stdev			17.1	30.5	352.1	351	186.5	229.1	2.0	1.5	4.4

times can make a significant impact on the overall solution times. Therefore, we use formulation (**SEP-BQC**) for the separation for the correlated case.

## 4 Computations

In this section we present our computational experiments for solving the network design problem with probabilistic capacities. We compare the impact of the strengthening methods discussed in Section 2 in the computational performance. We utilize the solution approaches for the separation problems discussed in Section 3. For the computational experiments we use the MIP solver of **Cplex** version 12.6 that solves conic quadratic relaxations at the nodes of the branch-and-bound tree. **Cplex** heuristics are turned off, and a single thread is used. The MIP search strategy is set to the traditional branch-and-bound method as it is not possible to add users cuts in **Cplex** with the dynamic search strategy. Since the solution approaches are significantly different for the independent and correlated cases, we address them separately. For the case of independent capacities the time limit and the memory limit are set to 1800 secs. and 500 MB, respectively, whereas for the harder correlated case, the limits are 3600 secs. and 1 GB. The experiments are performed on a 2.93GHz Pentium Linux workstation with 8GB main memory.

### 4.1 Data generation

We report the results of the computational experiments for varying number of nodes ( $n$ ) and arcs ( $a$ ), values of  $\Omega$ , and demand. For each combination, five random networks are generated with mean arc capacities drawn from uniform  $[0, 100]$  and  $\sigma_i$  from uniform  $[0, \mu_i/\Omega]$ . The demand  $d = \beta \cdot \phi$ , where  $\phi$  is the maximum flow possible through the network for the given value of  $\Omega$ . So that the networks are not completely dense, we set the probability of having an arc between two nodes as  $1/\sqrt{n}$ , while ensuring the connectedness of the network. In the case of correlated capacities, for each problem instance, the covariance matrix is generated using MATLAB moler matrix library which generates random symmetric positive definite matrices. The eigenvalues of each generated covariance matrix are then translated by half the spectral radius to reduce the condition number. The mean arc capacities in the correlated case are generated from uniform  $[\Omega \sigma_i, 2\Omega \sigma_i]$ . In Section 4.4, we drop the assumption (CV) on the coefficient of variation and the mean capacities

are generated from uniform  $[0, 2\Omega\sigma_i]$ . The data set is available for download at <http://ieor.berkeley.edu/~atamturk/data/conic.network.design>.

## 4.2 Independent arc capacities

In Table 4 we compare the root relaxation gap (**rgap**), the numbers of cuts generated (**cuts**), the number of nodes explored (**nodes**), the CPU time in seconds (**time**) and the number of instances solved to optimality (**#**) with four cut generation options. The **rgap** is computed as  $(z_r - z_o)/z_o$ , where  $z_r$  denotes the objective value at the root node and  $z_o$  denotes the optimal objective value. If none of the algorithms solve a given instance to optimality within the computation limits, then  $z_o$  is the objective value of the best found solution across all algorithms. Furthermore, if an algorithm is unable to solve all of the five instances, we provide the end gap (**egap**), which is computed as  $(z_e - z_o)/z_o$ , where  $z_e$  is the best objective value found with the algorithm. Each entry in the table presents the average for five instances, except for the **#[egap]** column, where the **egap** is the average for the unsolved instances.

The columns under the heading ‘conic cuts’ show the performance with the CPLEX barrier algorithm when the conic quadratic constraints (3) added to the formulation through the separation routine. We compare it with two linearizations: the first one is the CPLEX outer approximation, where CPLEX automatically generates gradients cuts and solves linear programs iteratively instead of conic quadratic programs with a barrier algorithm; whereas the second one is our implementation of the gradient cuts. Both linearizations perform better than using the barrier algorithm. CPLEX generates additional cutting planes to these linear formulations to improve the relaxations. Note that our implementation of the gradient cuts is more aggressive and generates significantly more cuts and reduces the root gaps and the number of nodes substantially; however, it is not as efficient as the native CPLEX implementation and takes longer time. Therefore, for the rest of the computations, we use the CPLEX outer approximation. The last set of columns under the heading ‘extended packs’ show the performance with the addition of extended pack inequalities [6]. The use of extended pack cuts strengthens the formulations substantially by reducing the average root gap to 12% and leads to much shorter solution times.

## 4.3 Correlated arc capacities

In Table 5 we compare the performance with conic cuts, CPLEX outer approximation as well as with adding the extended polymatroid cuts, and the aggregated lifted cover cuts to the formulations. As in the independent case, solving iterative linear programs via CPLEX outer approximation is substantially faster compared to solving conic the quadratic programs with a barrier algorithm in the search tree. The user cuts are generated throughout the search tree using the respective separation algorithms on top of the CPLEX outer approximation. Table 5 clearly shows the positive impact of strengthening the formulations with the extended polymatroid cuts and the aggregated lifted cover cuts. All instances are solved to optimality with the addition of user cuts and the average solution time across all instances reduces from 1587 seconds to merely 4 seconds. Note that the separation problems for network instances in Table 5 are solved much faster than the ones in Table 3

TABLE 4. Network design: independent case.

nodes	arcs	$\beta$	$\Omega$	Conic cuts				CPLEX outer approximation				User outer approximation				Extended packs			
				rgap	cuts	nodes	time	# [gap]	rgap	cuts	nodes	time	# [gap]	rgap	cuts	nodes	time	# [gap]	# [gap]
10	18	0.5	1	66.2	3	123	1	5	66.2	3	82	1	5	60.42	87	24	76	5	0
			3	68.5	7	394	1	5	68.5	7	226	3	5	64.9	89	21	71	5	12.0
			5	60.4	4	349	1	5	60.4	4	163	2	5	53.4	106	19	80	5	1.3
			1	54.4	5	264	1	5	49.0	5	158	0	5	46.4	77	20	62	5	20.5
			3	59.7	6	408	3	5	59.7	6	161	4	5	51.5	66	19	60	5	0.2
20	54	0.5	5	44	8	1817	8	5	44	8	1187	2	5	39.0	125	31	94	5	2.3
			1	42.2	6	386	1	5	40.9	6	278	2	5	38.9	82	18	68	5	3.0
			3	39.0	3	394	1	5	41.4	3	206	0	5	32.6	134	27	101	5	9.6
			5	56.9	11	1251	6	5	53.1	11	876	5	5	52.3	113	23	88	5	0.8
			1	70.8	21	28146	628	4 [26.1]	68.7	34	16424	16	5	60.9	836	81	398	5	8.0
40	153	0.3	3	68.5	27	19620	591	5	68.5	29	3570	5	5	61.9	562	61	285	5	1.5
			5	67.3	23	19050	773	3 [25.3]	67.2	28	3236	6	5	51.6	469	42	237	5	7.2
			1	56.5	16	17876	639	4 [19.3]	52.0	32	22242	26	5	44.3	815	97	368	5	9.2
			3	61.1	26	29287	887	3 [23.2]	56.9	53	51336	54	5	53.1	763	93	315	5	11.1
			5	59.5	22	21371	760	4 [18.6]	56.0	40	25241	25	5	50.5	1124	120	490	5	13.3
20	54	0.7	1	51.8	21	38152	769	3 [22.1]	47.5	43	49404	49	5	41.7	801	122	416	5	8.7
			3	51.4	24	33386	761	4 [20.2]	46.7	36	32124	22	5	45.1	673	102	326	5	7.6
			5	51.3	22	53640	762	3 [20.8]	44.6	46	47598	40	5	38.2	579	93	300	5	9.3
			1	64.7	18	46877	1450	2 [25.5]	58.63	122	297893	624	4 [19.7]	42.0	2558	127	1729	1 [15.2]	14.5
			3	66.6	17	46226	1440	2 [27.2]	60.3	162	457997	936	3 [20.3]	48.3	1938	119	1323	2 [15.9]	14.8
40	153	0.7	5	68.3	16	49432	1473	1 [31.2]	59.7	138	586878	1118	2 [20.8]	52.4	2391	124	1629	1 [16.4]	21.7
			1	58.7	18	87071	1800	1 [27.6]	48.1	142	898215	1222	4 [18.7]	37.8	2526	138	1602	2 [10.7]	20.5
			3	62.3	17	82869	1800	1 [29.2]	54.5	179	1008149	1603	3 [19.1]	44.7	2608	143	1740	1 [15.1]	27.9
			5	61.2	16	59570	1800	0 [29.8]	51.3	178	906390	1581	2 [20.9]	41.9	2845	189	1946	1 [14.8]	24.4
			1	52.6	16	64761	1800	2 [25.6]	42.2	148	806376	1184	4 [17.1]	36.2	2378	129	1639	1 [11.4]	27.1
avg	stddev	3	3	57.8	16	69720	1800	1 [27.2]	42.7	121	998075	1125	3 [18.0]	35.6	2169	121	1398	2 [10.5]	26.4
			5	55.7	15	83062	1800	0 [30.3]	45.1	152	772617	1023	3 [18.6]	35.31	2281	175	1515	3 [10.5]	24.9
			8.3	7	31719	806			53.8	64	258782	396		46.7	1081	84	670		12.1
			8.3	7	29239	710			9.1	64	378896	574		8.9	1011	53	691		8.9
																			593
																			54
																			91
																			150

because (a) instances in Table 5 are smaller and (b) the separation problems are solved only on subsets of the arcs with positive flow.

#### 4.4 Relaxing the assumption on the coefficient of variation

Throughout the paper, we assumed an upper bound on the coefficient of variation (CV). While assumption (CV) is a sufficient condition leading to the submodularity of the set functions used in the analysis, we show in this section, that it is possible to drop this assumption and still utilize the results where applicable.

Recall from Section 2.2 that if (CV) holds, the coefficients  $\beta_{ij}$  of the function

$$q(\mathbf{x}) = \sum_i \alpha_i x_i + \sum_i \sum_{j>i} 2\beta_{ij} x_i x_j + d^2,$$

are non-positive, and consequently,  $q$  is submodular. We can drop this assumption by using the McCormick linearization for pairs  $(i, j)$  where  $\beta_{ij} > 0$ . Introducing  $z_{ij} = x_i x_j$  for such pairs only, consider the function

$$\tilde{q}(\mathbf{x}, \mathbf{z}) = \sum_i \alpha_i x_i + \sum_{ij:j>i, \beta_{ij}<0} 2\beta_{ij} x_i x_j + \sum_{ij:j>i, \beta_{ij}>0} 2\beta_{ij} z_{ij} + d^2.$$

As  $\tilde{q}$  is submodular, we can employ the results using  $\tilde{q}$  instead of  $q$ .

In Table 6 we present the computational results for the general probabilistic network design instances without the assumption (CV). In this data set, 29% of the coefficients  $\beta_{ij}$  are positive. The results are largely consistent with Table 5 with slight degradation in the performance. The cutting planes added reduce the average solution time from 2334 seconds to merely 10 seconds and confirms their effectiveness for the general case as well.

#### 4.5 Large scale instances

Finally we test how the proposed approach scales for large scale network design instances derived from 1990 U.S. Census described in Daskin [24]. The data set is available at <http://umich.edu/~msdaskin/files/sitation-class-2013.zip>. We use the two largest data sets consisting of 88 and 150 cities in the United States. The arc costs are set proportional to the great circle distances between the cities as available in the data. The remaining parameters are generated as described in Section 4.1 with a general covariance matrix. These instances are run on a six-core Intel Xeon 3.6GHz computer with 32GB main memory with a two hour time limit. The results summarized in Table 7 show that none of the instances are solved well by default CPLEX. On the other hand, with the addition of the cuts all of the 88-city instances and 26 of the 45 150-city instances are solved to optimality. For the remaining 19 instances the average gap between the lower and upper bounds at termination (egap) is 65.6% lower compared to the default CPLEX.

### 5 Conclusion

In this paper we consider single-commodity network design with probabilistic arc capacities. The problem is modeled with an exponential number of probabilistic capacity constraints. We study the independent and correlated cases separately as they lead to significantly different constraint sets and separation problems. In both

TABLE 5. Network design: correlated case.

Conic cuts										CPLEX outer approximation										Extended polynomial cut										Extended polynomial & aggregated lifted cover cuts									
nodes	arcs	$\beta$	$\Omega$	rgap	cuts	nodes	time	# [gap]	rgap	cuts	nodes	time	# [gap]	rgap	cuts	nodes	time	# [gap]	rgap	cuts	covers	nodes	time	# [gap]															
10	21	0.5	1	84.1	6	474	2.2	5	84.1	6	232	0.1	5	80.4	18	67	0.1	5	64.2	16	9	33	0.1	5															
			3	79.1	6	675	3.4	5	79.1	5	280	0.1	5	77.4	16	71	0.1	5	61.2	14	10	27	0.1	5															
			5	82.7	4	616	1.7	5	82.7	4	202	0.1	5	81.4	33	89	0.1	5	62.6	20	9	37	0.1	5															
			1	72.8	7	468	2.6	5	72.8	7	314	0.1	5	66.1	43	104	0.1	5	50.2	39	17	58	0.1	5															
			3	79.1	7	1314	5.5	5	79.1	7	430	0.1	5	74.2	30	119	0.3	5	59	30	16	62	0.1	5															
10	21	0.5	5	73.9	8	901	10.5	5	73.9	8	427	0.2	5	70.2	54	174	0.2	5	48	39	21	70	0.2	5															
			1	68.3	7	1523	7.6	5	68.3	7	721	0.2	5	66.8	44	190	0.22	5	45.3	56	25	84	0.2	5															
			3	80	11	2670	20.4	5	80	11	855	0.3	5	73.5	53	204	0.4	5	52.6	52	26	98	0.2	5															
			5	76.1	12	5614	97.8	5	76.1	12	2125	0.8	5	70.4	98	359	0.3	5	49.3	101	42	141	0.2	5															
			1	73.1	29	25429	1327.9	4 [24]	72.2	11	5671	3.5	5	72	279	1834	1.3	5	55	208	141	248	0.8	5															
20	54	0.5	3	73.8	16	7690	238.7	5	73.8	16	3837	2.2	5	72	164	792	0.7	5	55.4	154	121	256	0.6	5															
			5	72.4	10	4283	81.5	5	72.4	10	2784	1.2	5	70.7	118	395	0.5	5	48.3	90	62	155	0.4	5															
			1	67.3	51	59081	2176.4	2 [9.9]	69.5	29	41528	33.7	5	65.3	423	4758	3.2	5	46	466	200	1132	2.5	5															
			3	70.4	41	36523	1712.4	4 [4.1]	70.5	31	14067	8.4	5	66.9	418	1793	1.7	5	49.4	344	167	531	1.5	5															
			5	68.6	84	34812	1585.5	3 [6.6]	70.4	50	129362	727.3	4 [11.2]	68.5	258	1074	1	5	50.6	190	120	310	0.8	5															
20	54	0.5	1	60.7	25	38103	1254.5	4 [13.3]	62.2	33	46481	32.5	5	62.1	719	8237	10.8	5	43.4	397	197	1270	2.6	5															
			3	67.3	66	102159	3600	0 [9.7]	68.4	44	28176	19.6	5	65.5	352	2192	2.1	5	46.3	238	134	647	1.2	5															
			5	67	48	47892	1698.7	4 [14.9]	67.7	38	24963	24.3	5	65.7	346	2658	1.9	5	47	303	224	828	2.4	5															
			1	68.1	46	32337	2854.5	2 [18.4]	71.3	68	56284	171.4	5	70.6	231	2304	1.7	5	51	387	222	672	2.9	5															
			3	66.6	54	28538	2586.2	2 [23.1]	72.2	108	137584	844.8	4	67.9	507	5620	5.2	5	50	397	246	814	3.2	5															
30	101	0.5	5	67.6	100	33951	2735.2	2 [21.2]	71.6	87	77529	385.8	5	69.3	305	2582	2.2	5	49.4	191	139	460	1.5	5															
			1	57.6	90	109833	3600	0 [18.8]	65.7	106	541575	2219.5	3 [4.0]	64.1	1244	24314	24.2	5	42	937	566	2596	9.5	5															
			3	59.6	21	65734	2850.7	2 [16.7]	64.3	83	330311	1612.2	4 [8.1]	60.9	1297	14424	15.9	5	42.8	1155	721	2999	14.7	5															
			5	60.8	40	133861	3600	0 [12.3]	65.2	98	262583	1123.6	5	61.5	963	5186	5.5	5	39.8	866	479	1242	6.3	5															
			1	44.4	67	83056	3600	0 [30.7]	59.3	108	644090	2892.9	2 [9.2]	61.5	1790	51076	63.1	5	36.6	1686	962	4759	28.8	5															
30	101	0.5	3	56.9	63	90960	3600	0 [10.8]	62.7	63	540993	1811.8	3 [22.4]	62.2	1977	49073	81.9	5	42	2168	1118	3411	27	5															
			5	51	83	76914	3600	0 [13.5]	56.6	91	314039	984.8	4 [6.1]	57	1175	13124	15.7	5	41.2	1379	630	2022	11.3	5															
			avg				68.5	37	37976	1587		70.8	42	118794	478		68.3	480	7141	9		49.2	445	245	925	4													
			stdev				9.5	30	39441	1476		6.8	38	190837	801		5.9	560	13578	19		5.8	563	302	1216	8													





TABLE 7. Network design: Computations on Daskin Data Set.

			CPLEX					Polymatroids and Aggregated Covers					
nodes	arcs	$\Omega$	rgap	cuts	nodes	time	# [egap]	rgap	cuts	covers	nodes	time	# [egap]
88	277	1	86.2	33	55694	7200	0 [50.7]	28.5	5115	1639	5691	1391	5
		3	82.8	30	52219	7200	0 [48.3]	26.2	5702	1912	5828	1554	5
		5	80.1	26	57557	7200	0 [43.2]	25.4	7439	1522	6021	1573	5
	478	1	81.2	27	90284	7200	0 [41.4]	35.5	12108	4559	8782	2884	5
		3	80.8	30	64326	7200	0 [38.4]	30.2	13005	4921	8426	2931	5
		5	77.1	26	67357	7200	0 [41.2]	28.4	13881	5022	9021	2695	5
	890	1	72.6	23	71154	7200	0 [38.4]	43.7	17862	6311	15933	5021	5
		3	70.2	21	82498	7200	0 [35.1]	41.9	17183	5993	15381	5392	5
		5	68.8	26	80676	7200	0 [31.3]	41.2	18336	6334	16017	5211	5
	612	1	87.3	27	60795	7200	0 [39.8]	40.1	15512	5512	13024	3706	5
3		83.7	29	81748	7200	0 [36.3]	39.6	16067	5701	13922	3919	5	
5		81.1	28	84404	7200	0 [34.4]	36.2	15482	5521	13433	4092	5	
150	1062	1	84.2	22	92482	7200	0 [39.2]	49.1	26823	7812	31093	6126	4 [9.1]
		3	81.6	23	94588	7200	0 [36.4]	46.6	30067	8108	33911	6319	4 [8.4]
		5	80.1	27	150708	7200	0 [34.5]	45.8	31482	8791	34224	6892	3 [10.9]
	1945	1	87.3	22	510154	7200	0 [42.3]	58.4	48513	12819	58913	7200	0 [21.6]
		3	89.1	26	824985	7200	0 [46.8]	60.8	50226	13088	61891	7200	0 [19.8]
		5	87.1	21	880676	7200	0 [47.3]	57.7	48943	12947	60551	7200	0 [25.1]
avg			81.2	25.9	189017	7200		40.8	21874.8	6584	22892.3	4517	
stdev			5.9	3.4	262949	0		10.9	14520.7	3557.2	19471.8	2050.7	

cases, we observe that exploiting the underlying submodularity and supermodularity arising with the probabilistic constraints provides significant advantages over the classical approaches.

We have not considered joint-probabilistic constraints across all cuts of the network, which leads to a non-convex feasible set even for the continuous relaxation of the problem. We have not considered multiple commodities either. For the multicommodity case, projecting out flow variables requires the use of metric inequalities on the design variables. We leave probabilistic metric constraints as a future research topic.

## Acknowledgement

This research has been supported, in part, by grant FA9550-10-1-0168 from the Office of the Assistant Secretary of Defense for Research and Engineering.

## References

- [1] S. Ahmed. Convex relaxations of chance constrained optimization problems. *Optimization Letters*, 8:1–12, 2014.
- [2] S. Ahmed and A. Atamtürk. Maximizing a class of submodular utility functions. *Mathematical Programming*, 128:149–169, 2011.
- [3] A. Atamtürk. Flow pack facets of the single node fixed-charge flow polytope. *Operations Research Letters*, 29:107–114, 2001.
- [4] A. Atamtürk. On capacitated network design cut-set polyhedra. *Mathematical Programming*, 92:425–437, 2002.
- [5] A. Atamtürk. Cover and pack inequalities for (mixed) integer programming. *Annals of Operations Research*, 139:21–38, 2005.

- [6] A. Atamtürk and A. Bhardwaj. Supermodular covering knapsack polytope. *Discrete Optimization*, 18:74–86, 2015.
- [7] A. Atamtürk and O. Günlük. Multi-commodity multi-facility network design. *arXiv preprint arXiv:1707.03810*. BCOL Research Report 17.04, UC Berkeley.
- [8] A. Atamtürk and O. Günlük. Network design arc set with variable upper bounds. *Networks*, 50:17–28, 2007.
- [9] A. Atamtürk and V. Narayanan. Cuts for conic mixed-integer programming. In *International Conference on Integer Programming and Combinatorial Optimization*, pages 16–29. Springer Berlin Heidelberg, 2007.
- [10] A. Atamtürk and V. Narayanan. Polymatroids and risk minimization in discrete optimization. *Operations Research Letters*, 36:618–622, 2008.
- [11] A. Atamtürk and V. Narayanan. The submodular knapsack polytope. *Discrete Optimization*, 6:333–344, 2009.
- [12] A. Atamtürk, , G. L. Nemhauser, and M. W. P. Savelsbergh. Valid inequalities for problems with additive variable upper bounds. *Mathematical Programming*, 91:145–162, 2001.
- [13] A. Balakrishnan, T. L. Magnanti, and P. Mirchandani. Designing hierarchical survivable networks. *Operations Research*, 46:116–136, 1998.
- [14] A. Balakrishnan, T. L. Magnanti, and P. Mirchandani. Connectivity-splitting models for survivable network design. *Networks*, 43:10–27, 2004.
- [15] A. Ben-Tal and A. Nemirovski. Robust solutions of linear programming problems contaminated with uncertain data. *Mathematical Programming*, 88:411–424, 2000.
- [16] A. Ben-Tal and A. Nemirovski. Robust optimization - methodology and applications. *Mathematical Programming*, 92:453–480, 2002.
- [17] D. Bertsimas and I. Popescu. Optimal inequalities in probability theory: A convex optimization approach. *SIAM J. on Optimization*, 15:780–804, 2005.
- [18] D. Bienstock and O. Günlük. Capacitated network design - Polyhedral structure and computation. *INFORMS Journal on Computing*, 8:243–259, 1996.
- [19] D. Bienstock and G. Muratore. Strong inequalities for capacitated survivable network design problems. *Mathematical Programming*, 89:127–147, 2000.
- [20] M. T. Çezik and G. Iyengar. Cuts for mixed 0-1 conic programming. *Mathematical Programming*, 104:179–202, 2005.
- [21] A. Chen, H. Yang, H. K. Lo, and W. H. Tang. Capacity reliability of a road network: an assessment methodology and numerical results. *Transportation Research Part B: Methodological*, 36:225–252, 2002.
- [22] A. Chen, Z. Zhou, P. Chootinan, S. Ryu, C. Yang, and S. Wong. Transport network design problem under uncertainty: a review and new developments. *Transport Reviews*, 31:743–768, 2011.
- [23] G. Claßen, D. Coudert, A. M. Koster, and N. Nepomuceno. A chance-constrained model and cutting planes for fixed broadband wireless networks. In *Network Optimization*, pages 37–42. Springer, 2011.
- [24] M. Daskin. *Network and Discrete Location: Models, Algorithms and Applications*. Wiley, second edition, 2013.
- [25] J. Edmonds. Submodular functions, matroids, and certain polyhedra. In *Combinatorial OptimizationEureka, You Shrink!*, pages 11–26. Springer, 2003.
- [26] B. Fortz and M. Poss. Easy distributions for combinatorial optimization problems with probabilistic constraints. *Operations Research Letters*, 38:545–549,

- 2010.
- [27] L. E. Ghaoui, M. Oks, and F. Oustry. Worst-case value-at-risk and robust portfolio optimization: A conic programming approach. *Operations Research*, 51:543–556, 2003.
  - [28] M. Grötschel, C. L. Monma, and M. Stoer. Design of survivable networks. In M. Ball, T. L. Magnanti, C. L. Monma, and G. L. Nemhauser, editors, *Network Models*, pages 617–672. North-Holland, 1995.
  - [29] J. L. Kennington and C. D. Nicholson. The uncapacitated time-space fixed-charge network flow problem: An empirical investigation of procedures for arc capacity assignment. *INFORMS Journal on Computing*, 22:326–337, 2010.
  - [30] F. Kılınç-Karzan. On minimal valid inequalities for mixed integer conic programs. *arXiv preprint arXiv:1408.6922*, 2014.
  - [31] F. Kılınç-Karzan and S. Yıldız. Two-term disjunctions on the second-order cone. In *Integer Programming and Combinatorial Optimization*, pages 345–356. Springer, 2014.
  - [32] A. M. Koster, M. Kutschka, and C. Raack. Robust network design: Formulations, valid inequalities, and computations. *Networks*, 61:128–149, 2013.
  - [33] H. K. Lo and Y.-K. Tung. Network with degradable links: capacity analysis and design. *Transportation Research Part B: Methodological*, 37:345–363, 2003.
  - [34] T. L. Magnanti and P. Mirchandani. Shortest paths, single origin-destination network design, and associated polyhedra. *Networks*, 23:103–121, 1993.
  - [35] T. L. Magnanti, P. Mirchandani, and R. Vachani. The convex hull of two core capacitated network design problems. *Mathematical Programming*, 60:233–250, 1993.
  - [36] G. P. McCormick. Computability of global solutions to factorable nonconvex programs: Part I : Convex underestimating problems. *Mathematical Programming*, 10:147–175, 1976.
  - [37] G. Nemhauser, L. Wolsey, and M. Fisher. An analysis of approximations for maximizing submodular set functions - I. *Mathematical Programming*, 14:265–294, 1978.
  - [38] A. Nemirovski and A. Shapiro. Convex approximations of chance constrained programs. *SIAM Journal on Optimization*, 17:969–996, 2006.
  - [39] A. Prékopa. *Stochastic Programming*. Kluwer Academic Publishers, 1995.
  - [40] D. Rajan and A. Atamtürk. Survivable network design: Routing of flows and slacks. In G. Anandalingam and S. Raghavan, editors, *Telecommunications Network Design and Management*, pages 65–82. Kluwer Academic Publishers, 2002.
  - [41] A. Schrijver. *Combinatorial Optimization - Polyhedra and Efficiency*. Springer-Verlag, Berlin, 2003.
  - [42] A. Shapiro, D. Dentcheva, and A. Ruszczyński. *Lectures on stochastic programming: modeling and theory*, volume 16. SIAM, 2014.
  - [43] Y. Song, J. R. Luedtke, and S. Küçükyavuz. Chance-constrained binary packing problems. *INFORMS Journal on Computing*, 26:735–747, 2014.
  - [44] M. Stoer and G. Dahl. A polyhedral approach to multicommodity survivable network design. *Numerische Mathematik*, 68:149–167, 1994.
  - [45] S. P. M. van Hoesel, A. M. C. A. Koster, R. L. M. J. van de Leensel, and M. W. P. Savelsbergh. Polyhedral results for the edge capacity polytope. *Mathematical Programming*, 92:335–358, 2002.

- [46] N. Yang and F. Wen. A chance constrained programming approach to transmission system expansion planning. *Electric Power Systems Research*, 75: 171–177, 2005.

## Appendix A. Simulation Details

### A.1 Network data

For the example in Section 1, we use a six-node acyclic complete network with demand 230  $s$  to  $t$  is 230. Mean capacities, variances and costs for the arcs are presented in Table 8.

TABLE 8. Candidate arcs and data.

edge#	from	to	mean capacity	variance	cost
1	s	1	81	16	14
2	s	2	90	676	42
3	s	3	12	4	91
4	s	4	91	289	79
5	s	t	63	9	95
6	1	2	9	4	65
7	1	3	27	25	3
8	1	4	54	36	84
9	1	t	95	256	93
10	2	3	96	169	67
11	2	4	15	1	75
12	2	t	97	64	74
13	3	4	95	16	39
14	3	t	48	9	65
15	4	t	80	49	17

## A.2 Minimum cost network configurations for different service levels

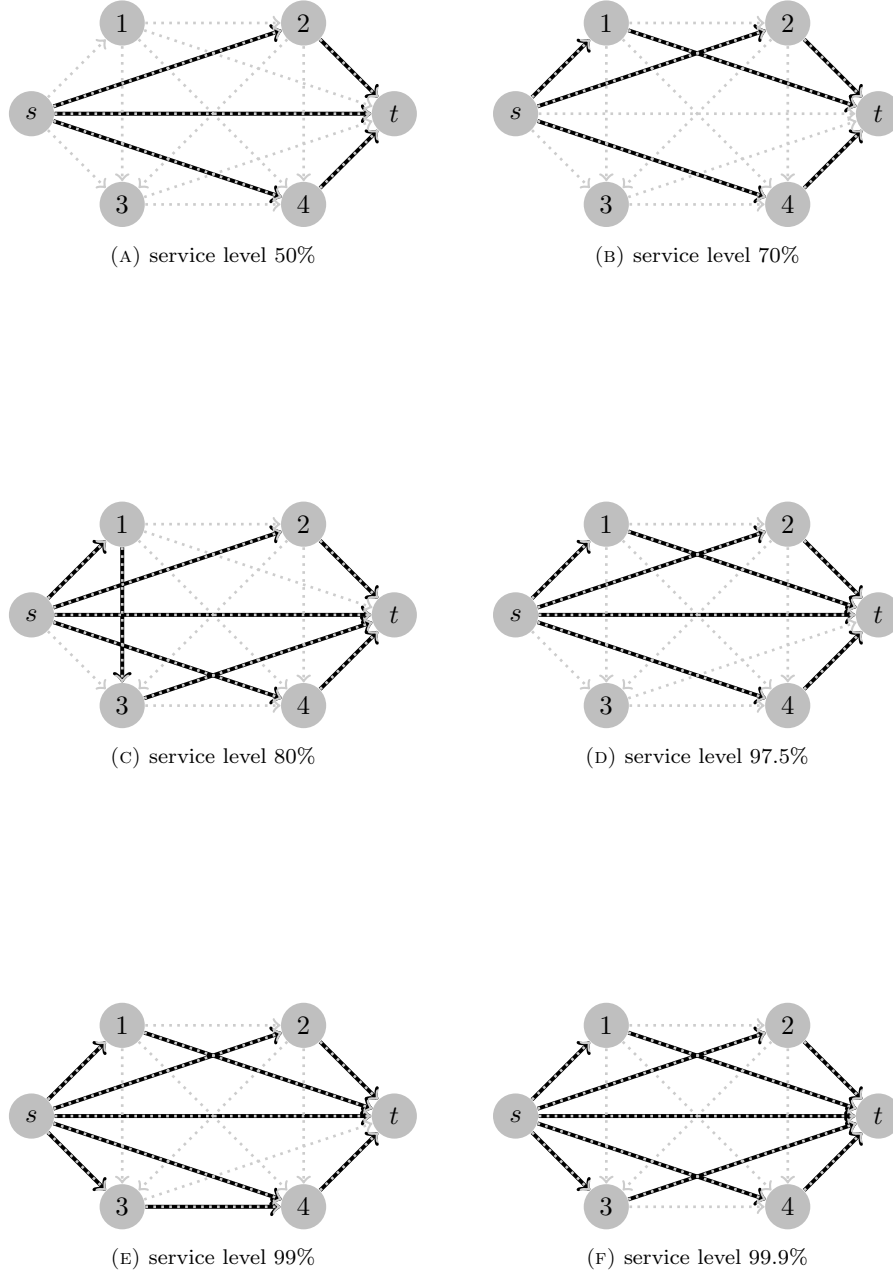


FIGURE 3. Network configurations corresponding to different service levels.





### A.3 Distribution of minimum cut capacities for the simulated instances

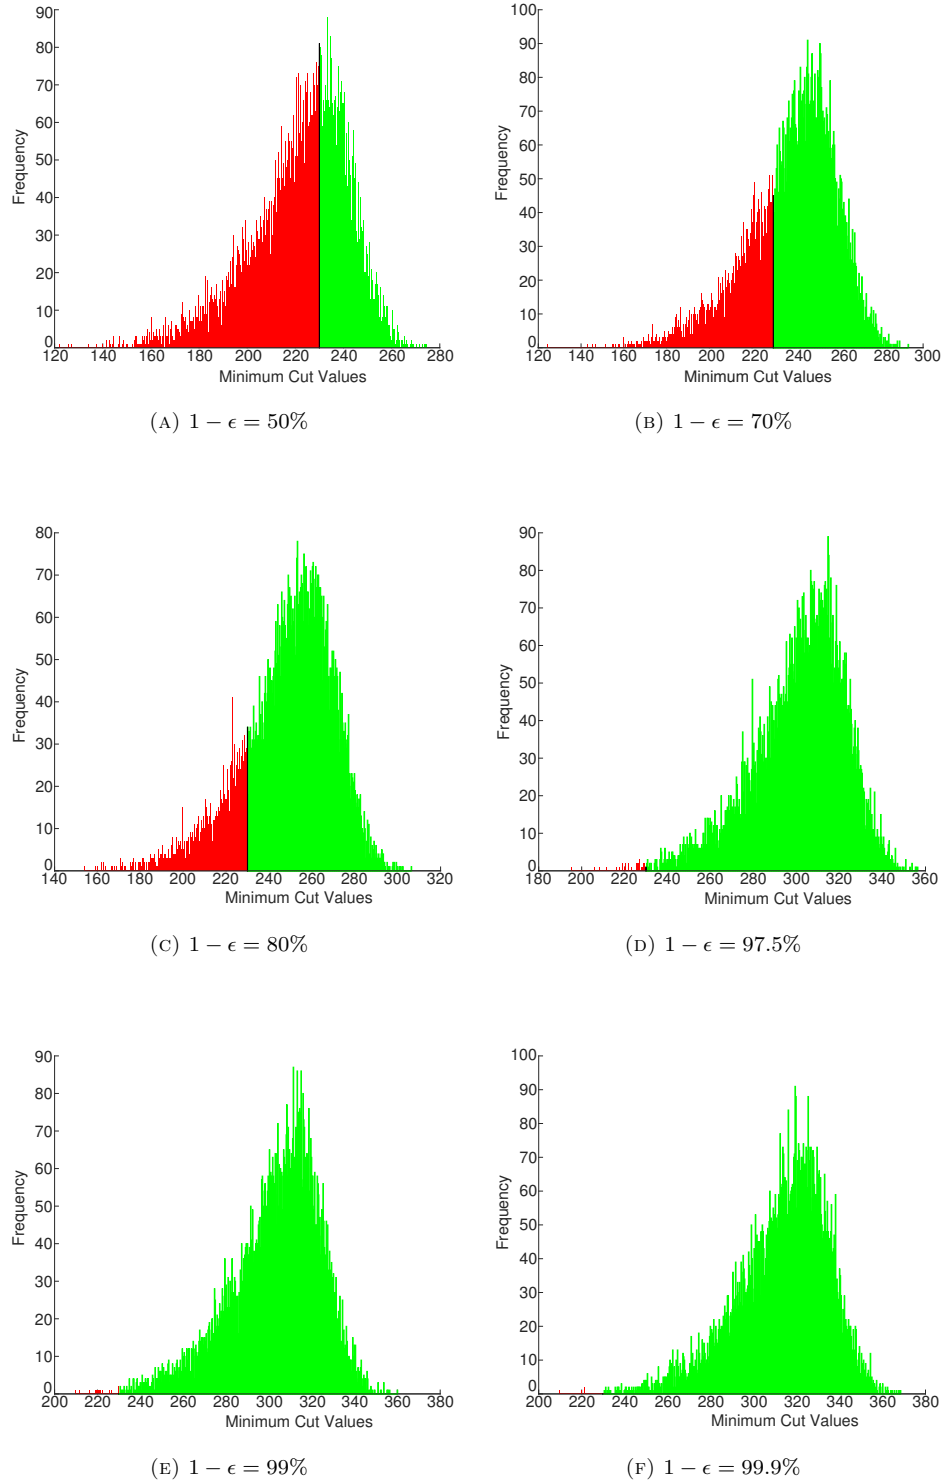


FIGURE 4. Minimum cut capacities for simulated instances.