

# Sound Event Detection of Weakly Labelled Data with CNN-Transformer and Automatic Threshold Optimization

Qiuqiang Kong\*, *Student Member, IEEE*, Yong Xu\*, *Member, IEEE*,  
Wenwu Wang, *Senior Member, IEEE* and Mark D. Plumbley, *Fellow, IEEE*

**Abstract**—Sound event detection (SED) is a task to detect sound events in an audio recording. One challenge of the SED task is that many datasets such as the Detection and Classification of Acoustic Scenes and Events (DCASE) datasets are weakly labelled. That is, there are only audio tags for each audio clip without the onset and offset times of sound events. To address the weakly labelled SED problem, we investigate segment-wise training and clip-wise training methods. The proposed systems are based on the variants of convolutional neural networks (CNNs) including convolutional recurrent neural networks and our proposed CNN-transformers for audio tagging and sound event detection. Another challenge of SED is that only the presence probabilities of sound events are predicted and thresholds are required to predict the presence or absence of sound events. Previous work set this threshold empirically which is not an optimised solution. To solve this problem, we propose an automatic threshold optimization method. The first stage is to optimize the system with respect to metrics that do not depend on the thresholds such as mean average precision (mAP). The second stage is to optimize the thresholds with respect to the metric that depends on those thresholds. This proposed automatic threshold optimization system achieved state-of-the-art audio tagging and SED F1 score of 0.646, 0.584, outperforming the performance with best manually selected thresholds of 0.629 and 0.564, respectively.

**Index Terms**—Sound event detection, weakly labelled data, automatic threshold optimization.

## I. INTRODUCTION

Sound event detection (SED) is an important topic and technology which can be used in smart home, self-driving cars and smart cities. For example, an ambulance siren can be recognized by a SED system even if an ambulance is far away which is difficult to detect with a camera due to the distance and obstructions. Different from audio tagging (AT) which only needs to detect the presence or absence of sound events in an audio recording, SED requires the prediction of the onset and offset times of sound events. SED has attracted much research since the introduction of the Detection

and Classification of Acoustic Scenes and Events (DCASE) challenges in 2013 [1], [2], [3], [4], [5].

One challenge of the SED task is that audio recordings are usually weakly labelled. That is, in the training data only the presence or absence of sound events are known, without knowing their onset and offset times. We call this kind of data as *weakly labelled data (WLD)*. In this paper we focus on the large-scale weakly supervised sound event detection task for smart cars dataset from the DCASE 2017 challenge Task 4. The audio recordings from this task is a sub-set of the AudioSet dataset [6]. This task includes both AT and SED subset. All audio clips provided for training are weakly labelled without time stamps of sound events. The AT subtask requires the prediction of the presence or absence of sound events in an audio clip. The SED subtask requires the recognition of the time stamps of the sound events. In previous research on AT, several CNN-based methods have been applied [7], [8], [9], [10], [11], [12], [13], [14], [15], [16], [17]. These approaches show that a robust feature extractor is important for AT and SED. Usually CNNs are applied to the log mel spectrogram of audio recordings followed by a sigmoid non-linearity to predict the presence or absence probability of sound events.

General SED tasks can be divided into two categories according to the availability of frame-level or clip-level labels: strongly supervised SED, when frame-level labels are provided; or weakly supervised SED, if only clip-level tags are provided. Several deep learning based methods [18], [19], [20], [21], [22], [23], [24] have been proposed for the strongly supervised SED task. However, frame-level sound event labels are difficult and time consuming to obtain. Recently, the DCASE 2017 Task 4 provides a large scale dataset designed for AT and SED with only weakly labelled data provided. Several neural network based methods have been proposed for audio tagging such as convolutional neural networks (CNNs) and their variants [10], [11], [12], [13], [14], [15], [16], [17]. Another method is the segment-wise training [15] method, where an audio clip is split into several segments. Then the segments are used independently to train a system to predict the sound event locations.

Although previous CNNs based methods have been successful in audio tagging and SED tasks, CNNs do not capture the long time dependency in an audio clip well. For example, the receptive field of a CNN can be limited to a short duration with a fixed length that does not take long history information into account in the system. To solve this problem, convolutional recurrent neural networks (CRNNs) were proposed to consider the long time information into the system [20],

This work was supported in part by the EPSRC Grant EP/N014111/1 “Making Sense of Sounds”, in part by the Research Scholarship from the China Scholarship Council 201406150082, and in part by a studentship (Reference: 1976218) from the EPSRC Doctoral Training Partnership under Grant EP/N509772/1.

Q. Kong, and M. D. Plumbley are with the Centre for Vision, Speech and Signal Processing, University of Surrey, Guildford GU2 7XH, U.K. (e-mail: q.kong@surrey.ac.uk; m.plumbley@surrey.ac.uk).

Y. Xu is with the Tencent AI Lab, Bellevue, WA 98004 USA (e-mail: lucaiyongxu@tencent.com).

W. Wang is with the Centre for Vision, Speech and Signal Processing, University of Surrey, Guildford GU2 7XH, U.K., and also with Qingdao University of Science and Technology, Qingdao 266071, China (e-mail: w.wang@surrey.ac.uk).

[25]. One disadvantage of CRNNs is that the hidden states of a CRNN have to be calculated one by one and can not be calculated in parallel. Recently transformer [26], [27] has been proposed to take the long time dependency of a time series into consideration in the system. A transformer consists of several attention layers. Each state of a layer in a transformer takes the information from all states of the previous layer. Therefore each state retains the global information of a time series. Different from the attention neural networks [28] which aggregate the vectors along time axis into a fixed vector representation, transformer retains the information along the time axis.

Another challenging problem of AT and SED which has not been investigated in previous work is the selection of thresholds in post-processing. For example, in the AT subtask, if the predicted probability of a sound class is over a threshold in an audio clip, then the audio clip is regarded as containing this sound class. The performance of these systems are sensitive to the threshold selection. Usually the threshold is selected manually by empirical methods. For example, in the winning system of the AT subtask in the DCASE 2017 [11] a threshold of 0.3 is used for all the sound classes. However, this threshold is selected by experience and may not be optimal. In this paper we propose an automatic threshold optimization method to solve this problem.

This work contributes in the following aspects. First, we investigate the segment-wise training and the clip-wise training for AT and SED. We found that different systems perform differently for the AT and SED subtask. Second, we propose a CNN-transformer system and achieves competitive results to the CNN-GRU system. Third, we propose an automatic threshold optimization method for the AT and SED subtask. The proposed systems outperform the best systems in the DCASE 2017 Task 4 challenge. This paper is organized as follows: Section II introduces CNN and CRNN for AT and SED. Section III introduces a CNN-transformer system. Section IV introduces segment-wise and clip-wise training. Section V proposes an automatic threshold optimization method for AT and SED. Section VI-A shows experimental results. Section VII concludes this work.

## II. CONVOLUTIONAL NEURAL NETWORKS (CNNs)

### A. Conventional CNNs

CNNs were originally designed for image classification [29] and have been recently used for audio related tasks such as speech recognition [30] and AT [31], [32]. A conventional CNN consists of convolution layers, pooling layers and fully connected layers. The input to each convolutional layer is a tensor with a shape  $(N, C, W, H)$  representing the number of input samples, channels, width and height. For audio tagging the input width and height represent the number of time frames and frequency bins. Each convolutional layer consists of a set of learnable kernels. In the forward pass, the input tensor is convolved with kernels. The output of a convolutional layer is a tensor which is also called feature maps. The kernels in a convolutional layer can learn local time-frequency patterns in the spectrogram of an audio clip. Lower

level convolutional layers can learn low level features and high level convolutional layers can learn high level features of the spectrogram. Recent CNN architectures apply batch normalization [33] after convolutional layers to speed up and stabilise training. Then nonlinear activation such as ReLU [34] is applied to increase the nonlinearity of a CNN model. Pooling layers can reduce the dimension of feature maps. For AT and SED, the pooling is applied on both time and frequency axis. A time distributed fully connected layer is applied on the output of the last convolutional layer to predict the presence probability of sound events in the time axis. Then the predicted probabilities are aggregated over the time axis to obtain the clip-wise sound event presence probability. The aggregation can be, for example, maximum or average over the time axis.

### B. Convolutional recurrent neural network (CRNNs)

The receptive field of CNNs have limited size. That is, CNNs can not capture long time dependency in an audio clip. However, some sound events have correlations in a long time duration. For example, the sound of ambulance may last for tens of seconds. These temporal information is useful for AT and SED. Designing a system that is able to capture the temporal dependency is beneficial for the audio tagging task. Recurrent neural networks (RNNs) [35] are types of neural networks that can store history information in their hidden states and thus capture long term dependency of sequential data. RNNs have been applied to language processing tasks such as [35]. The potential problem of a conventional RNN is that the gradient of weights may vanish or explode in training. Long short term memory (LSTM) [36] is a variation of RNN that introduces constant error carousel units, input gate, output gate and forget gate to avoid the gradient exploding and vanishing problem. An improved architecture of LSTM called gated recurrent units (GRU) [37] is proposed to reduce the parameters of LSTMs and simplify the gates to a reset gate and a forget gate. A GRU can be in both directions which we call as bidirectional GRU (biGRU). The biGRU is applied in our AT and SED systems.

## III. CNN-TRANSFORMER

CRNN can capture long time-dependency of sound events. On the other hand, the sequential nature of CRNNs also makes it more difficult to take advantage of modern fast computing devices such as GPUs. Recently, transformer [26] is proposed to learn correlations of time steps in a sequence such as natural language processing tasks [27]. Compared with RNNs which requires computing the hidden states in a sequence, transformer can parallelise the computation which only requires matrix multiplication in the forward pass. Transformer applies a self-attention mechanism which directly models relationships between all time steps in a sequence. In an audio clip, a sound class may contain several sound events over time. For example, the speech of a human may appear in any time of an audio clip. Transformer can capture the correlation of the speech over time even if the speech is not continuous over time.

### A. Transformer

The transformer was originally proposed in [26]. The motivation for the design of the transformer is to allow modeling of dependencies without regard to their distance in the input sequence. In addition, transformer allows for more parallelisation than RNNs by removing the recurrent connections. A transformer consists of several encoder and decoder layers. The encoder transforms an input to a high level embedding and the decoder transforms an embedding back to output. In a classification task such as audio tagging and SED we only use the encoder. Each encoder consists of several encoder layers. For each encoder layer, we denote the input to the encoder layer as a tensor  $x$  with a shape of  $T \times C$  where  $T$  and  $C$  represent the number of time steps and channels. We follow the symbols as used in [26]. An encoder layer consists of a query transform matrix  $W^Q$ , a key transform matrix  $W^K$  and a value transform matrix  $W^V$ . The matrices  $W^Q$  and  $W^K$  have a shape of  $C \times d_k$  and  $W^V$  has a shape of  $C \times d_v$  where  $d_k$  and  $d_v$  are integers. The input  $x$  has a shape of  $T \times C$ . Then the query  $Q$ , key  $K$  and value  $V$  can be obtained by:

$$\begin{aligned} Q &= xW^Q \\ K &= xW^K \\ V &= xW^V \end{aligned} \quad (1)$$

The query  $Q$  and key  $K$  have a shape of  $T \times d_k$  and the value  $V$  has a shape of  $T \times d_v$ . The output of an encoder layer can be written as:

$$h = \text{softmax}\left(\frac{QK^T}{\sqrt{d_k}}\right)V \quad (2)$$

where the output  $h$  has a shape of  $T \times H$ . Equation (2) computes the dot product of the query with all keys, divide each by  $\sqrt{d_k}$ , and apply a softmax function to obtain the weights on the values  $V$  [26]. The division of square root of  $d_k$  is a normalization term [26]. In (2) the inner product of  $Q$  and  $K^T$  has a shape of  $T \times T$  which represents the feature correlation of different time steps. The softmax operation converts the correlation value to probability along the time steps indicating how much the value  $V$  in a time step should be attended.

### B. CNN-Transformer

For audio tagging and SED, the input is usually a time-frequency representation such as a log mel spectrogram. Log mel spectrogram is a low level feature and CNNs have been proposed to apply on the log mel spectrogram to extract high level features [31]. To build the CNN-transformer system, we first apply a CNN described in Section II on the log mel spectrogram of an audio clip. Convolutional layers in the CNN are used to extract high level features of the input log mel spectrogram. We use the feature maps of the last convolutional layer to obtain embedding vectors along time axis. The embedding can be viewed as  $x$  with a shape of the number of time frames by the number of channels. The output of the transformer has a shape of  $T \times d_v$ . A fully

connected layer followed by a sigmoid non-linearity is applied on this output to obtain the presence or absence probability of sound classes over time steps. An aggregation function such as average aggregation can be applied to average out those probabilities along time domain to obtain the audio tagging result.

## IV. SEGMENT-WISE V.S. CLIP-WISE SED

Section II and III introduce CNN, CNN-biGRU and CNN-transformer architectures. In this section, we introduce how we apply the aforementioned architectures for AT and SED training with weakly labelled data. Conventional SED methods utilise strongly labelled data for supervised learning. However, collecting strongly labelled data is time consuming. The amount of strongly labelled data is therefore limited. To solve this problem, we propose to use weakly labelled dataset for SED. The SED systems with weakly labelled data can be categorized to segment-wise training [15], [9] and our previously proposed clip-wise training [11]. This section aims to investigate the comparison of the segment-wise and clip-wise training for AT and SED.

### A. Segment-wise training

For an audio clip  $X$  lasting for several seconds, we split it into several segments  $\{x_m\}_{m=1}^M$  where  $M$  is the number of segments. Each segment inherits the tags of the audio clip. We denote the tag of each segment as  $y \in \{0, 1\}^K$  where  $K$  is the number of sound classes. The SED problem is converted to an audio tagging problem on the segments. In training, a classifier  $f$  is trained on the segments. The loss function can be written as:

$$E = - \sum_{m=1}^M \sum_{k=1}^K [y_k \log f(x_m)_k + (1 - y_k) \log (1 - f(x_m)_k)] \quad (3)$$

In inference, an audio clip  $X$  is split into segments  $x_m$  and the SED result on each segment can be calculated by  $f(x_m)$ . The AT result can be obtained by aggregating  $f(x_m)$  over all the  $M$  segments:

$$F(X) = \text{agg}(\{f(x_m)\}_{m=1}^M). \quad (4)$$

The aggregation can be, for example, maximum or average over all the segments. The segment-wise classifier  $f$  can be CNN, CNN-biGRU or CNN-transformer followed by a sigmoid non-linearity to predict the presence probability of sound events of each segment. We will investigate the performance of choosing different duration of segments on SED and AT in Section VI-A.

### B. Clip-wise training

In the segment-wise training, all segments  $x_m$  inherit the tags of an audio clip  $X$ . The problem of segment-wise training is that many sound events may only last for a short time in the audio clip. Therefore the tags of the segments  $x_m$  may be incorrect when a segment does not contain the sound event. To solve this problem, our previous work proposed attention neural network based clip-wise training [11]. The

clip-wise training method does not explicitly assign tags for each segment  $x_m$ . Instead, the systems are designed to learn the tags of  $x_m$  implicitly, that is, from the hidden layer of a neural network. We denote the segment-wise prediction of a segment  $x_m$  to be  $f(x_m)$ . Then the prediction on the clip  $X$  can be obtained by aggregating the segment-wise predictions. For example, the aggregation can be a max, average or attention function over the prediction of all segments of each sound class. The max function can be defined as:

$$F(X)_k = \max_k f(x_m)_k. \quad (5)$$

The average function can be defined as:

$$F(X)_k = \sum_{m=1}^M f(x_m)_k. \quad (6)$$

The decision-level function can be defined as [28]:

$$F(X)_k = \sum_{m=1}^M f(x_m)_k p(x_m)_k \quad (7)$$

where  $p(x_m) = \frac{\exp(w(x_m)_k)}{\sum_{j=1}^M \exp(w(x_j)_k)}$  and  $w(\cdot)$  is a linear transformation. In training, we calculate the loss between the clip-level prediction  $F(X)$  and the ground truth label of  $X$ . For example, we calculate the binary crossentropy loss between the prediction and target:

$$E = - \sum_{k=1}^K [y_k \log F(X)_k + (1 - y_k) \log(1 - F(X)_k)]. \quad (8)$$

The difference of the clip-wise training (8) from the segment-wise training (3) is that the clip-wise training outputs the prediction of a clip  $F(X)$  but the segment-wise training outputs the prediction of a segment  $F(x_m)$ . The frame-wise prediction of the clip-wise training can be obtained from the intermediate layer by calculating  $f(x_m)$ .

## V. AUTOMATIC THRESHOLD OPTIMIZATION

To obtain the presence or absence of sound events in an audio clip, thresholds need to be applied to the system predictions. We set the thresholds  $\{\mu_1, \dots, \mu_K\}$  for all sound classes. For each sound event a segment with predicted presence probability over the threshold indicates the presence of the sound event. Segments with predicted presence probability below the threshold indicates the absence of the sound event. Higher threshold can lead to better precision and lower recall which may lead to miss detection of sound events. Lower threshold can lead to better recall and lower precision which can lead to false alarms. The thresholds for AT are denoted as  $\Theta^{\text{AT}} = \{\mu_1, \dots, \mu_K\}$ . Algorithm 1 shows the algorithm to obtain AT result from the predicted probability of sound events.

SED requires to predict not only the presence or absence but also the onset or offset times of sound events in an audio clip. Similar to AT, we first apply thresholds  $\{\mu_1, \dots, \mu_K\}$  on  $F(X)$  to predict the presence or absence of sound events in an audio clip  $X$ . If a sound event is predicted to be present, then a set of thresholds  $\{\tau_1^{\text{high}}, \dots, \tau_K^{\text{high}}\}$  are applied on  $F(x_m)$

---

### Algorithm 1 Audio tagging

---

- 1: Inputs: predicted presence probability of sound events in an audio clip  $F(X)$ . AT thresholds  $\{\mu_1, \dots, \mu_K\}$ .
  - 2: Outputs: Predicted audio tags.
  - 3: **for**  $k = 1, \dots, K$  **do**
  - 4:   **if**  $F(X)_k < \mu_k$  **then**
  - 5:     return 0 for the  $k$ -th sound event.
  - 6:   **else**
  - 7:     return 1 for the  $k$ -th sound event.
- 

---

### Algorithm 2 Sound event detection

---

- 1: Inputs: clip-wise prediction  $F(X)$ , framewise prediction  $F(x_m)$ , AT thresholds  $\{\mu_1, \dots, \mu_K\}$ , SED high thresholds  $\{\tau_1^{\text{high}}, \dots, \tau_K^{\text{high}}\}$ , SED low thresholds  $\{\tau_1^{\text{low}}, \dots, \tau_K^{\text{low}}\}$ .
  - 2: Outputs: Detected sound events.
  - 3: **for**  $k = 1, \dots, K$  **do**
  - 4:   **if**  $F(X)_k < \mu_k$  **then**
  - 5:     return 0 for the  $k$ -th sound event.
  - 6:   **else**
  - 7:     **for**  $m = 1, \dots, M$  **do**
  - 8:       **if**  $f(x_m)_k > \tau_k^{\text{high}}$  **then**
  - 9:         Return 1 for the neighbour segments  $x'$  of  $x_m$  until  $f(x')_k < \tau_k^{\text{low}}$ .
- 

to locate the sound events. The superscript “high” indicates that those are higher thresholds to reduce false alarms in detection. Then a set of thresholds  $\{\tau_1^{\text{low}}, \dots, \tau_K^{\text{low}}\}$  are applied to search the frames containing sound events located by the higher thresholds. The superscript “low” indicates that those are lower thresholds to reduce the missing frames of sound events in detection. The thresholds for SED are denoted as  $\Theta^{\text{SED}} = \{\mu_1, \dots, \mu_K, \tau_1^{\text{high}}, \dots, \tau_K^{\text{high}}, \tau_1^{\text{low}}, \dots, \tau_K^{\text{low}}\}$ . Algorithm 2 shows the algorithm to obtain SED results from the clip-wise and frame-wise predictions.

The winning system of the AT subtask in DCASE 2017 Task 4 [11] applies constant thresholds for both the AT and SED subtask. Those thresholds are set empirically. Setting the thresholds requires a lot of experience and the manually selected thresholds are often not optimal. In this section, we propose an automatic threshold optimization method. In the first stage, we optimize the systems and evaluate the systems based on the metrics that do not depend on the thresholds such as mean average precision (mAP). This will show the performance of different systems independent of the threshold selection. In the second stage, for a specific system, we optimize the thresholds over a specific metric such as F1 score or error rate (ER) that depends on those thresholds.

For an audio clip  $X$ , the AT result  $r^{\text{AT}}$  can be obtained by  $\text{alg}^{\text{AT}}(F(X), \Theta^{\text{AT}})$  where  $\text{alg}^{\text{AT}}$  is the AT algorithm shown in Algorithm 1. The SED result  $r^{\text{SED}}$  can be obtained by  $\text{alg}^{\text{SED}}(F(X), \{f(x_m)\}_{m=1}^M, \Theta^{\text{SED}})$  where  $\text{alg}^{\text{SED}}$  is the SED algorithm shown in Algorithm 2. The goal of AT or SED is to minimize some loss  $J(\Theta)$ , for example, ER  $J_{\text{ER}}(\Theta)$  or negative F1 score  $J_{\text{F1}}(\Theta)$ . The reason of using negative F1 is that minimizing  $J_{\text{F1}}(\Theta)$  is equivalent to maximizing F1 score. The optimization of the thresholds is to solve the following

**Algorithm 3** Adam optimization. Symbol  $g_t^2$  indicates the elementwise square  $g_t \odot g_t$ . Learning rate is denoted as  $\alpha$ . Hyper-parameters are set to  $\beta_1 = 0.9$ ,  $\beta_2 = 0.999$  and  $\epsilon = 10^{-8}$  following [38].

---

```

1: Inputs: parameters  $\Theta$ .
2: Init  $\Theta_0, m_0 = 0, v_0 = 0, t = 0$ 
3: while  $\Theta$  not converged do
4:    $t \leftarrow t + 1$ 
5:    $g_t = \nabla_{\Theta} J$ 
6:    $m_t \leftarrow \beta_1 m_{t-1} + (1 - \beta_1) g_t$ 
7:    $v_t \leftarrow \beta_2 v_{t-1} + (1 - \beta_2) g_t^2$ 
8:    $\hat{m}_t \leftarrow m_t / (1 - \beta_1^t)$ 
9:    $\hat{v}_t \leftarrow v_t / (1 - \beta_2^t)$ 
10:   $\Theta_t \leftarrow \Theta_{t-1} - \alpha \cdot \hat{m}_t / (\sqrt{\hat{v}_t} + \epsilon)$ 

```

---

optimization problem:

$$\hat{\Theta} = \underset{\Theta}{\operatorname{argmin}} J(\Theta) \quad (9)$$

The difficulty of solving (9) is that  $\Theta$  consists of several parameters to be optimized. Thus grid search over thresholds is inefficient. Another way is to use gradient based methods to iteratively optimize the thresholds. However, equation (9) is a non-differentiable function so we can not calculate the gradient over the thresholds in an analytical way. This is because both the AT and SED algorithms in Algorithm 1 and Algorithm 2 contain non-differentiable operations such as thresholding. In addition, the evaluation metrics ER and F1 score are also non-differentiable. To solve this problem, we propose to calculate the gradients over the thresholds in a numerical way. That is, for each parameter  $\theta$  the gradient is calculated by:

$$\nabla_{\theta} J(\Theta) = \frac{J(\Theta + \Delta\theta) - J(\Theta)}{\Delta\theta}, \quad (10)$$

where  $\Delta\theta$  is a small number. The value of  $\Delta\theta$  is all zero except for the position of  $\theta$  which has a value of  $\Delta\theta$ . After calculating the numerical gradient for all parameters  $\nabla_{\Theta} J = \{\nabla_{\theta} J\}_{\theta \in \Theta}$ , the optimized thresholds can be obtained by applying gradient based optimization methods iteratively:  $\Theta \leftarrow \operatorname{opt}(\Theta, \nabla_{\Theta} J)$  where  $\operatorname{opt}$  denotes an optimization algorithm such as gradient descent (GD) or Adam [38]. GD optimization can be written by  $\Theta \leftarrow \Theta - \alpha \nabla_{\Theta} J$  where  $\alpha$  is a learning rate. Adam optimization is described in Algorithm 3. The optimization of thresholds is described in Algorithm 4.

## VI. EXPERIMENTS

### A. Experimental setup

There are several SED datasets including the DCASE 2017 Task 4 [39], the DCASE 2018 Task 4 [40] and the DCASE 2019 Task 4 [41]. We evaluate our SED system on the DCASE 2017 Task 4 “large-scale weakly supervised sound event detection for smart cars”. The reason we choose this dataset is because it is a large-scale dataset containing over 140 hours of weakly labelled audio clips for training. The audio recordings of the DCASE 2017 Task 4 are from a subset of AudioSet [6] where each audio clip is extracted from YouTube video.

### Algorithm 4 Automatic thresholds optimization

---

```

1: Inputs: Validation dataset  $D = \{X^{(n)}, y^{(n)}\}_{n=1}^N$ , trained
   AT system  $F(\cdot)$ , trained SED system  $f(\cdot)$ .
2: Outputs: Optimized thresholds  $\Theta$ .
3: Initialize  $\Theta$ .
4: for  $i = 1, \dots, \text{ITER}$  do
5:   for  $n = 1, \dots, N$  do
6:      $\hat{y}^{(n)} = \operatorname{alg}(F(X^{(n)}), f(x_m^{(n)}), \Theta)$ .
7:    $J = \operatorname{metric}(\{\hat{y}^{(n)}\}_{n=1}^N, \{y^{(n)}\}_{n=1}^N)$ 
8:   for  $\theta$  in  $\Theta$  do
9:      $\nabla_{\theta} J = \frac{J(\Theta + \Delta\theta) - J(\theta)}{\Delta\theta}$ 
10:   $\nabla_{\Theta} J = \{\nabla_{\theta} J\}_{\theta \in \Theta}$ 
11:   $\Theta \leftarrow \operatorname{opt}(\Theta, \nabla_{\Theta} J)$ 

```

---

TABLE I  
SOUND EVENTS IN THE DCASE 2017 TASK 4 “LARGE-SCALE WEAKLY SUPERVISED SOUND EVENT DETECTION FOR SMART CARS”

	Event name	Training number
Warning sounds	Train horn	441
	Air horn, truck horn	407
	Car alarm	273
	Reversing beeps	337
	Ambulance (siren)	624
	Police car (siren)	2399
	Fire engine, fire truck (siren)	2399
	Civil defense siren	1506
Vehicle sounds	Screaming	744
	Bicycle	2020
	Skateboard	1617
	Car	25744
	Car passing by	3724
	Bus	3745
	Truck	7090
	Motorcycle	3291
	Train	2301

DCASE 2017 Task 4 consists of 17 sound events divided into two categories: “warning” and “vehicle”. Most of these audio clips have duration of 10 seconds. The audio clips shorter than 10 seconds are padded with silence to 10 seconds. Table I lists the sound events and their statistics. The DCASE 2017 Task 4 dataset consists of a training subset with 51172 audio clips, a validation subset with 488 audio clips, and an evaluation set with 1103 audio clips. The training subset is weakly labelled. The validation and evaluation subsets are both weakly and strongly labelled for evaluation. The source code of this work is released<sup>1</sup>.

### B. Feature

We use log mel spectrogram as input feature following previous work on audio tagging [31], [9], [42]. To begin with, all audio clips are converted to monophonic and resampled to 32 kHz because some audio recordings from YouTube have a sampling rate up to 32 kHz. The short time Fourier transform with a Hanning window of 1024 samples with a hop size of 320 samples is used to extract spectrogram which leads to 100 frames in a second. We apply 64 mel filter banks on the spectrogram followed by logarithmic operation to obtain

<sup>1</sup>[https://github.com/qiuqiangkong/sound\\_event\\_detection\\_dcase2017\\_task4](https://github.com/qiuqiangkong/sound_event_detection_dcase2017_task4)

TABLE II  
CNN ARCHITECTURE.

Layers	Output size	Param. num.
Input: log mel spectrogram	$bs \times 1 \times 640 \times 64$	-
$\begin{pmatrix} 3 \times 3 @ 64 \\ \text{BN, ReLU} \end{pmatrix} \times 2$	$bs \times 64 \times 640 \times 64$	37,696
$2 \times 2$ avg. pooling	$bs \times 64 \times 320 \times 32$	-
$\begin{pmatrix} 3 \times 3 @ 128 \\ \text{BN, ReLU} \end{pmatrix} \times 2$	$bs \times 128 \times 320 \times 32$	221,696
$2 \times 2$ avg. pooling	$bs \times 128 \times 160 \times 16$	-
$\begin{pmatrix} 3 \times 3 @ 256 \\ \text{BN, ReLU} \end{pmatrix} \times 2$	$bs \times 256 \times 160 \times 16$	885,760
$2 \times 2$ avg. pooling	$bs \times 256 \times 80 \times 8$	-
$\begin{pmatrix} 3 \times 3 @ 512 \\ \text{BN, ReLU} \end{pmatrix} \times 2$	$bs \times 512 \times 80 \times 8$	3,540,992
Embedding: Avg. out freq. bins	$bs \times 512 \times 80 \times 1$	-

log mel spectrogram. The number 64 is chosen so that it can be evenly divided by a power of 2 in the down-sampling layers of CNNs. The mel filter banks have a lower cut-off frequency of 50 Hz and a higher cut-off frequency of 14 kHz to avoid aliasing caused by resampling. The feature extraction is implemented using the *LibROSA* [43] package.

### C. Model

We adopt a 9-layer CNN as the backbone architecture which has shown to perform well on a variety of audio tagging tasks [42]. Table II shows the configuration of the backbone CNN. The CNN consists of 4 convolutional blocks, where each convolutional block consists of 2 convolutional layers with kernel sizes of  $3 \times 3$ . Batch normalization and ReLU non-linearity is applied after each convolutional layer. The convolutional block consists of 64, 128, 256 and 512 feature maps, respectively. A  $2 \times 2$  average pooling is applied after each convolutional block to extract high level features. In Table II, the number following @ represents the number of feature maps. The second column shows the number of batch size (bs), feature maps, frames and frequency bins. We average out the frequency axis of the output from the last convolutional layer. Then time distributed fully connected layer with sigmoid non-linearity is applied to predict the presence probability of sound events of each time frame. To obtain the AT result for supervised learning, aggregation functions including max, average and attention along time frames are applied. Adam [38] optimizer with a learning rate of 0.001 is applied and is reduced to 0.0001 after the performance is plateaued on validation data. Mixup [44] with alpha of 1.0 is used in all experiments to prevent from overfitting.

### D. Evaluation metrics

To evaluate the systems performance, we use the precision, recall and F1 score which are described in [45]:

$$P = \frac{TP}{TP + FP} \quad (11)$$

$$R = \frac{TP}{TP + FN} \quad (12)$$

$$F1 = \frac{2P \cdot R}{P + R} \quad (13)$$

where TP, FP, FN are the number of true positive, false positive and false negative samples, respectively. The higher precision, recall and F1 score indicate better performance. Usually thresholds need to be manually selected and applied on the output predictions to calculate TP, FP and FN. We use average precision (AP) [6] to compare the performance of different system because the calculation of AP does not depend on threshold. AP is defined as the area under the precision-recall curve calculated at multiple thresholds. Mean average precision (mAP) is the average AP over all sound classes. The higher mAP indicates better performance. Random guess has an mAP of around 0.06 for the DCASE 2017 Task 4 which has 17 sound classes. The mAP is a *macro-averaging* statistic because it is calculated independently within a sound class. Then the statistics are averaged across all sound classes. On the other hand, *micro-averaging* statistic is calculated from outputs and ground truths flattened from all classes.

For the AT task, systems are ranked based on macro-averaging F1 score. For the SED subtask, systems are ranked based on micro-averaging of F1 score and Error rate (ER) evaluated on 1-second segments. The ER is defined as follows:

$$ER = \frac{\sum_k S(k) + \sum_k D(k) + \sum_k I(k)}{\sum_k N(k)}, \quad (14)$$

where I, D, S are the number of insertion, deletion and substitution of segments. The segment based evaluation is calculated in a fixed time grid, using segments of one second length to compare the ground truth and the system output. Similarly, segment based F1-score are calculated in the same way.

### E. Segment-wise AT and SED

We first investigate segment-wise training AT and SED performance. Because the audio clips are weakly labelled, there is no information when a sound event occurs. How long sound events last in an audio clip can be different from class to class. This can affect the label accuracy during the segment-wise training because all segments inherit the tags from the audio clip. Table III shows the average percentage of time frames in an audio clip containing different sound events. Sound events such as civil defense siren has a presence percentage of 0.930 which indicates segment-wise labels are more likely to be correct. Sound events such as train horn has a presence percentage of 0.400 which indicates segment-wise label is less likely to be correct.

The 10-second audio clips are split into segments with different lengths from 1 to 10 seconds. Each segment inherit the tags from the audio clip. A 9-layer CNN is applied to build the segment-wise training systems. Fig. 1 shows the mAP and ER of AT and SED with different segment-wise training duration. Training with 2-second segments achieves an mAP of 0.64 in audio tagging, slightly outperforming other segment duration in AT. This indicates that the prediction of long segments does not perform well when no attention or temporal dependency is used. The second column of Fig. 1 shows that training with 1-second segments achieves a SED mAP of 0.44, outperforming other segment duration,

TABLE III  
THE PERCENTAGE OF TIME CONTAINING SOUND EVENTS IN AN AUDIO CLIP LABELLED AS CONTAINING THE SOUND EVENT.

Train horn	Air horn, truck horn	Car alarm	Reversing beeps	Bicycle	Skateboard	Ambulance	Fire engine, fire truck	Civil defense siren
0.400	0.553	0.463	0.538	0.478	0.616	0.829	0.905	0.930
Police car	Screaming	Car	Car passing by	Bus	Truck	Motorcycle	Train	Avg
0.746	0.619	0.606	0.768	0.885	0.764	0.696	0.776	0.681

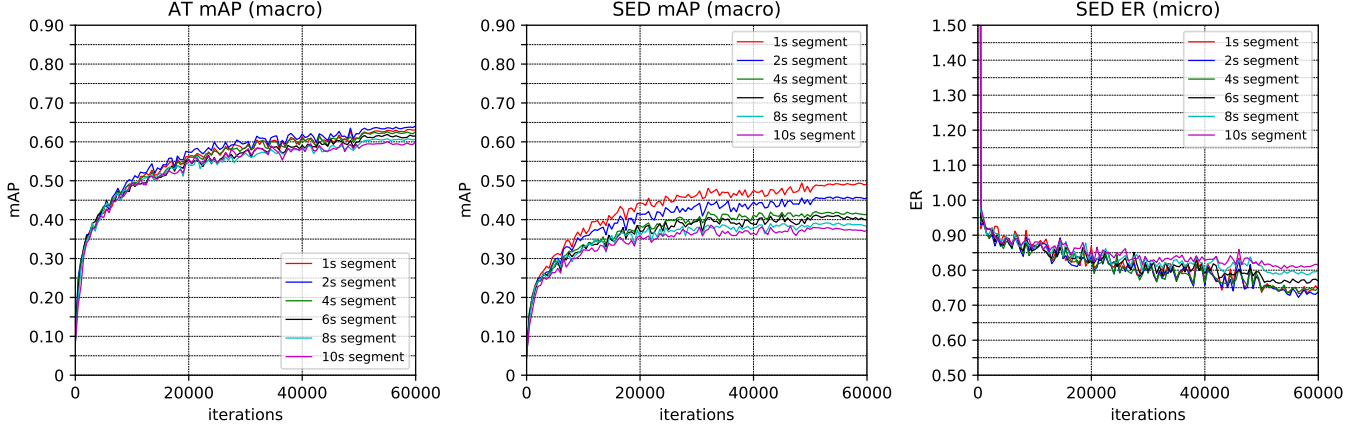


Fig. 1. Segment-wise training result trained on different duration of audio segments. Audio tagging macro mAP; SED macro mAP; SED micro error rate.

which indicates that shorter segments will have higher SED prediction resolution. To calculate the ER, we use constant AT threshold of  $\mu_k = 0.5, k = 1, \dots, K$ , high and low SED thresholds of  $\tau_k^{\text{high}} = 0.3, \tau_k^{\text{low}} = 0.1, k = 1, \dots, K$  for all sound class following [11]. The third column of 1 shows that the 1-second and 2-second segment duration achieve an ER of 0.74, outperforming other segment duration.

#### F. Clip-wise AT and SED

We investigate the clip-wise training AT and SED in this section. The difference of the clip-wise training and the segment-wise training is that the SED result can be obtained from the intermediate layer of a neural network. The AT prediction is obtained by the aggregation functions such as (5, 6, 7). The SED prediction is obtained from  $f(x_m)$  before aggregation. Fig. 2 shows the AT and SED performance of the proposed CNN systems. For the AT subtask, the decision-level maximum or average aggregation systems achieve mAP of 0.60. The decision-level attention improves the mAP to 0.64, indicating the attention of the prediction of different frames plays an important role in AT. The CNN-BiGRU system and the proposed CNN-transformer system further improve the mAP performance to 0.65, indicating that the temporal dependency information is helpful for AT. For the SED subtask, the CNN-transformer system achieves a SED mAP of 0.45, slightly outperforming the CNN-biGRU system of 0.44 and other CNN systems of 0.36 to 0.39. On the other hand, the CNN-biGRU achieves an ER of 0.66, outperforming other systems from 0.69 to 0.86. The ER is calculated using the threshold that is the same as the thresholds for the segment-wise training experiment.

Fig. 3 shows the class-wise performance of the CNN-biGRU system over training iterations. The performance on different sound classes varies. The prediction of screaming achieves the highest AT mAP of 0.94. On the other hand, the prediction of car passing by achieves the lowest mAP of 0.20. One explanation of the underperformance of sound classes such as car passing by is that they are difficult to perceive even by human in audio recordings. For SED, some sound classes achieve better mAP than others, for example, civil defense siren achieves the highest mAP of 0.80, indicating the system is performing well on these sound classes. The ER curve of different sound classes is different. Civil defense siren has an ER of 0.26 while other sound classes such as bicycle has ER over 1. The class-wise results show that both the AT and SED performance vary from sound class to sound class.

#### G. Automatic thresholds optimization

Previous subsection shows that the performance of different sound classes can be very different. Thus it can be useful to observe the precision-recall curve of different sound classes under various thresholds. Fig. 4 shows the precision-recall curve of sound classes under different thresholds. The blue and red curve show the validation and evaluation precision-recall curve, respectively. It can be seen that the validation and the evaluation curve have similar trend but are not fully overlapped, indicating that the data distribution of validation and evaluation data can be slightly different. Some sound classes such as screaming have high precision at a variety of thresholds. On the other hand, for some sound classes such as car passing by, the precision drops rapidly with the increase



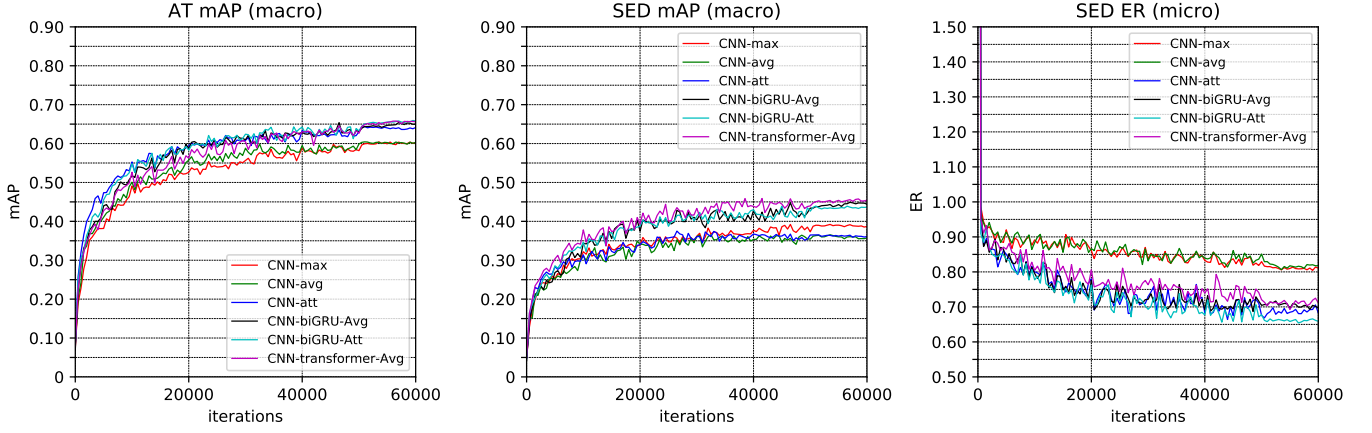


Fig. 2. Clip-wise training result with different systems. Audio tagging macro mAP; SED macro mAP; SED micro error rate.

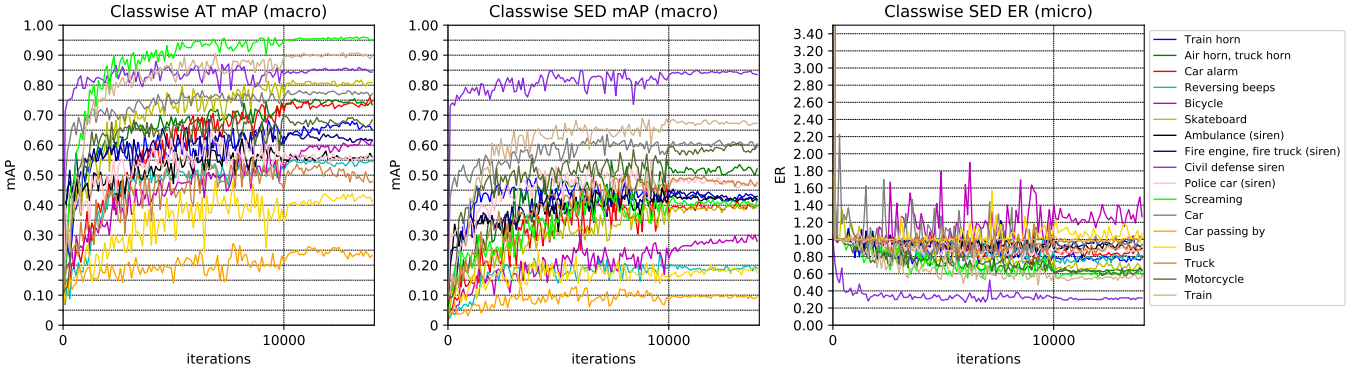


Fig. 3. Class-wise performance of clip-wise training. Audio tagging macro mAP; SED macro mAP; SED micro error rate.

of recall. Fig. 4 shows that to obtain the best metric different thresholds are required for different sound classes.

Table IV shows the AT and SED performance with clipwise training systems. We first apply constant thresholds for both AT and SED systems. The constant thresholds are the same as the thresholds applied in previous sections. In addition to applying the constant thresholds, we apply thresholds  $\Theta^{\text{AT}}$  and  $\Theta^{\text{SED}}$  for AT and SED obtained by using the automatic thresholds optimization algorithm described in Algorithm 4. Table IV shows that the proposed automatic thresholds optimization improved both the AT and SED performance. For example, the CNN-transformer AT F1 score improves from 0.557 to 0.599 and 0.629 to 0.646 in validation and evaluation set, respectively. The CNN-biGRU SED ER is reduced from 0.80 to 0.65 and 0.78 to 0.68 in validation and evaluation set, respectively. The results show the effectiveness of the proposed automatic threshold optimization method.

Table V shows the precision, recall and F1-score of different methods for the AT on the validation and evaluation sets, respectively. The official DCASE2017 baseline is give in [4] by using a multilayer perceptron (MLP) classifier, denoted as “DCASE2017 Baseline”. The MIL-NN is a multiple instance learning based neural network system proposed in [46]. The CNN-ensemble system is proposed by [15] and ranked the 1st in the SED subtask in Task 4 of DCASE 2017 challenge.

Our proposed systems achieve a F1 score of 64.6 on the evaluation set, outperforming the other methods in AT. The CNN-biGRU and the CNN-transformer systems achieve similar performance. Table VI shows the SED result with different methods. On the evaluation set, our proposed CNN-biGRU-att with automatic thresholds optimization achieves an F1 score of 58.4, outperforming other systems. The system achieves an ER of 0.68 which is comparable with the ensemble based CNN system [15].

## VII. CONCLUSION

This paper investigated sound event detection (SED) with weakly labelled data. The variants of convolutional neural networks (CNNs) and CNN-transformer systems were proposed for the audio tagging and sound event detection tasks. The segment-wise training and clip-wise training were investigated. The clip-wise training achieves an mAP of 0.650 in audio tagging and an ER of 0.68 in SED. The segment-wise training achieves an mAP of 0.49 in SED. A novel automatic thresholds optimization method is proposed to avoid selecting thresholds empirically. The automatic thresholds optimization method improves the AT F1 score from 0.629 to 0.646 and reduces ER from 0.78 to 0.68. In future, we will focus on extending the sound event detection system to large scale training data such as AudioSet.



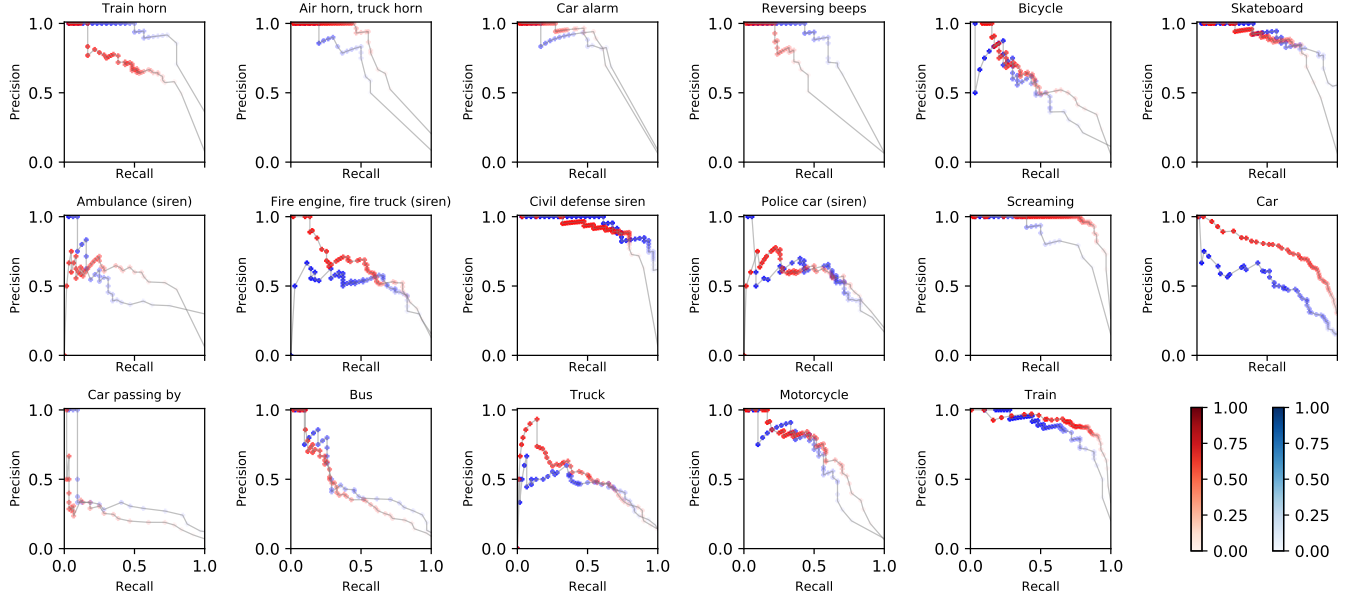


Fig. 4. Precision-recall curve of sound classes at different thresholds with the CNN-biGRU system.

TABLE IV  
PERFORMANCE OF THE PROPOSED SYSTEMS ON THE VALIDATION (VAL.) AND EVALUATION (EVAL.) DATASET.

Systems	VAL. AT				VAL. SED			EVAL. AT				EVAL. SED		
	mAP	F1	P	R	mAP	F1	ER	mAP	F1	P	R	mAP	F1	ER
CNN-max	0.579	47.9	49.7	46.2	0.359	35.2	0.83	0.602	56.5	59.3	53.9	0.387	46.6	0.75
CNN-max (auto thres)	#	53.8	63.3	46.7	#	48.9	0.74	#	58.2	67.4	51.3	#	52.0	0.72
CNN-avg	0.587	47.9	49.5	46.4	0.342	34.6	0.83	0.603	55.3	57.8	53.0	0.357	45.2	0.76
CNN-avg (auto thres)	#	56.4	<b>64.9</b>	49.8	#	35.7	0.76	#	59.7	66.5	54.2	#	51.8	0.74
CNN-att	0.637	55.9	55.7	56.1	0.339	48.0	0.82	0.641	60.5	60.7	60.4	0.361	55.2	0.80
CNN-att (auto thres)	#	<b>60.4</b>	59.6	<b>61.2</b>	#	52.3	0.68	#	61.7	61.0	62.4	#	54.5	0.69
CNN-biGRU-avg	0.650	55.5	54.1	56.9	<b>0.456</b>	49.1	0.90	0.650	63.2	63.8	62.7	0.444	56.4	0.84
CNN-biGRU-avg (auto thres)	#	60.2	60.9	59.4	#	53.4	68.5	#	63.2	64.8	61.7	#	56.7	0.72
CNN-biGRU-att	0.647	55.7	55.4	55.9	0.419	49.2	0.80	0.658	62.5	63.2	61.7	0.436	56.4	0.78
CNN-biGRU-att (auto thres)	#	58.1	57.5	58.7	#	<b>53.7</b>	<b>0.65</b>	#	64.0	63.7	<b>64.2</b>	#	<b>58.4</b>	<b>0.68</b>
CNN-transformer-avg	<b>0.653</b>	55.7	55.4	0.561	43.7	48.3	0.91	<b>0.656</b>	62.9	64.4	61.6	<b>0.454</b>	55.6	0.87
CNN-transformer-avg (auto thres)	#	59.9	63.6	56.6	#	52.4	75.4	#	<b>64.6</b>	<b>69.1</b>	60.7	#	57.3	0.75

TABLE V  
PERFORMANCE OF DIFFERENT SYSTEMS ON AT.

Dev-set	F1	Precision	Recall
DCASE2017 Baseline [4]	10.9	7.8	17.5
MIL-NN ensemble [46]	35.3	28.6	46.0
CNN-ensemble [15]	57.0	<b>70.3</b>	47.9
Previously submitted Fusion (i+ii) [11]	57.7	56.5	58.9
CNN-biGRU-att (auto thres)	58.1	57.5	58.7
CNN-transformer-avg (auto thres)	<b>59.9</b>	63.6	56.6
Eval-set	F1	Precision	Recall
DCASE2017 Baseline [4]	18.2	15.0	23.1
MIL-DL [46]	35.2	31.6	39.7
CNN-ensemble [15]	52.6	<b>69.7</b>	42.3
Previously submitted fusion system [11]	55.6	61.4	50.8
CNN-biGRU-att (auto thres)	64.0	63.7	<b>64.2</b>
CNN-transformer-avg (auto thres)	<b>64.6</b>	69.1	60.7


TABLE VI  
F1, PRECISION AND RECALL COMPARISONS FOR THE AUDIO TAGGING SUB-TASK ON THE DEVELOPMENT THE EVALUATION SETS.

Dev-set	F1	Error rate
DCASE2017 baseline [4]	13.8	1.02
CNN-ensemble [15]	47.1	<b>0.71</b>
MultiScale-CNN [47]	34.2	0.84
Previously submitted Fusion [11]	<b>49.7</b>	0.72
CNN-biGRU-att (auto thres)	<b>53.7</b>	<b>0.65</b>
CNN-transformer-avg (auto thres)	52.4	0.75
Eval-set	F1	Error rate
DCASE2017 baseline [4]	28.4	0.93
CNN-ensemble [15]	55.5	<b>0.66</b>
MultiScale-CNN [47]	47.1	0.75
Previously submitted fusion [11]	51.8	0.73
CNN-biGRU-att (auto thres)	<b>58.4</b>	0.68
CNN-transformer-avg (auto thres)	57.3	0.75

## REFERENCES

- [1] D. Giannoulis, E. Benetos, D. Stowell, M. Rossignol, M. Lagrange, and M. D. Plumbley, "Detection and classification of acoustic scenes and events: An IEEE AASP challenge," in *IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*, 2013.
- [2] D. Stowell, D. Giannoulis, E. Benetos, M. Lagrange, and M. D.

- Plumbly, "Detection and classification of acoustic scenes and events," *IEEE Transactions on Multimedia*, vol. 17, no. 10, pp. 1733–1746, 2015.
- [3] A. Mesaros, T. Heittola, and T. Virtanen, "TUT database for acoustic scene classification and sound event detection," in *IEEE European Signal Processing Conference (EUSIPCO)*, 2016, pp. 1128–1132.
  - [4] A. Mesaros, T. Heittola, A. Diment, B. Elizalde, A. Shah, E. Vincent, B. Raj, and T. Virtanen, "DCASE 2017 challenge setup: Tasks, datasets and baseline system," in *Workshop on Detection and Classification of Acoustic Scenes and Events (DCASE)*, 2017.
  - [5] A. Mesaros, T. Heittola, and T. Virtanen, "A multi-device dataset for urban acoustic scene classification," *Workshop on Detection and Classification of Acoustic Scenes and Events (DCASE)*, 2018.
  - [6] J. F. Gemmeke, D. P. Ellis, D. Freedman, A. Jansen, W. Lawrence, R. C. Moore, M. Plakal, and M. Ritter, "Audio set: An ontology and human-labeled dataset for audio events," in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017, pp. 776–780.
  - [7] E. Cakir, T. Heittola, and T. Virtanen, "Domestic audio tagging with convolutional neural networks," *IEEE AASP Challenge on Detection and Classification of Acoustic Scenes and Events (DCASE)*, 2016.
  - [8] Y. Xu, Q. Kong, Q. Huang, W. Wang, and M. D. Plumbly, "Convolutional gated recurrent neural network incorporating spatial features for audio tagging," in *International Joint Conference on Neural Networks (IJCNN)*, 2017, pp. 3461–3466.
  - [9] S. Hershey, S. Chaudhuri, D. P. Ellis, J. F. Gemmeke, A. Jansen, R. C. Moore, M. Plakal, D. Platt, R. A. Saurous, B. Seybold *et al.*, "CNN architectures for large-scale audio classification," in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017, pp. 131–135.
  - [10] A. Kumar and B. Raj, "Audio event detection using weakly labeled data," in *Proceedings of ACM on Multimedia Conference*, 2016, pp. 1038–1047.
  - [11] Y. Xu, Q. Kong, W. Wang, and M. D. Plumbly, "Large-scale weakly supervised audio classification using gated convolutional neural network," in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2018, pp. 121–125.
  - [12] T.-W. Su, J.-Y. Liu, and Y.-H. Yang, "Weakly-supervised audio event detection using event-specific gaussian filters and fully convolutional networks," in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017, pp. 791–795.
  - [13] S.-Y. Chou, J.-S. R. Jang, and Y.-H. Yang, "Learning to recognize transient sound events using attentional supervision," in *International Joint Conference on Artificial Intelligence (IJCAI)*, 2018, pp. 3336–3342.
  - [14] J. Salamon, B. McFee, and P. Li, "DCASE 2017 submission: Multiple instance learning for sound event detection," DCASE2017 Challenge, Tech. Rep., 2017.
  - [15] K. Lee, D. Lee, S. Lee, and Y. Han, "Ensemble of convolutional neural networks for weakly-supervised sound event detection using multiple scale input," DCASE2017 Challenge, Tech. Rep., September 2017.
  - [16] S. Chou, J. Jang, and Y.-H. Yang, "FrameCNN: a weakly-supervised learning framework for frame-wise acoustic event detection and classification," DCASE2017 Challenge, Tech. Rep., 2017.
  - [17] S. Adavanne, P. Pertilä, and T. Virtanen, "Sound event detection using spatial features and convolutional recurrent neural network," in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017, pp. 771–775.
  - [18] E. Cakir, T. Heittola, H. Huttunen, and T. Virtanen, "Polyphonic sound event detection using multi label deep neural networks," in *International Joint Conference on Neural Networks (IJCNN)*, 2015.
  - [19] E. Cakir, G. Parascandolo, T. Heittola, H. Huttunen, and T. Virtanen, "Convolutional recurrent neural networks for polyphonic sound event detection," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 25, no. 6, pp. 1291–1303, 2017.
  - [20] T. Hayashi, S. Watanabe, T. Toda, T. Hori, J. Le Roux, and K. Takeda, "BLSTM-HMM hybrid system combined with sound activity detection network for polyphonic sound event detection," in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017, pp. 766–770.
  - [21] J. L. Dai Wei, P. Pham, S. Das, S. Qu, and F. Metze, "Sound event detection for real life audio dcase challenge," in *Proc. Detection and Classification of Acoustic Scenes and Events Workshop (DCASE)*, 2016.
  - [22] X. Xia, R. Togneri, F. Sohel, and D. Huang, "Frame-wise dynamic threshold based polyphonic acoustic event detection," in *Interspeech*, 2017.
  - [23] H. Phan, L. Hertel, M. Maass, and A. Mertins, "Robust audio event recognition with 1-max pooling convolutional neural networks," *arXiv preprint arXiv:1604.06338*, 2016.
  - [24] Y. Wang and F. Metze, "A first attempt at polyphonic sound event detection using connectionist temporal classification," in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017, pp. 2986–2990.
  - [25] K. Choi, G. Fazekas, M. Sandler, and K. Cho, "Convolutional recurrent neural networks for music classification," in *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2017, pp. 2392–2396.
  - [26] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, "Attention is all you need," in *Advances in Neural Information Processing Systems (NIPS)*, 2017, pp. 5998–6008.
  - [27] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, "Bert: Pre-training of deep bidirectional transformers for language understanding," *arXiv preprint arXiv:1810.04805*, 2018.
  - [28] Q. Kong, C. Yu, Y. Xu, T. Iqbal, W. Wang, and M. D. Plumbly, "Weakly labelled audioset tagging with attention neural networks," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2019.
  - [29] A. Krizhevsky, I. Sutskever, and G. E. Hinton, "ImageNet classification with deep convolutional neural networks," in *Advances in neural information processing systems (NIPS)*, 2012, pp. 1097–1105.
  - [30] O. Abdel-Hamid, A.-r. Mohamed, H. Jiang, L. Deng, G. Penn, and D. Yu, "Convolutional neural networks for speech recognition," *IEEE/ACM Transactions on audio, speech, and language processing*, vol. 22, no. 10, pp. 1533–1545, 2014.
  - [31] K. Choi, G. Fazekas, and M. Sandler, "Automatic tagging using deep convolutional neural networks," *International Society of Music Information Retrieval (ISMIR)*, 2016.
  - [32] Q. Kong, T. Iqbal, Y. Xu, W. Wang, and M. D. Plumbly, "DCASE 2018 challenge baseline with convolutional neural networks," *Workshop on Detection and Classification of Acoustic Scenes and Events (DCASE)*, 2018.
  - [33] S. Ioffe and C. Szegedy, "Batch normalization: Accelerating deep network training by reducing internal covariate shift," *arXiv preprint arXiv:1502.03167*, 2015.
  - [34] V. Nair and G. E. Hinton, "Rectified linear units improve restricted boltzmann machines," in *Proceedings of International Conference on Machine Learning (ICML)*, 2010, pp. 807–814.
  - [35] T. Mikolov, M. Karafiát, L. Burget, J. Černocký, and S. Khudanpur, "Recurrent neural network based language model," in *Conference on International Speech Communication Association (ISCA)*, 2010.
  - [36] S. Hochreiter and J. Schmidhuber, "Long short-term memory," *Neural Computation*, vol. 9, no. 8, pp. 1735–1780, 1997.
  - [37] K. Cho, B. Van Merriënboer, C. Gulcehre, D. Bahdanau, F. Bougares, H. Schwenk, and Y. Bengio, "Learning phrase representations using RNN encoder-decoder for statistical machine translation," *Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2014.
  - [38] D. Kingma and J. Ba, "Adam: A method for stochastic optimization," *International Conference for Learning Representations (ICLR)*, 2014.
  - [39] "DCASE 2017 Task 4," <http://www.cs.tut.fi/sgn/arg/dcase2017/challenge/task-large-scale-sound-event-detection>.
  - [40] R. Serizel, N. Turpault, H. Eghbal-Zadeh, and A. P. Shah, "Large-scale weakly labeled semi-supervised sound event detection in domestic environments," 2018.
  - [41] N. Turpault, R. Serizel, A. P. Shah, and J. Salamon, "Sound event detection in domestic environments with weakly labeled data and soundscape synthesis," 2019.
  - [42] Q. Kong, Y. Cao, T. Iqbal, Y. Xu, W. Wang, and M. D. Plumbly, "Cross-task learning for audio tagging, sound event detection and spatial localization: DCASE 2019 baseline systems," *arXiv preprint arXiv:1904.03476*, 2019.
  - [43] B. McFee, C. Raffel, D. Liang, D. P. Ellis, M. McVicar, E. Battenberg, and O. Nieto, "librosa: Audio and music signal analysis in python," in *Proceedings of Python in Science Conference*, 2015, pp. 18–25.
  - [44] H. Zhang, M. Cisse, Y. N. Dauphin, and D. Lopez-Paz, "mixup: Beyond empirical risk minimization," *International Conference on Learning Representations (ICLR) (ICLR)*, 2018.
  - [45] A. Mesaros, T. Heittola, and T. Virtanen, "Metrics for polyphonic sound event detection," *Applied Sciences*, vol. 6, no. 6, p. 162, 2016.
  - [46] S.-Y. Tseng, J. Li, Y. Wang, J. Szurley, F. Metze, and S. Das, "Multiple instance deep learning for weakly supervised audio event detection," *INTERSPEECH*, pp. 3279–3283, 2018.
  - [47] J. Lee, J. Park, S. Kum, Y. Jeong, and J. Nam, "Combining multi-scale features using sample-level deep convolutional neural networks for weakly supervised sound event detection," *Workshop on Detection and Classification of Acoustic Scenes and Events (DCASE)*, pp. 69–73, 2017.



**Qiugiang Kong** (S'17) received the B.Sc. and M.E. degrees from South China University of Technology, Guangzhou, China, in 2012 and 2015, respectively. He is currently working toward the Ph.D. degree from the University of Surrey, Guildford, U.K. on sound event detection. His research topic includes sound understanding, audio signal processing and machine learning. He was nominated as the post-graduate research student of the year in University of Surrey, 2019.



**Yong Xu** (M'17) received the Ph.D. degree from the University of Science and Technology of China (USTC), Hefei, China, in 2015, on the topic of DNN-based speech enhancement and recognition. Currently, he is a senior research scientist in Tencent AI lab, Bellevue, USA. He once worked at the University of Surrey, U.K. as a Research Fellow from 2016 to 2018 working on sound event detection. He visited Prof. Chin-Hui Lee's lab in Georgia Institute of Technology, USA from Sept. 2014 to May 2015. He once also worked in IFLYTEK company from

2015 to 2016 to develop far-field ASR technologies. His research interests include deep learning, speech enhancement and recognition, sound event detection, etc. He received 2018 IEEE SPS best paper award.



**Wenwu Wang** (M'02-SM'11) was born in Anhui, China. He received the B.Sc. degree in 1997, the M.E. degree in 2000, and the Ph.D. degree in 2002, all from Harbin Engineering University, China. He then worked in King's College London, Cardiff University, Tao Group Ltd. (now Antix Labs Ltd.), and Creative Labs, before joining University of Surrey, UK, in May 2007, where he is currently a professor in signal processing and machine learning, and a Co-Director of the Machine Audition Lab within the Centre for Vision Speech and Signal Processing.

He has been a Guest Professor at Qingdao University of Science and Technology, China, since 2018. His current research interests include blind signal processing, sparse signal processing, audio-visual signal processing, machine learning and perception, machine audition (listening), and statistical anomaly detection. He has (co)-authored over 200 publications in these areas. He served as an Associate Editor for IEEE TRANSACTIONS ON SIGNAL PROCESSING from 2014 to 2018. He is also Publication Co-Chair for ICASSP 2019, Brighton, UK.



**Mark D. Plumbley** (S'88-M'90-SM'12-F'15) received the B.A.(Hons.) degree in electrical sciences and the Ph.D. degree in neural networks from University of Cambridge, Cambridge, U.K., in 1984 and 1991, respectively. Following his PhD, he became a Lecturer at King's College London, before moving to Queen Mary University of London in 2002. He subsequently became Professor and Director of the Centre for Digital Music, before joining the University of Surrey in 2015 as Professor of Signal Processing. He is known for his work on analysis

and processing of audio and music, using a wide range of signal processing techniques, including matrix factorization, sparse representations, and deep learning. He is a co-editor of the recent book on Computational Analysis of Sound Scenes and Events, and Co-Chair of the recent DCASE 2018 Workshop on Detection and Classifications of Acoustic Scenes and Events. He is a Member of the IEEE Signal Processing Society Technical Committee on Signal Processing Theory and Methods, and a Fellow of the IET and IEEE.