

Fully-simulated Integration of Scamp5d Vision System and Robot Simulator

Wen Fan
University of Manchester
School of Electrical & Electronic Engineering
wen.fan@postgrad.manchester.ac.uk

Yanan Liu
University of Bristol
Bristol Robotics Lab & Visual Information Lab
yanan.liu@ieee.org

Yifan Xing
University of Bristol
Visual Information Lab
yifan.xing@bristol.ac.uk

Abstract

This paper proposed a fully-simulated environment by integrating an on-sensor visual computing device, SCAMP, and CoppeliaSim robot simulator via interface and remote API. Within this platform, a mobile robot obstacle avoidance and target navigation with pre-set barriers is exploited with on-sensor visual computing, where images are captured in a robot simulator and processed by an on-sensor processing server after being transferred. We made our developed platform and associated algorithms for mobile robot navigation available online.

Keywords: computational camera, robot navigation, Scamp-5d system, CoppeliaSim, simulation

1. Introduction

The Scamp vision system [1, 2, 4] (Figure 1) is a general-purpose visual device with parallel in-sensor computing capabilities enabled by novel large-scale circuit design and system integration of photosensitive pixels, registers, arithmetic units, and IO. With these features, it is increasingly integrated with robots for various applications with low-power consumption, and efficient parallel computing without external hardware. However, it is often inefficient to validate ideas and perform experiments when integrating the Scamp vision system with a mobile robot. Although an earlier semi-simulated platform is developed, the real Scamp vision system is not always accessible. Hence, authors are motivated to develop a fully-simulated platform consisting of the Scamp vision system and robot simulator for both researchers and novices to prototype ideas more efficiently and flexibly. The comparison of different platforms is shown in Table 1.

With this in mind, this work takes advantage of a com-

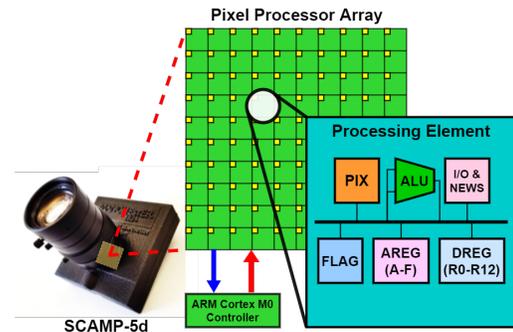


Figure 1. SCAMP-5d vision system and the PPA. The photosensitive chip consists of 256×256 processor elements where pixel, registers, arithmetic units and other peripheral units are integrated providing parallel on-sensor computing ability. (Figure from [7])

prehensive robot simulator CoppeliaSim [8] with Scamp vision simulator, to validate ideas and develop prototype more quickly. CoppeliaSim is a virtual robot platform where each agent can be controlled via remote API [3], hence enabling sensor readings and control instructions transferred to/from other platforms. This work developed a Python-based interface & API connecting two simulation platforms allowing data transferred mutually. In addition, through the proposed platform, we demonstrate a mobile robot navigation system based on monocular on-sensor computing with the Scamp. We made our developed platform and algorithms available from¹. The experimental video can be seen from².

Earlier work on the platform development of Scamp vision system mainly include Chen *et al.* [2] where the whole development framework was proposed, Liu *et al.* [6] in-

¹https://github.com/Neo-manchester/fully_simulated_platform_Scampsim_Coppelia.git

²<https://youtu.be/Ly5oBufGPag>

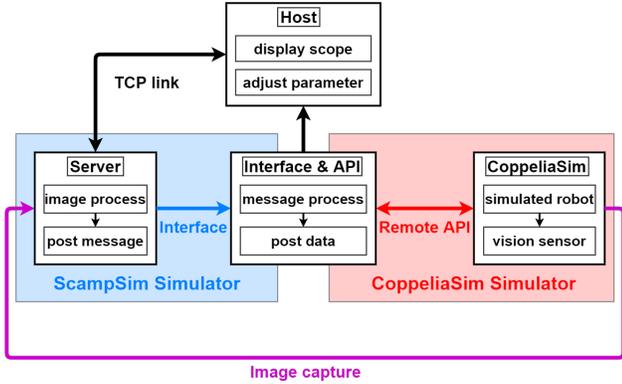


Figure 2. The framework of the fully-simulated system. Once the Server is started, the Host works via TCP link. Then the Coppeliasim is switched on by the remote API. After that, a closed loop of image processing from ScampSim, data transmission through interface/API, robot simulation and sensor reading from Coppeliasim is set up, coming along with visualisation and parameter tuning on the Host.

roduced a semi-simulated platform by integrating a real Scamp5d vision system with Coppeliasim robot simulator for more user-friendly robot-related application development. Based on these two works, this paper developed a fully-simulated development platform for more flexible idea validation before mounting a real Scamp upon a mobile platform. Table 1 compares these three platforms where different levels of simulation and its features are shown.

2. Simulation Platform Development

The framework of the fully-simulated system is shown in Figure 2, which mainly consists of ScampSim, Coppeliasim, Interface & API, and Host.

2.1. SCAMP-5d Vision System Simulator

As shown in Figure 2, the ScampSim simulator usually consists of Server and communication interface with other modules. The Server can visualise the image processing and the Host provides a GUI for users to adjust image processing parameters (Figure 3). The Coppeliasim serves as a comprehensive robot simulator where customised robot-related applications, such as vision sensors, can be set. Then, sensor readings can be transferred to the ScampSim Server for image processing. After that, the processed data are sent back through Interface & API to the robot simulator guiding the robots performing tasks. Here, the Interface & API acts as a 'bridge' to connect the other two modules for data transmission. The detail of the SCAMP-5d vision simulation and setup can be seen from ³ and [2].

³https://scamp.gitlab.io/scamp5d_doc/_p_a_g_e_s_i_m_u_l_a_t_i_o_n.html

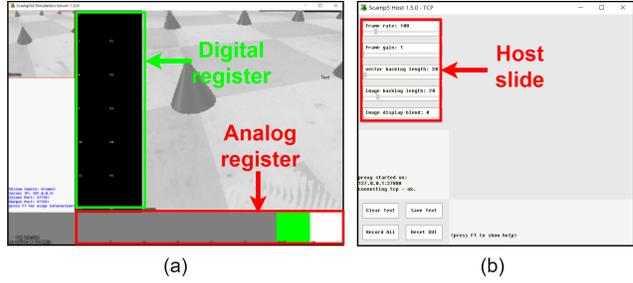


Figure 3. (a): ScampSim Server user interface. The image processing procedure can be seen from Digital/Analog registers. (b): The Host user interface, where customised parameters for image processing on the Server can be tuned. These two modules communicate mutually through TCP link.

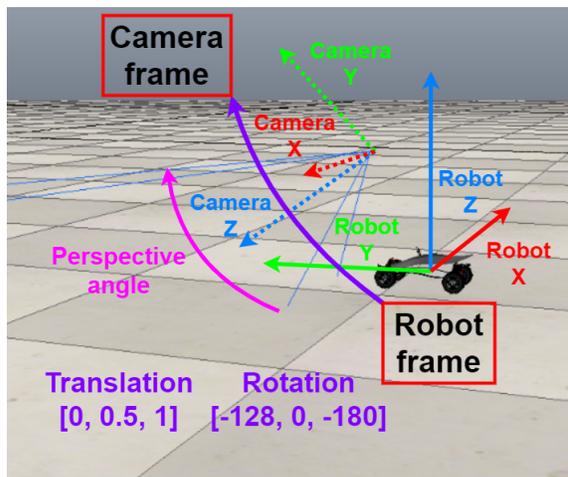


Figure 4. The frame difference between robot and camera in Coppeliasim. The translation $[X, Y, Z]$ and rotation $[\Psi, \theta, \Phi]$ from robot to camera are defined as $[0, 0.5, 1]$ and $[-128, 0, -180]$. The camera perspective angle is 60° both vertically and horizontally.

2.2. Coppeliasim Robot Simulation Environment

The Coppeliasim⁴ [8] is a popular robot simulator where the many types of mobile platforms and ambient environments are supported. By mounting a vision sensor and adjusting the associated parameters onto a Manta mobile robot, the camera can simulate a real Scamp5d camera for the gray-scale image of 256×256 capturing (Figure 4).

2.3. The Interface & Remote API

The Python-based interface is introduced to receive the messages from the ScampSim Server which is similar to the earlier simulated platform [6]. In addition, the interface integrates the remote API to communicate with the Coppeliasim, which enabled by several Coppeliasim API functions, such as '*client.simxGetObjectPosition*'

⁴<https://www.coppeliarobotics.com/>

Platform	configuration	Flexibility	Developing cycle
Real Scamp vision system [2]	SCAMP + A mobile platform	Low	Long
Semi-sim platform [6]	SCAMP + A robot simulator	Medium	Medium
Fully-sim platform (this work)	SCAMP simulator + A robot simulator	High	Short

Table 1. Comparison of different simulation levels of Scamp vision system and mobile platforms.

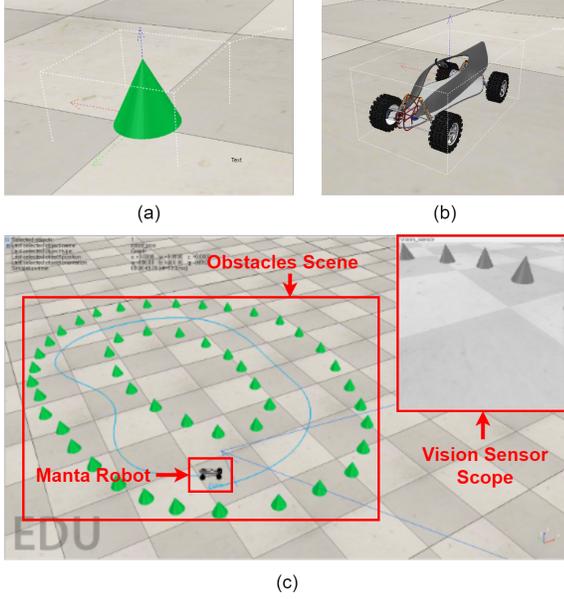


Figure 5. Obstacles and Robot in the CoppeliaSim. (a) Cone as the obstacles. (b) The Manta mobile vehicle. (c) The example of experimental environment setups within the CoppeliaSim.

and `'client.sim.xSetJointPosition'`. These functions can read and set states of agents within CoppeliaSim according to the instructions from Server through Interfaces & API.

3. Experiment

To validate the effectiveness of the proposed simulated platform, this paper set up a simple environment for the robot navigation testing the whole loop of the image capturing, data transmission, image processing, and robot control. As shown in Figure 5, the cone as the obstacles can provide features such as corner points, sloped edges and round bottom. With this setup, the simulation environment can be simplified to verify the effectiveness of the system more efficiently. The Manta robot is selected in this case, a wheeled mobile robot based on the Ackerman chassis. Users can take advantage of our platform for idea validation by setting up the more complex environment.

3.1. Robot Navigation Algorithm

This section proposes algorithms for the robot obstacle avoidance and navigation to the pre-set targets, which can

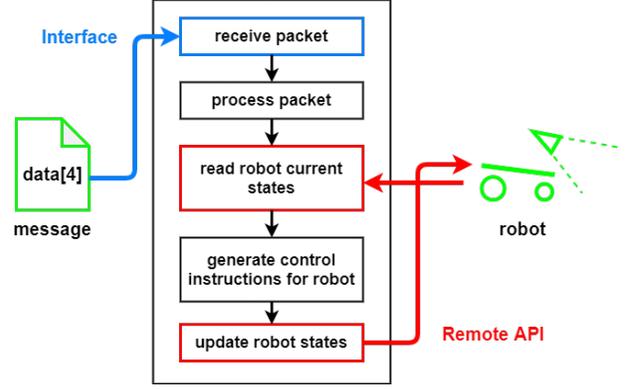


Figure 6. The operation process of robot navigation via interface & API. After being received by the Interface, the message from the Server is processed to generate the control instructions for the robot in CoppeliaSim.

be seen in Figure 6 and Algorithm 1 in detail. `'data[4]'` is the message from the Server containing robot navigation and obstacle avoidance related information: `'closest_x'`, `'closest_y'`, `'closest_dis'` and `'direction'` (Figure 9). D_{safe} is the safe range to avoid the collision. The obstacle avoidance manoeuvre should be performed once the distance between the vehicle and barriers is detected to be smaller than the D_{safe} . The target is achieved successfully when the distance between the vehicle and the target is smaller than the E_{safe} .

3.2. Image Processing Algorithm

The ScampSim Server performs image processing algorithms in the same parallel way with the real Scamp vision system once the sensor reading image is received from the CoppeliaSim. As can be seen from Figure 7, binary thresholding and noise filtering are the main image preprocess methods to efficiently segment obstacles out with a clean background for further image processing.

Then, this work takes advantage of the Scamp built-in flooding function (`scamp5_flood`) to efficiently obtain the bounding box (`'scamp5_scan_boundingbox'`) of each cone, hence to get the approximate size information of each obstacle with the thinking of a bigger bounding box indicating a shorter distance. The obstacle avoidance starts from the closest one. Details can be seen from Algorithm 2, Figure 8 and Figure 9.

Algorithm 1 Robot Navigation Algorithm

Input: $data[4]$, $target$ // Server message and pre-set targets

Output: θ_{steer} // control the robot steer angle

```

1: while true do
2:   packet = Scamp5_get_packet() // read via interface
3:   if packet is None then
4:     break
5:   else
6:     data[4] = process_packet
7:     if  $D_{safe} < closest\_dis$  then // target navigation
8:       pos = robot coordinate // read via API
9:        $\theta_{target} = atan2(target - pos)$ 
10:       $E_{dis} = sqrt(target - pos)$ 
11:      if  $E_{safe} < E_{dis}$  then
12:         $\theta_{robot} = robot\ orientation$  // read via API
13:         $\theta_{steer} = \theta_{target} - \theta_{robot}$ 
14:        sent  $\theta_{steer}$  to robot // write via API
15:      else
16:        break // on target
17:    else // obstacle avoidance navigation
18:       $\theta_{steer} = control\ output(Algorithm\ 2)$ 
19:      sent  $\theta_{steer}$  to robot // write via API
20: return  $\theta_{steer}$ 

```

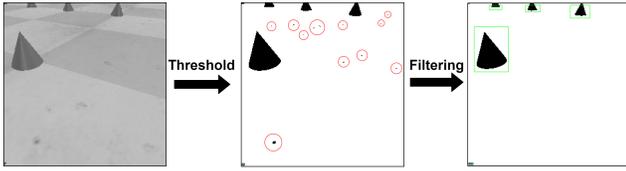


Figure 7. Threshold and noise filtering for obstacle segmentation.

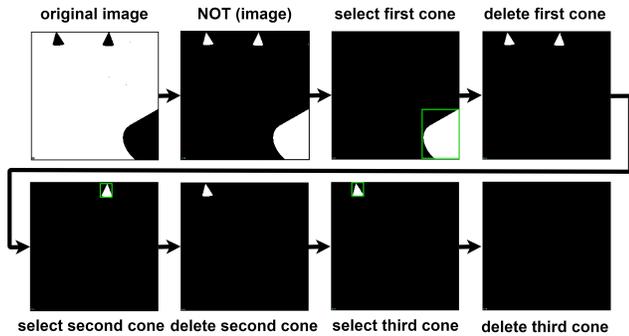


Figure 8. The operation process of cone boundingbox extraction.

Once cones are segmented, the first '1' pixel can be the source to apply the flooding operation to get rid of other cones. The boundingbox function is performed to get the size of this cone (Figure 8). Then, the found cone should be deleted from the original image to start the next iteration of cone detection until all the cones are extracted.

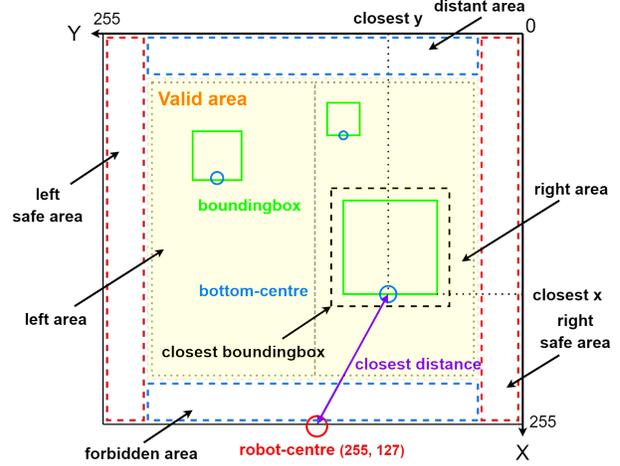


Figure 9. The principle of the closest obstacle detection algorithm. The key idea is to find out the closest boundingbox to (255, 127), which indicates the robot position. The closest distance will be updated if the bottom centre exists inside the valid area, except for 'safe area', 'forbidden area' and 'distant area'. The right and left areas present the right and left parts of the valid area.

Algorithm 2 Closest obstacle detection algorithm

Input: $R10$ // image after threshold and filtering

Output: $data[4]$ // post message

```

1: while OR(NOT(R10)) = true do
2:   event_coords[count] = Scamp5_scan_events(R10,1)
3:   R11 = Scamp5_load_point(event_coords[count])
4:   R11 = Scamp5_flood(R10)
5:   boundingbox = Scamp5_scan_boundingbox(R11)
6:   if distant_area <  $X_{bottom}$  < forbidden_area then
7:     if right_safe <  $Y_{bottom}$  < left_safe then
8:        $dis = sqrt((255,127) - (X_{bottom}, Y_{bottom}))$ 
9:       if  $dis < closest\_dis$  then
10:         $closest\_dis = dis$ 
11:         $closest\_x = X_{bottom}$ 
12:         $closest\_y = Y_{bottom}$ 
13:      else
14:        else
15:      else
16:        direction = closest_y whether in right or left area
17:         $R10 = XOR(R10, R11)$ 
18:        count++
19:         $data[4] = [closest\_x, closest\_y, closest\_dis, direction]$ 
20:        post( $data[4]$ ) // post message to interface
21: return  $data[4]$ 

```

3.3. Robot Obstacle Avoidance Algorithm

If no barriers are detected, the robot will follow the target navigation algorithm shown in Algorithm 1. Once obstacle distances are smaller than D_{safe} , the obstacle avoidance

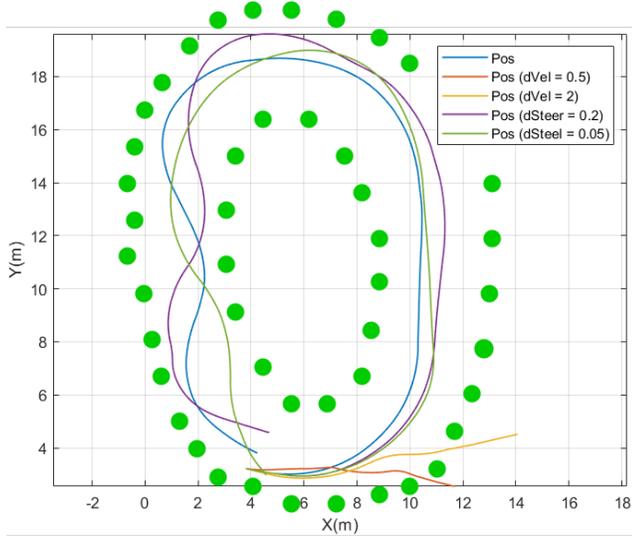


Figure 10. The robot trajectories in the reactive navigation.

functions are activated shown in Equation 1 and 2.

$$K = O_{closest} \times \left(\frac{K_{safe}}{D_{closest}} \right) \quad (1)$$

$$\theta_{steer} = -K_{steer} \times K \quad (2)$$

The $D_{closest}$ and $O_{closest}$ represent the closest obstacle's distance and direction in message *data[4]*. A closer cone produces a bigger θ_{steer} . The K_{safe} and K_{steer} are adjustable parameters related to the safe range length D_{safe} and steering response sensitivity respectively. The negative sign in Equation 2 means the robot turns towards the direction far from the closest obstacle.

3.4. Navigation Experiments

This section presents three navigation tasks, reactive navigation [5], single target, and multiple targets navigation, to verify the fully-simulated environment and the above-mentioned algorithms. The initial parameters for the experiment setup are shown in Table 2. For the reactive navigation, the robot navigates freely to prevent collisions in the environment with an obstacle layout of concentric-like ellipses as shown in Figure 10 where the multiple trajectories can be seen. Then single and multiple tasks navigation are illustrated. In this case, the robot not only performs obstacle avoidance but also path planning towards its target position through obstacles (Figure 11, Figure 12 and Figure 13).

4. Conclusion and Future Work

A fully-simulated environment integrating a Scamp simulator and CoppeliaSim is presented in this work provid-

Parameter ID	Initial Value
dVel	1(r/s)
dSteer	0.1(rad)
K_{safe}	100
K_{steer}	20
D_{safe}	200
E_{safe}	1
distant area	[0,50]
forbidden area	[240,255]
safe area	[0,10],[245,255]
right and left area	[15,127],[128,240]

Table 2. The initial parameters of the fully-simulated system

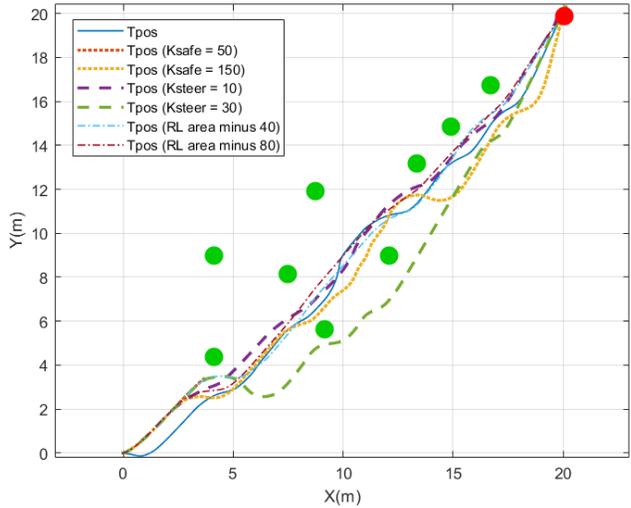


Figure 11. The robot trajectories in the single target navigation.

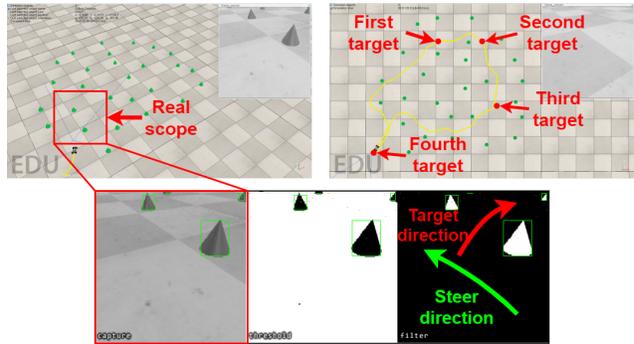


Figure 12. The simulation of the multiple target navigation.

ing researchers with a flexible idea and prototype validation platform. In the experiment, we use reactive navigation, single task and multi-task navigation to validate the effectiveness of the proposed platform. Customised environments and mobile platforms can be built based on our proposed platform by users according to different types of applica-

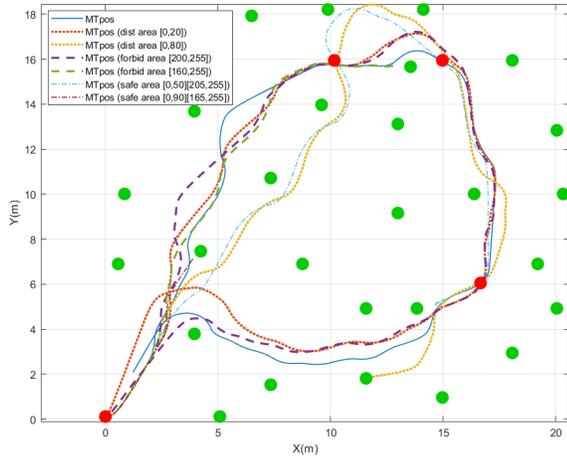


Figure 13. The robot trajectories in the multiple target navigation.

tions.

However, a more effective synchronisation mechanism should be optimised to decrease the influence of communication latency among these three modules. In addition, the Interface & remote API module can be improved along with the updates of Interface libraries for the Scamp vision system in the future.

References

- [1] Stephen J Carey, Alexey Lopich, David RW Barr, Bin Wang, and Piotr Dudek. A 100,000 fps vision sensor with embedded 535gops/w 256× 256 simd processor array. In *2013 Symposium on VLSI Circuits*, pages C182–C183. IEEE, 2013.
- [2] Jianing Chen, Stephen J Carey, and Piotr Dudek. Scamp5d vision system and development framework. In *Proceedings of the 12th International Conference on Distributed Smart Cameras*, pages 1–2, 2018.
- [3] Stephen James, Marc Freese, and Andrew J Davison. Pyrep: Bringing v-rep to deep robot learning. *arXiv preprint arXiv:1906.11176*, 2019.
- [4] Yanan Liu, Laurie Bose, Jianing Chen, Stephen J Carey, Piotr Dudek, and Walterio Mayol-Cuevas. High-speed light-weight cnn inference via strided convolutions on a pixel processor array. In *The 31st British Machine Vision Conference (BMVC 2020)*, 2020.
- [5] Yanan Liu, Laurie Bose, Colin Greatwood, Jianing Chen, Rui Fan, Thomas Richardson, Stephen J. Carey, Piotr Dudek, and Walterio Mayol-Cuevas. Agile reactive navigation for a non-holonomic mobile robot using a pixel processor array. *IET Image Processing*, 15(9):1883–1892, 2021.
- [6] Yanan Liu, Jianing Chen, Laurie Bose, Piotr Dudek, and Walterio Mayol-Cuevas. Bringing a robot simulator to the scamp vision system. *arXiv preprint arXiv:2105.10479*, 2021.
- [7] Yanan Liu, Jianing Chen, Laurie Bose, Piotr Dudek, and Walterio Mayol-Cuevas. Direct servo control from in-sensor cnn inference with a pixel processor array. *arXiv preprint arXiv:2106.07561*, 2021.
- [8] Eric Rohmer, Surya PN Singh, and Marc Freese. V-rep: A versatile and scalable robot simulation framework. In *2013 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 1321–1326. IEEE, 2013.