

Fast Decoding of Interleaved Linearized Reed–Solomon Codes and Variants

Hannes Bartz, *Member, IEEE*, Sven Puchinger, *Member, IEEE*

Abstract

We construct s -interleaved linearized Reed–Solomon (ILRS) codes and variants and propose efficient decoding schemes that can correct errors beyond the unique decoding radius in the sum-rank metric. The proposed interpolation-based scheme for ILRS codes can be used as a list decoder or as a probabilistic unique decoder that corrects errors of sum-rank up to $t \leq \frac{s}{s+1}(n-k)$, where s is the interleaving order, n the length and k the dimension of the code. Upper bounds on the list size and the decoding failure probability are given where the latter is based on a novel Loidreau–Overbeck-like decoder for ILRS codes. We show how the proposed decoding schemes can be used to decode errors beyond the unique decoding radius in the skew metric by using an isometry between the sum-rank metric and the skew metric.

We generalize fast minimal approximant basis interpolation techniques to obtain efficient decoding schemes for ILRS codes (and variants) with subquadratic complexity in the code length.

Up to our knowledge, the presented decoding schemes are the first being able to correct errors beyond the unique decoding region in the sum-rank and skew metric. The performance of the proposed decoding schemes and the tightness of the upper bound on the decoding failure probability are validated via Monte Carlo simulations.

Index Terms

Interleaved linearized Reed–Solomon codes, sum-rank metric, skew metric, interpolation-based decoding

I. INTRODUCTION

The sum-rank metric is a mix between the Hamming metric and the rank metric and was first considered in [2, Sec. III] for constructing space-time codes. Later, the sum-rank metric was discovered as a suitable metric for error control in coherent multishot network coding [3], i.e. a scenario where the network topology and the in-network combinations are known at the receiver. Recently, the sum-rank metric has also been considered for applications in code-based quantum-resistant cryptography [4], [5].

In the sum-rank metric vectors are considered in a *block-wise* manner. Consider a vector $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)})$ with elements from \mathbb{F}_{q^m} that consists of the ℓ blocks $\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(\ell)}$. The sum-rank weight of \mathbf{x} is then defined as

$$\text{wt}_{\Sigma R}(\mathbf{x}) := \sum_{i=1}^{\ell} \text{rk}_q(\mathbf{x}^{(i)})$$

where $\text{rk}_q(\mathbf{x}^{(i)})$ denotes the \mathbb{F}_q -rank of $\mathbf{x}^{(i)}$, i.e. the maximum number for \mathbb{F}_q -linearly independent elements in $\mathbf{x}^{(i)}$. If the size of each block equals one (i.e. $\ell = n$), the sum-rank metric coincides with the Hamming metric. For a single block ($\ell = 1$) the sum-rank metric coincides with the rank-metric. There is an isometry between the sum-rank metric and the so-called *skew* metric [6]. An overview on fundamentals and applications of codes in the sum-rank metric is given in [7].

Linearized Reed–Solomon (LRS) codes [6], [8] are a class of evaluation codes that fulfill the Singleton-like bound in the sum-rank metric with equality. Hence, linearized Reed–Solomon (LRS) codes are maximum sum-rank distance (MSRD) codes. Similar to original Reed–Solomon (RS) codes in the Hamming metric [9] and Gabidulin codes [10] in the rank metric, LRS codes are constructed by evaluating degree-restricted polynomials at a set of evaluation points, also called *code locators*. Other than RS codes, that are constructed from ordinary polynomials, and Gabidulin codes, that are constructed from *linearized* polynomials [11], LRS codes are constructed from *skew* polynomials [12], a class of non-commutative polynomials that includes ordinary and linearized polynomials as special cases. LRS codes receive their name from the considered skew polynomial evaluation, which is *linear* under certain conditions (i.e. per block). There exist efficient bounded minimum distance (BMD) decoders for LRS codes that can correct errors of sum-rank up to half the minimum distance of the code [6], [8], [13].

Interleaved codes of interleaving order s are obtained by stacking s codewords of a code (e.g. over \mathbb{F}_{q^m}) into a matrix. Interleaving is a common tool in coding theory to design codes and decoders that have an improved *burst* error-correction capability. In the Hamming metric one gets an improved error-correction capability for errors that occur in a column-wise

Parts of this paper have been presented at the 2021 IEEE International Symposium on Information Theory (ISIT) [1].

H. Bartz is with the Institute of Communications and Navigation, German Aerospace Center (DLR), Germany (e-mail: hannes.bartz@dlr.de).

S. Puchinger is with Hensoldt Sensors GmbH, Ulm, Germany (e-mail: sven.puchinger@tum.de).

This work was done while S. Puchinger was with the Department of Applied Mathematics and Computer Science, Technical University of Denmark (DTU), Lyngby, Denmark and the Department of Electrical and Computer Engineering, Technical University of Munich, Munich, Germany. Within this period he was supported by the European Union’s Horizon 2020 research and innovation program under the Marie Skłodowska-Curie grant agreement no. 713683 and by the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme (grant agreement no. 801434).

manner since such error patterns corrupt the same locations in the component codewords. In the rank metric one obtains an improved performance for errors that share the same \mathbb{F}_q -row space.

Decoders for interleaved codes are known in the Hamming metric for Reed–Solomon [14]–[26] and in general algebraic geometry codes [27]–[29], and in the rank metric for Gabidulin codes [30]–[37]. All of these decoders have in common that they are either list decoders with exponential worst-case and small average-case list size, or probabilistic unique decoders that fail with a very small probability.

A. Related Results

LRS have recently shown to provide reliable and secure coding schemes for multi-shot network coding [38]. Furthermore, there is a construction [39] of locally repairable codes with maximal recoverability (also known as partial MDS codes) based on LRS codes, which attains the smallest known field size among all existing code constructions for a wide range of code parameters. The construction of long LRS codes over small field sizes was considered [40] and Cyclic-Skew-Cyclic and sum-rank Bose–Chaudhuri–Hocquenghem (BCH) codes were presented in [41]. An efficient syndrome-based error-erasure decoder for LRS codes was proposed in [42].

In [43] the authors generalized the bounds on list decoding of Gabidulin codes in the rank metric [44] to list decoding of LRS codes in the sum-rank metric. The results show that polynomial-time list decoding of LRS codes beyond the Johnson radius is in general not possible. In particular, some LRS codes have an exponential list size directly above the unique decoding radius.

Recently, a Gao-like decoder for *horizontally* interleaved LRS codes was proposed in [45]. A Metzner–Kapturowski-like decoder that allows to decode *any* s -interleaved sum-rank-metric code with high interleaving order s was presented in [46]. It was also shown, that *folded* variants of LRS codes can be decoded beyond the unique decoding radius efficiently [47], [48].

Apart from LRS codes, there exist several good (but not necessarily MSR) sum-rank-metric codes, such as partial unit memory codes constructed from rank-metric codes [49]–[51], convolutional codes [52], [53] and constructions with a variable block size [54].

B. Our Techniques & Contributions

We generalize the sum-rank metric to (interleaved) matrices and define a corresponding (burst) sum-rank channel that generalizes the corresponding (burst) channel models in the Hamming metric and the rank metric. In this channel model each (burst) error matrix over \mathbb{F}_{q^m} can be seen as a tall matrix over \mathbb{F}_q that has a small sum-rank weight.

We show how to construct interleaved linearized Reed–Solomon (ILRS) codes and propose a Loidreau–Overbeck-like and an interpolation-based decoding scheme that both allow for decoding errors beyond the unique decoding radius in the sum-rank metric efficiently.

The Loidreau–Overbeck-like decoder for ILRS codes generalizes the first decoder for interleaved Gabidulin codes by Loidreau and Overbeck [30], [55] and can correct errors of sum-rank weight $t \leq \frac{s}{s+1}(n-k)$ with high probability (Theorem 1), where s is the interleaving order, n the length and k the dimension of the code.

The proposed efficient interpolation-based decoding scheme for ILRS codes is inspired by the Wachter–Zeh–Zeh decoder for interleaved Gabidulin codes [34]. Similar as the Wachter–Zeh–Zeh decoder for interleaved Gabidulin codes [34], the proposed interpolation-based decoding scheme can be interpreted as a list decoder (with not necessarily polynomial-time worst-case list size) and a probabilistic unique decoder, which either returns a unique solution or a decoding failure. The list decoder is capable of correcting errors of sum-rank weight up to $t \leq \frac{s}{s+1}(n-k+1)$ (see Theorem 2), whereas the probabilistic unique decoder can correct up to $t \leq \frac{s}{s+1}(n-k)$ (see Theorem 4). The interpolation-based decoder requires at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} , where $\mathcal{M}(n)$ is the cost (in operations in \mathbb{F}_{q^m}) of multiplying two skew-polynomials of degree at most n , which is *subquadratic* in the code length n . The resulting performance is achieved by a fast generalized operator evaluation interpolation algorithm (Algorithm 4) that is derived in Section IV, which relies on fast minimal approximant bases computations [37].

It is shown how the proposed decoding schemes can be used for decoding interleaved skew Reed–Solomon (ISRS) codes from errors of skew weight up to $t < \frac{s}{s+1}(n-k+1)$.

For the presented decoding schemes, upper bounds on the worst-case list size and the decoding failure probability are given. The tightness of the upper bounds on the decoding failure probability are validated by Monte Carlo simulations.

Up to our knowledge, the proposed decoding schemes are first ones having an error-correction capability beyond the unique decoding radius in the sum-rank and the skew metric by allowing an exponential worst-case and small average-case list size or a small decoding failure probability. Therefore, the proposed decoding schemes achieve the best decoding regions for all explicit sum-rank-metric code constructions and the corresponding decoders known so far.

The generalization of the results for interleaved Reed–Solomon and interleaved Gabidulin codes to ILRS codes in the sum-rank metric is not straight-forward, as e.g. the properties of the generalized operator evaluation and the concept of conjugacy have to be taken into account carefully. In particular, the \mathbb{F}_q -linearity known from the rank metric only holds in a block-wise manner, which in turn requires more sophisticated proof techniques (see e.g. the proof of Lemma 4).

The main results of this paper, in particular the improvements upon the existing noninterleaved variants, are illustrated in Table I.

TABLE I

OVERVIEW OF NEW DECODING REGIONS PARAMETERS: CODE LENGTH n , INTERLEAVING PARAMETER s (USUALLY $s \ll n$), ERROR WEIGHT (IN RESP. METRIC) t AND $t_{\max} := \frac{s}{s+1}(n-k)$. $\mathcal{M}(n)$ IS THE COST (IN OPERATIONS IN \mathbb{F}_{q^m}) OF MULTIPLYING TWO SKEW-POLYNOMIALS OF DEGREE AT MOST n AND ω IS THE MATRIX MULTIPLICATION EXPONENT. FOR THE COMPLEXITY ALWAYS THE LOWEST OF THE REFERENCED DECODING ALGORITHMS IS GIVEN.

Code Class / Decoder	Metric	Decoding Region	List Size Failure Probability	Complexity (over \mathbb{F}_{q^m})	Reference(s)
LRS Codes unique decoding ($s=1$)	sum-rank	$t < \frac{1}{2}(n-k+1)$	—	$\tilde{O}(\mathcal{M}(n))$	[6], [8], [13]
ILRS Codes list decoding	sum-rank	$t < \frac{s}{s+1}(n-k+1)$	$ \mathcal{L} \leq q^{m(k(s-1))}$	$\tilde{O}(s^\omega \mathcal{M}(n))$	Thm. 2 Sec. III-D3
ILRS Codes prob. unique decoding	sum-rank	$t \leq \frac{s}{s+1}(n-k)$	$P_f \leq \kappa_q^{\ell+1} q^{-m((s+1)(t_{\max}-t)+1)}$	$\tilde{O}(s^\omega \mathcal{M}(n))$	Thm. 1 & 4 Sec. III-C & III-D4
skew Reed–Solomon (SRS) Codes unique decoding ($s=1$)	skew	$t < \frac{1}{2}(n-k+1)$	—	$O(n^2)$	[6], [56]
ISRS Codes list decoding	skew	$t < \frac{s}{s+1}(n-k+1)$	$ \mathcal{L} \leq q^{m(k(s-1))}$	$\tilde{O}(s^\omega \mathcal{M}(n))$	Thm. 2 & Prop. 5 Section III-F
ISRS Codes prob. unique decoding	skew	$t \leq \frac{s}{s+1}(n-k)$	$P_f \leq \kappa_q^{\ell+1} q^{-m((s+1)(t_{\max}-t)+1)}$	$\tilde{O}(s^\omega \mathcal{M}(n))$	Thm. 1 & 4, Prop. 5 Sec. III-F

C. Structure of the paper:

In Section II the notation as well as a basic definitions on skew polynomials and the sum-rank metric is introduced. Unfortunately, the formally correct statement of the results derived in this paper requires a quite involved notation as well as several previous results on LRS codes. This results in a rather long preliminary section that may be skipped by readers that are familiar with the sum-rank metric and/or LRS codes. In Section III the construction and decoding of ILRS codes in the sum-rank metric is considered. First, a Loidreau–Overbeck-like decoder for ILRS codes and an upper bound on the decoding failure probability is derived. Second, a new efficient interpolation-based decoding scheme for ILRS codes, can be used as a list decoder or as a probabilistic unique decoder, is presented. By relating the conditions for successful decoding to the Loidreau–Overbeck-like decoder, we derive an upper bound on the decoding failure probability of the interpolation-based probabilistic unique decoder. In Section IV we show how to solve the generalized operator evaluation interpolation problem, which is one of the complexity-dominating parts of the decoding process, efficiently via minimal approximant bases computations. Section V concludes the paper.

II. PRELIMINARIES

A. Notation

A set is a collection of distinct elements and is denoted by $\mathcal{S} = \{s_1, s_2, \dots, s_r\}$. The cardinality of \mathcal{S} , i.e. the number of elements in \mathcal{S} , is denoted by $|\mathcal{S}|$. By $[i, j]$ with $i < j$ we denote the set of integers $\{i, i+1, \dots, j\}$. We denote the set of nonnegative integers by $\mathbb{Z}_{\geq 0} = \{0, 1, 2, \dots\}$.

Let \mathbb{F}_q be a finite field of order q and denote by \mathbb{F}_{q^m} the extension field of \mathbb{F}_q of degree m with primitive element α . The multiplicative group $\mathbb{F}_{q^m} \setminus \{0\}$ of \mathbb{F}_{q^m} is denoted by $\mathbb{F}_{q^m}^*$. Matrices and vectors are denoted by bold uppercase and lowercase letters like \mathbf{A} and \mathbf{a} , respectively, and indexed starting from one. The Hamming weight of a vector $\mathbf{a} \in \mathbb{F}_{q^m}^n$ is defined as the number of nonzero entries, i.e. as

$$\text{wt}_H(\mathbf{a}) := |\{i \in \{1, \dots, n\} : a_i \neq 0\}|.$$

The Hamming weight of a matrix \mathbf{A} is defined as the number of nonzero columns of \mathbf{A} . Under a fixed basis of \mathbb{F}_{q^m} over \mathbb{F}_q any element $a \in \mathbb{F}_{q^m}$ can be represented by a corresponding column vector $\mathbf{a} \in \mathbb{F}_q^{m \times 1}$. For a matrix $\mathbf{A} \in \mathbb{F}_{q^m}^{M \times N}$ we denote by $\text{rk}_q(\mathbf{A})$ the rank of the matrix $\mathbf{A}_q \in \mathbb{F}_q^{M \times N}$ obtained by column-wise expanding the elements in \mathbf{A} over \mathbb{F}_q . Let $\sigma : \mathbb{F}_{q^m} \rightarrow \mathbb{F}_{q^m}$ be a finite field automorphism given by $\sigma(a) = a^{q^r}$ for all $a \in \mathbb{F}_{q^m}$, where we assume that $1 \leq r \leq m$ and $\gcd(r, m) = 1$. For a matrix \mathbf{A} and a vector \mathbf{a} we use the notation $\sigma(\mathbf{A})$ and $\sigma(\mathbf{a})$ to denote the element-wise application of the automorphism σ , respectively. For $\mathbf{A} \in \mathbb{F}_{q^m}^{M \times N}$ we denote by $\langle \mathbf{A} \rangle_q$ the \mathbb{F}_q -linear rowspace of the matrix $\mathbf{A}_q \in \mathbb{F}_q^{M \times N}$ obtained by row-wise expanding the elements in \mathbf{A} over \mathbb{F}_q . The left and right kernel of a matrix $\mathbf{A} \in \mathbb{F}_{q^m}^{M \times N}$ is denoted by $\ker_l(\mathbf{A})$ and $\ker_r(\mathbf{A})$, respectively.

For a set $\mathcal{I} \subset \mathbb{Z}_{>0}$ we denote by $[\mathbf{A}]_{\mathcal{I}}$ (respectively $[\mathbf{a}]_{\mathcal{I}}$) the matrix (vector) consisting of the columns (entries) of the matrix \mathbf{A} (vector \mathbf{a}) indexed by \mathcal{I} .

Vector spaces are denoted by calligraphic letters such as e.g. \mathcal{V} . For non-negative integers a and b , the number of b -dimensional subspaces of \mathbb{F}_q^a is given by the Gaussian binomial $\begin{bmatrix} a \\ b \end{bmatrix}_q$ which is defined as

$$\begin{bmatrix} a \\ b \end{bmatrix}_q = \prod_{i=1}^b \frac{q^{a-b+i} - 1}{q^i - 1}.$$

The Gaussian binomial satisfies [57]

$$q^{(a-b)b} \leq \begin{bmatrix} a \\ b \end{bmatrix}_q \leq \kappa_q q^{(a-b)b}, \quad (1)$$

where

$$\kappa_q := \prod_{i=1}^{\infty} (1 - q^{-i})^{-1}.$$

Note that κ_q is monotonically decreasing in q with a limit of 1, and e.g. $\kappa_2 \approx 3.463$, $\kappa_3 \approx 1.785$, and $\kappa_4 \approx 1.452$.

The notion of conjugacy is an integral part for the definition of LRS codes.

Definition 1 (Conjugacy [58]) For any two elements $a \in \mathbb{F}_{q^m}$ and $c \in \mathbb{F}_{q^m}^*$ define

$$a^c := \sigma(c)ac^{-1}.$$

- Two elements $a, b \in \mathbb{F}_{q^m}$ are called σ -conjugates, if there exists an element $c \in \mathbb{F}_{q^m}^*$ such that $b = a^c$.
- Two elements that are not σ -conjugates are called σ -distinct.

The notion of σ -conjugacy defines an equivalence relation on \mathbb{F}_{q^m} and thus a partition of \mathbb{F}_{q^m} into conjugacy classes [59]. The set

$$\mathcal{C}(a) := \{a^c : c \in \mathbb{F}_{q^m}^*\}$$

is called *conjugacy class* of a . A finite field \mathbb{F}_{q^m} has at most $\ell \leq q - 1$ distinct conjugacy classes. For $\ell \leq q - 1$ the elements $1, \alpha, \alpha^2, \dots, \alpha^{\ell-2}$ are representatives of all (nontrivial) disjoint conjugacy classes of \mathbb{F}_{q^m} .

B. Sum-Rank Metric

The sum-rank metric was defined in [6] and generalized the Hamming metric and the rank metric. For the sum-rank metric, we consider vectors $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ that consists of ℓ blocks $\mathbf{x}^{(1)}, \mathbf{x}^{(2)}, \dots, \mathbf{x}^{(\ell)}$ of lengths n_1, n_2, \dots, n_ℓ , respectively. The vector $\mathbf{n} = (n_1, n_2, \dots, n_\ell) \in \mathbb{Z}_{\geq 0}^\ell$ containing the block-lengths such that $\sum_{i=1}^{\ell} n_i = n$ is called the *length partition* of \mathbf{x} .

Definition 2 (Sum-Rank Weight [3]) Let $\ell \in \mathbb{Z}_{\geq 0}$, let $\mathbf{n} = (n_1, n_2, \dots, n_\ell)$ be the length partition with $n_i \in \mathbb{Z}_{\geq 0}$ for all $i = 1, \dots, \ell$ and let $n := \sum_{i=1}^{\ell} n_i$. Let $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ where $\mathbf{x}^{(i)} \in \mathbb{F}_{q^m}^{n_i}$ for all $i = 1, \dots, \ell$. The sum-rank weight of \mathbf{x} is defined as

$$\text{wt}_{\Sigma R}(\mathbf{x}) := \sum_{i=1}^{\ell} \text{rk}_q(\mathbf{x}^{(i)}).$$

The vector

$$\mathbf{r} := (\text{rk}_q(\mathbf{x}^{(1)}), \text{rk}_q(\mathbf{x}^{(2)}), \dots, \text{rk}_q(\mathbf{x}^{(\ell)})) \in \mathbb{Z}_{\geq 0}^\ell$$

is called the *rank partition* of \mathbf{x} .

Note, that for $\ell = n$ we have that the sum-rank metric coincides with the Hamming metric, whereas for $\ell = 1$ we obtain the rank metric. For any vector $\mathbf{x} \in \mathbb{F}_{q^m}^n$ we have that $\text{wt}_{\Sigma R}(\mathbf{x}) \leq \text{wt}_H(\mathbf{x})$. By [6], [60] there always exists a basis of \mathbb{F}_{q^m} over \mathbb{F}_q such that equality holds. The sum-rank distance between two vectors $\mathbf{x}, \mathbf{y} \in \mathbb{F}_{q^m}^n$ is defined as

$$d_{\Sigma R}(\mathbf{x}, \mathbf{y}) := \text{wt}_{\Sigma R}(\mathbf{x} - \mathbf{y}) = \sum_{i=1}^{\ell} \text{rk}_q(\mathbf{x}^{(i)} - \mathbf{y}^{(i)}).$$

We define the (burst) sum-rank weight of a matrix $\mathbf{X} = (\mathbf{X}^{(1)} \mid \mathbf{X}^{(2)} \mid \dots \mid \mathbf{X}^{(\ell)}) \in \mathbb{F}_{q^m}^{s \times n}$ as

$$\text{wt}_{\Sigma R}(\mathbf{X}) := \sum_{i=1}^{\ell} \text{rk}_q(\mathbf{X}^{(i)}),$$

where $\mathbf{X}^{(i)} \in \mathbb{F}_{q^m}^{s \times n_i}$ for all $i = 1, \dots, \ell$. The sum-rank distance between two matrices $\mathbf{X}, \mathbf{Y} \in \mathbb{F}_{q^m}^{s \times n}$ is then defined as

$$d_{\Sigma R}(\mathbf{X}, \mathbf{Y}) := \text{wt}_{\Sigma R}(\mathbf{X} - \mathbf{Y}) = \sum_{i=1}^{\ell} \text{rk}_q(\mathbf{X}^{(i)} - \mathbf{Y}^{(i)}).$$

Remark 1 We want to emphasize that the sum-rank weight and the sum-rank distance depends on the length partition \mathbf{n} of the considered vector \mathbf{x} . To simplify the notation, we implicitly assume that the sum-rank weight and distance is computed with respect to the length partition of \mathbf{x} , since this will be clear from the context.

In Section III-A we use the generalization of the sum-rank metric to matrices from above to define a (burst) sum-rank channel model that we consider for *interleaved* LRS codes.

C. Skew Polynomials

Skew polynomials are a special class of non-commutative polynomials that were introduced by Ore [12]. A skew polynomial is a polynomial of the form

$$f(x) = \sum_i f_i x^i$$

with a finite number of coefficients $f_i \in \mathbb{F}_{q^m}$ being nonzero. The degree $\deg(f)$ of a skew polynomial f is defined as $\max\{i : f_i \neq 0\}$ if $f \neq 0$ and $-\infty$ otherwise.

The set of skew polynomials with coefficients in \mathbb{F}_{q^m} together with ordinary polynomial addition and the multiplication rule

$$xa = \sigma(a)x, \quad a \in \mathbb{F}_{q^m} \quad (2)$$

forms a non-commutative ring denoted by $\mathbb{F}_{q^m}[x, \sigma]$. The non-commutativity of the multiplication rule for skew polynomials in (2) is illustrated in Example 1.

Example 1 (Skew Polynomial Multiplication) Consider the finite extension field F_{2^3} with primitive element α and primitive polynomial $x^3 + x + 1$. Let σ be the Frobenius automorphism defined as $\sigma(a) = a^2$ for all $a \in \mathbb{F}_{2^3}$. Define the skew polynomials $f(x) = \alpha x^2$ and $g(x) = \alpha^2 x$. Using the multiplication rule from (2) we get

$$\begin{aligned} f \cdot g &= \alpha x^2 \alpha^2 x = \alpha \sigma^2(\alpha^2) x^3 = \alpha (\alpha^2)^4 x^3 = \alpha^2 x^3 & \text{and} \\ g \cdot f &= \alpha^2 x \alpha x^2 = \alpha^2 \sigma(\alpha) x^3 = \alpha^2 \alpha^2 x^3 = (\alpha^2 + \alpha) x^3 \end{aligned}$$

which shows that the skew polynomial multiplication is non-commutative since we have that $f \cdot g \neq g \cdot f$. Note, that for the ordinary product of f and g in $\mathbb{F}_{q^m}[x]$ we have

$$f \cdot g = g \cdot f = \alpha \alpha^2 x^3 = (\alpha + 1) x^3$$

which is commutative and different from the skew polynomial product(s).

The set of skew polynomials in $\mathbb{F}_{q^m}[x, \sigma]$ of degree less than k is denoted by $\mathbb{F}_{q^m}[x, \sigma]_{<k}$. For any $a, b \in \mathbb{F}_{q^m}$ we define the operator

$$\mathcal{D}_a(b) := \sigma(b)a.$$

For an integer $i \geq 0$, we define (see [6, Proposition 32])

$$\mathcal{D}_a^{i+1}(b) = \mathcal{D}_a(\mathcal{D}_a^i(b)) = \sigma^{i+1}(b) \mathcal{N}_{i+1}(a) \quad (3)$$

where $\mathcal{D}_a^0(b) = b$ and $\mathcal{N}_i(a) = \sigma^{i-1}(a) \sigma^{i-2}(a) \dots \sigma(a) a$ is the generalized power function (see [59]). For an integer $i < 0$ we define

$$\mathcal{D}_a^{-i}(b) = \sigma^{-i}(b) / \sigma^{-i}(\mathcal{N}_i(a)).$$

Observe, that for any integers i, j we have that

$$\mathcal{D}_a^j(\mathcal{D}_a^i(b)) = \mathcal{D}_a^{i+j}(b). \quad (4)$$

The generalized operator evaluation of a skew polynomial $f \in \mathbb{F}_{q^m}[x, \sigma]$ at an element b w.r.t. a , where $a, b \in \mathbb{F}_{q^m}$, is defined as (see [6], [61])

$$f(b)_a = \sum_i f_i \mathcal{D}_a^i(b).$$

The generalized operator evaluation forms an \mathbb{F}_q -linear map, i.e. for any $f \in \mathbb{F}_{q^m}[x, \sigma]$, $\beta, \gamma \in \mathbb{F}_q$ and $a, b, c \in \mathbb{F}_{q^m}$ we have that

$$f(\beta b + \gamma c)_a = \beta f(b)_a + \gamma f(c)_a.$$

For an element $a \in \mathbb{F}_{q^m}$, a vector $\mathbf{b} \in \mathbb{F}_{q^m}^n$ and a skew polynomial $f \in \mathbb{F}_{q^m}[x, \sigma]$ we define

$$f(\mathbf{b})_a := (f(b_1)_a, f(b_2)_a, \dots, f(b_n)_a).$$

Proposition 1 (Number of Roots [8]) Let $b_1^{(i)}, \dots, b_{n_i}^{(i)}$ be elements from \mathbb{F}_{q^m} and let a_1, \dots, a_ℓ be representatives be from conjugacy classes of \mathbb{F}_{q^m} for all $i = 1, \dots, \ell$. Then for any nonzero $f \in \mathbb{F}_{q^m}[x, \sigma]$ satisfying

$$f(b_j^{(i)})_{a_i} = 0, \forall i = 1, \dots, \ell, j = 1, \dots, n_i$$

we have that $\deg(f) \leq \sum_{i=1}^{\ell} n_i$ where equality holds if and only if the $b_1^{(i)}, \dots, b_{n_i}^{(i)}$ are \mathbb{F}_q -linearly independent for each $i = 1, \dots, \ell$.

Given a set $\mathcal{B} := \{(b_i, a_i) : i = 1, \dots, n\}$, the minimal polynomial $M_{\mathcal{B}}$ vanishing on the elements b_1, \dots, b_n from \mathbb{F}_{q^m} with respect to the corresponding evaluation parameters a_1, \dots, a_n , i.e.

$$M_{\mathcal{B}}(b_i)_{a_i} = 0, \quad \forall i = 1, \dots, n,$$

is defined as

$$M_{\mathcal{B}}(x) = \text{lclm} \left(x - \frac{\sigma(b_i)a_i}{b_i} \right)_{\substack{1 \leq i \leq n \\ b_i \neq 0}},$$

where $\text{lclm}(\cdot)$ denotes the least common left multiple (lclm) of the polynomials in the bracket. We have $\deg(M_{\mathcal{B}}(x)) \leq n$ with equality if and only if the b_i belonging to the same evaluation parameter a_i are \mathbb{F}_q -linearly independent and the distinct a_i are from different conjugacy classes of \mathbb{F}_{q^m} .

Example 2 (Minimal Skew Polynomial) Consider the elements b_1, b_2, b_3, b_4 from \mathbb{F}_{3^5} and let $a_1 = a_2 = 1$ and $a_3 = a_4 = \alpha$. Since 1 and α are representatives from all $q-1 = 2$ nontrivial conjugacy classes of \mathbb{F}_{3^5} , we have that $\deg(M_{\mathcal{B}}(x)) = 4$ where $\mathcal{B} = \{(b_i, a_i) : i = 1, \dots, 4\}$ if and only if the two elements b_1 and b_2 as well as the two elements b_3 and b_4 are \mathbb{F}_3 -linearly independent.

For two skew polynomials $f, g \in \mathbb{F}_{q^m}[x, \sigma]$ we denote by $f \bmod_r g$ the right modulo operation, i.e. the remainder of the right division of f by g .

The existence of a (generalized operator evaluation) interpolation polynomial is considered in Lemma 1 (see e.g. [8]).

Lemma 1 (Lagrange Interpolation (Generalized Operator Evaluation)) Let $b_1^{(i)}, \dots, b_{n_i}^{(i)}$ be \mathbb{F}_q -linearly independent elements from \mathbb{F}_{q^m} for all $i = 1, \dots, \ell$. Let $c_1^{(i)}, \dots, c_{n_i}^{(i)}$ be elements from \mathbb{F}_{q^m} and let a_1, \dots, a_{ℓ} be representatives for different conjugacy classes of \mathbb{F}_{q^m} . Define the set of tuples $\mathcal{B} := \{(b_j^{(i)}, c_j^{(i)}, a_i) : i = 1, \dots, \ell, j = 1, \dots, n_i\}$. Then there exists a unique interpolation polynomial $\mathcal{I}_{\mathcal{B}}^{\text{op}} \in \mathbb{F}_{q^m}[x, \sigma]$ such that

$$\mathcal{I}_{\mathcal{B}}^{\text{op}}(b_j^{(i)})_{a_i} = c_j^{(i)}, \quad \forall i = 1, \dots, \ell, \forall j = 1, \dots, n_i,$$

and $\deg(\mathcal{I}_{\mathcal{B}}^{\text{op}}) < \sum_{i=1}^{\ell} n_i$.

Lemma 2 (Product Rule [62]) For two skew polynomials $f, g \in \mathbb{F}_{q^m}[x, \sigma]$ and elements $a, b \in \mathbb{F}_{q^m}$ the generalized operator evaluation of the product $f \cdot g$ at b w.r.t a is given by

$$(f \cdot g)(b)_a = f(g(b)_a)_a.$$

The set of all skew polynomials of the form

$$Q(x, y_1, \dots, y_s) = Q_0(x) + Q_1(x)y_1 + \dots + Q_s(x)y_s,$$

where $Q_j \in \mathbb{F}_{q^m}[x, \sigma]$ for all $j = 0, \dots, \ell$ is denoted by $\mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$.

Definition 3 (w -weighted Degree) Given a vector $\mathbf{w} \in \mathbb{Z}_{\geq 0}^{s+1}$, the w -weighted degree of a multivariate skew polynomial from $Q \in \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$ is defined as

$$\deg_{\mathbf{w}}(Q) = \max_j \{\deg(Q_j) + w_j\}.$$

Given a vector $\mathbf{w} = (w_0, w_1, \dots, w_s)$ the w -weighted total order $\prec_{\mathbf{w}}$ on monomials in $\mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$ is defined for all $j, j' \in [0, s]$ and some $l, l' \geq 0$ as

$$x^l y_j \prec_{\mathbf{w}} x^{l'} y_{j'} \iff \begin{cases} l + w_j < l' + w_{j'} \text{ or} \\ l + w_j = l' + w_{j'} \text{ and } j < j'. \end{cases}$$

The w -weighted monomial ordering is also called w -weighted term over position ordering [63] since first the w -weighted degree of the term is considered and the position j is considered only if two monomials have the same w -weighted degree.

We identify the leading position of a multivariate polynomial $Q \in \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$ as the as index j of the maximum monomial $x^l y_j$ under $\prec_{\mathbf{w}}$ and denote it by $\text{LP}_{\prec_{\mathbf{w}}}(Q)$. For a set $\mathcal{S} \subseteq \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$ we denote the set of all leading positions of the elements in \mathcal{S} by $\text{LP}_{\prec_{\mathbf{w}}}(\mathcal{S}) := \{\text{LP}_{\prec_{\mathbf{w}}}(Q) : Q \in \mathcal{S}\}$.

For an element $a \in \mathbb{F}_{q^m}$ and a vector $\mathbf{b} = (b_1, b_2, \dots, b_n) \in \mathbb{F}_{q^m}^n$ we define the vector

$$\mathcal{D}_a^j(\mathbf{b}) := (\mathcal{D}_a^j(b_1), \mathcal{D}_a^j(b_2), \dots, \mathcal{D}_a^j(b_n))$$

and the matrix

$$\mathbf{V}_d(\mathbf{b})_a := \begin{pmatrix} \mathbf{b} \\ \mathcal{D}_a^1(\mathbf{b}) \\ \mathcal{D}_a^2(\mathbf{b}) \\ \vdots \\ \mathcal{D}_a^{d-1}(\mathbf{b}) \end{pmatrix} = \begin{pmatrix} b_1 & b_2 & \dots & b_n \\ \mathcal{D}_a^1(b_1) & \mathcal{D}_a^1(b_2) & \dots & \mathcal{D}_a^1(b_n) \\ \mathcal{D}_a^2(b_1) & \mathcal{D}_a^2(b_2) & \dots & \mathcal{D}_a^2(b_n) \\ \vdots & \vdots & \ddots & \vdots \\ \mathcal{D}_a^{d-1}(b_1) & \mathcal{D}_a^{d-1}(b_2) & \dots & \mathcal{D}_a^{d-1}(b_n) \end{pmatrix} \in \mathbb{F}_{q^m}^{d \times n}.$$

For a vector $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ with $\mathbf{x}^{(i)} \in \mathbb{F}_{q^m}^{n_i}$ for all $i = 1, \dots, \ell$, a length partition $\mathbf{n} = (n_1, n_2, \dots, n_\ell) \in \mathbb{Z}_{\geq 0}^\ell$ such that $\sum_{i=1}^\ell n_i = n$ and a vector $\mathbf{a} = (a_1, a_2, \dots, a_\ell) \in \mathbb{F}_{q^m}^\ell$ we define the vector¹

$$\mathcal{D}_a^i(\mathbf{x}) := (\mathcal{D}_{a_1}^i(\mathbf{x}^{(1)}) \mid \mathcal{D}_{a_2}^i(\mathbf{x}^{(2)}) \mid \dots \mid \mathcal{D}_{a_\ell}^i(\mathbf{x}^{(\ell)})) \in \mathbb{F}_{q^m}^n.$$

By the properties of the operator $\mathcal{D}_a^i(\cdot)$ (see (4)), we have that

$$\mathcal{D}_a^{i+j}(\mathbf{x}) = \mathcal{D}_a^j(\mathcal{D}_a^i(\mathbf{x})) \quad (5)$$

and

$$\mathcal{D}_a^i(\xi \mathbf{x}) = \sigma^i(\xi) \mathcal{D}_a^i(\mathbf{x}) \quad \forall \xi \in \mathbb{F}_{q^m}. \quad (6)$$

For a matrix

$$\mathbf{X} = \begin{pmatrix} \mathbf{x}_1 \\ \mathbf{x}_2 \\ \vdots \\ \mathbf{x}_d \end{pmatrix} \in \mathbb{F}_{q^m}^{d \times n},$$

and integer j and a vector $\mathbf{a} = (a_1, a_2, \dots, a_\ell) \in \mathbb{F}_{q^m}^\ell$ we define $\mathcal{D}_a^j(\cdot)$ applied to \mathbf{X} as

$$\mathcal{D}_a^j(\mathbf{X}) := \begin{pmatrix} \mathcal{D}_a^j(\mathbf{x}_1) \\ \mathcal{D}_a^j(\mathbf{x}_2) \\ \vdots \\ \mathcal{D}_a^j(\mathbf{x}_d) \end{pmatrix}.$$

The following result relates the rank of a matrix \mathbf{X} with the rank of $\mathcal{D}_a^j(\mathbf{X})$. Although the proof is similar as for the special case of the element-wise Frobenius automorphism (see e.g. [64]), we include it for the sake of completeness.

Lemma 3 (Rank of Row-Operator Matrix) *Let $\mathbf{n} = (n_1, n_2, \dots, n_\ell) \in \mathbb{Z}_{\geq 0}^\ell$ be a length partition such that $\sum_{i=1}^\ell n_i = n$ and let $\mathbf{X} = (\mathbf{X}^{(1)} \mid \mathbf{X}^{(2)} \mid \dots \mid \mathbf{X}^{(\ell)}) \in \mathbb{F}_{q^m}^{d \times n}$ with $\mathbf{X}^{(i)} \in \mathbb{F}_{q^m}^{d \times n_i}$ for all $i = 1, \dots, \ell$. Let the vector $\mathbf{a} = (a_1, a_2, \dots, a_\ell) \in \mathbb{F}_{q^m}^\ell$ contain representatives from different (nontrivial) conjugacy classes of \mathbb{F}_{q^m} . Then for any integer j we have that*

$$\text{rk}_{q^m}(\mathcal{D}_a^j(\mathbf{X})) = \text{rk}_{q^m}(\mathbf{X}).$$

Proof: By the definition of the operators $\mathcal{D}_a^j(\cdot)$ in (3) we have that

$$\mathcal{D}_a^j(\mathbf{X}) = \sigma^j(\mathbf{X}) \cdot \text{diag}(\mathcal{N}_j(a_1), \dots, \mathcal{N}_j(a_1) \mid \dots \mid \mathcal{N}_j(a_\ell), \dots, \mathcal{N}_j(a_\ell)).$$

The entries in \mathbf{a} are representatives from different (nontrivial) conjugacy classes of \mathbb{F}_{q^m} we have that $a_i \neq 0$ for all $i = 1, \dots, \ell$. Since for any $b \in \mathbb{F}_{q^m}$ we have that $\mathcal{N}_j(b) = 0$ if and only if $b = 0$, the matrix $\text{diag}(\mathcal{N}_j(a_1), \dots, \mathcal{N}_j(a_1) \mid \dots \mid \mathcal{N}_j(a_\ell), \dots, \mathcal{N}_j(a_\ell))$ has full \mathbb{F}_{q^m} -rank n . Hence, the rank of $\mathcal{D}_a^j(\mathbf{X})$ depends only on the rank of $\sigma^j(\mathbf{X})$.

Let $r = \text{rk}_{q^m}(\mathbf{X})$ and denote by $\widetilde{\mathbf{X}}$ the reduced row echelon form of \mathbf{X} . Then the first r rows $\widetilde{\mathbf{x}}_1, \dots, \widetilde{\mathbf{x}}_r$ are \mathbb{F}_{q^m} -linearly independent, i.e. for $\xi_1, \dots, \xi_r \in \mathbb{F}_{q^m}$ we have that

$$\sum_{i=1}^r \xi_i \widetilde{\mathbf{x}}_i = 0 \iff \xi_i = 0, \forall i = 1, \dots, r. \quad (7)$$

Note, that the matrix $\sigma(\widetilde{\mathbf{X}})$ is also in reduced row echelon form. Now assume that the first r rows of $\sigma(\widetilde{\mathbf{X}})$ are \mathbb{F}_{q^m} -linearly dependent. Then there exist $\tilde{\xi}_1, \dots, \tilde{\xi}_r \in \mathbb{F}_{q^m}$, not all zero, such that

$$\sum_{i=1}^r \tilde{\xi}_i \sigma^j(\widetilde{\mathbf{x}}_i) = 0 \iff \sum_{i=1}^r \sigma^{-j}(\tilde{\xi}_i) \widetilde{\mathbf{x}}_i = 0.$$

¹To simplify the notation we omit the length partition \mathbf{n} from the vector operator $\mathcal{D}_a^i(\mathbf{x})$ since it will be always clear from the context (i.e. as the length partition of the vector \mathbf{x}).

Since by the \mathbb{F}_{q^m} -linearity of σ the elements $\sigma^{-j}(\xi_1), \dots, \sigma^{-j}(\xi_r)$ are also not all zero, this contradicts (7). The last $d-r$ rows of $\widetilde{\mathbf{X}}$ and $\sigma^j(\widetilde{\mathbf{X}})$ are zero and thus we have that $\text{rk}_{q^m}(\mathbf{X}) = \text{rk}_{q^m}(\sigma^j(\mathbf{X}))$ and conclude that $\text{rk}_{q^m}(\mathcal{D}_a^j(\mathbf{X})) = \text{rk}_{q^m}(\mathbf{X})$. ■

Definition 4 (σ -Generalized Moore Matrix) For an integer $d \in \mathbb{Z}_{>0}$, a length partition $\mathbf{n} = (n_1, n_2, \dots, n_\ell) \in \mathbb{Z}_{\geq 0}^\ell$ such that $\sum_{i=1}^\ell n_i = n$ and the vectors $\mathbf{a} = (a_1, a_2, \dots, a_\ell) \in \mathbb{F}_{q^m}^\ell$ and $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ with $\mathbf{x}^{(i)} \in \mathbb{F}_{q^m}^{n_i}$ for all $i = 1, \dots, \ell$, the σ -Generalized Moore matrix is defined as

$$\lambda_d(\mathbf{x})_{\mathbf{a}} := \begin{pmatrix} \mathcal{D}_{\mathbf{a}}^0(\mathbf{x}) \\ \mathcal{D}_{\mathbf{a}}^1(\mathbf{x}) \\ \vdots \\ \mathcal{D}_{\mathbf{a}}^{d-1}(\mathbf{x}) \end{pmatrix} = (\mathbf{V}_d(\mathbf{x}^{(1)})_{a_1} \mid \mathbf{V}_d(\mathbf{x}^{(2)})_{a_2} \mid \dots \mid \mathbf{V}_d(\mathbf{x}^{(\ell)})_{a_\ell}) \in \mathbb{F}_{q^m}^{d \times n}.$$

Similar as for ordinary polynomials and Vandermonde matrices, there is a relation between the generalized operator evaluation and product with a σ -Generalized Moore matrix. In particular, for a skew polynomial $f(x) = \sum_{i=0}^{k-1} f_i x^i \in \mathbb{F}_{q^m}[x, \sigma]_{<k}$ and vectors $\mathbf{a} = (a_1, a_2, \dots, a_\ell) \in \mathbb{F}_{q^m}^\ell$ and $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ we have that

$$f(\mathbf{a})_{\mathbf{x}} = (f_0, f_1, \dots, f_{k-1}) \cdot \lambda_k(\mathbf{x})_{\mathbf{a}}. \quad (8)$$

Proposition 2 provides an important result on the rank of σ -Generalized Moore matrices.

Proposition 2 (Rank of σ -Generalized Moore Matrix) For a vector $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ where $\mathbf{x}^{(i)} \in \mathbb{F}_{q^m}^{n_i}$ for all $i = 1, \dots, \ell$ and a vector $\mathbf{a} = (a_1, a_2, \dots, a_\ell)$, the \mathbb{F}_{q^m} -rank of $\lambda_d(\mathbf{x})_{\mathbf{a}}$ satisfies

$$\text{rk}_{q^m}(\lambda_d(\mathbf{x})_{\mathbf{a}}) = \min\{d, n\}$$

if and only if we have that $\text{rk}_q(\mathbf{x}_i) = n_i$ for all $i = 1, \dots, \ell$ and the elements a_1, \dots, a_ℓ belong to different conjugacy classes.

The statement in Proposition 2 follows directly from [59, Theorem 4.5] and [6, Theorem 2].

Remark 2 To simplify the notation we omit the rank partition \mathbf{n} in $\lambda_j(\cdot)_{\mathbf{a}}$ since it will be always clear from the context (i.e. the length partition of the considered vector).

D. Linearized Reed–Solomon Codes

Linearized Reed–Solomon (LRS) codes were first defined by Martínez-Peñas in [6] and also considered by Caruso in [8]. LRS codes are a class of sum-rank-metric evaluation codes that generalize RS in the Hamming metric as well as Gabidulin codes [10] in the rank metric. LRS receive their name from the generalized operator evaluation of skew polynomials that is used for the code construction, which is \mathbb{F}_q -linear for a fixed evaluation parameter.

There exists an isometry between the sum-rank metric and the skew metric [6] that relates LRS to SRS codes in the skew metric. Hence, LRS codes can be seen as generalized SRS codes (see [65]).

Definition 5 (Linearized Reed–Solomon Code [6]) Let $\mathbf{a} = (a_1, a_2, \dots, a_\ell) \in \mathbb{F}_{q^m}^\ell$ be a vector containing representatives from different conjugacy classes of \mathbb{F}_{q^m} . Let $\mathbf{n} := (n_1, n_2, \dots, n_\ell) \in \mathbb{Z}_{\geq 0}^\ell$ be a length partition and let $n = \sum_{i=1}^\ell n_i$. Let the vectors $\beta^{(i)} = (\beta_1^{(i)}, \beta_2^{(i)}, \dots, \beta_{n_i}^{(i)}) \in \mathbb{F}_{q^m}^{n_i}$ contain \mathbb{F}_q -linearly independent elements from \mathbb{F}_{q^m} for all $i = 1, \dots, \ell$ and define $\beta = (\beta^{(1)} \mid \beta^{(2)} \mid \dots \mid \beta^{(\ell)}) \in \mathbb{F}_{q^m}^n$. A linearized Reed–Solomon (LRS) code of length n and dimension k is defined as

$$\text{LRS}[\beta, \mathbf{a}, \ell; \mathbf{n}, k] = \{ (f(\beta^{(1)})_{a_1} \mid f(\beta^{(2)})_{a_2} \mid \dots \mid f(\beta^{(\ell)})_{a_\ell}) : f \in \mathbb{F}_{q^m}[x, \sigma]_{<k} \} \subseteq \mathbb{F}_{q^m}^n.$$

Each codeword $\mathbf{c} \in \text{LRS}[\beta, \mathbf{a}, \ell; \mathbf{n}, k]$ has the form

$$\mathbf{c} = (\mathbf{c}^{(1)} \mid \mathbf{c}^{(2)} \mid \dots \mid \mathbf{c}^{(\ell)})$$

where $\mathbf{c}^{(i)} = f(\beta^{(i)})_{a_i}$ for all $i = 1, \dots, \ell$ and some $f \in \mathbb{F}_{q^m}[x, \sigma]_{<k}$. Note, that an LRS code $\text{LRS}[\beta, \mathbf{a}, \ell; \mathbf{n}, k]$ can be described by a generator matrix $\lambda_k(\beta)_{\mathbf{a}}$.

LRS codes achieve the Singleton-like bound in the sum-rank metric (see [6, Proposition 34]) with equality, i.e. the minimum sum-rank distance equals $n - k + 1$, and thus are MSR codes.

There exist efficient decoding algorithms that allow for BMD decoding errors of sum-rank weight up to $t \leq \lfloor \frac{n-k}{2} \rfloor$ (see [6], [8], [56]).

In Section III-B we construct vertically s -interleaved LRS codes by stacking s codewords of an LRS code and show that the error-correction capability can be increased to $t < \frac{s}{s+1}(n - k + 1)$ by either admitting a list of candidate codewords or a small decoding failure probability. Compared to BMD decoding this is a gain of almost a factor of two, even for moderately large values of s .

E. Cost Model

We use the *big-O* notation $O(\cdot)$ and the *soft-O* notation $\tilde{O}(\cdot)$, which neglects logarithmic factors in the input parameter, to state the asymptotic cost of algorithms, which is expressed in terms of arithmetic operations (additions, multiplications and applications of a (specific) automorphism σ) in the field \mathbb{F}_{q^m} . For the complexity of the corresponding arithmetic operations in the subfield \mathbb{F}_q , the reader is referred to the work by Couveignes and Lercier [66].

By ω we denote the matrix multiplication exponent, i.e. the infimum of values $\omega_0 \in [2; 3]$ such that there is an algorithm for multiplying $n \times n$ matrices over \mathbb{F}_{q^m} in $O(n^{\omega_0})$ operations in \mathbb{F}_{q^m} . The best currently known bound is $\omega < 2.37286$ [67].

We denote by $\mathcal{M}(n)$ the cost of multiplying two skew polynomials with coefficients in \mathbb{F}_{q^m} of degree n . The currently best-known cost bound on $\mathcal{M}(n)$ is

$$\mathcal{M}(n) \in O\left(n^{\min\{\frac{\omega+1}{2}, 1.635\}}\right) \quad (9)$$

operations in \mathbb{F}_{q^m} using the algorithm in [68] (see [69], [70] for algorithms with a cost bound over \mathbb{F}_q). Overall, the algorithms in [68]–[70] are faster than classical multiplication (exponent is reduced from 2 to ≤ 1.635 in [68]), which has quadratic complexity.

F. Known Decoding Approaches for (Interleaved) Gabidulin Codes

Gabidulin codes are a family of maximum rank distance (MRD) codes that were proposed independently in [10], [71], [72]. A Gabidulin code of length n and dimension k can be defined as the row space of a generator matrix $\mathbf{G} = \mathbf{V}_k(\mathbf{b})_1$, where $\mathbf{b} = (b_1, b_2, \dots, b_n)$ contains linearly independent elements from \mathbb{F}_{q^m} (also called *code locators*), and has minimum rank distance $d = n - k + 1$.

The construction and decoding of *interleaved* Gabidulin codes was first considered in [30], [55], [73]. Let \mathcal{C} be a Gabidulin code of length n and dimension k over \mathbb{F}_{q^m} (for details see e.g. [10]). Then a (vertically) s -interleaved Gabidulin code \mathcal{IC} with constituent code \mathcal{C} is defined as

$$\mathcal{IC} := \left\{ \begin{pmatrix} \mathbf{c}_1 \\ \mathbf{c}_2 \\ \vdots \\ \mathbf{c}_s \end{pmatrix} : \mathbf{c}_j \in \mathcal{C} \right\} \subseteq \mathbb{F}_{q^m}^{s \times n}.$$

The minimum rank distance of \mathcal{IC} is $d = n - k + 1$. Note, that by considering the relation between the vector-matrix product with the Vandermonde-like matrix $\mathbf{V}_k(\mathbf{b})_1$ (see (8)), each component codeword \mathbf{c}_j is uniquely associated with a (message) polynomial $f_j \in \mathbb{F}_{q^m}[x, \sigma]_{<k}$. In particular, we have $\mathbf{c}_j = f_j(\mathbf{b})_1$ for all $j = 1, \dots, s$.

We now give a brief overview on two known decoding schemes for interleaved Gabidulin codes in the rank metric, namely the Loidreau–Overbeck decoder [30], [55], [73] and the interpolation-based Wachter–Zeh–Zeh decoder [34]. We want to emphasize, that apart from the mentioned decoding schemes, there exist also syndrome-based decoding schemes for interleaved Gabidulin codes, which are not considered in this paper.

1) *Loidreau–Overbeck Decoder*: In [30], [55], [73] Loidreau and Overbeck showed, that similar as for Reed–Solomon codes in the Hamming metric, interleaved Gabidulin codes can correct errors of rank $t \leq \frac{s}{s+1}(n - k)$ with high probability.

We now briefly sketch the Loidreau–Overbeck decoder for interleaved Gabidulin codes in the rank metric [30], [55], [73], which we will later on generalize to interleaved LRS codes in the sum-rank metric (Section III-C).

Suppose we transmit a codeword $\mathbf{C} \in \mathcal{IC}$ over a rank error channel and receive $\mathbf{R} = \mathbf{C} + \mathbf{E}$, where the error matrix has \mathbb{F}_q -rank t . The main ingredient of the Loidreau–Overbeck decoder is the decoding matrix

$$\mathbf{L} = \begin{pmatrix} \mathbf{V}_{n-t-1}(\mathbf{b})_1 \\ \mathbf{V}_{n-t-k}(\mathbf{r}_1)_1 \\ \vdots \\ \mathbf{V}_{n-t-k}(\mathbf{r}_s)_1 \end{pmatrix} \in \mathbb{F}_{q^m}^{((s+1)(n-t)-sk-1) \times n}. \quad (10)$$

If the dimension of the right kernel of \mathbf{L} is one, then any nonzero vector in the right kernel of \mathbf{L} allows for deriving \mathbb{F}_q -linear transformation matrices that allow for constructing a transformed received word, where the corrupted and non-corrupted columns are aligned to the left and right, respectively. Hence, the transmitted codeword can be reconstructed by performing (column) erasure decoding on the rightmost $n - t$ columns of the transformed received word. Overall, the decoder proceeds as follows:

- Set up the decoding matrix \mathbf{L} as in (10).
- If the dimension of the right kernel of \mathbf{L} is larger than one, declare a “decoding failure”. Otherwise, find any nonzero vector $\mathbf{h} \in \ker_r(\mathbf{L})$.
- Compute an invertible matrix $\mathbf{T} \in \mathbb{F}_q^{n \times n}$ such that the first (leftmost) t entries of $\mathbf{h}\mathbf{T}$ are zero.
- Then the rightmost $n - t$ columns of $\mathbf{E}(\mathbf{T}^{-1})^\top$ are zero, which implies that the $n - t$ rightmost columns of $\mathbf{R}(\mathbf{T}^{-1})^\top$ are noncorrupted.

- Hence, the transmitted codeword can be reconstructed by (column) erasure decoding on the $n - t$ rightmost columns of $\mathbf{R}(\mathbf{T}^{-1})^\top$ (e.g. using Lagrange interpolation).

2) *Interpolation-Based Decoder*: Wachter-Zeh and Zeh proposed a Welch–Berlekamp-like interpolation-based decoder for interleaved Gabidulin codes [34], that can be used as a probabilistic unique decoder, that returns a unique solution with high probability, or as a (not necessarily polynomial-time) list decoder, that returns a list of codewords lying within the decoding radius. The decoding radius for the list and probabilistic unique decoder is $t < \frac{s}{s+1}(n-k+1)$ and $t \leq \frac{s}{s+1}(n-k)$, respectively.

The decoding scheme can be sketched as follows:

- **Interpolation Step**: Construct a degree-restricted multivariate skew polynomial of the form

$$Q(x, y_1, \dots, y_s) = Q_0(x) + Q_1(x)y_1 + \dots + Q_s(x)y_s$$

that vanishes on a set of interpolation points obtained from the code locators \mathbf{b} and the received matrix \mathbf{R} .

- **Root-Finding Step**: Find all f_j, \dots, f_s in $\mathbb{F}_{q^m}[x, \sigma]_{<k}$ satisfying

$$Q_0(x) + Q_1(x)f_1(x) + \dots + Q_s(x)f_s(x) = 0.$$

III. DECODING OF INTERLEAVED LINEARIZED REED–SOLOMON CODES

In this section, we consider ILRS codes with respect to the sum-rank metric. In the Hamming metric, the gain from interleaving comes from the fact, that *burst* errors, i.e. errors that act in a column-wise manner share the same location. This principle can be extended to the rank metric [30], [31], [64] and as we will show in this section, to the sum-rank metric. By fixing a basis of $\mathbb{F}_{q^{ms}}$ over \mathbb{F}_{q^m} , each column of the interleaved matrix can be seen as an element from $\mathbb{F}_{q^{ms}}$. Therefore, s -interleaved codes over \mathbb{F}_{q^m} can be seen as punctured codes over the large field $\mathbb{F}_{q^{ms}}$, which can be decoded over \mathbb{F}_{q^m} [74].

Interleaving was suggested in [75] as a method to decrease the overhead in lifted Gabidulin codes for error correction in non-coherent (single-shot) network coding, at the cost of a larger packet size while preserving a low decoding complexity. It was later shown [32], [34], [76] that it can also increase the error-correction capability of the code using suitable decoders for interleaved Gabidulin codes at the cost of a small decoding failure probability.

After defining and analyzing ILRS codes, we propose a Loidreau–Overbeck-like decoder for ILRS codes that is capable of correcting (burst) sum-rank errors beyond the unique decoding radius at a cost of a (very) small decoding failure probability. We derive an upper bound on the decoding failure probability that accounts for the distribution of the error matrices. The Loidreau–Overbeck-like decoder allows a rigorous analysis of the decoding failure probability and gives insights about the decoding process.

We propose an interpolation-based decoding scheme for ILRS codes that can correct sum-rank errors beyond the unique decoding radius, which can be used as a (not necessarily polynomial-time) list decoder or as a probabilistic unique decoder that either returns a unique solution or a decoding failure. For the list decoder, an upper bound on the worst-case list size is proposed, and for the probabilistic unique decoder an upper bound on the decoding failure probability that is based on the Loidreau–Overbeck-like decoder, is derived.

We generalize the isometry between the sum-rank metric and the skew metric (see [6]) to interleaved matrices and we define interleaved skew Reed–Solomon (ISRS) codes, which are considered in Section III-F.

Before defining ILRS codes, we start by introducing the (burst) sum-rank error channel.

A. Sum-Rank Error Channel

As a channel model we consider the (burst) sum-rank error channel which is defined as follows. The output $\mathbf{R} = (\mathbf{R}^{(1)} | \mathbf{R}^{(2)} | \dots | \mathbf{R}^{(\ell)}) \in \mathbb{F}_{q^m}^{s \times n}$ is related to the input $\mathbf{C} = (\mathbf{C}^{(1)} | \mathbf{C}^{(2)} | \dots | \mathbf{C}^{(\ell)}) \in \mathbb{F}_{q^m}^{s \times n}$ by

$$\mathbf{R} = \mathbf{C} + \mathbf{E}. \quad (11)$$

The error matrix \mathbf{E} has the form

$$\mathbf{E} = (\mathbf{E}^{(1)} | \mathbf{E}^{(2)} | \dots | \mathbf{E}^{(\ell)}) \in \mathbb{F}_{q^m}^{s \times n}$$

where $\mathbf{E}^{(i)} \in \mathbb{F}_{q^m}^{s \times n_i}$ has $\text{rk}_q(\mathbf{E}^{(i)}) = t_i$ for all $i = 1, \dots, \ell$ and $\text{wt}_{\Sigma R}(\mathbf{E}) = \sum_{i=1}^{\ell} t_i = t$. Alternatively, we may write the sum-rank channel in (11) as

$$\begin{pmatrix} \mathbf{r}_1 \\ \mathbf{r}_2 \\ \vdots \\ \mathbf{r}_s \end{pmatrix} = \begin{pmatrix} \mathbf{c}_1 \\ \mathbf{c}_2 \\ \vdots \\ \mathbf{c}_s \end{pmatrix} + \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \vdots \\ \mathbf{e}_s \end{pmatrix} \quad (12)$$

where $\mathbf{r}_j = (\mathbf{r}_j^{(1)} | \mathbf{r}_j^{(2)} | \dots | \mathbf{r}_j^{(\ell)}) \in \mathbb{F}_{q^m}^n$, $\mathbf{c}_j = (\mathbf{c}_j^{(1)} | \mathbf{c}_j^{(2)} | \dots | \mathbf{c}_j^{(\ell)}) \in \mathbb{F}_{q^m}^n$ and $\mathbf{e}_j = (\mathbf{e}_j^{(1)} | \mathbf{e}_j^{(2)} | \dots | \mathbf{e}_j^{(\ell)}) \in \mathbb{F}_{q^m}^n$ for all $j = 1, \dots, s$.

B. Interleaved Linearized Reed–Solomon Codes

Motivated by the results on interleaved Reed–Solomon codes [14], [77] and interleaved Gabidulin codes [30], we define ILRS codes as follows.

Definition 6 (Interleaved Linearized Reed–Solomon Code) Let $\mathbf{a} = (a_1, a_2, \dots, a_\ell) \in \mathbb{F}_{q^m}^\ell$ be a vector containing representatives from different conjugacy classes of \mathbb{F}_{q^m} . Let $\mathbf{n} := (n_1, n_2, \dots, n_\ell) \in \mathbb{Z}_{\geq 0}^\ell$ be a length partition and let $n = \sum_{i=1}^\ell n_i$. Let the vectors $\boldsymbol{\beta}^{(i)} = (\beta_1^{(i)}, \beta_2^{(i)}, \dots, \beta_{n_i}^{(i)}) \in \mathbb{F}_{q^{n_i}}$ contain \mathbb{F}_q -linearly independent elements from \mathbb{F}_{q^m} for all $i = 1, \dots, \ell$ and define $\boldsymbol{\beta} = (\boldsymbol{\beta}^{(1)} \mid \boldsymbol{\beta}^{(2)} \mid \dots \mid \boldsymbol{\beta}^{(\ell)}) \in \mathbb{F}_{q^m}^n$. A (homogeneous) s -interleaved linearized Reed–Solomon (ILRS) code of length n and dimension k is defined as

$$\text{ILRS}[\boldsymbol{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k] = \left\{ \left(\begin{array}{c|c|c|c} f_1(\boldsymbol{\beta}^{(1)})_{a_1} & f_1(\boldsymbol{\beta}^{(2)})_{a_2} & \dots & f_1(\boldsymbol{\beta}^{(\ell)})_{a_\ell} \\ f_2(\boldsymbol{\beta}^{(1)})_{a_1} & f_2(\boldsymbol{\beta}^{(2)})_{a_2} & \dots & f_2(\boldsymbol{\beta}^{(\ell)})_{a_\ell} \\ \vdots & \vdots & \ddots & \vdots \\ f_s(\boldsymbol{\beta}^{(1)})_{a_1} & f_s(\boldsymbol{\beta}^{(2)})_{a_2} & \dots & f_s(\boldsymbol{\beta}^{(\ell)})_{a_\ell} \end{array} \right) : \begin{array}{l} f_j \in \mathbb{F}_{q^m}[x, \sigma]_{<k}, \\ \forall j \in [1, s] \end{array} \right\} \subseteq \mathbb{F}_{q^m}^{s \times n}.$$

The ILRS codes from Definition 6 include LRS codes (see Definition 5) as a special case for $s = 1$. Besides that, ILRS codes generalize several code families in the Hamming, rank and sum-rank metric. For $\ell = 1$ we obtain interleaved Gabidulin codes [30] with ordinary Gabidulin codes [10] for $s = 1$. Interleaved generalized Reed–Solomon codes are obtained by setting σ to be the identity and $\ell = n$ implying that $n_i = 1$ for all $i = 1, \dots, \ell$. The generator matrix of an s -interleaved LRS code $\text{ILRS}[\boldsymbol{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k]$ is the same as for a non-interleaved LRS code $\text{LRS}[\boldsymbol{\beta}, \mathbf{a}, \ell; \mathbf{n}, k]$ and is given by $\mathbf{G} = \lambda_k(\boldsymbol{\beta})_{\mathbf{a}}$.

Remark 3 Let α be a primitive element of \mathbb{F}_{q^m} . Then $\alpha^0, \dots, \alpha^{q-2}$ are representatives of all disjoint conjugacy classes (except the trivial one). Hence, we have that $\ell \leq (q-1)$ and that the length is bounded by $n \leq (q-1)m$. Further, we may choose the vector \mathbf{a} in Definition 6 as $\mathbf{a} = (1, \alpha, \dots, \alpha^{q-2})$.

Any codeword $\mathbf{C} \in \text{ILRS}[\boldsymbol{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k]$ has the form

$$\mathbf{C} := (\mathbf{C}^{(1)} \mid \mathbf{C}^{(2)} \mid \dots \mid \mathbf{C}^{(\ell)})$$

where

$$\mathbf{C}^{(i)} := \begin{pmatrix} \mathbf{c}_1^{(i)} \\ \mathbf{c}_2^{(i)} \\ \vdots \\ \mathbf{c}_s^{(i)} \end{pmatrix} = \begin{pmatrix} f_1(\boldsymbol{\beta}^{(i)})_{a_i} \\ f_2(\boldsymbol{\beta}^{(i)})_{a_i} \\ \vdots \\ f_s(\boldsymbol{\beta}^{(i)})_{a_i} \end{pmatrix} \in \mathbb{F}_{q^m}^{s \times n_i}$$

for all $i = 1, \dots, \ell$. To emphasize the interleaving we may write any codeword $\mathbf{C} \in \text{ILRS}[\boldsymbol{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k]$ as

$$\mathbf{C} = \begin{pmatrix} \mathbf{c}_1 \\ \mathbf{c}_2 \\ \vdots \\ \mathbf{c}_s \end{pmatrix}$$

where each row $\mathbf{c}_j = (\mathbf{c}_j^{(1)} \mid \mathbf{c}_j^{(2)} \mid \dots \mid \mathbf{c}_j^{(s)})$ is a codeword of the component code $\text{LRS}[\boldsymbol{\beta}, \mathbf{a}, \ell; \mathbf{n}, k]$. The structure of the codeword matrices of an ILRS code is illustrated in Figure 1.

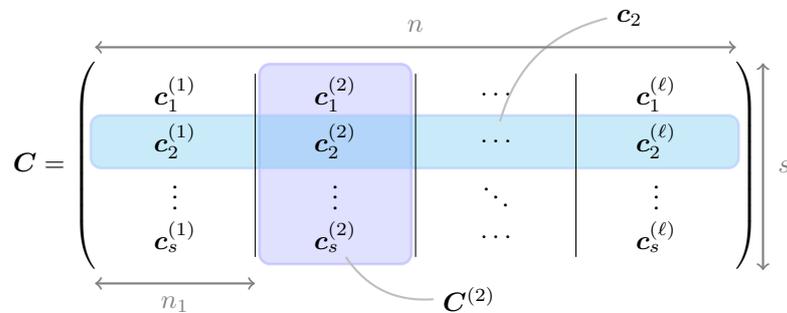


Fig. 1. Illustration of the structure a codeword matrix from an ILRS code.

To indicate the relation between codewords and the corresponding message polynomials we define $\mathbf{f} := (f_1, f_2, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]^s$ and write

$$C(\mathbf{f}) = (C^{(1)}(\mathbf{f}) \mid C^{(2)}(\mathbf{f}) \mid \dots \mid C^{(s)}(\mathbf{f})).$$

Proposition 3 shows that ILRS codes fulfill the Singleton-like bound in the sum-rank metric (see [6, Proposition 34]) with equality and thus are MSRD codes.

Proposition 3 (Minimum Distance) *The minimum sum-rank distance of $\text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ satisfies*

$$d_{\Sigma R}(\text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]) = n - k + 1.$$

Proof: The statement follows directly by considering a codeword containing only one nonzero row corresponding to a codeword having minimum sum-rank weight among all codewords of $\text{LRS}[\beta, \mathbf{a}, \ell; \mathbf{n}, k]$. By [6, Theorem 4] and the \mathbb{F}_{q^m} -linearity, the minimum distance is thus $n - k + 1$. \blacksquare

C. Loidreau–Overbeck-like Decoder for ILRS Codes

Based on the decoder by Loidreau and Overbeck for interleaved Gabidulin codes from [30], [55], [73], we now derive a decoding scheme for ILRS codes. This Loidreau–Overbeck-like decoding scheme allows to decoder errors beyond the BMD radius by allowing a small decoding failure probability. The main result of this section is summarized in Theorem 1.

Theorem 1 (Loidreau–Overbeck-like Decoder for ILRS Codes) *Let $\mathbf{R} = C(\mathbf{f}) + \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ where $C(\mathbf{f}) \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ and $\mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ is chosen uniformly at random from the set $\{\mathbf{E} \in \mathbb{F}_{q^m}^{s \times n} : \text{wt}_{\Sigma R}(\mathbf{E}) = t\}$, where*

$$t \leq t_{\max} := \frac{s}{s+1}(n - k).$$

Then, Algorithm 1 with input \mathbf{R} returns the correct message polynomial vector \mathbf{f} with success probability at least

$$\Pr(\text{success}) \geq 1 - \kappa_q^{\ell+1} q^{-m((s+1)(t_{\max}-t)+1)}. \quad (13)$$

Furthermore, the algorithm has complexity $O(sn^\omega)$ operations in \mathbb{F}_{q^m} plus $O(mn^{\omega-1})$ operations in \mathbb{F}_q .

One benefit of the Loidreau–Overbeck-like decoding scheme is, that the failure probability can be analyzed well and upper bounded using probabilistic arguments on the distribution of the error matrix. Although the Loidreau–Overbeck-like decoder has a higher computational complexity than the interpolation-based decoder, which we derive in Section III-D, it plays a central role in bounding the decoding failure probability. In particular, we will use the results from this section in Section III-D to upper bound the decoding failure probability of the interpolation-based decoding scheme by relating the conditions for successful decoding of the two decoding schemes. A similar approach was used for bounding the decoding failure probability of the interpolation-based decoding scheme for interleaved Gabidulin codes in [64].

Compared to the original Loidreau–Overbeck decoder for interleaved Gabidulin codes (see Section II-FI for a high-level description) the main challenge for deriving a Loidreau–Overbeck-like decoder for ILRS codes is to obtain the transformation matrices that allow for transforming the received word, such that the rank error and the non-corrupted part are aligned in particular columns, in a block-wise manner.

Suppose we transmit a codeword $C \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ over a sum-rank channel (12) and receive

$$\mathbf{R} = \begin{pmatrix} \mathbf{r}_1 \\ \mathbf{r}_2 \\ \vdots \\ \mathbf{r}_s \end{pmatrix} = \begin{pmatrix} \mathbf{c}_1 \\ \mathbf{c}_2 \\ \vdots \\ \mathbf{c}_s \end{pmatrix} + \begin{pmatrix} \mathbf{e}_1 \\ \mathbf{e}_2 \\ \vdots \\ \mathbf{e}_s \end{pmatrix} = C + \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$$

where the error matrix \mathbf{E} has sum-rank weight t with \mathbb{F}_q -rank partition $\mathbf{t} = (t_1, t_2, \dots, t_\ell)$. Now consider the matrices

$$\mathbf{L} := \begin{pmatrix} \lambda_{n-t-1}(\beta) \mathbf{a} \\ \lambda_{n-t-k}(\mathbf{r}_1) \mathbf{a} \\ \vdots \\ \lambda_{n-t-k}(\mathbf{r}_s) \mathbf{a} \end{pmatrix} \in \mathbb{F}_{q^m}^{((s+1)(n-t)-sk-1) \times n}. \quad (14)$$

and (slightly abusing the notation above)

$$\lambda_{n-t-k}(\mathbf{E}) \mathbf{a} := \begin{pmatrix} \lambda_{n-t-k}(\mathbf{e}_1) \mathbf{a} \\ \vdots \\ \lambda_{n-t-k}(\mathbf{e}_s) \mathbf{a} \end{pmatrix} \in \mathbb{F}_{q^m}^{s(n-t-k) \times n}.$$

Lemma 4 (Properties of Decoding Matrix) Consider the transmission of a codeword $\mathbf{C} \in \text{ILRS}[\boldsymbol{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k]$ over a sum-rank channel (12) where the error matrix \mathbf{E} has sum-rank weight t with \mathbb{F}_q -rank partition $\mathbf{t} = (t_1, t_2, \dots, t_\ell)$. Suppose that $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}$ has \mathbb{F}_{q^m} -rank t . Then the decoding matrix \mathbf{L} in (14) has the following properties:

1) The \mathbb{F}_{q^m} -linear row space of \mathbf{L} satisfies

$$\langle \mathbf{L} \rangle_{q^m} = \left\langle \left(\begin{array}{c} \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \\ \lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \end{array} \right) \right\rangle_{q^m}.$$

- 2) There are invertible matrices $\mathbf{W}^{(i)} \in \mathbb{F}_q^{n_i \times n_i}$ such that $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$ has exactly t non-zero columns. Moreover, these columns are \mathbb{F}_{q^m} -linearly independent.
- 3) We have $\text{rk}_{q^m}(\mathbf{L}) = n - 1$.

Proof:

- Ad 1): For the proof of first statement we use the fact, that the \mathbb{F}_{q^m} -row space of $\lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}}$ forms an LRS code of length n and dimension $t - 1$. Since any codeword \mathbf{c}_i is in the row space of $\lambda_k(\boldsymbol{\beta})_{\mathbf{a}}$, we have (by (5))

$$\mathcal{D}_{\mathbf{a}}^j(\mathbf{c}_i) \in \langle \lambda_{k+j}(\boldsymbol{\beta})_{\mathbf{a}} \rangle_q$$

for all j . In particular,

$$\langle \lambda_{n-t-k}(\mathbf{c}_i)_{\mathbf{a}} \rangle_q \subseteq \langle \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \rangle_q,$$

so by elementary row operations, we have

$$\mathbf{L} = \begin{pmatrix} \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \\ \lambda_{n-t-k}(\mathbf{r}_1)_{\mathbf{a}} \\ \vdots \\ \lambda_{n-t-k}(\mathbf{r}_s)_{\mathbf{a}} \end{pmatrix} = \begin{pmatrix} \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \\ \lambda_{n-t-k}(\mathbf{c}_1)_{\mathbf{a}} + \lambda_{n-t-k}(\mathbf{e}_1)_{\mathbf{a}} \\ \vdots \\ \lambda_{n-t-k}(\mathbf{c}_s)_{\mathbf{a}} + \lambda_{n-t-k}(\mathbf{e}_s)_{\mathbf{a}} \end{pmatrix} \xrightarrow{\text{row operations}} \begin{pmatrix} \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \\ \lambda_{n-t-k}(\mathbf{e}_1)_{\mathbf{a}} \\ \vdots \\ \lambda_{n-t-k}(\mathbf{e}_s)_{\mathbf{a}} \end{pmatrix} = \begin{pmatrix} \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \\ \lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \end{pmatrix}.$$

- Ad 2): Since the \mathbb{F}_q -rank partition of \mathbf{E} is \mathbf{t} , there are invertible matrices $\mathbf{W}^{(i)} \in \mathbb{F}_q^{n_i \times n_i}$ such that the rightmost $n_i - t_i$ columns of

$$\mathbf{E}^{(i)} \mathbf{W}^{(i)} \in \mathbb{F}_{q^m}^{s \times n_i}$$

are zero. This implies that also the rightmost $n_i - t_i$ columns of

$$\lambda_{n-t-k}(\mathbf{E}^{(i)})_{\mathbf{a}_i} \mathbf{W}^{(i)} \in \mathbb{F}_{q^m}^{(n-t-k)s \times n_i}$$

are zero. Since the \mathbb{F}_{q^m} -rank of $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}$ is t and since

$$\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$$

has exactly t non-zero columns, these non-zero columns are \mathbb{F}_{q^m} -linearly independent (i.e., the t_i leftmost columns in each block). This implies 2).

- Ad 3): Since, by 2), $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$ has exactly t non-zero columns, the \mathbb{F}_{q^m} -rank of \mathbf{L} , which, by 1), equals the rank of

$$\begin{pmatrix} \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \\ \lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \end{pmatrix} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)}),$$

is given by t plus the rank of the matrix $\mathbf{B} \in \mathbb{F}_{q^m}^{(n-t-1) \times n-t}$ consisting of the columns of $\lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$ in which $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$ is non-zero (i.e., the rightmost $n_i - t_i$ columns in block i). This can be easily seen by permuting the columns, such that the matrix is in block-triangular form

$$\mathbf{L} \begin{matrix} \mathbb{F}_q\text{-linear column op.} \\ \mathbb{F}_{q^m}\text{-linear row op.} \end{matrix} \begin{pmatrix} \lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \\ \lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \end{pmatrix} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)}) \begin{matrix} \text{column permutations} \\ \sim \end{matrix} \begin{pmatrix} \star & \mathbf{B} \\ \tilde{\mathbf{E}} & \mathbf{0} \end{pmatrix},$$

where $\tilde{\mathbf{E}} \in \mathbb{F}_{q^m}^{(n-t-k)s \times t}$ are the non-zero columns of $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$ (note that $\text{rk}_{q^m}(\tilde{\mathbf{E}}) = t$). Since

$$\lambda_{n-t-1}(\boldsymbol{\beta})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$$

is a generator matrix of an $[n, n-t-1]$ LRS code (which is maximum distance separable (MDS) in the Hamming metric), \mathbf{B} has rank $n-t-1$. Hence, the overall rank of \mathbf{L} is $t + (n-t-1) = n-1$. ■

Note, that by the rank-nullity theorem statement 1) in Lemma 4 also implies that also the \mathbb{F}_{q^m} -linear right kernels of the two matrices are the same. We now derive properties of elements in the right \mathbb{F}_{q^m} -kernel of the decoding matrix, that lay the foundations for a Loidreau–Overbeck-like decoder for ILRS codes.

Lemma 5 (Properties of Right Kernel) *Suppose that $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}$ has \mathbb{F}_{q^m} -rank t . Let $\mathbf{h} = (\mathbf{h}^{(1)} \mid \mathbf{h}^{(2)} \mid \dots \mid \mathbf{h}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ be a non-zero vector in the right kernel of the decoding matrix \mathbf{L} in (14). Then:*

- 1) We have $\text{rk}_q(\mathbf{h}^{(i)}) = n_i - t_i$ for all $i = 1, \dots, \ell$, i.e., \mathbf{h} has sum-rank weight $\text{wt}_{\Sigma R}(\mathbf{h}) = n - t$.
- 2) There are invertible matrices $\mathbf{T}^{(i)} \in \mathbb{F}_q^{n_i \times n_i}$, for all $i = 1, \dots, \ell$, such that the first (leftmost) t_i positions of $\mathbf{h}^{(i)} \mathbf{T}^{(i)}$ are zero.
- 3) For the matrices $\mathbf{T}^{(i)} \in \mathbb{F}_q^{n_i \times n_i}$ above, define $\mathbf{D}^{(i)} := \left(\mathbf{T}^{(i)-1}\right)^\top$. Then, the rightmost $n_i - t_i$ columns of $\mathbf{E}^{(i)} \mathbf{D}^{(i)}$ are zero.
- 4) Write $\tilde{\beta}^{(i)} := \beta^{(i)} \mathbf{D}^{(i)}$ and denote by $\tilde{r}_{j,\mu}^{(i)}$ the μ -th entry of $\mathbf{r}_j^{(i)} \mathbf{D}^{(i)}$. Then, independently for any $j = 1, \dots, s$, the j -th message polynomial f_j can be uniquely reconstructed from the received word as the interpolation polynomial

$$f_j = \mathcal{I}_{\mathcal{B}_j}^{\text{op}}$$

where $\mathcal{B}_j := \{(\tilde{\beta}_\mu^{(i)}, \tilde{r}_{j,\mu}^{(i)}, a_i) : i = 1, \dots, \ell, \mu = t_i + 1, \dots, n_i\}$.

Proof:

- Ad 1): Due to 2) in Lemma 4, any vector in the right kernel of $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \cdot \text{diag}(\mathbf{W}^{(1)}, \dots, \mathbf{W}^{(\ell)})$ must be zero in the first t_i positions of the i -th block, for every i . In particular, the leftmost t_i positions of

$$\mathbf{h}^{(i)} \left(\mathbf{W}^{(1)-1}\right)^\top \in \mathbb{F}_{q^m}^{n_i}$$

are zero. This implies that

$$\text{rk}_q(\mathbf{h}^{(i)}) \leq n_i - t_i.$$

On the other hand, \mathbf{h} is in the right kernel of the matrix $\lambda_{n-t-k}(\beta)_{\mathbf{a}}$, which is a generator matrix of an $[n, n - t - 1]$ LRS code. This code is MSRD, and hence its dual code has parameters $[n, t + 1, n - t]$ (i.e., it is also MSRD). Since \mathbf{h} is non-zero, its sum-rank weight must therefore be at least $n - t$. This can only be the case for

$$\text{rk}_q(\mathbf{h}^{(i)}) = n_i - t_i.$$

- Ad 2): Expand $\mathbf{h}^{(i)}$ into an $m \times n_i$ matrix over \mathbb{F}_q , which has \mathbb{F}_q -rank $n_i - t_i$ by 1). Then, we can perform elementary column operations on this matrix to bring it into reduced column echelon form, where the $n_i - t_i$ non-zero columns are the rightmost ones. The matrix $\mathbf{T}^{(i)}$ is then chosen to be the matrix that, by multiplication from the right, performs the used sequence of elementary column operations. Note that the $n_i - t_i$ non-zero entries of $\mathbf{h}^{(i)} \mathbf{T}^{(i)}$ are linearly independent over \mathbb{F}_q .
- Ad 3): Consider the matrix

$$\mathbf{A} = (\mathbf{A}^{(1)} \mid \mathbf{A}^{(2)} \mid \dots \mid \mathbf{A}^{(\ell)}) \in \mathbb{F}_{q^m}^{s(n-k-t) \times (n-t)}$$

and vector

$$\mathbf{b} = (\mathbf{b}^{(1)} \mid \mathbf{b}^{(2)} \mid \dots \mid \mathbf{b}^{(\ell)}) \in \mathbb{F}_{q^m}^{n-t},$$

where

$$\begin{aligned} \mathbf{A}^{(i)} &:= \left[\lambda_{n-t-k}(\mathbf{E}^{(i)})_{\mathbf{a}_i} \mathbf{D}^{(i)} \right]_{\{t_i+1, \dots, n_i\}}, \\ \mathbf{b}^{(i)} &:= \left[\mathbf{h}^{(i)} \mathbf{T}^{(i)} \right]_{\{t_i+1, \dots, n_i\}}. \end{aligned}$$

Since $\mathbf{h} \cdot \text{diag}(\mathbf{T}^{(1)}, \dots, \mathbf{T}^{(\ell)})$ is in the right kernel of $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}} \cdot \text{diag}(\mathbf{D}^{(1)}, \dots, \mathbf{D}^{(\ell)})$ and the t_i leftmost positions of $\mathbf{h}^{(i)} \mathbf{T}^{(i)}$ are zero, the vector \mathbf{b} is in the right kernel of \mathbf{A} . We prove that \mathbf{A} is the zero matrix.

Let $\hat{t} := \text{wt}_{\Sigma R}(\mathbf{A})$ and $\hat{r} := \text{rk}_{q^m}(\mathbf{A})$. Since $\text{wt}_{\Sigma R}(\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}) = \text{rk}_{q^m}(\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}) = t$ and the columns of \mathbf{A} are \mathbb{F}_q -linear combinations of the columns of $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}$, we must have $\hat{t} = \hat{r}$. Hence, there are invertible matrices $\mathbf{V}^{(i)} \in \mathbb{F}_q^{(n_i-t_i) \times (n_i-t_i)}$ such that

$$\mathbf{A} \cdot \text{diag}(\mathbf{V}^{(1)}, \dots, \mathbf{V}^{(\ell)})$$

has exactly \tilde{t} non-zero columns, say $\mathcal{A} \subseteq \{1, \dots, n-t\}$, which are \mathbb{F}_{q^m} -linearly independent. Hence, the vector

$$\mathbf{b} \cdot \text{diag}\left(\left(\mathbf{V}^{(1)-1}\right)^\top, \dots, \left(\mathbf{V}^{(\ell)-1}\right)^\top\right)$$

is zero in all positions in \mathcal{A} . Since, by construction, the entries of $\mathbf{b}^{(i)}$ are linearly independent, we must have $\mathcal{A} = \emptyset$, $\tilde{t} = 0$, and hence $\mathbf{A} = \mathbf{0}$. This proves 3).

- Ad 4): Consider the transformed and punctured received word $\tilde{\mathbf{R}} = (\tilde{\mathbf{R}}^{(1)} \mid \tilde{\mathbf{R}}^{(2)} \mid \dots \mid \tilde{\mathbf{R}}^{(\ell)})$ defined by

$$\tilde{\mathbf{R}}^{(i)} := \left[\mathbf{R}^{(i)} \mathbf{D}^{(i)} \right]_{\{t_i+1, \dots, n_i\}} \stackrel{3)}{=} \left[\mathbf{C}^{(i)} \mathbf{D}^{(i)} \right]_{\{t_i+1, \dots, n_i\}}.$$

Hence, the j -th row of $\tilde{\mathbf{R}}^{(i)}$ can be written as

$$\begin{aligned} \left(\tilde{r}_{j,t_i+1}^{(i)} \quad \dots \quad \tilde{r}_{j,n_i}^{(i)} \right) &= \left[\mathbf{r}_j^{(i)} \mathbf{D}^{(i)} \right]_{\{t_i+1, \dots, n_i\}} \\ &= \left[\mathbf{c}_j^{(i)} \mathbf{D}^{(i)} \right]_{\{t_i+1, \dots, n_i\}} \\ &= \left[\left(f_j \left(\beta_1^{(i)} \right)_{a_i} \quad \dots \quad f_j \left(\beta_{n_i}^{(i)} \right)_{a_i} \right) \mathbf{D}^{(i)} \right]_{\{t_i+1, \dots, n_i\}} \\ &= \left[\left(f_j \left(\tilde{\beta}_1^{(i)} \right)_{a_i} \quad \dots \quad f_j \left(\tilde{\beta}_{n_i}^{(i)} \right)_{a_i} \right) \right]_{\{t_i+1, \dots, n_i\}}, \end{aligned}$$

where in the last equality we used the \mathbb{F}_q -linearity of the evaluation map $f_j(\cdot)_{a_i}$ for a fixed a_i . Hence, we can recover f_j by interpolation as stated in 4). Note that the $\tilde{\beta}_\mu^{(i)}$ are linearly independent by definition and $\sum_{i=1}^\ell (n_i - t_i) = n - t \leq k$, so the interpolation is well-defined. \blacksquare

The structure of the transformed received matrices $\tilde{\mathbf{R}}^{(i)} = \mathbf{R}^{(i)} \mathbf{D}^{(i)}$ is illustrated in Figure 2. A qualitative illustration of

$$\hat{\mathbf{R}}^{(i)} = \mathbf{R}^{(i)} \mathbf{D}^{(i)} = \begin{pmatrix} \hat{r}_{1,1}^{(i)} & \dots & \hat{r}_{1,t_i}^{(i)} & c_{1,t_i+1}^{(i)} & \dots & c_{1,n_i}^{(i)} \\ \hat{r}_{2,1}^{(i)} & \dots & \hat{r}_{2,t_i}^{(i)} & c_{2,t_i+1}^{(i)} & \dots & c_{2,n_i}^{(i)} \\ \vdots & \ddots & \vdots & \vdots & \ddots & \vdots \\ \hat{r}_{s,1}^{(i)} & \dots & \hat{r}_{s,t_i}^{(i)} & c_{s,t_i+1}^{(i)} & \dots & c_{s,n_i}^{(i)} \end{pmatrix}$$

$\underbrace{\hspace{10em}}_{t_i} \quad \underbrace{\hspace{10em}}_{n_i - t_i}$

Fig. 2. Illustration of the transformed received matrices $\tilde{\mathbf{R}}^{(i)} = \mathbf{R}^{(i)} \mathbf{D}^{(i)}$. The red part is corrupted by an error of rank t_i whereas the green part corresponds to the last (rightmost) $n_i - t_i$ columns of the transformed codeword matrix $\tilde{\mathbf{C}}(\mathbf{f})^{(i)} = \mathbf{C}^{(i)}(\mathbf{f}) \mathbf{D}^{(i)}$ that is obtained by evaluating \mathbf{f} at the transformed code locators $\beta^{(i)} \mathbf{D}^{(i)}$.

the transformed received matrix $\tilde{\mathbf{R}} = (\tilde{\mathbf{R}}^{(1)} \mid \tilde{\mathbf{R}}^{(2)} \mid \dots \mid \tilde{\mathbf{R}}^{(\ell)})$ is illustrated in Figure 3.

$$\hat{\mathbf{R}} = \left(\begin{array}{|c|c|} \hline \text{red} & \text{green} \\ \hline \end{array} \right)_{t_1, n_1 - t_1} \mid \left(\begin{array}{|c|c|} \hline \text{red} & \text{green} \\ \hline \end{array} \right)_{t_2, n_2 - t_2} \mid \dots \mid \left(\begin{array}{|c|c|} \hline \text{red} & \text{green} \\ \hline \end{array} \right)_{t_\ell, n_\ell - t_\ell}$$

Fig. 3. Qualitative illustration of the transformed received matrix $\tilde{\mathbf{R}}$. The red parts correspond to the corrupted columns whereas the green parts correspond to the non-corrupted columns.

Lemma 5 provides an efficient algorithm to retrieve the message polynomial vector from a received word under the condition that the matrix $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}$ has \mathbb{F}_{q^m} -rank t . The method is outlined in Algorithm 1.

The complete procedure for the Loidreau–Overbeck-like decoder for ILRS codes is given in Algorithm 1.

²In fact, we only need k out of $n - t$ interpolation points, which leads to a more efficient algorithm.

Algorithm 1: LOIDREAU–OVERBECK DECODER FOR ILRS CODES

Input : A received matrix $\mathbf{R} = \mathbf{C}(\mathbf{f}) + \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ where $\mathbf{C}(\mathbf{f}) \in \text{ILRS}[\beta, \mathbf{a}, \ell; \mathbf{n}, k]$ and $\text{wt}_{\Sigma R}(\mathbf{E}) = t$.

Output: Message polynomial vector $\mathbf{f} = (f_1, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ or “decoding failure”

```

1 Set up the matrix  $\mathbf{L}$  as in (14)
2 Compute right kernel  $\mathcal{H} = \ker_r(\mathbf{L})$ 
3 if  $\dim(\mathcal{H}) > 1$  then
4   return “decoding failure”
5 else
6   Compute an element  $\mathbf{h} = (\mathbf{h}^{(1)} \mid \dots \mid \mathbf{h}^{(\ell)}) \in \mathcal{H} \setminus \{\mathbf{0}\}$ 
7   for  $i = 1, \dots, \ell$  do
8     Compute  $n_i - t_i \leftarrow \text{rk}_q(\mathbf{h}^{(i)})$ 
9     Compute full-rank matrix  $\mathbf{T}^{(i)} \in \mathbb{F}_q^{n_i \times n_i}$  such that the first  $t_i$  entries of  $\mathbf{h}^{(i)}\mathbf{T}^{(i)}$  are zero
10     $\tilde{\beta}^{(i)} \leftarrow \beta^{(i)} (\mathbf{T}^{(i)-1})^\top$ 
11    for  $j = 1, \dots, s$  do
12       $\tilde{\mathbf{r}}_j = (\tilde{\mathbf{r}}_j^{(1)} \ \dots \ \tilde{\mathbf{r}}_j^{(\ell)}) \leftarrow \mathbf{r}_j \text{diag}\left(\left(\mathbf{T}^{(1)-1}\right)^\top, \dots, \left(\mathbf{T}^{(\ell)-1}\right)^\top\right)$  //  $\mathbf{r}_j$  is the  $j$ -th row of  $\mathbf{R}$ 
13       $f_j \leftarrow \mathcal{I}_{\mathcal{B}_j}^{\text{op}}$  where  $\mathcal{B}_j := \{(\tilde{\beta}_\mu^{(i)}, \tilde{r}_{j,\mu}^{(i)}, a_i) : i = 1, \dots, \ell, \mu = t_i + 1, \dots, n_i\}$ 
14    return  $\mathbf{f} = (f_1, \dots, f_s)$ 

```

Remark 4 Since an operation in \mathbb{F}_{q^m} costs at least $\Omega(m)$ operations in \mathbb{F}_q (cf. Section II-E), the cost “ $O(sn^\omega)$ operations in \mathbb{F}_{q^m} ” dominates the complexity of Algorithm 1.

Lemma 6 provides a condition on the \mathbb{F}_{q^m} -rank of stacked σ -generalized Moore matrices that we will later on use to derive the probability of success of Algorithm 1.

Lemma 6 Let $\mathbf{M} \in \mathbb{F}_{q^m}^{s \times t}$ with $\text{wt}_{\Sigma R}(\mathbf{M}) = t$, where $\mathbf{t} = (t_1, \dots, t_\ell)$ with $t_i \geq 0$ and $\sum_{i=1}^\ell t_i = t$. Then, we have

$$\text{rk}_{q^m}(\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}) < t \quad (15)$$

if and only if

$$\exists \mathbf{b} \in \mathbb{F}_{q^m}^t : \text{wt}_{\Sigma R}(\mathbf{b}) > n - t - k \quad \text{and} \quad \lambda_{n-t-k}(\xi \mathbf{b})_{\mathbf{a}} \mathbf{M}^\top = \mathbf{0} \quad \forall \xi \in \mathbb{F}_{q^m}^*. \quad (16)$$

The proof of Lemma 6 proceeds similarly as the proof of [55, Lemma 3.14] and can be found in Appendix A.

Lemma 7 provides an upper bound on the probability that the matrix $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}$ is rank deficient if the error matrix \mathbf{E} is chosen uniformly at random from the set of all matrices from $\mathbb{F}_{q^m}^{s \times n}$ having sum-rank weight t .

Lemma 7 Let $t \leq t_{\max} := \frac{s}{s+1}(n-k)$. Let $\mathbf{n} = (n_1, n_2, \dots, n_\ell) \in \mathbb{Z}_{\geq 0}^\ell$ be a length partition such that $\sum_{i=1}^\ell n_i = n$ and let $\mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ be chosen uniformly at random from the set

$$\{\mathbf{E} \in \mathbb{F}_{q^m}^{s \times n} : \text{wt}_{\Sigma R}(\mathbf{E}) = t\}.$$

Then, we have

$$\Pr(\text{rk}_{q^m}(\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}) < t) \leq \kappa_q^{\ell+1} q^{-m((s+1)(t_{\max}-t)+1)}.$$

The proof of Lemma 7 can be found in Appendix A.

Finally, we are now equipped with all results that are needed to proof Theorem 1 stated at the beginning of this section.

Proof: Due to Lemma 5, the algorithm returns the correct message polynomial vector if the \mathbb{F}_{q^m} -rank of $\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}$ is at least t . Hence, the success probability is lower bounded by the probability that $\text{rk}_{q^m}(\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}) = t$, which is given in Lemma 7.

The lines of the algorithm have the following complexities:

- Lines 3 and 6: This can be done by solving the linear system of equations $\mathbf{L}\mathbf{h}^\top = \mathbf{0}$. Since $\mathbf{L} \in \mathbb{F}_{q^m}^{((s+1)(n-t)-sk-1) \times n}$, it costs $O(sn^\omega)$ operations in \mathbb{F}_{q^m} .
- Line 8 can be implemented by transforming the matrix representation of $\mathbf{h}^{(i)}$, which is an $m \times n_i$ matrix over \mathbb{F}_q , into column echelon form. For each i , this costs $O(mn_i^{\omega-1})$ operations in \mathbb{F}_q . In total, all ℓ calls of this line cost $O(\ell m \sum_i n_i^{\omega-1}) \subseteq O(mn^{\omega-1})$ operations in \mathbb{F}_q .

- Line 9 can be implemented by transforming the matrix representation of $\mathbf{h}^{(i)}$ into column echelon form, which was already accomplished in Line 8.
- Line 10 is a matrix-matrix multiplication over \mathbb{F}_q , which costs $O(mn_i^{\omega-1})$ operations in \mathbb{F}_q for each i . All ℓ iterations of this line cost together $O(mn^{\omega-1})$ operations in \mathbb{F}_q .
- Line 12 requires $O(\sum_i n_i^2) \subseteq O(n^2)$ multiplications over \mathbb{F}_{q^m} and thus $O(sn^2)$ operations in \mathbb{F}_{q^m} in total.
- Line 13 computes s interpolation polynomials of degree less than $k \leq n$ point tuples. This costs in total $\tilde{O}(s\mathcal{M}(n))$ operations in \mathbb{F}_{q^m} .

This proves the complexity statement. \blacksquare

Note, that the decoding radius t_{\max} defined above does not necessarily need to be an integer. The lower bound on the probability of successful decoding in (13) corresponds to an upper bound on the decoding failure probability, i.e. we have that

$$\Pr(\text{failure}) \leq \kappa_q^{\ell+1} q^{-m((s+1)(t_{\max}-t)+1)}.$$

An execution of the Loidreau–Overbeck-like decoder is illustrated in Example 3.

Example 3 (Loidreau–Overbeck-like Decoder) Consider the finite field \mathbb{F}_{3^3} with primitive element α defined by the primitive polynomial $x^3 + 2x + 1$. Consider the interleaved LRS code $\text{ILRS}[\boldsymbol{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k]$ over \mathbb{F}_{3^3} with code locators $\boldsymbol{\beta} = ((1, \alpha, \alpha^2) | (1, \alpha, \alpha^2))$, evaluation parameters $\mathbf{a} = (1, \alpha)$, $s = 2$, length partition $\mathbf{n} = (3, 3)$ and dimension $k = 3$. Suppose we transmit the codeword

$$\mathbf{C}(\mathbf{f}) = \left(\begin{array}{ccc|ccc} 2\alpha^2 & 2\alpha + 1 & 2\alpha^2 + \alpha & 2\alpha^2 & 2\alpha + 1 & 2\alpha^2 + \alpha \\ \alpha + 1 & 2\alpha^2 + 1 & \alpha^2 + 1 & \alpha + 1 & \alpha^2 + \alpha + 2 & 0 \end{array} \right) \in \text{ILRS}[\boldsymbol{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k] \quad (17)$$

corresponding to the message polynomials $\mathbf{f} = (f_1, f_2) = (2\alpha^2, x^2 + (2\alpha^2 + \alpha)x + \alpha^2)$ over a sum-rank channel that adds an error

$$\mathbf{E} = \left(\begin{array}{ccc|ccc} 0 & 2\alpha^2 + 1 & 2\alpha^2 + 1 & 0 & 0 & 2 \\ 0 & \alpha^2 + \alpha + 1 & \alpha^2 + \alpha + 1 & 0 & 0 & 2\alpha^2 + 2 \end{array} \right)$$

of sum-rank weight $t = 2$ and we receive

$$\mathbf{R} = \left(\begin{array}{ccc|ccc} 2\alpha^2 & 2\alpha^2 + 2\alpha + 2 & \alpha^2 + \alpha + 1 & 2\alpha^2 & 2\alpha + 1 & 2\alpha^2 + \alpha + 2 \\ \alpha + 1 & \alpha + 2 & 2\alpha^2 + \alpha + 2 & \alpha + 1 & \alpha^2 + \alpha + 2 & 2\alpha^2 + 2 \end{array} \right). \quad (18)$$

Note, that a BMD decoder could only correct errors up to sum-rank weight $\lfloor \frac{n-k}{2} \rfloor = 1$. According to (14) the Loidreau–Overbeck-like decoding matrix is

$$\mathbf{L} = \left(\begin{array}{ccc|ccc} 1 & \alpha & \alpha^2 & 1 & \alpha & \alpha^2 \\ 1 & \alpha + 2 & \alpha^2 + \alpha + 1 & \alpha & \alpha^2 + 2\alpha & \alpha^2 + 2\alpha + 2 \\ 1 & \alpha + 1 & \alpha^2 + 2\alpha + 1 & \alpha^2 + 2\alpha & 2 & 2\alpha + 2 \\ 2\alpha^2 & 2\alpha^2 + 2\alpha + 2 & \alpha^2 + \alpha + 1 & 2\alpha^2 & 2\alpha + 1 & 2\alpha^2 + \alpha + 2 \\ \alpha + 1 & \alpha + 2 & 2\alpha^2 + \alpha + 2 & \alpha + 1 & \alpha^2 + \alpha + 2 & 2\alpha^2 + 2 \end{array} \right).$$

The decoding matrix \mathbf{L} has \mathbb{F}_{q^m} -rank $n - 1 = 5$ implying the right \mathbb{F}_{3^3} -kernel of \mathbf{L} has dimension one. We pick

$$\mathbf{h} = (\mathbf{h}^{(1)} | \mathbf{h}^{(2)}) = ((\alpha, 2\alpha^2 + 2\alpha + 1, \alpha^2 + \alpha + 2) | (\alpha + 1, \alpha^2 + \alpha, 0)) \in \ker_r(\mathbf{L})$$

as non-zero element from the right kernel of \mathbf{L} and recover the rank partition of the error as

$$\mathbf{t} = (n_1 - \text{rk}_3(\mathbf{h}^{(1)}) | n_2 - \text{rk}_3(\mathbf{h}^{(2)})) = (1 | 1).$$

Next, we compute the transformation matrices

$$\mathbf{T}^{(1)} = \begin{pmatrix} 0 & 1 & 1 \\ 1 & 0 & 1 \\ 1 & 0 & 0 \end{pmatrix} \quad \text{and} \quad \mathbf{T}^{(2)} = \begin{pmatrix} 0 & 1 & 1 \\ 0 & 1 & 2 \\ 1 & 2 & 2 \end{pmatrix}$$

such that the first entry of $\mathbf{h}^{(1)}\mathbf{T}^{(1)}$ and $\mathbf{h}^{(2)}\mathbf{T}^{(2)}$ are zero, i.e. we have

$$\mathbf{h}^{(1)}\mathbf{T}^{(1)} = (0, \alpha, 2\alpha^2 + 1) \quad \text{and} \quad \mathbf{h}^{(2)}\mathbf{T}^{(2)} = (0, \alpha^2 + 2\alpha + 1, 2\alpha^2 + 1).$$

Defining the block diagonal matrix $\mathbf{D} = \text{diag}\left(\left(\mathbf{T}^{(1)-1}\right)^\top, \left(\mathbf{T}^{(2)-1}\right)^\top\right)$ we can compute the invertible transformed code locators $\tilde{\boldsymbol{\beta}}$ and the transformed received word $\tilde{\mathbf{R}}$ as

$$\begin{aligned} \tilde{\boldsymbol{\beta}} &= \boldsymbol{\beta} \cdot \mathbf{D} = ((\alpha^2, \alpha^2 + 2\alpha + 1, 2\alpha^2 + \alpha) | (\alpha^2 + 1, 2\alpha + 2, \alpha + 2)) \\ \tilde{\mathbf{R}} &= \mathbf{R} \cdot \mathbf{D} = \left(\begin{array}{ccc|ccc} \alpha^2 + \alpha + 1 & \alpha^2 + 2\alpha + 2 & \alpha^2 + \alpha + 1 & \alpha^2 + \alpha + 2 & \alpha^2 + \alpha + 2 & \alpha^2 + 2\alpha + 1 \\ 2\alpha^2 + \alpha + 2 & 2\alpha^2 + \alpha + 1 & \alpha^2 & 2\alpha^2 + \alpha & 2\alpha^2 + \alpha & \alpha^2 + 1 \end{array} \right). \end{aligned}$$

Observe, that $\tilde{\mathbf{R}}$ is the transformed codeword $\tilde{\mathbf{C}}(\mathbf{f}) = \mathbf{C}(\mathbf{f})\mathbf{D} \in \text{ILRS}[\tilde{\beta}, \mathbf{a}, \ell, s; \mathbf{n}, k]$ corresponding to the message polynomials in $\mathbf{f} = (f_1, f_2)$ that is corrupted by the transformed error

$$\tilde{\mathbf{E}} = \mathbf{E}\mathbf{D} = \left(\begin{array}{ccc|ccc} 2\alpha^2 + 1 & 0 & 0 & 2 & 0 & 0 \\ \alpha^2 + \alpha + 1 & 0 & 0 & 2\alpha^2 + 1 & 0 & 0 \end{array} \right)$$

of sum-rank weight t whose $n_i - t_i = 2$ rightmost columns in each block are zero. Hence, the two rightmost columns in each block of $\tilde{\mathbf{R}}$ are equal to the two rightmost columns in each block of $\tilde{\mathbf{C}}(\mathbf{f})$ which allows for recovering the message polynomials $f_1(x)$ and $f_2(x)$ via Lagrange interpolation.

D. An Interpolation-Based Decoding Approach for ILRS Codes

In the previous subsection we derived a Loidreau–Overbeck-like probabilistic unique decoder for ILRS codes that requires at most $O(sn^\omega)$ operations in \mathbb{F}_{q^m} (see Theorem 1). We now derive a fast Wachter-Zeh–Zeh-like [34] interpolation-based decoding scheme for ILRS codes which can either be used as a list decoder (with not necessarily polynomial-time list size) or as probabilistic unique decoder, which either returns a unique solution (if it exists) or a decoding failure. In the course of this section we will derive the main result which is stated in Theorem 2.

Theorem 2 (List Decoding of ILRS Codes) Consider a received word $\mathbf{R} = \mathbf{C} + \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ where $\mathbf{C} \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ is a codeword of an s -interleaved ILRS code. If $t = \text{wt}_{\Sigma R}(\mathbf{E})$ satisfies

$$t < \frac{s}{s+1}(n - k + 1)$$

then a list \mathcal{L} of size

$$|\mathcal{L}| \leq q^{m(k(s-1))}$$

containing all message polynomial vectors $\mathbf{f} \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ that correspond to codewords $\mathbf{C}(\mathbf{f}) \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ satisfying $d_{\Sigma R}(\mathbf{C}(\mathbf{f}), \mathbf{R}) < \frac{s}{s+1}(n - k + 1)$ can be found requiring at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} .

Since $\mathcal{M}(n) \in O(n^{1.635})$ (see (9)) and for most applications we have that $s \ll n$, the proposed interpolation-based decoder is *subquadratic* in the code length n and thus faster compare to the Loidreau–Overbeck-like decoder from Section III-C.

Suppose we transmit a codeword $\mathbf{C}(\mathbf{f}) \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ over a sum-rank channel (11) and receive a matrix $\mathbf{R} \in \mathbb{F}_{q^m}^{s \times n}$ that is corrupted by an error matrix $\mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ of sum-rank weight t .

1) *Interpolation Step:* For a multivariate skew polynomial of the form

$$Q(x, y_1, \dots, y_s) = Q_0(x) + Q_1(x)y_1 + \dots + Q_s(x)y_s \quad (19)$$

where $Q_l(x) \in \mathbb{F}_{q^m}[x, \sigma]$ for all $l \in [0, s]$ define the n generalized operator evaluation maps

$$\mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma] \times \mathbb{F}_{q^m}^{s+1} \rightarrow \mathbb{F}_{q^m} \\ \left(Q, (\beta_j^{(i)}, r_{1,j}^{(i)}, \dots, r_{s,j}^{(i)}) \right) \mapsto \mathcal{E}_j^{(i)}(Q) := Q_0(\beta_j^{(i)})_{a_i} + \sum_{l=1}^s Q_l(r_{l,j}^{(i)})_{a_i} \quad (20)$$

for all $i = 1, \dots, \ell$ and $j = 1, \dots, n_i$.

Consider the following interpolation problem in the skew polynomial ring $\mathbb{F}_{q^m}[x, \sigma]$.

Problem 1 (ILRS Interpolation Problem) Given the integers $D, s, \ell \in \mathbb{Z}_{\geq 0}$, a set

$$\mathcal{E} = \left\{ \mathcal{E}_j^{(i)} : i = 1, \dots, \ell, j = 1, \dots, n_i \right\}$$

containing the generalized operator evaluation maps defined in (20) and a vector $\mathbf{w} = (0, k-1, \dots, k-1) \in \mathbb{Z}_{\geq 0}^{s+1}$, find a nonzero polynomial of the form

$$Q(x, y_1, \dots, y_s) = Q_0(x) + Q_1(x)y_1 + \dots + Q_s(x)y_s$$

with $Q_l(x) \in \mathbb{F}_{q^m}[x, \sigma]$ for all $l \in [0, s]$ that satisfies:

- 1) $\mathcal{E}_j^{(i)}(Q) = 0, \quad \forall i = 1, \dots, \ell, j = 1, \dots, n_i,$
- 2) $\deg_{\mathbf{w}}(Q) < D.$

Defining the skew polynomials

$$Q_0(x) = \sum_{i=0}^{D-1} q_{0,i} x^i \quad \text{and} \quad Q_j(x) = \sum_{i=0}^{D-k} q_{j,i} x^i,$$

a solution of Problem 1 can be found by solving the \mathbb{F}_{q^m} -linear system

$$\mathbf{R}_I \mathbf{q} = \mathbf{0} \quad (21)$$

for

$$\mathbf{q} = (q_{0,0}, q_{0,1}, \dots, q_{0,D-1} \mid q_{1,0}, q_{1,1}, \dots, q_{1,D-k} \mid \dots \mid q_{s,0}, q_{s,1}, \dots, q_{s,D-k}) \quad (22)$$

where the interpolation matrix $\mathbf{R}_I \in \mathbb{F}_{q^m}^{n \times D(s+1) - s(k-1)}$ is given by

$$\mathbf{R}_I = (\lambda_D(\boldsymbol{\beta})_{\mathbf{a}}^\top \quad \lambda_{D-k+1}(\mathbf{r}_1)_{\mathbf{a}}^\top \quad \dots \quad \lambda_{D-k+1}(\mathbf{r}_s)_{\mathbf{a}}^\top). \quad (23)$$

Problem 1 can be solved using the Kötter interpolation over skew polynomial rings [78] in $O(s^2 n^2)$ operations in \mathbb{F}_{q^m} . A solution of Problem 1 can be found efficiently requiring only $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} using a variant of the minimal approximant bases approach from [37], which we derive in Section IV-B (cf. Corollary 1). Another approach yielding the same computational complexity of $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} is given by the fast divide-and-conquer Kötter interpolation from [79].

Lemma 8 (Existence of Solution) *A nonzero solution of Problem 1 exists if*

$$D = \left\lceil \frac{n+s(k-1)+1}{s+1} \right\rceil.$$

Proof: Problem 1 corresponds to a system of n \mathbb{F}_{q^m} -linear equations in $D(s+1) - s(k-1)$ unknowns (see (21)) which has a nonzero solution if the number of equations is less than the number of unknowns, i.e. if

$$n < D(s+1) - s(k-1) \iff D \geq \frac{n+s(k-1)+1}{s+1}. \quad (24)$$

The \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1 is defined as

$$\mathcal{Q} := \{Q \in \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma] : \mathbf{q}(Q) \in \ker_r(\mathbf{R}_I)\}$$

where $\mathbf{q}(Q) \in \mathbb{F}_{q^m}^{D(s+1) - s(k-1)}$ is the coefficient vector of Q as defined in (22). The dimension of the \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1 (i.e. the dimension of the right kernel of \mathbf{R}_I in (23)) is denoted by

$$d_I := \dim(\mathcal{Q}) = \dim(\ker_r(\mathbf{R}_I)).$$

All polynomials of the form (19) that satisfy Condition 1 of Problem 1 form a (free) left $\mathbb{F}_{q^m}[x, \sigma]$ -module

$$\mathcal{K} = \{Q \in \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma] : \mathcal{E}_j^{(i)}(Q) = 0, \forall i = 1, \dots, \ell, j = 1, \dots, n_i\},$$

which we further call the *interpolation module*. Note, that \mathcal{K} contains also polynomials that have degree larger or equal than D . By restricting the degree of the elements in \mathcal{K} to at most $D-1$, we have that \mathcal{Q} coincides with $\mathcal{K} \cap \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]_{<D}$.

2) *Root-Finding Step:* The goal of the root-finding step is to recover the message polynomials $f_1, \dots, f_s \in \mathbb{F}_{q^m}[x, \sigma]_{<k}$ from the multivariate polynomial constructed in the interpolation step. Therefore, we need the following results.

Lemma 9 (Roots of Polynomial) *Let*

$$P(x) := Q_0(x) + Q_1(x)f_1(x) + \dots + Q_s(x)f_s(x).$$

Then there exist elements $\zeta_1^{(i)}, \dots, \zeta_{n_i-t_i}^{(i)}$ in \mathbb{F}_{q^m} that are \mathbb{F}_q -linearly independent for each $i = 1, \dots, \ell$ such that

$$P(\zeta_j^{(i)})_{a_i} = 0$$

for all $i = 1, \dots, \ell$ and $j = 1, \dots, n_i - t_i$.

Proof: The proof exploits the \mathbb{F}_q -linearity of the generalized operator evaluation (per block) which allows to transform the \mathbb{F}_q -rank errors (per block) into corrupted and non-corrupted columns. By definition, the sum-rank weight of \mathbf{E} equals $t = \sum_{i=1}^{\ell} t_i$, where $t_i = \text{rk}_q(\mathbf{E}^{(i)})$. Hence, there exist nonsingular matrices $\mathbf{T}^{(i)} \in \mathbb{F}_q^{n_i \times n_i}$ such that the $\mathbf{E}^{(i)}\mathbf{T}^{(i)}$ has only t_i nonzero columns for all $i = 1, \dots, \ell$. Now assume w.l.o.g. that the matrices $\mathbf{T}^{(i)}$ are chosen such that only the last t_i columns of $\mathbf{E}^{(i)}\mathbf{T}^{(i)}$ are nonzero for all $i = 1, \dots, \ell$. Define $\boldsymbol{\zeta}^{(i)} = \boldsymbol{\beta}^{(i)}\mathbf{T}^{(i)}$. Since we have that $\text{rk}_q(\boldsymbol{\beta}^{(i)}) = n_i$ and $\mathbf{T}^{(i)}$ is invertible, we have that $\text{rk}_q(\boldsymbol{\zeta}^{(i)}) = n_i$ for all $i = 1, \dots, \ell$. Then we have that the first $n_i - t_i$ columns of $\mathbf{R}^{(i)}\mathbf{T}^{(i)}$ are non-corrupted and given by

$$\begin{pmatrix} f_1(\zeta_1^{(i)})_{a_i} & \dots & f_1(\zeta_{n_i-t_i}^{(i)})_{a_i} \\ \vdots & \ddots & \vdots \\ f_s(\zeta_1^{(i)})_{a_i} & \dots & f_s(\zeta_{n_i-t_i}^{(i)})_{a_i} \end{pmatrix} \in \mathbb{F}_{q^m}^{s \times (n_i-t_i)},$$

for all $i = 1, \dots, \ell$. By Lemma 2 and the interpolation conditions in Problem 1 we have

$$P(\zeta_j^{(i)})_{a_i} = Q_0(\zeta_j^{(i)})_{a_i} + Q_1(f_1(\zeta_j^{(i)})_{a_i})_{a_i} + \dots + Q_s(f_s(\zeta_j^{(i)})_{a_i})_{a_i} = 0$$

for all $i = 1, \dots, \ell$ and $j = 1, \dots, n_i - t_i$ and the statement follows. \blacksquare

Theorem 3 (Decoding Radius) *Let $C(\mathbf{f})$ be a codeword from $\text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ and let $\mathbf{R} = C(\mathbf{f}) + \mathbf{E}$ be the received word. Further, let $Q(x, y_1, \dots, y_s) \neq 0$ fulfill the constraints in Problem 1. If $t = \text{wt}_{\Sigma R}(\mathbf{E})$ satisfies*

$$t < \frac{s}{s+1}(n - k + 1) \quad (25)$$

then

$$P(x) = Q_0(x) + Q_1(x)f_1(x) + \dots + Q_s(x)f_s(x) = 0. \quad (26)$$

Proof: By Lemma 9 there exist elements $\zeta_1^{(i)}, \dots, \zeta_{n_i - t_i}^{(i)}$ in \mathbb{F}_{q^m} that are \mathbb{F}_q -linearly independent for each $i = 1, \dots, \ell$ such that

$$P(\zeta_j^{(i)})_{a_i} = 0$$

for all $i = 1, \dots, \ell$ and $j = 1, \dots, n_i - t_i$. By choosing

$$D \leq n - t \quad (27)$$

the degree of $P(x)$ exceeds the degree bound from Proposition 1 which is possible only if $P(x) = 0$. Combining (24) and (27) we get

$$\begin{aligned} n + s(k - 1) &< D(s + 1) \leq (s + 1)(n - t) \\ \iff t &< \frac{s}{s + 1}(n - k + 1). \end{aligned}$$

Theorem 3 shows, that the message polynomials $f_1, \dots, f_s \in \mathbb{F}_{q^m}[x, \sigma]_{<k}$ satisfy (25) if the sum-rank weight of the error lies within the decoding radius in (25). The decoding region in (25) shows a significantly improved (burst) error-correction performance due to interleaving.

In the root-finding step, all polynomials $f_1, \dots, f_s \in \mathbb{F}_{q^m}[x, \sigma]_{<k}$ that satisfy (26) need to be found. In order minimize the number of solutions of the root-finding problem one may use a basis of the \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1 instead of only considering only a single single solution (see [34]).

In [80] it was shown that using a degree-restricted subset of a Gröbner basis (of cardinality at most s) for the interpolation module \mathcal{K} w.r.t. \prec_w is sufficient to achieve the minimal number of solutions of the root-finding problem. Although the results in [80] we derived for linearized polynomial modules, they carry over to skew polynomial modules since the structure of the corresponding problems (including the noncommutativity) is the same. For details about solving the root-finding problem using Gröbner bases the reader is referred to [80].

We now use this approach to obtain the minimal number of solutions of the root-finding problem. Let $\mathcal{B} \subset \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$ be a basis for the interpolation module \mathcal{K} such that the left $\mathbb{F}_{q^m}[x, \sigma]$ -span of the polynomials in the degree-restricted subset

$$\mathcal{B}_{<D} := \{Q \in \mathcal{B} : \deg_w(Q) < D\} \subseteq \mathcal{Q}$$

contains \mathcal{Q} . Examples of bases \mathcal{B} where the degree-restricted subset $\mathcal{B}_{<D} \subseteq \mathcal{Q}$ spans \mathcal{Q} are minimal Gröbner bases w.r.t. \prec_w and w -ordered weak-Popov approximant bases for the interpolation module \mathcal{K} . Minimal Gröbner bases for \mathcal{K} w.r.t. \prec_w can be computed efficiently using the multivariate Kötter interpolation over skew polynomial rings from [78], [79]. An efficient method to construct w -ordered weak-Popov approximant bases for \mathcal{K} is given in Section IV-B.

Let the polynomials $Q^{(1)}, \dots, Q^{(s')} \in \mathcal{B}_{<D}$ be given by

$$Q^{(r)} = Q_0^{(r)} + Q_1^{(r)}y_1 + \dots + Q_s^{(r)}y_s$$

with

$$Q_0^{(r)}(x) = \sum_{i=0}^{D-1} q_{0,i}^{(r)} x^i \quad \text{and} \quad Q_j^{(r)}(x) = \sum_{i=0}^{D-k} q_{j,i}^{(r)} x^i, \quad \forall j = 1, \dots, s$$

for all $r = 1, \dots, s'$. By using the same arguments as in [80, Lemma 5.4] one can show that $s' := |\mathcal{B}_{<D}|$ satisfies $1 \leq s' \leq s$.

Define the matrices

$$\sigma^i(\mathbf{Q}_j) := \begin{pmatrix} \sigma^i(q_{1,j}^{(1)}) & \sigma^i(q_{2,j}^{(1)}) & \dots & \sigma^i(q_{s,j}^{(1)}) \\ \vdots & \vdots & \ddots & \vdots \\ \sigma^i(q_{1,j}^{(s')}) & \sigma^i(q_{2,j}^{(s')}) & \dots & \sigma^i(q_{s,j}^{(s')}) \end{pmatrix} \in \mathbb{F}_{q^m}^{s' \times s}$$

Algorithm 2: LIST DECODING OF ILRS CODES

Input : Channel output $\mathbf{R} = \mathbf{C} + \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ where $\mathbf{C} \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ and $\text{wt}_{\Sigma R}(\mathbf{E}) = t < \frac{s}{s+1}(n - k + 1)$.

Output: A list \mathcal{L} containing message polynomial vectors $\mathbf{f} = (f_1, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ that satisfy (26).

- 1 Find left $\mathbb{F}_{q^m}[x, \sigma]$ -linearly independent $Q^{(1)}, \dots, Q^{(s')} \in \mathcal{Q} \setminus \{0\}$ whose left $\mathbb{F}_{q^m}[x, \sigma]$ -span contains the \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1.
 - 2 Using $Q^{(1)}, \dots, Q^{(s')}$, find the list $\mathcal{L} \subseteq \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ of all $\mathbf{f} = (f_1, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ that satisfy (26).
 - 3 **return** \mathcal{L}
-

4) *Probabilistic Unique Decoding:* We now consider the proposed interpolation-based decoder for ILRS codes as a probabilistic unique decoder which either returns a unique solution (if the list size is equal to one) or a decoding failure.

Using similar arguments as in [34, Lemma 3] we can lower bound the dimension d_I of the \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1.

Lemma 10 (Dimension of Solution Space) *Let t satisfy (25). Then the dimension $d_I = \dim(\mathcal{Q})$ of the \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1 satisfies*

$$d_I \geq s(D + 1) - sk - t.$$

Proof: By \mathbb{F}_q -linear row operations and permutations and \mathbb{F}_{q^m} -linear column operations we can bring the interpolation matrix \mathbf{R}_I in (23) into a matrix of the form

$$\tilde{\mathbf{R}}_I = \begin{pmatrix} \lambda_D(\zeta)_{\mathbf{a}}^\top & \mathbf{0} & \cdots & \mathbf{0} \\ \lambda_D(\epsilon)_{\mathbf{a}}^\top & \lambda_{D-k+1}(\tilde{\epsilon}_1)_{\mathbf{a}}^\top & \cdots & \lambda_{D-k+1}(\tilde{\epsilon}_s)_{\mathbf{a}}^\top \end{pmatrix} \in \mathbb{F}_{q^m}^{n \times D(s+1) - s(k-1)}$$

where $\zeta = (\zeta^{(1)} \mid \zeta^{(2)} \mid \cdots \mid \zeta^{(\ell)}) \in \mathbb{F}_{q^m}^{n-t}$ with $\zeta^{(i)} = (\zeta_1^{(i)}, \dots, \zeta_{n_i-t_i}^{(i)}) \in \mathbb{F}_{q^m}^{n_i-t_i}$ and $\text{rk}_q(\zeta^{(i)}) = n_i - t_i$ for all $i = 1, \dots, \ell$ and $\epsilon, \tilde{\epsilon}_j \in \mathbb{F}_{q^m}^t$ for all $j = 1, \dots, s$. By Proposition 2 and the fact that $D \leq n - t$ (see (27)) the matrix $\lambda_D(\zeta)_{\mathbf{a}}^\top \in \mathbb{F}_{q^m}^{(n-t) \times D}$ has \mathbb{F}_{q^m} -rank D since the entries in ζ are block-wise \mathbb{F}_q -linearly independent and the entries in \mathbf{a} are representatives from different conjugacy classes of \mathbb{F}_{q^m} . The last t rows of $\tilde{\mathbf{R}}_I$ can increase the \mathbb{F}_{q^m} -rank by at most t and thus $\text{rk}_{q^m}(\mathbf{R}_I) = \text{rk}_{q^m}(\tilde{\mathbf{R}}_I) \leq D + t$. Hence, the dimension d_I of the \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1 satisfies

$$\begin{aligned} d_I &= \dim(\ker_r(\mathbf{R}_I)) = D(s+1) - s(k-1) - \text{rk}_{q^m}(\mathbf{R}_I) \\ &\geq s(D+1) - sk - t. \end{aligned}$$

The rank of the root-finding matrix \mathbf{Q}_R can be full if and only if the dimension of the solution space of the interpolation problem $d_I = \dim(\mathcal{Q})$ is at least s , i.e. if

$$\begin{aligned} d_I \geq s &\iff t \leq sD - sk \\ &\iff t \leq \frac{s}{s+1}(n - k). \end{aligned} \tag{31}$$

The probabilistic unique decoding region in (31) is only slightly smaller than the list decoding region in (25). Combining the decoding condition $D \leq n_t - \delta$ and (31) we get the degree constraint for the probabilistic unique decoder (see also [80])

$$D_u = \left\lceil \frac{n + sk}{s + 1} \right\rceil.$$

In order to get an estimate probability of successful decoding, we may use similar assumptions as in [34] to derive a heuristic upper bound on the decoding failure probability. Under the assumption that the coefficients $q_{i,j}^{(r)}$ are uniformly distributed over \mathbb{F}_{q^m} (see [34, Lemma 9]) one can derive a heuristic upper bound on the decoding failure probability P_f as

$$P_f \leq \kappa_q q^{-m(d_I - s + 1)} \leq \kappa_q q^{-m(s(\lceil \frac{n+sk}{s+1} \rceil - k) - t + 1)}. \tag{32}$$

By reducing the conditions of successful decoding of the interpolation-based decoder to the conditions of the Loidreau–Overbeck-like decoder from Section III-C we obtain an upper bound on the decoding failure probability that takes into account the distribution of the error matrix \mathbf{E} . The results of the interpolation-based probabilistic unique decoder are summarized in Algorithm 3 and Theorem 4.

Theorem 4 (Probabilistic Unique Decoding of ILRS Codes) *Consider a received word $\mathbf{R} = \mathbf{C} + \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ where $\mathbf{C} \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ is a codeword of an s -interleaved ILRS code and \mathbf{E} is chosen uniformly at random from all matrices from $\mathbb{F}_{q^m}^{s \times n}$ of sum-rank weight t . If $t = \text{wt}_{\Sigma R}(\mathbf{E})$ satisfies*

$$t \leq t_{\max} := \frac{s}{s+1}(n - k)$$

Algorithm 3: PROBABILISTIC UNIQUE DECODING OF ILRS CODES

Input : Channel output $\mathbf{R} = \mathbf{C} + \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ where $\mathbf{C} \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ and $\text{wt}_{\Sigma R}(\mathbf{E}) = t$.

Output: Message polynomial vector $\mathbf{f} = (f_1, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ or “decoding failure”

- 1 Find left $\mathbb{F}_{q^m}[x, \sigma]$ -linearly independent $Q^{(1)}, \dots, Q^{(s')} \in \mathcal{Q} \setminus \{0\}$ whose left $\mathbb{F}_{q^m}[x, \sigma]$ -span contains the \mathbb{F}_{q^m} -linear solution space \mathcal{Q} of Problem 1.
 - 2 **if** $s' = s$ **then**
 - 3 Use $Q^{(1)}, \dots, Q^{(s)}$ to find the unique vector $\mathbf{f} = (f_1, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ that satisfies (26)
 - 4 **return** Message polynomial vector $\mathbf{f} = (f_1, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$
 - 5 **else**
 - 6 **return** “decoding failure”
-

then the unique message polynomial vector $\mathbf{f} \in \mathbb{F}_{q^m}[x, \sigma]_{<k}^s$ corresponding to the codeword $\mathbf{C}(\mathbf{f}) \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; \mathbf{n}, k]$ can be found with probability at least

$$1 - \kappa_q^\ell q^{-m((s+1)(t_{\max}-t)+1)}$$

requiring at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} .

Proof: For the purpose of the proof (but not algorithmically), we consider the root-finding problem set up with an \mathbb{F}_{q^m} -basis $Q^{(1)}, \dots, Q^{(d_I)}$ of \mathcal{Q} . The unique decoder fails if there are at least two distinct roots \mathbf{f} and \mathbf{f}' . In this case, the \mathbb{F}_{q^m} -linear system $\mathbf{Q}_R \cdot \mathbf{f}_R = -\mathbf{q}_0$ in (30) set up with the \mathbb{F}_{q^m} -basis $\tilde{Q}^{(r)} \in \mathcal{Q}$ for $r = 1, \dots, d_I$ has at least two solutions. This means that $\mathbf{Q}_R \in \mathbb{F}_q^{D d_I \times s k}$ must have rank $< s k$.

The matrix \mathbf{Q}_R contains a lower block triangular matrix with matrices $\mathbf{Q}_0, \sigma^{-1}(\mathbf{Q}_0), \dots, \sigma^{-(k-1)}(\mathbf{Q}_0)$ on the upper diagonal, which have all \mathbb{F}_{q^m} -rank $\text{rk}_{q^m}(\mathbf{Q}_0)$ (see Lemma 3). Thus, if $\text{rk}_{q^m}(\mathbf{Q}_0) = s$ the matrix \mathbf{Q}_R has full \mathbb{F}_{q^m} -rank $s k$. Therefore, $\text{rk}_{q^m}(\mathbf{Q}_R) < s k$ implies that \mathbf{Q}_0 has rank $< s$.

Since the root-finding system (30) has at least one solution \mathbf{f}_R , there is a vector $\mathbf{f}_0 \in \mathbb{F}_{q^m}^s$ such that

$$\mathbf{Q}_0 \mathbf{f}_0 = -\mathbf{q}_{0,0}^\top.$$

Thus, the matrix

$$\overline{\mathbf{Q}}_0 := (\mathbf{Q}_0 \quad \mathbf{q}_{0,0}^\top) \in \mathbb{F}_{q^m}^{d_I \times (s+1)}$$

has rank $\text{rk}_{q^m}(\overline{\mathbf{Q}}_0) = \text{rk}_{q^m}(\mathbf{Q}_0) < s$. Hence, there are at least $d_I - s + 1$ \mathbb{F}_{q^m} -linearly independent polynomials $\tilde{Q}^{(1)}, \dots, \tilde{Q}^{(d_I-s+1)} \in \mathcal{Q}$ such that their zeroth coefficients $\tilde{q}_{l,0}^{(1)}, \dots, \tilde{q}_{l,0}^{(d_I-s+1)}$ are zero for all $l = 0, \dots, s$ (obtained by suitable \mathbb{F}_{q^m} -linear combinations of the original basis polynomials $Q^{(1)}, \dots, Q^{(d_I)}$, such that the corresponding \mathbb{F}_{q^m} -linear row operations on $\overline{\mathbf{Q}}_0$ give a $(d_I - s + 1) \times (s + 1)$ zero matrix (recall that $\overline{\mathbf{Q}}_0$ has d_I rows, but rank at most $s - 1$).

The $d_I - s + 1$ \mathbb{F}_{q^m} -linearly independent coefficient vectors of $\tilde{Q}^{(1)}, \dots, \tilde{Q}^{(d_I-s+1)}$ of the form (22) are in the left kernel of the matrix

$$\mathbf{R}_I^\top = \begin{bmatrix} \lambda_D(\beta) \mathbf{a} \\ \lambda_{D-k+1}(\mathbf{r}_1) \mathbf{a} \\ \vdots \\ \lambda_{D-k+1}(\mathbf{r}_s) \mathbf{a} \end{bmatrix} \in \mathbb{F}_{q^m}^{D(s+1)-s(k-1) \times n}.$$

Since the zeroth components $\tilde{q}_{l,0}^{(r)}$ of all $\tilde{Q}^{(r)}$ are zero for all $l = 0, \dots, s$ and $r = 1, \dots, d_I - s + 1$, this means that the left kernel of the matrix

$$\tilde{\mathbf{R}}_I^\top = \begin{bmatrix} \mathcal{D}_\mathbf{a}(\lambda_{D-1}(\beta) \mathbf{a}) \\ \mathcal{D}_\mathbf{a}(\lambda_{D-k}(\mathbf{r}_1) \mathbf{a}) \\ \vdots \\ \mathcal{D}_\mathbf{a}(\lambda_{D-k}(\mathbf{r}_s) \mathbf{a}) \end{bmatrix} \in \mathbb{F}_{q^m}^{D(s+1)-sk-1 \times n}$$

has dimension at least $d_I - s + 1$. The maximum decoding radius t_{\max} corresponds to the degree constraint $D = n - t_{\max}$ (see (27)) and thus

$$\begin{aligned} \dim(\ker_l(\tilde{\mathbf{R}}_I^\top)) &\geq d_I - s + 1 \\ &\geq s(n - t_{\max} + 1) - sk - t_{\max} - s + 1 \\ &\geq 1. \end{aligned}$$

Therefore, we have that

$$\begin{aligned} \text{rk}_{q^m}(\tilde{\mathbf{R}}_I^\top) &\leq D(s+1) - sk - 1 - \dim(\ker_l(\tilde{\mathbf{R}}_I^\top)) \\ &< D(s+1) - sk - 1 \\ &= (n - t_{\max})(s+1) - sk - 1 \\ &= n - 1. \end{aligned}$$

Observe, that for $D = n - t_{\max}$ we have that

$$\tilde{\mathbf{R}}_I^\top = \mathcal{D}_a(\mathbf{L})$$

where \mathbf{L} is the Loidreau–Overbeck decoding matrix from (14). By Lemma 3 the \mathbb{F}_{q^m} -rank of \mathbf{L} and $\rho(\mathbf{L})_a$ is the same and thus we have that

$$\text{rk}_{q^m}(\mathbf{L}) = \text{rk}_{q^m}(\tilde{\mathbf{R}}_I^\top) < n - 1$$

which shows that in this case the Loidreau–Overbeck decoder fails as well. Therefore, we conclude that

$$\Pr(\text{rk}_{q^m}(\mathbf{Q}_R) < sk) \leq \Pr(\text{rk}_{q^m}(\mathbf{Q}_0) < s) \leq \Pr(\text{rk}_{q^m}(\mathbf{L}) < n - 1)$$

and thus the lower bound on the probability of successful decoding follows from Theorem 1. The complexity statement follows from Corollary 1 and Corollary 2. \blacksquare

The lower bound on the probability of successful decoding in Theorem 4 yields also an upper bound on the decoding failure probability P_f , i.e. we have that

$$P_f \leq \kappa_q^{\ell+1} q^{-m((s+1)(t_{\max}-t)+1)}. \quad (33)$$

The normalized decoding radius $\tau := t/n$ for ILRS codes is $\tau \approx \frac{s}{s+1}(1-R)$. The improvement of the normalized decoding radius upon the normalized BMD radius is illustrated in Figure 4. The simulations results in Section III-E show that the upper

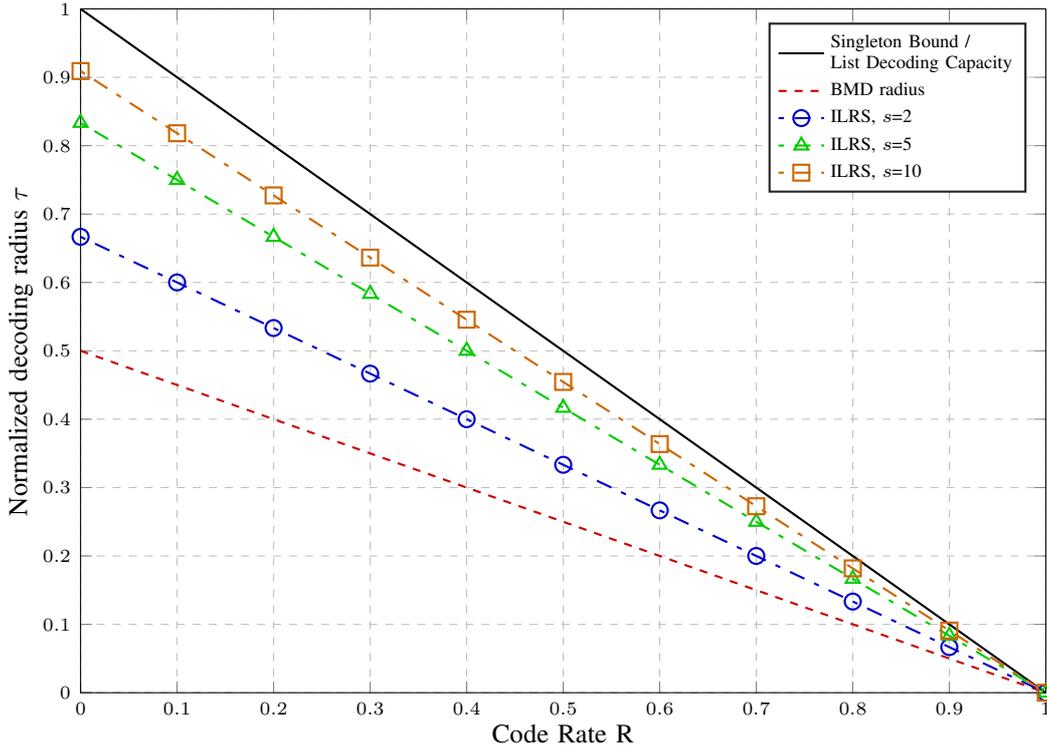


Fig. 4. Normalized decoding radius τ of ILRS codes over the code rate R for interleaving orders $s \in \{2, 5, 10\}$.

bound on the decoding failure probability in (33) gives a good estimate on the expected success probability of the probabilistic unique decoder.

The interpolation-based probabilistic unique decoding scheme for ILRS codes is illustrated in Example 4.

Example 4 (Interpolation-Based Decoding) Consider again the code $\text{ILRS}[\beta, \alpha, \ell, s; \mathbf{n}, k]$, the codeword $\mathbf{C}(\mathbf{f})$ from (17) and received word \mathbf{R} from (18) considered in Example 3. The interpolation points corresponding to the $n = 6$ evaluation maps $\mathcal{E}_1^{(1)}, \dots, \mathcal{E}_3^{(2)}$ are the columns of the matrix

$$\begin{pmatrix} \beta \\ \mathbf{R} \end{pmatrix} = \left(\begin{array}{ccc|ccc} 1 & \alpha & \alpha^2 & 1 & \alpha & \alpha^2 \\ 2\alpha^2 & 2\alpha^2 + 2\alpha + 2 & \alpha^2 + \alpha + 1 & 2\alpha^2 & 2\alpha + 1 & 2\alpha^2 + \alpha + 2 \\ \alpha + 1 & \alpha + 2 & 2\alpha^2 + \alpha + 2 & \alpha + 1 & \alpha^2 + \alpha + 2 & 2\alpha^2 + 2 \end{array} \right).$$

First, we compute $\mathbb{F}_{q^m}[x, \sigma]$ -linearly independent polynomials of minimal $\mathbf{w} = (0, 2, 2)$ -weighted degree that span the solution space of Problem 1 as

$$\begin{aligned} Q^{(1)} &= ((\alpha^2 + 2\alpha)x^2 + (2\alpha^2 + \alpha + 2)x + \alpha^2 + \alpha + 2) + (x + 2\alpha^2 + 2\alpha + 1)y_1 + (2\alpha^2 + \alpha)y_2 \\ Q^{(2)} &= (2x^3 + (2\alpha^2 + 2\alpha + 1)x^2 + \alpha^2x + 2) + ((2\alpha^2 + 2)x + 2\alpha)y_1 + (x + 2\alpha^2 + \alpha + 1)y_2 \end{aligned}$$

using e.g. the skew Kötter interpolation from [78]. Since the \mathbf{w} -weighted degree of the $s = 2$ polynomials $Q^{(1)}$ and $Q^{(2)}$ is less than $D = 4$, our decoding problem has a unique solution (cf. Proposition 4).

Next, using the coefficients of $Q^{(1)}$ and $Q^{(2)}$ we set up the root-finding matrix \mathbf{Q}_R as (see (28))

$$\mathbf{Q}_R = \begin{pmatrix} 2\alpha^2 + 2\alpha + 1 & 2\alpha^2 + \alpha & 0 & 0 & 0 & 0 \\ & 2\alpha & 2\alpha^2 + \alpha + 1 & 0 & 0 & 0 \\ & 1 & 0 & 2\alpha^2 + 2 & 2\alpha^2 + 2\alpha & 0 \\ 2\alpha^2 + \alpha + 1 & 1 & 2\alpha + 2 & 2\alpha^2 + 2\alpha + 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 2\alpha^2 + \alpha + 1 & 2\alpha^2 + 1 \\ 0 & 0 & 2\alpha^2 + 2\alpha + 1 & 1 & 2\alpha + 1 & 2\alpha^2 + 2 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 2\alpha^2 + 2 & 1 \end{pmatrix}$$

and the vector \mathbf{q}_0 as (see (29))

$$\mathbf{q}_0 = (\alpha^2 + \alpha + 2, 2, 2\alpha^2 + 2\alpha + 2, \alpha^2 + 2\alpha + 1, \alpha^2 + 2, 2\alpha^2 + \alpha + 1, 0, 2)^\top.$$

The unique solution of the \mathbb{F}_{q^m} -linear root-finding system $\mathbf{Q}_R \cdot \mathbf{f}_R = -\mathbf{q}_0$ in (30) is

$$\begin{aligned} \mathbf{f}_R &:= (f_0^{(1)}, f_0^{(2)}, \sigma^{-1}(f_1^{(1)}), \sigma^{-1}(f_1^{(2)}), \sigma^{-2}(f_2^{(1)}), \sigma^{-2}(f_2^{(2)})) \\ &= (2\alpha^2, \alpha^2, 0, 2\alpha^2 + 2\alpha, 0, 1)^\top. \end{aligned}$$

Considering the structure of \mathbf{f}_R (cf. (29)) we can recover the message polynomials

$$\begin{aligned} f_1(x) &= 2\alpha^2 + \sigma(0)x + \sigma^2(0)x^2 = 2\alpha^2 \\ f_2(x) &= \alpha^2 + \sigma(2\alpha^2 + 2\alpha)x + \sigma^2(1)x^2 = \alpha^2 + (2\alpha^2 + \alpha)x + x^2 \end{aligned}$$

which correspond to the transmitted codeword $\mathbf{C}(\mathbf{f})$.

E. Comparison to Previous Work and Simulation Results

In order to evaluate the upper bound on the decoding failure probability in (33) we performed a Monte Carlo simulation (100 errors) of a code $\text{ILRS}[\beta, \alpha, \ell = 2, s = 4; \mathbf{n} = (4, 4), k = 3]$ over \mathbb{F}_{3^4} over a sum-rank channel (11), where the error matrices we chosen uniformly at random from the set of all error matrices of sum-rank $t \in \{3, 4\}$.

The channel realization is chosen uniformly at random from all possible realizations of the sum-rank channel with exactly this number of weight t errors. For the implementation of the channel model the procedure from [4, Appendix A] was used, which is a variant of enumerative coding [82].

The results in Figure 5 show, that the upper bound in (33) gives a good estimate of the actual decoding failure probability of the decoder. For the same parameters a (non-interleaved) linearized Reed–Solomon code [38] (i.e. $s = 1$) can only correct errors of sum-rank weight up to $t = 2$ (BMD radius).

F. Applications to Decoding Errors in the Skew Metric

The sum-rank metric is closely related to the skew metric, also defined in [6]. In particular, there exists an isometry between the sum-rank metric and the skew metric [6]. We now show how the isometry from [38, Theorem 9] can be modified in order to use ILRS codes for decoding errors beyond the unique decoding radius in the skew metric.

Consider an ILRS code $\text{ILRS}[\beta, \alpha, \ell, s; \mathbf{n}, k]$ and define the vectors

$$\beta^{-1} := \left((\beta_1^{(1)})^{-1}, (\beta_2^{(1)})^{-1}, \dots, (\beta_{n_\ell}^{(\ell)})^{-1} \right)$$

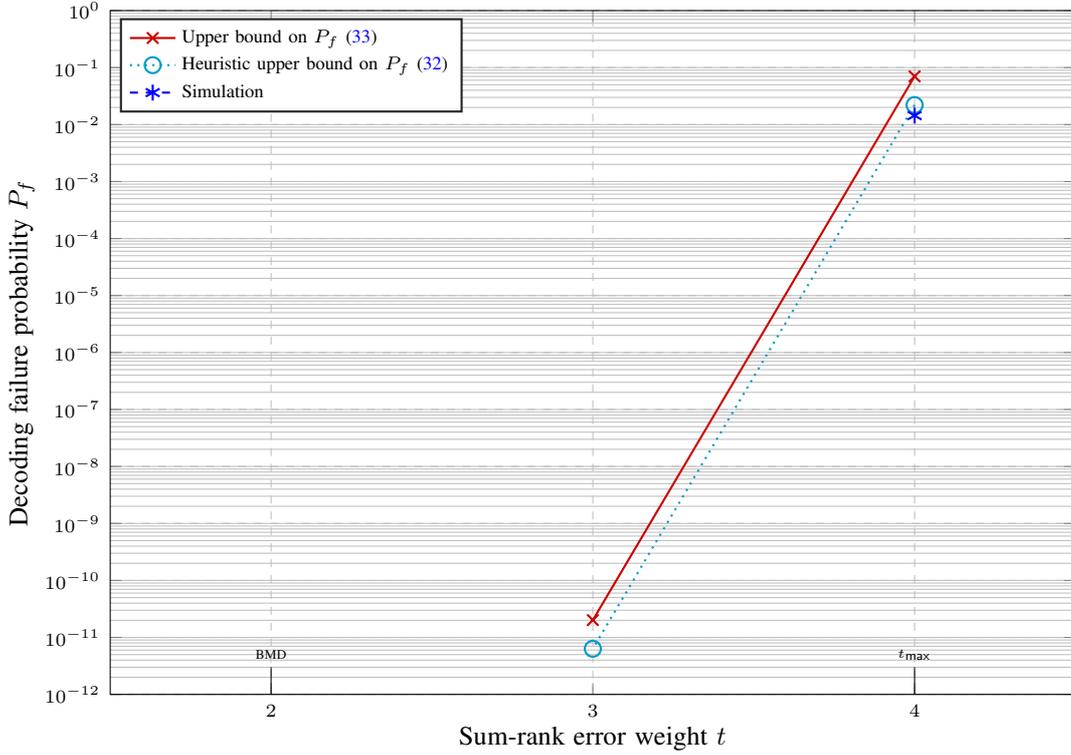


Fig. 5. Result of a Monte Carlo simulation of the code $\text{ILRS}[\beta, \mathbf{a}, \ell = 2, s = 4; n = 8, k = 3]$ over \mathbb{F}_{3^4} transmitted over a sum-rank error channel with overall $t \in \{3, 4\}$.

and

$$\mathbf{b} := \left(\mathcal{D}_{a_1}(\beta^{(1)}) \mid \mathcal{D}_{a_2}(\beta^{(2)}) \mid \dots \mid \mathcal{D}_{a_\ell}(\beta^{(\ell)}) \right) \cdot \text{diag}(\beta^{-1}).$$

Then the *skew weight* of a vector $\mathbf{x} = (\mathbf{x}^{(1)} \mid \mathbf{x}^{(2)} \mid \dots \mid \mathbf{x}^{(\ell)}) \in \mathbb{F}_{q^m}^n$ with $\mathbf{x}^{(i)} \in \mathbb{F}_{q^m}^{n_i}$ for all $i = 1, \dots, \ell$ is defined as (see [56])

$$\text{wt}_{skew}(\mathbf{x}) := \deg \left(\text{lcm} \left(x - \mathcal{D}_{b_j^{(i)}}(x_j^{(i)}) (x_j^{(i)})^{-1} \right)_{x_j^{(i)} \neq 0} \right). \quad (34)$$

By fixing a basis of $\mathbb{F}_{q^{ms}}$ over \mathbb{F}_{q^m} we can consider a matrix $\mathbf{X} \in \mathbb{F}_{q^m}^{s \times n}$ as a vector $\mathbf{x} = (x_1, x_2, \dots, x_n) \in \mathbb{F}_{q^{ms}}^n$. The skew weight of a matrix $\mathbf{X} \in \mathbb{F}_{q^m}^{s \times n}$ with respect to \mathcal{B} is then as the skew weight of the vector $\mathbf{x} \in \mathbb{F}_{q^{ms}}^n$, i.e. as (see (34))

$$\text{wt}_{skew}(\mathbf{X}) := \deg \left(\text{lcm} \left(x - \mathcal{D}_{b_j^{(i)}}(x_j^{(i)}) (x_j^{(i)})^{-1} \right)_{x_j^{(i)} \neq 0} \right) \quad (35)$$

where the polynomial on the right-hand side is now from $\mathbb{F}_{q^{ms}}[\sigma; x]$ since we have that $x_i \in \mathbb{F}_{q^{ms}}$ for all $i = 1, \dots, n$.

Proposition 5 summarizes the isometry between the sum-rank metric and the skew metric for interleaved matrices, which directly follows from [38, Theorem 9] and (35).

Proposition 5 (Isometry Between the Sum-Rank and the Skew Metric) Let $\beta = (\beta^{(1)} \mid \beta^{(2)} \mid \dots \mid \beta^{(\ell)}) \in \mathbb{F}_{q^m}^n$ be a vector with $\text{wt}_{\Sigma R}(\beta) = n$ and define the vectors

$$\beta^{-1} := \left((\beta_1^{(1)})^{-1}, (\beta_2^{(1)})^{-1}, \dots, (\beta_{n_\ell}^{(\ell)})^{-1} \right).$$

Then for a matrix $\mathbf{X} = (\mathbf{X}^{(1)} \mid \mathbf{X}^{(2)} \mid \dots \mid \mathbf{X}^{(\ell)})$ we have that

$$\text{wt}_{skew}(\mathbf{X} \cdot \text{diag}(\beta^{-1})) = \text{wt}_{\Sigma R}(\mathbf{X}).$$

Using the results from above we can define s -interleaved skew Reed–Solomon ISRS codes as

$$\text{ISRS}[\mathbf{b}, \ell, s; n, k] := \{ \mathbf{C} \cdot \text{diag}(\beta^{-1}) : \mathbf{C} \in \text{ILRS}[\beta, \mathbf{a}, \ell, s; n, k] \}.$$

Now suppose we transmit a codeword $\mathbf{C} \in \text{ISRS}[\mathbf{b}, s; n, k]$ over a skew error channel

$$\mathbf{R} = \mathbf{C} + \mathbf{E}$$

where $\mathbf{E} \in \mathbb{F}_{q^m}^{s \times n}$ has skew weight $t = \text{wt}_{\text{skew}}(\mathbf{E})$. Then the decoding schemes from Section III-B can be used to decode ISRS codes as follows:

- 1) Compute $\mathbf{R}' = \mathbf{R} \cdot \text{diag}(\beta^{-1})$. This step requires $O(sn)$ operations in \mathbb{F}_{q^m} .
- 2) Use the list or probabilistic unique decoders from Section III to decode errors of skew weight up to $t \leq \frac{s}{s+1}(n-k)$ requiring at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} .

IV. FAST INTERPOLATION AND ROOT-FINDING VIA MINIMAL APPROXIMANT BASES

In this section we show how to speed up the above described decoding schemes for ILRS codes by reducing the core computation, namely the *interpolation* and the *root-finding* problems, to a *minimal approximant basis* computation of matrices over the relevant skew polynomial ring. This work continues the speed-ups obtained for several code families in the rank, sum-rank and subspace metric in [37]. In particular, we generalize the vector operator interpolation problem [37, Problem 13] to the *generalized* operator evaluation and use the ideas of [37, Algorithm 6] to derive a new interpolation algorithm to solve it efficiently via fast minimal approximant bases computations. By using the relation between the remainder evaluation and the generalized operator evaluation (see [6], [61]), the proposed algorithm can be used to solve the multi-dimensional generalization of the two-dimensional vector remainder interpolation problem [37, Problem 27].

A. Preliminaries on Skew Polynomial Matrices

For a matrix $\mathbf{B} \in \mathbb{F}_{q^m}[x, \sigma]^{a \times b}$ and a vector $\mathbf{s} \in \mathbb{Z}^a$, we define the \mathbf{s} -shifted column degree of \mathbf{B} to be the tuple

$$\text{cdeg}_{\mathbf{s}}(\mathbf{B}) = (d_1, \dots, d_b) \in (\mathbb{Z} \cup \{-\infty\})^b$$

where d_j is the maximal shifted degree in the j -th column, i.e., $d_j := \max_{i=1, \dots, a} \{\deg B_{ij} + s_i\}$. We write $\text{cdeg}(\mathbf{B}) := \text{cdeg}_{\mathbf{0}}(\mathbf{B})$, where $\mathbf{0} := (0, \dots, 0)$. Analogously, for $\mathbf{s} \in \mathbb{Z}^b$, we define the (\mathbf{s} -shifted) row degree of \mathbf{B} to be

$$\text{rdeg}_{\mathbf{s}}(\mathbf{B}) := \text{cdeg}_{\mathbf{s}}(\mathbf{B}^\top) \quad \text{and} \quad \text{rdeg} \mathbf{B} := \text{cdeg}(\mathbf{B}^\top).$$

The degree of the matrix, i.e. the maximal degree among its entries, is denoted:

$$\text{deg}(\mathbf{B}) := \max_{i,j} \{\deg B_{ij}\}.$$

If $\mathbf{v} \in \mathbb{F}_{q^m}[x, \sigma]^{1 \times a} \setminus \{\mathbf{0}\}$ is a row vector and $\mathbf{s} = (s_1, \dots, s_a) \in \mathbb{Z}^a$ a shift, we define the \mathbf{s} -pivot index of \mathbf{v} to be the largest index i with $1 \leq i \leq a$ such that $\deg v_i + s_i = \text{rdeg}_{\mathbf{s}}(\mathbf{v})$, and analogously for column vectors. Note, that the \mathbf{s} -pivot index of a vector $\mathbf{v} \in \mathbb{F}_{q^m}[x, \sigma]^{1 \times a}$ coincides with the leading position $\text{LP}_{\prec_{\mathbf{s}}}(V)$, where $V \in \mathbb{F}_{q^m}[x, y_1, \dots, y_a, \sigma]$ is the multivariate polynomial corresponding to \mathbf{v} . If $a \geq b$ (or $a \leq b$, respectively), then we say that \mathbf{B} is in column (row) \mathbf{s} -ordered weak Popov form if the \mathbf{s} -pivot indices of its columns (rows) are strictly increasing in the column (row) index.

Given a matrix $\mathbf{A} \in \mathbb{F}_{q^m}[x, \sigma]^{a \times b}$ and an “order” $d \in \mathbb{Z}_{\geq 0}$, a left approximant basis is a matrix $\mathbf{B} \in \mathbb{F}_{q^m}[x, \sigma]^{a \times a}$ such that $\mathbf{B}\mathbf{A} \equiv 0 \pmod{x^d}$, and such that \mathbf{B} is in a certain normal form while satisfying that any vector $\mathbf{b} \in \mathbb{F}_{q^m}[x, \sigma]^{1 \times a}$ such that $\mathbf{b}\mathbf{A} \equiv 0 \pmod{x^d}$ is in the left $\mathbb{F}_{q^m}[x, \sigma]$ -row space of \mathbf{B} . An analogous definition is given for right approximant bases.

Definition 7 (Left/Right Approximant Bases [37]) Let $\mathbf{A} \in \mathbb{F}_{q^m}[x, \sigma]^{a \times b}$ and $d \in \mathbb{Z}_{\geq 0}$.

- For $\mathbf{s} \in \mathbb{Z}^b$, a right \mathbf{s} -ordered weak-Popov approximant basis of \mathbf{A} of order d is a full-rank matrix $\mathbf{B} \in \mathbb{F}_{q^m}[x, \sigma]^{b \times b}$ s.t.
 - 1) \mathbf{B} is in \mathbf{s} -ordered column weak Popov form.
 - 2) The columns of \mathbf{B} are a basis of all right approximants of \mathbf{A} of order d .
- For $\mathbf{s} \in \mathbb{Z}^a$, a left \mathbf{s} -ordered weak-Popov approximant basis of \mathbf{A} of order d is a full-rank matrix $\mathbf{B} \in \mathbb{F}_{q^m}[x, \sigma]^{a \times a}$ s.t.
 - 1) \mathbf{B} is in \mathbf{s} -ordered row weak Popov form.
 - 2) The rows of \mathbf{B} are a basis of all right approximants of \mathbf{A} of order d .

We denote by $\text{owPopovApprox}_{\text{R}}(\mathbf{A}, \mathbf{s}, d)$ (right case) and $\text{owPopovApprox}_{\text{L}}(\mathbf{A}, \mathbf{s}, d)$ (left case) the sets of all such bases, respectively. If the input is not relevant, we simply write (left or right) approximant basis.

By fixing the basis $\{1, y_1, \dots, y_s\}$ each multivariate skew polynomial $Q \in \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$ of the form

$$Q(x, y_1, \dots, y_s) = Q_0(x) + Q_1(x)y_1 + \dots + Q_s(y_s)$$

may be uniquely represented by a vector³ $\mathbf{Q} = (Q_0, Q_1, \dots, Q_s) \in \mathbb{F}_{q^m}[x, \sigma]^{s+1}$ such that

$$Q(x, y_1, \dots, y_s) = \mathbf{Q} \begin{pmatrix} 1 \\ y_1 \\ \vdots \\ y_s \end{pmatrix}.$$

Note, that in this case we have that $\text{deg}_{\mathbf{w}}(Q) = \text{rdeg}_{\mathbf{w}}(\mathbf{Q})$.

³We index the vector \mathbf{Q} starting from zero to be compliant with the conventional notation used in the literature for interpolation-based decoding.

B. Fast Interpolation via Minimal Approximant Bases

We now generalize the results on the fast (operator) interpolation algorithm based on minimal approximant bases [37, Algorithm 6] to the generalized operator evaluation. Let

$$\mathbf{U} = \left(\mathbf{U}^{(1)}, \mathbf{U}^{(2)}, \dots, \mathbf{U}^{(\ell)} \right) \in \prod_{i=1}^{\ell} \mathbb{F}_{q^m}^{n_i \times (s+1)} \quad (36)$$

be a tuple containing the matrices

$$\mathbf{U}^{(i)} = \begin{pmatrix} u_{1,1}^{(i)} & u_{1,2}^{(i)} & \cdots & u_{1,s+1}^{(i)} \\ u_{2,1}^{(i)} & u_{2,2}^{(i)} & \cdots & u_{2,s+1}^{(i)} \\ \vdots & \vdots & \ddots & \vdots \\ u_{n_i,1}^{(i)} & u_{n_i,2}^{(i)} & \cdots & u_{n_i,s+1}^{(i)} \end{pmatrix} \in \mathbb{F}_{q^m}^{n_i \times (s+1)}$$

for each received space $\mathcal{U}^{(i)}$ such that $\langle \mathbf{U}^{(i)} \rangle_q = \mathcal{U}^{(i)}$ for all $i = 1, \dots, \ell$. Then for all $j = 1, \dots, n_i$ and $i = 1, \dots, \ell$, the j -th row of each matrix $\mathbf{U}^{(i)}$ corresponds to the interpolation point associated with the generalized operator evaluation map $\mathcal{E}_j^{(i)}$. Similar to [37, Problem 13], we now define the generalized operator vector interpolation problem in Problem 2.

Problem 2 (Generalized Operator Vector Interpolation) Given $s, n, D \in \mathbb{Z}_{>0}$, $\mathbf{w} \in \mathbb{Z}_{\geq 0}^{s+1}$, $\mathbf{a} \in \mathbb{F}_{q^m}^\ell$ and $\mathbf{U} \in \prod_{i=1}^{\ell} \mathbb{F}_{q^m}^{n_i \times (s+1)}$ as defined in (36), where the rows of each $\mathbf{U}^{(i)}$ are \mathbb{F}_q -linearly independent. Consider the \mathbb{F}_{q^m} -vector space \mathcal{Q} (left scalar multiplication) of vectors $\mathbf{Q} = (Q_0, Q_1, \dots, Q_s) \in \mathbb{F}_{q^m}[x, \sigma]^{s+1}$ that satisfy the following two conditions:

$$\sum_{l=1}^{s+1} Q_{l-1} (U_{j,l}^{(i)})_{a_i} = 0, \quad \forall j = 1, \dots, n_i, i = 1, \dots, \ell \quad (37)$$

$$\text{rdeg}_{\mathbf{w}}(\mathbf{Q}) < D. \quad (38)$$

Find left $\mathbb{F}_{q^m}[x, \sigma]$ -linearly independent $\mathbf{Q}^{(1)}, \dots, \mathbf{Q}^{(s')} \in \mathcal{Q} \setminus \{\mathbf{0}\}$ whose left $\mathbb{F}_{q^m}[x, \sigma]$ -span contains \mathcal{Q} .

Note, that the conditions (37) and (38) are equivalent to

$$\begin{aligned} \mathcal{E}_j^{(i)}(\mathbf{Q}) &= 0, \quad \forall j = 1, \dots, n_i, i = 1, \dots, \ell \\ \text{deg}_{\mathbf{w}}(\mathbf{Q}) &< D, \end{aligned}$$

respectively, where $Q \in \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$ is the multivariate skew polynomial corresponding to \mathbf{Q} . Hence, the interpolation problems in the interpolation-based decoding procedures for ILRS codes (Problem 1) is an instance of the generalized operator vector interpolation problem in Problem 2.

We now show how to speed up the interpolation step for Problem 2 (and thus also Problem 1) by computing a so-called *left approximant bases* of a matrix \mathbf{A} that is constructed from interpolation and minimal polynomials depending on the interpolation points [37]. To construct such a matrix \mathbf{A} , we first need to transform the interpolation points as described in Lemma 11. Since we apply \mathbb{F}_q -linear elementary row operations on $\mathbf{U}^{(i)}$, the interpolation conditions do not change due to the \mathbb{F}_q -linearity of the generalized operator evaluation.

Lemma 11 Consider an instance of Problem 2 with $\mathbf{U} = (\mathbf{U}^{(1)}, \mathbf{U}^{(2)}, \dots, \mathbf{U}^{(\ell)})$. Using \mathbb{F}_q -linear elementary row operations, we can transform each $\mathbf{U}^{(i)}$ into a matrix of the form

$$\tilde{\mathbf{U}}^{(i)} = \left(\begin{array}{c|c} \mathbf{0}_{\nu_1^{(i)} \times \eta_1^{(i)}} & \tilde{\mathbf{U}}^{(i,1)} \\ \hline \mathbf{0}_{\nu_2^{(i)} \times \eta_2^{(i)}} & \tilde{\mathbf{U}}^{(i,2)} \\ \hline \mathbf{0}_{\nu_3^{(i)} \times \eta_3^{(i)}} & \tilde{\mathbf{U}}^{(i,3)} \\ \hline & \vdots \\ \hline \mathbf{0}_{\nu_{\varrho^{(i)}}^{(i)} \times \eta_{\varrho^{(i)}}^{(i)}} & \tilde{\mathbf{U}}^{(i,\varrho^{(i)})} \end{array} \right),$$

where $1 \leq \varrho^{(i)} \leq s+1$ and we have $\tilde{\mathbf{U}}^{(i,r)} \in \mathbb{F}_{q^m}^{\nu_r^{(i)} \times (s+1-\eta_r^{(i)})}$ for all $i = 1, \dots, \ell$ and $r = 1, \dots, \varrho^{(i)}$, with

- $0 \leq \eta_1^{(i)} < \eta_2^{(i)} < \dots < \eta_{\varrho^{(i)}}^{(i)} < s+1$,
- $1 \leq \nu_i^{(i)} \leq n$ such that $\sum_{r=1}^{\varrho^{(i)}} \nu_r^{(i)} = n_i$, and
- the entries of the first column of $\tilde{\mathbf{U}}^{(i,r)}$ are linearly independent over \mathbb{F}_q for each $i = 1, \dots, \ell$ and $r = 1, \dots, \varrho^{(i)}$.

Each matrix $\tilde{U}^{(i)}$ can be obtained with $O(sm n_i^{\omega-1})$ operations in \mathbb{F}_q .

We define

- $\mathcal{A}_i = \{\eta_1^{(i)}, \eta_2^{(i)}, \dots, \eta_{\varrho^{(i)}}^{(i)}\}$
- $\mathcal{A} = \bigcup_{i=1}^{\ell} \mathcal{A}_i = \{\eta_1, \eta_2, \dots, \eta_{\varrho}\}$ (where $\varrho = |\mathcal{A}|$)
- $\mathcal{J}_r := \{i : \eta_r \in \mathcal{A}_i\}$ (set of shot indices i that have the current pivot position $\eta_r + 1$)
- For all $i \in \mathcal{J}_r$ we define an r_i s.t. $\eta_{r_i}^{(i)} = \eta_r$. Then we have that all matrices $\tilde{U}^{(i, r_i)}$ have the same pivot position $\eta_r + 1$ for all $i \in \mathcal{J}_r$ and $r = 1, \dots, \varrho$.

Lemma 12 Let $\tilde{U}^{(1)}, \dots, \tilde{U}^{(\varrho^{(i)})}$ be defined as in Lemma 11 for all $i = 1, \dots, \ell$. Then, $\mathbf{Q} = (Q_0, \dots, Q_s) \in \mathbb{F}_{q^m}[x, \sigma]^{s+1}$ satisfies Condition (37) in Problem 2 if and only if there exists a vector $\chi \in \mathbb{F}_{q^m}[x, \sigma]^{\varrho}$ such that

$$(\mathbf{Q} \ \chi) \cdot \mathbf{A} = \mathbf{0}, \quad (39)$$

where $\mathbf{A} \in \mathbb{F}_{q^m}[x, \sigma]^{(s+1+\varrho) \times \varrho}$ is a matrix whose r -th column, for $r = 1, \dots, \varrho$, is of the form

$$\begin{pmatrix} \mathbf{0}_{\eta_r \times 1} \\ 1 \\ R_{\eta_r+2}^{(r)} \\ \vdots \\ R_{s+1}^{(r)} \\ \hline \mathbf{0}_{(r-1) \times 1} \\ G^{(r)} \\ \hline \mathbf{0}_{(\varrho-r) \times 1} \end{pmatrix}$$

where, for all $r = 1, \dots, \varrho$ we have

$$\begin{aligned} G^{(r)} &:= M_{\mathcal{B}_r} \quad \text{with} \quad \mathcal{B}_r = \left\{ \left(\tilde{U}_{\kappa, 1}^{(i, r_i)}, a_i \right) : i \in \mathcal{J}_r, \kappa = 1, \dots, \nu_{r_i}^{(i)} \right\} \\ R_j^{(r)} &:= \mathcal{I}_{\mathcal{B}_{r,j}}^{\text{op}} \quad \text{with} \quad \mathcal{B}_{r,j} = \left\{ \left(\tilde{U}_{\kappa, 1}^{(i, r_i)}, \tilde{U}_{\kappa, j-\eta_r}^{(i, r_i)}, a_i \right) : i \in \mathcal{J}_r, \kappa = 1, \dots, \nu_{r_i}^{(i)} \right\}, \quad \forall j = \eta_r + 2, \dots, s + 1. \end{aligned}$$

The proof of Lemma 12 can be found in Appendix B.

Note, that the generalized operator evaluation of a skew polynomial modulo the minimal polynomial in step (a) is considered in [79, Lemma 1].

Theorem 5 (Correctness of Algorithm 4) Algorithm 4 is correct. For the complexity, assume $D \in \Theta(n)$. If the first column of the input matrices $\mathbf{U}^{(1)}, \dots, \mathbf{U}^{(\ell)}$ consists of \mathbb{F}_q -linearly independent elements, it can be implemented with complexity

$$\tilde{O}(s^\omega \mathcal{M}(n))$$

operations in \mathbb{F}_{q^m} . Otherwise, it costs

$$\tilde{O}(s^\omega \mathcal{M}(n))$$

operations in \mathbb{F}_{q^m} plus $O(sm n^{\omega-1})$ operations in \mathbb{F}_q .

Proof: The correctness of the algorithm follows from Lemma 12 and [37, Lemma 21]. The annihilator polynomials $G^{(r)}$ and interpolation polynomials $R_j^{(r)}$ can be computed in $\tilde{O}(\mathcal{M}(\nu_i))$ operations in \mathbb{F}_{q^m} . Computing all the polynomials $G^{(r)}$ and $R_j^{(r)}$ with $r = 1, \dots, \varrho$ and $j = r + 1, \dots, s + 1$ hence costs at most

$$\tilde{O} \left(s \sum_{i=1}^{\ell} \sum_{r=1}^{\varrho^{(i)}} \mathcal{M}(\nu_r^{(i)}) \right) \subseteq \tilde{O} \left(s \sum_{i=1}^{\ell} \mathcal{M}(n_i) \right) \subseteq \tilde{O}(s \mathcal{M}(n))$$

operations in \mathbb{F}_{q^m} , since $\sum_{r=1}^{\varrho^{(i)}} \nu_r^{(i)} = n_i$ and $\mathcal{M}(\cdot)$ is a convex function.

Checking whether the first column of $\mathbf{U}^{(i)}$ has \mathbb{F}_q -rank n_i can be done by computing the minimal polynomial of the entries $u_{1,1}^{(i)}, \dots, u_{n_i,1}^{(i)}$ and checking if the degree equals n_i . This check can be done in $\tilde{O}(\mathcal{M}(n_i))$ operations in \mathbb{F}_{q^m} . Overall, this requires $\tilde{O}(\mathcal{M}(n))$ operations in \mathbb{F}_{q^m} . Only if the entries are linearly independent, we need to compute the matrices $\mathbf{U}^{(i,r)}$ in Line 5. This costs $O(sm \sum_{i=1}^{\ell} n_i^{\omega-1}) \subseteq O(sm n^{\omega-1})$ operations in \mathbb{F}_q .

By definition of $G^{(r)}$ and $R_j^{(r)}$, we have $\deg \mathbf{A} \leq n$. Due to $d \leq D + n$, Line 16 costs $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} . ■

Algorithm 4: FAST GENERALIZED OPERATOR INTERPOLATION ALGORITHM

Input : Instance of Problem 2: $s, \ell, n, D \in \mathbb{Z}_{>0}$, shift vector $\mathbf{w} \in \mathbb{Z}_{\geq 0}^{s+1}$, and $\mathbf{U} \in \prod_{i=1}^{\ell} \mathbb{F}_{q^m}^{n_i \times (s+1)}$ as defined in (36), where the rows of each $\mathbf{U}^{(i)}$ are \mathbb{F}_q -linearly independent.

Output: If it exists, a solution of Problem 2. Otherwise, “no solution”.

```

1 for  $i = 1, \dots, \ell$  do
2   if elements in first column of  $\mathbf{U}^{(i)}$  are  $\mathbb{F}_q$ -lin. ind. then
3      $\tilde{\mathbf{U}}^{(i,1)} \leftarrow \mathbf{U}^{(i)}$ ,  $\varrho^{(i)} \leftarrow 1$ ,  $\nu_1^{(i)} \leftarrow n_i$ ,  $\eta_1^{(i)} \leftarrow 0$ 
4   else
5      $\tilde{\mathbf{U}}^{(i,r)} \in \mathbb{F}_{q^m}^{\nu_r^{(i)} \times (s+1-\eta_r^{(i)})}$  for  $r = 1, \dots, \varrho^{(i)}$   $\leftarrow$  compute as in Lemma 11
6   Define  $\mathcal{A}_i = \{\eta_1^{(i)}, \eta_2^{(i)}, \dots, \eta_{\varrho^{(i)}}^{(i)}\}$ ,  $\mathcal{A} = \bigcup_{i=1}^{\ell} \mathcal{A}_i = \{\eta_1, \eta_2, \dots, \eta_{\varrho}\}$  and  $\mathcal{J}_r := \{i : \eta_r \in \mathcal{A}_i\}$ 
7   Define an  $r_i$  s.t.  $\eta_{r_i}^{(i)} = \eta_r$ . For all  $i \in \mathcal{J}_r$ .
8   for  $r = 1, \dots, \varrho$  do
9      $G^{(r)} := M_{\mathcal{B}_r}$  where  $\mathcal{B}_r = \{(\tilde{U}_{\kappa,1}^{(i,r_i)}, a_i) : i \in \mathcal{J}_r, \kappa = 1, \dots, \nu_{r_i}^{(i)}\}$ 
10    for  $j = \eta_i + 2, \dots, s+1$  do
11       $R_j^{(r)} := \mathcal{I}_{\mathcal{B}_{r,j}}^{\text{op}}$  with  $\mathcal{B}_{r,j} = \{(\tilde{U}_{\kappa,1}^{(i,r_i)}, \tilde{U}_{\kappa,j-\eta_r}^{(i,r_i)}, a_i) : i \in \mathcal{J}_r, \kappa = 1, \dots, \nu_{r_i}^{(i)}\}$ 
12   $\mathbf{A} \leftarrow$  set up matrix from the  $G^{(r)}$  and  $R_j^{(r)}$  as in Lemma 12
13   $w_{\min} \leftarrow \min_{l=1, \dots, s+1} \{w_l\}$ 
14   $d \leftarrow D - w_{\min} + n$ 
15   $\mathbf{s} \leftarrow (w_1, \dots, w_{s+1}, w_{\min}, \dots, w_{\min}) \in \mathbb{Z}_{\geq 0}^{s+1+\varrho}$ 
16   $\mathbf{B} \leftarrow$  left  $\mathbf{s}$ -ordered weak-Popov approximant basis of  $\mathbf{A}$  of order  $d$  // solved by [37, Algorithm 4]
17   $\{i_1, \dots, i_{s'}\} \leftarrow$  indices of rows of  $\mathbf{B}$  with  $\mathbf{s}$ -shifted row degree  $< D$ 
18  if  $s' > 0$  then
19    for  $j = 1, \dots, s'$  do
20       $\mathbf{Q}^{(j)} \leftarrow (B_{i_j,1}, \dots, B_{i_j,s+1})$ 
21    return  $\mathbf{Q}^{(1)}, \dots, \mathbf{Q}^{(s')}$ 
22  else
23    return “no solution”

```

C. Fast Root-Finding via Minimal Approximant Bases

We now show how to efficiently solve the root-finding step in the interpolation-based decoding schemes for ILRS codes efficiently by computing a *right* shifted minimal approximant basis for a matrix \mathbf{A} . In contrast to the interpolation-step, the root-finding step is independent of the skew polynomial evaluation. Hence, we can use the results from [37, Section IV-C] for decoding interleaved Gabidulin codes directly to solve the root-finding problems for ILRS codes.

The root-finding problem for ILRS (Section III-D2) codes is an instance of the vector root-finding problem [37, Problem 14], which can be solved by [37, Algorithm 7] requiring at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} . In the following, we briefly summarize the efficient root-finding method via minimal approximant bases from [37, Section IV-C].

Problem 3 (Vector Root Finding [37]) Given $s, n, k \in \mathbb{Z}_{>0}$ and vectors $\mathbf{Q}^{(1)}, \dots, \mathbf{Q}^{(s')} \in \mathbb{F}_{q^m}[x, \sigma]^{s+1} \setminus \{\mathbf{0}\}$ that are left $\mathbb{F}_{q^m}[x, \sigma]$ -linearly independent (this implies $s' \leq s+1$) and fulfill $\deg(\mathbf{Q}^{(r)}) \leq n$ for all r . Find a basis of the \mathbb{F}_{q^m} -linear affine space (scalar multiplication from the right)

$$\mathcal{R} := \{(f_1, \dots, f_s) \in \mathbb{F}_{q^m}[x, \sigma]^s : \mathbf{Q}_0^{(r)} + \sum_{l=1}^s \mathbf{Q}_l^{(r)} f_l = 0 \forall r, \deg(f_j) < k \forall j\}. \quad (40)$$

Now consider an instance of Problem 3 and define

$$\mathbf{A} := \begin{pmatrix} Q_0^{(1)} & Q_1^{(1)} & \dots & Q_s^{(1)} \\ \vdots & \vdots & \ddots & \vdots \\ Q_0^{(s')} & Q_1^{(s')} & \dots & Q_s^{(s')} \end{pmatrix} \in \mathbb{F}_{q^m}[x, \sigma]^{s' \times (s+1)} \quad (41)$$

$$\mathbf{s} := (k, 1, \dots, 1) \in \mathbb{Z}_{\geq 0}^{s+1} \quad (42)$$

$$d := \max_{l,r} \left\{ \deg \left(Q_l^{(r)} \right) \right\} + k. \quad (43)$$

Then by [37, Lemma 23] we have that the \mathbb{F}_{q^m} -linear root space \mathcal{R} in (40) of Problem 3 satisfies

$$\mathcal{R} = \left\{ (f_1, \dots, f_s)^\top : (f_0, \dots, f_s)^\top = \mathbf{B}\mathbf{v}, \right. \\ \left. \mathbf{v} \in \mathbb{F}_{q^m}[x, \sigma]^{(s+1) \times 1} \text{ with } \text{cdeg}_t \mathbf{v} \leq k \text{ and } f_0 = 1 \right\}$$

where $\mathbf{B} \in \mathbb{F}_{q^m}[x, \sigma]^{(s+1) \times (s+1)}$ is a right s -ordered weak-Popov approximant basis of \mathbf{A} of order d . Hence, the root-finding problem can be reduced to an minimal approximant basis problem over skew polynomial rings, which can be solved efficiently with the routines given in [37]. This results in the fast root-finding algorithm [37, Algorithm 7], which requires at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} and can be summarized as follows:

- 1) Given $\mathbf{Q}^{(1)}, \dots, \mathbf{Q}^{(s')}$, set up \mathbf{A} as in (41), \mathbf{s} as in (42) and d as in (43).
- 2) Compute a right s -ordered weak-Popov approximant basis $\mathbf{B} \in \mathbb{F}_{q^m}[x, \sigma]^{(s+1) \times (s+1)}$ of \mathbf{A} of order d .
- 3) If \mathbf{B} has a row of $\text{rdeg}_s \leq k$, the compute an affine basis

$$\mathbf{g}^* + \langle \mathbf{g}^{(1)}, \dots, \mathbf{g}^{(s')} \rangle_{\mathbb{F}_{q^m}, \text{right}},$$

for \mathcal{R} using [37, Lemma 24], where $\langle \cdot \rangle_{\mathbb{F}_{q^m}, \text{right}}$ denotes the right \mathbb{F}_{q^m} -span. Otherwise return “no solution”.

The computational complexity is dominated by step 2, which can be solved efficiently by the routine `RightSkewPMBasis`(\cdot) from [37] requiring at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} .

We conclude this section with two statements that summarize the complexity of the interpolation problems and root-finding problems for the interpolation-based decoders for ILRS from Section III-D.

Corollary 1 (Complexity of Interpolation Problems) *Algorithm 4 can solve the interpolation problem Problem 1 in at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_q .*

Corollary 2 (Complexity of Root-Finding Problems) *The root-finding problem of the interpolation-based decoder for ILRS from Section III-D can be solved by [37, Algorithm 7] requiring at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} .*

V. CONCLUSION

A. Summary

We considered s -interleaved linearized Reed–Solomon (ILRS) codes and showed, that they capable of correcting errors beyond the unique decoding radius in the sum-rank metric. We proposed an efficient interpolation-based decoding scheme for ILRS codes, which can be used as a list decoder or as a probabilistic unique decoder and can correct errors of sum-rank up to $t \leq \frac{s}{s+1}(n - k + 1)$ and $t \leq \frac{s}{s+1}(n - k)$, respectively, where s is the interleaving order, n the length and k the dimension of the code. We derived a Loidreau–Overbeck-like decoder for ILRS codes, which provides arguments to upper bound on the decoding failure probability for the interpolation-based probabilistic unique decoder.

By using the isometry between the sum-rank and the skew metric we defined ISRS codes and showed how to use the proposed decoding schemes for correcting errors in the skew metric.

Up to our knowledge, the proposed decoding schemes are the first being able to correct errors beyond the unique decoding region in the sum-rank and the skew metric efficiently. The results for the decoding schemes for ILRS codes are validated via Monte Carlo simulations.

We presented an efficient interpolation algorithm, that solves the interpolation step of the proposed interpolation-based decoding schemes efficiently by casting the interpolation problem to a minimal approximant bases problem. Using the efficient interpolation algorithm, the interpolation-based decoding scheme for ILRS and ISRS codes can be implemented requiring at most $\tilde{O}(s^\omega \mathcal{M}(n))$ operations in \mathbb{F}_{q^m} , where $\mathcal{M}(n)$ is the cost (in operations in \mathbb{F}_{q^m}) of multiplying two skew-polynomials of degree at most n and ω is the matrix multiplication exponent. As a result, we obtained the currently fastest known decoding algorithms in the sum-rank and the skew metric.

B. Remarks on Generality

In this paper, we considered codes constructed by skew polynomials with zero derivations, i.e. polynomials from $\mathbb{F}_{q^m}[x, \sigma]$, only. The main reason for this is that for operations in $\mathbb{F}_{q^m}[x, \sigma]$ we can give complexity bounds, which are of interest in the implementation point of view. All considered decoding algorithms (Algorithms 1-3), the fast interpolation and root-finding algorithm (Algorithm 4 and [37]) as well as the isometry between the (burst) sum-rank and skew metric (see [6]) work as well over $\mathbb{F}_{q^m}[x; \sigma, \delta]$. However, the complexity analysis has to be performed w.r.t. this setup (computational complexity may be larger).

In Section III we considered decoding of *homogeneous* ILRS and ISRS codes, respectively, i.e. interleaved codes where the component codes have the same code dimension. We consider these simpler code classes in order to not further complicate the quite involved notation. All decoding schemes proposed in this paper can be generalized to *heterogeneous* interleaved codes, where each component code may have a different dimension, in a straight-forward manner like e.g. in [64], [80]. Denote by k_1, \dots, k_s the dimensions of the component codes and define $\bar{k} := \frac{1}{s} \sum_{l=1}^s k_l$. The resulting decoding regions are then $t < \frac{s}{s+1}(n - \bar{k} + 1)$ for list decoding and $t \leq \frac{s}{s+1}(n - \bar{k})$ for probabilistic unique decoding.

C. Outlook & Future Work

For future work it would be interesting to see how the results generalize for codes and decoder over (particular) rings.

It would also be interesting to derive a Berlekamp–Massey-like decoding algorithm for ILRS codes (in the spirit of [32], [42] for interleaved Gabidulin codes), which could potentially be implemented efficiently using the fast multi-sequence skew-feedback shift-register synthesis from [33].

Another interesting direction of future work could be to consider decoding of interleaved variants of the codes from [40], which can be constructed using smaller field sizes.

So far, no results on the list-decodability of random (linear) sum-rank-metric codes like, e.g. [83], [84] in the rank metric, are available. Once such results are available it would be interesting to compare the list-decodability of random (linear) sum-rank-metric codes with constructive results proposed in this paper.

REFERENCES

- [1] H. Bartz and S. Puchinger, “Decoding of Interleaved Linearized Reed-Solomon Codes with Applications to Network Coding,” in *IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2021.
- [2] H.-f. Lu and P. V. Kumar, “A Unified Construction of Space-Time Codes with Optimal Rate-Diversity Tradeoff,” *IEEE Transactions on Information Theory*, vol. 51, no. 5, pp. 1709–1730, 2005.
- [3] R. W. Nóbrega and B. F. Uchôa-Filho, “Multishot Codes for Network Coding using Rank-Metric Codes,” in *2010 Third IEEE International Workshop on Wireless Network Coding*. IEEE, 2010, pp. 1–6.
- [4] S. Puchinger, J. Renner, and J. Rosenkilde, “Generic Decoding in the Sum-Rank Metric,” *arXiv preprint arXiv:2001.04812*, 2020.
- [5] F. Hörmann, H. Bartz, and A.-L. Horlemann, “Security Considerations for McEliece-like Cryptosystems Based on Linearized Reed-Solomon Codes in the Sum-Rank Metric,” *International Workshop on Code-Based Cryptography (CBCrypto)*, May 2022.
- [6] U. Martínez-Peñas, “Skew and Linearized Reed–Solomon Codes and Maximum Sum Rank Distance Codes over any Division Ring,” *Journal of Algebra*, vol. 504, pp. 587–612, 2018.
- [7] U. Martínez-Peñas, M. Shehadeh, and F. R. Kschischang, “Codes in the Sum-Rank Metric: Fundamentals and Applications,” *Foundations and Trends® in Communications and Information Theory*, vol. 19, no. 5, pp. 814–1031, 2022. [Online]. Available: <http://dx.doi.org/10.1561/0100000120>
- [8] X. Caruso, “Residues of Skew Rational Functions and Linearized Goppa Codes,” *arXiv preprint arXiv:1908.08430*, 2019.
- [9] I. S. Reed and G. Solomon, “Polynomial Codes over Certain Finite Fields,” *Journal of the society for industrial and applied mathematics*, vol. 8, no. 2, pp. 300–304, 1960.
- [10] E. M. Gabidulin, “Theory of Codes with Maximum Rank Distance,” *Probl. Inf. Transm.*, vol. 21, no. 1, pp. 3–16, 1985.
- [11] O. Ore, “On a Special Class of Polynomials,” *Transactions of the American Mathematical Society*, vol. 35, no. 3, pp. 559–584, 1933.
- [12] —, “Theory of Non-Commutative Polynomials,” *Annals of Mathematics*, pp. 480–508, 1933.
- [13] D. Boucher and F. Ulmer, “Linear Codes using Skew Polynomials with Automorphisms and Derivations,” *Designs, codes and cryptography*, vol. 70, no. 3, pp. 405–431, 2014.
- [14] V. Y. Krachkovsky and Y. X. Lee, “Decoding for Iterative Reed–Solomon Coding Schemes,” *IEEE Transactions on Magnetics*, vol. 33, no. 5, pp. 2740–2742, 1997.
- [15] D. Bleichenbacher, A. Kiayias, and M. Yung, “Decoding of Interleaved Reed Solomon Codes Over Noisy Data,” in *International Colloquium on Automata, Languages, and Programming*. Springer, 2003, pp. 97–108.
- [16] D. Coppersmith and M. Sudan, “Reconstructing Curves in Three (and Higher) Dimensional Space from Noisy Data,” in *ACM Symposium on the Theory of Computing*, 2003.
- [17] F. Parvaresh and A. Vardy, “Multivariate Interpolation Decoding Beyond the Guruswami–Sudan Radius,” in *Allerton Conference on Communication, Control and Computing*, 2004.
- [18] A. Brown, L. Minder, and A. Shokrollahi, “Probabilistic Decoding of Interleaved RS-Codes on the q-Ary Symmetric Channel,” in *IEEE International Symposium on Information Theory (ISIT)*, 2004, pp. 326–326.
- [19] F. Parvaresh, “Algebraic List-Decoding of Error-Correcting Codes,” Ph.D. dissertation, University of California, San Diego, 2007.
- [20] G. Schmidt, V. Sidorenko, and M. Bossert, “Enhancing the Correcting Radius of Interleaved Reed–Solomon Decoding Using Syndrome Extension Techniques,” in *IEEE International Symposium on Information Theory (ISIT)*, 2007, pp. 1341–1345.
- [21] G. Schmidt, V. R. Sidorenko, and M. Bossert, “Collaborative Decoding of Interleaved Reed–Solomon Codes and Concatenated Code Designs,” *IEEE Transactions on Information Theory*, vol. 55, no. 7, pp. 2991–3012, 2009.
- [22] H. Cohn and N. Heninger, “Approximate Common Divisors via Lattices,” *The Open Book Series*, vol. 1, no. 1, pp. 271–293, 2013.
- [23] J. S. Nielsen, “Generalised Multi-Sequence Shift-Register Synthesis Using Module Minimisation,” in *IEEE International Symposium on Information Theory (ISIT)*, 2013, pp. 882–886.
- [24] A. Wachter-Zeh, A. Zeh, and M. Bossert, “Decoding Interleaved Reed–Solomon Codes Beyond Their Joint Error-Correcting Capability,” *Designs, Codes and Cryptography*, vol. 71, no. 2, pp. 261–281, 2014.

- [25] S. Puchinger and J. Rosenkilde né Nielsen, “Decoding of Interleaved Reed–Solomon Codes Using Improved Power Decoding,” in *IEEE International Symposium on Information Theory (ISIT)*, 2017.
- [26] J.-H. Yu and H.-A. Loeliger, “Simultaneous Partial Inverses and Decoding Interleaved Reed–Solomon Codes,” *IEEE Transactions on Information Theory*, vol. 64, no. 12, pp. 7511–7528, 2018.
- [27] A. Brown, L. Minder, and A. Shokrollahi, “Improved Decoding of Interleaved AG Codes,” in *IMA International Conference on Cryptography and Coding*. Springer, 2005, pp. 37–46.
- [28] S. Kampf, “Bounds on Collaborative Decoding of Interleaved Hermitian Codes and Virtual Extension,” *Designs, Codes and Cryptography*, vol. 70, no. 1–2, pp. 9–25, 2014.
- [29] S. Puchinger, J. Rosenkilde, and I. Bouw, “Improved Power Decoding of Interleaved One-Point Hermitian Codes,” *Designs, Codes and Cryptography*, vol. 87, no. 2–3, pp. 589–607, 2019.
- [30] P. Loidreau and R. Overbeck, “Decoding Rank Errors Beyond the Error-Correction Capability,” *International Workshop on Algebraic and Combinatorial Coding Theory (ACCT)*, 2006.
- [31] V. Sidorenko and M. Bossert, “Decoding Interleaved Gabidulin Codes and Multisequence Linearized Shift-Register Synthesis,” in *IEEE International Symposium on Information Theory (ISIT)*, 2010, pp. 1148–1152.
- [32] V. Sidorenko, L. Jiang, and M. Bossert, “Skew-Feedback Shift-Register Synthesis and Decoding Interleaved Gabidulin Codes,” *IEEE Transactions on Information Theory*, vol. 57, no. 2, pp. 621–632, 2011.
- [33] V. Sidorenko and M. Bossert, “Fast Skew-Feedback Shift-Register Synthesis,” *Designs, Codes and Cryptography*, vol. 70, no. 1–2, pp. 55–67, 2014.
- [34] A. Wachter-Zeh and A. Zeh, “List and Unique Error-Erasure Decoding of Interleaved Gabidulin Codes with Interpolation Techniques,” *Designs, Codes and Cryptography*, vol. 73, no. 2, pp. 547–570, 2014.
- [35] S. Puchinger, J. Rosenkilde né Nielsen, W. Li, and V. Sidorenko, “Row Reduction Applied to Decoding of Rank-Metric and Subspace Codes,” *Designs, Codes and Cryptography*, vol. 82, no. 1–2, pp. 389–409, 2017.
- [36] S. Puchinger, S. Muelich, D. Mödinger, J. Rosenkilde né Nielsen, and M. Bossert, “Decoding Interleaved Gabidulin Codes Using Alekhovich’s Algorithm,” *Electronic Notes in Discrete Mathematics*, vol. 57, pp. 175–180, 2017.
- [37] H. Bartz, T. Jerkovits, S. Puchinger, and J. Rosenkilde, “Fast Decoding of Codes in the Rank, Subspace, and Sum-Rank Metric,” *IEEE Transactions on Information Theory*, pp. 1–1, 2021.
- [38] U. Martínez-Peñas and F. R. Kschischang, “Reliable and Secure Multishot Network Coding using Linearized Reed-Solomon Codes,” *IEEE Transactions on Information Theory*, vol. 65, no. 8, pp. 4785–4803, 2019.
- [39] —, “Universal and Dynamic Locally Repairable Codes with Maximal Recoverability via Sum-Rank Codes,” *IEEE Transactions on Information Theory*, 2019.
- [40] U. Martínez-Peñas, “A General Family of MSRD Codes and PMDS Codes with Smaller Field Sizes from Extended Moore Matrices,” *arXiv preprint arXiv:2011.14109*, 2020.
- [41] —, “Sum-Rank BCH Codes and Cyclic-Skew-Cyclic Codes,” *IEEE Transactions on Information Theory*, vol. 67, no. 8, pp. 5149–5167, 2021.
- [42] F. Hörmann, H. Bartz, and S. Puchinger, “Error-Erasure Decoding of Linearized Reed-Solomon Codes in the Sum-Rank Metric,” in *IEEE International Symposium on Information Theory (ISIT)*, 2022. [Online]. Available: <https://arxiv.org/abs/2202.06758>
- [43] S. Puchinger and J. Rosenkilde, “Bounds on List Decoding of Linearized Reed-Solomon Codes,” in *2021 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2021, pp. 154–159.
- [44] A. Wachter-Zeh, “Bounds on list decoding of rank-metric codes,” *IEEE Trans. Inform. Theory*, vol. 59, no. 11, pp. 7268–7277, Nov. 2013.
- [45] F. Hörmann and H. Bartz, “Fast Gao-like Decoding of Horizontally Interleaved Linearized Reed–Solomon Codes,” *accepted at: International Workshop on Code-Based Cryptography (CBCrypto)*, Apr. 2023.
- [46] T. Jerkovits, F. Hörmann, and H. Bartz, “On Decoding High-Order Interleaved Sum-Rank- and Skew-Metric Codes,” *International Workshop on Code-Based Cryptography (CBCrypto)*, May 2022.
- [47] F. Hörmann and H. Bartz, “Efficient Decoding of Folded Linearized Reed–Solomon Codes in the Sum-Rank Metric,” in *International Workshop on Coding and Cryptography (WCC)*, 2022. [Online]. Available: <https://arxiv.org/abs/2109.14943>
- [48] —, “Interpolation-Based Decoding of Folded Variants of Linearized and Skew Reed–Solomon Codes,” *accepted at: Designs, Codes and Cryptography*, 2023. [Online]. Available: <https://arxiv.org/abs/2303.15195>
- [49] A. Wachter, V. R. Sidorenko, M. Bossert, and V. V. Zyablov, “On (partial) Unit Memory Codes based on Gabidulin Codes,” *Problems of Information Transmission*, vol. 47, no. 2, pp. 117–129, 2011.
- [50] A. Wachter-Zeh and V. Sidorenko, “Rank Metric Convolutional Codes for Random Linear Network Coding,” in *2012 International Symposium on Network Coding (NetCod)*. IEEE, 2012, pp. 1–6.
- [51] A. Wachter-Zeh, M. Stinner, and V. Sidorenko, “Convolutional Codes in Rank Metric with Application to Random Network Coding,” *IEEE Transactions on Information Theory*, vol. 61, no. 6, pp. 3199–3213, 2015.
- [52] D. Napp, R. Pinto, J. Rosenthal, and P. Vettori, “MRD Rank Metric Convolutional Codes,” in *IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2017, pp. 2766–2770.
- [53] —, “Faster Decoding of Rank Metric Convolutional Codes,” in *23rd International Symposium on Mathematical Theory of Networks and Systems*, 2018.
- [54] E. Byrne, H. Gluesing-Luerssen, and A. Ravagnani, “Fundamental Properties of Sum-Rank-Metric Codes,” *IEEE Transactions on Information Theory*, 2021.
- [55] R. Overbeck, “Public key cryptography based on coding theory,” Ph.D. dissertation, Technische Universität, 2007.
- [56] D. Boucher, “An Algorithm for Decoding Skew Reed-Solomon Codes with respect to the Skew Metric,” in *Workshop on Coding and Cryptography*, 2019.
- [57] R. Koetter and F. R. Kschischang, “Coding for Errors and Erasures in Random Network Coding,” *IEEE Transactions on Information Theory*, vol. 54, no. 8, pp. 3579–3591, 2008.
- [58] T.-Y. Lam, *A General Theory of Vandermonde Matrices*. Center for Pure and Applied Mathematics, University of California, Berkeley, 1985.
- [59] T.-Y. Lam and A. Leroy, “Vandermonde and Wronskian Matrices over Division Rings,” *Journal of Algebra*, vol. 119, no. 2, pp. 308–336, 1988.
- [60] U. Martínez-Peñas, “On the Similarities between Generalized Rank and Hamming Weights and their Applications to Network Coding,” *IEEE Transactions on Information Theory*, vol. 62, no. 7, pp. 4081–4095, 2016.
- [61] A. Leroy et al., “Pseudolinear Transformations and Evaluation in Ore Extensions,” *Bulletin of the Belgian Mathematical Society-Simon Stevin*, vol. 2, no. 3, pp. 321–347, 1995.
- [62] U. Martínez-Peñas, “Private Information Retrieval from Locally Repairable Databases with Colluding Servers,” in *IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2019, pp. 1057–1061.
- [63] W. W. Adams, W. W. Adams, W. H. ADAMS, P. Loustanaun, and W. W. Adams, *An Introduction to Gröbner Bases*. American Mathematical Soc., 1994, no. 3.
- [64] A. Wachter-Zeh, “Decoding of Block and Convolutional Codes in Rank Metric,” Ph.D. dissertation, Ulm University and Université Rennes 1, 2013.
- [65] S. Liu, F. Manganiello, and F. R. Kschischang, “Construction and Decoding of Generalized Skew-Evaluation Codes,” in *2015 IEEE 14th Canadian Workshop on Information Theory (CWIT)*. IEEE, 2015, pp. 9–13.
- [66] J.-M. Couveignes and R. Lercier, “Elliptic Periods for Finite Fields,” *Finite Fields and Their Applications*, vol. 15, no. 1, pp. 1–22, 2009.

- [67] F. Le Gall, “Powers of Tensors and Fast Matrix Multiplication,” in *International Symposium on Symbolic and Algebraic Computation (ISSAC)*, 2014, pp. 296–303.
- [68] S. Puchinger and A. Wachter-Zeh, “Fast Operations on Linearized Polynomials and their Applications in Coding Theory,” *Journal of Symbolic Computation*, vol. 89, pp. 194–215, 2018.
- [69] X. Caruso and J. Le Borgne, “Fast Multiplication for Skew Polynomials,” in *International Symposium on Symbolic and Algebraic Computation (ISSAC)*, 2017.
- [70] —, “A New Faster Algorithm for Factoring Skew Polynomials Over Finite Fields,” *Journal of Symbolic Computation*, vol. 79, pp. 411–443, 2017.
- [71] P. Delsarte, “Bilinear Forms over a Finite Field with Applications to Coding Theory,” *J. Comb. Theory Ser. A*, vol. 25, no. 3, pp. 226–241, Nov. 1978.
- [72] R. M. Roth, “Maximum-Rank Array Codes and their Application to Crisscross Error Correction,” *IEEE Trans. Inform. Theory*, vol. 37, no. 2, pp. 328–336, Mar. 1991.
- [73] R. Overbeck, “Structural attacks for public key cryptosystems based on gabidulin codes,” *Journal of cryptology*, vol. 21, no. 2, pp. 280–301, 2008.
- [74] V. Sidorenko, G. Schmidt, and M. Bossert, “Decoding Punctured Reed-Solomon Codes up to the Singleton Bound,” in *7th International ITG Conference on Systems, Communications and Coding 2008 (SCC)*, Jan 2008.
- [75] D. Silva, F. R. Kschischang, and R. Koetter, “A Rank-Metric Approach to Error Control in Random Network Coding,” *IEEE Transactions on Information Theory*, vol. 54, no. 9, pp. 3951–3967, 2008.
- [76] H. Bartz and A. Wachter-Zeh, “Efficient Decoding of Interleaved Subspace and Gabidulin Codes Beyond their Unique Decoding Radius using Gröbner Bases,” *Advances in Mathematics of Communications*, vol. 12, no. 4, p. 773, 2018.
- [77] V. Y. Krachkovsky and Y. X. Lee, “Decoding of Parallel Reed–Solomon Codes with Applications to Product and Concatenated Codes,” in *IEEE ISIT*, 1998.
- [78] S. Liu, F. Manganiello, and F. R. Kschischang, “Kötter Interpolation in Skew Polynomial Rings,” *Designs, Codes and Cryptography*, vol. 72, no. 3, pp. 593–608, 2014.
- [79] H. Bartz, T. Jerkovits, and J. Rosenkilde, “Fast Kötter–Nielsen–Høholdt Interpolation over Skew Polynomial Rings and its Application in Coding Theory,” 2021.
- [80] H. Bartz, “Algebraic Decoding of Subspace and Rank-Metric Codes,” Ph.D. dissertation, Technische Universität München, 2017.
- [81] H. Bartz, T. Jerkovits, S. Puchinger, and J. Rosenkilde, “Fast Root Finding for Interpolation-Based Decoding of Interleaved Gabidulin Codes,” in *2019 IEEE Information Theory Workshop (ITW)*. IEEE, 2019, pp. 1–5.
- [82] T. Cover, “Enumerative Source Encoding,” *IEEE Transactions on Information Theory*, vol. 19, no. 1, pp. 73–77, 1973.
- [83] V. Guruswami, J. Hastad, and S. Kopparty, “On the List-Decodability of Random Linear Codes,” in *Proceedings of the forty-second ACM symposium on Theory of computing*, 2010, pp. 409–416.
- [84] Y. Ding, “On list-decodability of random rank metric codes and subspace codes,” *IEEE Transactions on Information Theory*, vol. 61, no. 1, pp. 51–59, 2014.

APPENDIX A

PROOFS AND STATEMENTS FROM SECTION III

A. Proof of Lemma 6

Proof: First we show that if there exists a vector \mathbf{b} satisfying (16), then (15) holds. Let \mathbf{b} be as in (16) and denote by \mathbf{m}_i the i -th row of \mathbf{M} . Then we can write $\lambda_{n-t-k}(\mathbf{b})_{\mathbf{a}} \mathbf{M}^{\top} = \mathbf{0}$ equivalently as

$$\mathcal{D}_{\mathbf{a}}^j(\mathbf{b})\mathbf{m}_i^{\top} = 0, \quad \forall i = 1, \dots, s, \quad \forall j = 0, \dots, n-t-k-1. \quad (44)$$

Applying $\mathcal{D}_{\mathbf{a}}^{n-t-k-1-j}(\cdot)$ to both sides of equation (44) and using the property of the row operator from (5) we get

$$\mathcal{D}_{\mathbf{a}}^{n-t-k-1}(\mathbf{b})\mathcal{D}_{\mathbf{a}}^{n-t-k-1-j}(\mathbf{m}_i)^{\top} = 0 \quad \forall i = 1, \dots, s, \quad \forall j = 0, \dots, n-t-k-1. \quad (45)$$

Substituting $j' \leftarrow n-t-k-1-j$ we may write (45) as

$$\mathcal{D}_{\mathbf{a}}^{n-t-k-1}(\mathbf{b})\mathcal{D}_{\mathbf{a}}^{j'}(\mathbf{m}_i)^{\top} = 0, \quad \forall i = 1, \dots, s, \quad \forall j' = 0, \dots, n-t-k-1$$

or equivalently in vector-matrix form as

$$\mathcal{D}_{\mathbf{a}}^{n-t-k-1}(\mathbf{b})\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}^{\top} = \mathbf{0}.$$

Hence, $\mathcal{D}_{\mathbf{a}}^{n-t-k-1}(\mathbf{b})^{\top} \neq \mathbf{0}$ is in the right kernel of $\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}$, which implies that the \mathbb{F}_{q^m} -rank of $\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}$ is smaller than t .

Now we show that if (15) holds, there exists a vector \mathbf{b} satisfying (16). Let $\text{rk}_{q^m}(\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}) < t$. Then there is a non-zero vector $\tilde{\mathbf{b}} \in \mathbb{F}_{q^m}^t$ such that $\tilde{\mathbf{b}}^{\top}$ is in the right kernel of $\text{rk}_{q^m}(\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}})$. Clearly, all \mathbb{F}_{q^m} -multiples of $\tilde{\mathbf{b}}^{\top}$ are also in this right kernel. Thus we have

$$\begin{aligned} (\xi\tilde{\mathbf{b}})\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}^{\top} &= \mathbf{0}, \quad \forall \xi \in \mathbb{F}_{q^m} \\ \Rightarrow \xi\tilde{\mathbf{b}}\mathcal{D}_{\mathbf{a}}^j(\mathbf{m}_i) &= 0, \quad \forall \xi \in \mathbb{F}_{q^m}, \quad \forall i = 1, \dots, s, \quad \forall j = 0, \dots, n-t-k-1. \end{aligned} \quad (46)$$

Applying $\mathcal{D}_{\mathbf{a}}^{-j}(\cdot)$ to both sides of (46) and using the property of the row operator from (5) we get

$$\mathcal{D}_{\mathbf{a}}^{n-t-k-1-j}(\mathcal{D}_{\mathbf{a}}^{-(n-t-k-1)}(\xi\tilde{\mathbf{b}}))\mathbf{m}_i^{\top} = 0, \quad \forall \xi \in \mathbb{F}_{q^m}, \quad \forall i = 1, \dots, s, \quad \forall j = 0, \dots, n-t-k. \quad (47)$$

Substituting $j' \leftarrow n-t-k-1-j$ and using the property of the row operator from (6) we can write (47) as

$$\mathcal{D}_{\mathbf{a}}^{j'}(\sigma^{-(n-t-k-1)}(\xi)\mathcal{D}_{\mathbf{a}}^{-(n-t-k-1)}(\tilde{\mathbf{b}}))\mathbf{m}_i^{\top} = 0, \quad \forall \xi \in \mathbb{F}_{q^m}, \quad \forall i = 1, \dots, s, \quad \forall j' = 0, \dots, n-t-k. \quad (48)$$

Writing $\xi' \leftarrow \sigma^{-(n-t-k-1)}(\xi)$ and exploiting the fact that σ is an \mathbb{F}_{q^m} -automorphism, we can write (48) as

$$\mathcal{D}_{\mathbf{a}}^{j'}(\xi'\mathcal{D}_{\mathbf{a}}^{-(n-t-k-1)}(\tilde{\mathbf{b}}))\mathbf{m}_i^{\top} = 0, \quad \forall \xi' \in \mathbb{F}_{q^m}, \quad \forall i = 1, \dots, s, \quad \forall j' = 0, \dots, n-t-k$$

or equivalently in matrix form as

$$\lambda_{n-t-k} \left(\xi^t \mathcal{D}_{\mathbf{a}}^{-(n-t-k-1)}(\tilde{\mathbf{b}}) \right) \mathbf{M}^\top = \mathbf{0}, \quad \forall \xi^t \in \mathbb{F}_{q^m}.$$

Thus, $\mathbf{b} := \mathcal{D}_{\mathbf{a}}^{-(n-t-k-1)}(\tilde{\mathbf{b}}) \neq \mathbf{0}$ satisfies the equality in (16). Is it left to show that \mathbf{b} has sum-rank weight $\text{wt}_{\Sigma R}(\mathbf{b}) > n - t - k$.

Suppose, towards a contradiction, that $\text{wt}_{\Sigma R}(\mathbf{b}) = r \leq n - t - k$ and rank partition $\mathbf{r} = (r_1, \dots, r_\ell)$ with $r_i \geq 0$ and $\sum_{i=1}^\ell r_i = r$. Then there is a block diagonal matrix $\mathbf{T} = \text{diag}(\mathbf{T}_1, \dots, \mathbf{T}_\ell) \in \mathbb{F}_q^{t \times t}$ such that every $\mathbf{T}_i \in \mathbb{F}_q^{t_i \times t_i}$ is invertible and such that in every block $i = 1, \dots, \ell$, exactly r_i entries of $\mathbf{b}\mathbf{T}$ are non-zero. It is easy to see that these r_i non-zero entries are \mathbb{F}_q -linearly independent (within a block). We denote the indices of the non-zero positions of $\mathbf{b}\mathbf{T}$ in the i -th block by $\mathcal{T}_i \subseteq \{1, \dots, n\}$ and $\mathcal{T} := \cup_{i=1}^\ell \mathcal{T}_i$. Note that \mathcal{T} is the Hamming support of the entire vector $\mathbf{b}\mathbf{T}$.

By Proposition 2, the r columns of $\lambda_{n-t-k}(\mathbf{b}\mathbf{T})$ indexed by \mathcal{T} have full \mathbb{F}_{q^m} -rank, i.e.,

$$\text{rk}_{q^m} [\lambda_{n-t-k}(\mathbf{b}\mathbf{T})]_{\mathcal{T}} = r.$$

Due to

$$\lambda_{n-t-k}(\mathbf{b})\mathbf{M}^\top = \lambda_{n-t-k}(\mathbf{b}\mathbf{T}) \left(\mathbf{M}(\mathbf{T}^{-1})^\top \right)^\top = \mathbf{0}$$

and due to the fact that the columns of $\lambda_{n-t-k}(\mathbf{b}\mathbf{T})$ indexed by the complement of \mathcal{T} are zero, we must have that the columns of $\mathbf{M}(\mathbf{T}^{-1})^\top$ indexed by \mathcal{T} are zero. Hence, we have

$$d_{\Sigma R}(\mathbf{M}) = d_{\Sigma R} \left(\mathbf{M}(\mathbf{T}^{-1})^\top \right)^\top \leq t - r < t,$$

where the first equality is true since $(\mathbf{T}^{-1})^\top$ is a block-diagonal matrix with invertible $(t_i \times t_i)$ matrices over \mathbb{F}_q on the diagonal, and the last inequality holds since $\mathbf{b} \neq \mathbf{0}$, so $r > 0$. This is a contradiction to the assumption $d_{\Sigma R}(\mathbf{M}) = t$.

Overall, \mathbf{b} fulfills both properties in (16), which concludes the proof. \blacksquare

B. Proof of Lemma 7

Proof: Let \mathbf{t} be the rank partition of \mathbf{E} . Then there are invertible matrices $\mathbf{T}^{(i)} \in \mathbb{F}_q^{n_i \times n_i}$ such that $\mathbf{E}^{(i)}\mathbf{T}^{(i)}$ has exactly t_i non-zero entries. Denote by $\mathbf{M} \in \mathbb{F}_{q^m}^{s \times t}$ the non-zero columns of $\mathbf{E} \cdot \text{diag}(\mathbf{T}^{(1)}, \dots, \mathbf{T}^{(\ell)})$. By construction, we have

$$\text{rk}_{q^m} (\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}) = \text{rk}_{q^m} (\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}). \quad (49)$$

It is readily seen that drawing \mathbf{E} uniformly at random with a fixed rank partition \mathbf{t} , i.e.,

$$\mathbf{E} \stackrel{\S}{\leftarrow} \mathcal{E}^{(\mathbf{t})} := \{ \mathbf{E} \in \mathbb{F}_{q^m}^{s \times n} : \mathbf{E} \text{ has rank partition } \mathbf{t} \}$$

results in \mathbf{M} being drawn uniformly at random from the set

$$\mathbf{M} \stackrel{\S}{\leftarrow} \mathcal{M}^{(\mathbf{t})} := \{ \mathbf{M} \in \mathbb{F}_{q^m}^{s \times t} : \text{wt}_{\Sigma R}(\mathbf{M}) = \mathbf{t} \}.$$

By (49) and Lemma 6, with \mathbf{E} and \mathbf{M} drawn as above, we have

$$\begin{aligned} \Pr(\text{rk}_{q^m} (\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}) < t) &= \Pr(\text{rk}_{q^m} (\lambda_{n-t-k}(\mathbf{M})_{\mathbf{a}}) < t) \\ &= \Pr((16) \text{ is satisfied for } \mathbf{M}). \end{aligned}$$

We upper-bound the latter probability. First, let $\mathbf{b} \in \mathbb{F}_{q^m}^t$ be fixed with $\text{wt}_{\Sigma R}(\mathbf{b}) > n - t - k$. We count the number of matrices \mathbf{M} with

$$\lambda_{n-t-k}(\mathbf{b})_{\mathbf{a}}\mathbf{M}^\top = \mathbf{0}. \quad (50)$$

Note that $\lambda_{n-t-k}(\mathbf{b})_{\mathbf{a}} \in \mathbb{F}_{q^m}^{(n-t-k) \times t}$ and, by Proposition 2 and $\text{wt}_{\Sigma R}(\mathbf{b}) > n - t - k$, we have

$$\text{rk}_{q^m} (\lambda_{n-t-k}(\mathbf{b})_{\mathbf{a}}) = n - t - k.$$

Hence, the right kernel of $\lambda_{n-t-k}(\mathbf{b})_{\mathbf{a}}$ has cardinality $(q^m)^{t-(n-t-k)} = q^{m(2t-n+k)}$, and there are at most $q^{ms(2t-n+k)}$ many matrices \mathbf{M} satisfying (50). On the other hand, we have,

$$\begin{aligned} |\{ \mathbf{M} \in \mathbb{F}_{q^m}^{s \times t} : \text{wt}_{\Sigma R}(\mathbf{M}) = \mathbf{t} \}| &= \prod_{i=1}^{\ell} \left| \left\{ \mathbf{M}^{(i)} \in \mathbb{F}_{q^m}^{s \times t_i} : \text{rk}_q(\mathbf{M}^{(i)}) = t_i \right\} \right| \\ &\stackrel{(*)}{\geq} \prod_{i=1}^{\ell} q^{smt_i} \kappa_q^{-1} = q^{smt} \kappa_q^{-\ell}, \end{aligned}$$

where in (*), we use [55, Lemma 3.13]. In summary, the probability that (50) is satisfied for a specific \mathbf{b} is upper-bounded by

$$\begin{aligned} \Pr(\mathbf{M} \text{ satisfies (50) for a specific } \mathbf{b}) &\leq \frac{q^{ms(2t-n+k)}}{\left| \{ \mathbf{M} \in \mathbb{F}_{q^m}^{s \times t} : \text{wt}_{\Sigma R}(\mathbf{M}) = t \} \right|} \\ &\leq \kappa_q^\ell q^{ms(2t-n+k)} q^{-smt} \\ &= \kappa_q^\ell q^{sm(t-n+k)}. \end{aligned} \quad (51)$$

We union-bound this probability over the choices of \mathbf{b} with $\text{wt}_{\Sigma R} > n - t - k$. Note that (50) is the same condition for two \mathbf{b} vectors for which the row space of $\lambda_{n-t-k}(\mathbf{b})_{\mathbf{a}}$ is the same. Since this row space is trivially the same for two vectors \mathbf{b} and \mathbf{b}' with $\mathbf{b} = \xi \mathbf{b}'$ for $\xi \in \mathbb{F}_{q^m}^*$, we multiply (51) by the following number⁴

$$\frac{\left| \{ \mathbf{b} \in \mathbb{F}_{q^m}^t : \text{wt}_{\Sigma R} > n - t - k \} \right|}{q^m - 1} \leq \frac{q^{mt} - 1}{q^m - 1} = \begin{bmatrix} t \\ 1 \end{bmatrix}_{q^m} \leq \kappa_q q^{m(t-1)}$$

Overall, we have

$$\begin{aligned} \Pr((16) \text{ is satisfied for } \mathbf{M}) &\leq \kappa_q^{\ell+1} q^{sm(t-n+k)} q^{m(t-1)} \\ &= \kappa_q^{\ell+1} q^{m(t(s+1)-s(n-k)-1)} \\ &= \kappa_q^{\ell+1} q^{-m((s+1)(t_{\max}-t)+1)}. \end{aligned}$$

Note that this expression is independent of the rank partition \mathbf{t} , so it is also an upper bound for $\Pr(\text{rk}_{q^m}(\lambda_{n-t-k}(\mathbf{E})_{\mathbf{a}}) < t)$ with \mathbf{E} drawn as in the lemma statement (i.e., from the set of all errors of sum-rank weight t , and not from the subset $\mathcal{E}^{(\mathbf{t})}$ with a specific rank partition \mathbf{t}). \blacksquare

C. Proof of Proposition 4

Proof:

- Ad 1): By Lemma 8 there exists at least one nonzero polynomial $Q \in \mathcal{Q}$ which implies that $s' \geq 1$. Now suppose that $\text{LP}_{\prec_w}(Q) = 0$ for some $Q \in \mathcal{Q} \setminus \{0\}$, i.e. we have that $\deg(Q_0) > \max\{\deg(Q_j) + k - 1\}$. Since $t < \frac{s}{s+1}(n-k+1)$ and $Q \in \mathcal{Q}$ we have that $Q(x, f_1, \dots, f_s) = 0$ (see Theorem 3) which is possible only if $\deg(Q_0) \leq \max\{\deg(Q_j) + k - 1\}$. Therefore we must have that $\deg_w(Q) \geq D$ and thus $Q \notin \mathcal{Q}$. Hence, there are no polynomials in \mathcal{Q} (and so in $\mathcal{B}_{<D}$) with leading position 0 and therefore we must have that $s' \leq s$ since by assumption the leading positions of $\mathcal{B}_{<D}$ are distinct and $\text{LP}_{\prec_w}(Q) \in \{0, \dots, s\}$ for any $Q \in \mathbb{F}_{q^m}[x, y_1, \dots, y_s, \sigma]$.
- Ad 2): Let $\mathcal{J} = \text{LP}_{\prec_w}(\mathcal{B}_{<D})$ and suppose w.l.o.g. that $\deg_w(Q^{(r)}) = D - 1$ for all $r = 1, \dots, s'$. In case some $Q^{(r)}$ have weighted degree less than $D - 1$ we can increase the degree to $D - 1$ by taking the left product with an appropriate $a \in \mathbb{F}_{q^m}[x, \sigma]$ without changing $\text{LP}_{\prec_w}(Q^{(r)})$ and the number of solutions of $Q^{(r)}(x, f_1(x), \dots, f_s(x)) = 0$ for all $r \in [1, s']$. Let $\mathbf{Q}_S^{(j)} \in \mathbb{F}_{q^m}^{k \times k}$ be the submatrix of \mathbf{Q}_R consisting of the k columns corresponding to the unknowns $f_{j,0}, \sigma^{-1}(f_{j,1}), \dots, \sigma^{-(k-1)}(f_{j,k-1})$ and k rows containing inverse automorphisms of the (leading) coefficient $q_{j,D-k}^{(r)}$ for each $j \in \mathcal{J}$ and some $r \in [1, s']$. Then each $\mathbf{Q}_S^{(j)}$ is a $k \times k$ upper triangular matrix with elements

$$\sigma^{-(D-k)} \left(q_{j,D-k}^{(r)} \right), \sigma^{-(D-k+1)} \left(q_{j,D-k}^{(r)} \right), \dots, \sigma^{-(D-1)} \left(q_{j,D-k}^{(r)} \right)$$

on the diagonal since by definition the leading positions of $\mathcal{B}_{<D}$ are distinct for all $Q^{(r)} \in \mathcal{B}_{<D}$. Let j_r for $r = 1, \dots, s'$ be the indices of the leading terms of the polynomials in $\mathcal{B}_{<D}$ and let $s' = |\mathcal{B}_{<D}|$. Then we can set up an upper block triangular truncated root-finding subsystem of the form

$$\underbrace{\begin{pmatrix} \mathbf{Q}_S^{(j_1)} & \cdots & \cdots \\ & \mathbf{Q}_S^{(j_2)} & \cdots \\ & & \ddots \\ & & & \mathbf{Q}_S^{(j_{s'})} \end{pmatrix}}_{\mathbf{Q}} \cdot \begin{pmatrix} f_{j_1,0} \\ \vdots \\ \sigma^{-(k-1)}(f_{j_1,k-1}) \\ \hline \vdots \\ f_{j_{s'},0} \\ \vdots \\ \sigma^{-(k-1)}(f_{j_{s'},k-1}) \end{pmatrix} = -\hat{\mathbf{q}}_0$$

⁴For the existing failure probability bound in the special case $\ell = 1$, Overbeck [55] uses $\begin{bmatrix} t \\ 1 \end{bmatrix}_{q^m} \approx q^{m(t-1)}$, which is in fact a relatively tight *lower* bound (see (1)). Hence, the result in [55] rather gives an estimate than a strict upper bound. To obtain an expression that is a *strict* upper bound, we use the right-hand side of (1).

- where \hat{q}_0 obtained by considering the corresponding entries of q_0 . We have $\text{rk}_{q^m}(\mathbf{Q}_S^{(j)}) = k$ for all $j \in \mathcal{J}$ and conclude that $\text{rk}_{q^m}(\mathbf{Q}_R) \geq \text{rk}_{q^m}(\hat{\mathbf{Q}}) = \sum_{j \in \mathcal{J}} k$ where the first inequality follows because we considered only a submatrix of \mathbf{Q}_R .
- Ad 3): By 1) and 2) the rank of the root-finding matrix \mathbf{Q}_R satisfies $\text{rk}_{q^m}(\mathbf{Q}_R) \geq s'k$. Hence, the dimension of the solution space of the \mathbb{F}_{q^m} -linear root-finding system in (26) is at most $sk - s'k = k(s - s')$.
 - Ad 4): The \mathbb{F}_{q^m} -linear root-finding system in (26) has a unique solution if and only if the rank of the root-finding matrix \mathbf{Q}_R in (28) is full, i.e. if $\text{rk}_{q^m}(\mathbf{Q}_R) = sk$. By 2) this is satisfied if $s' = s$. Now assume that the root-finding system set up with all polynomials $\tilde{Q}^{(r)} \in \mathcal{Q} \setminus \{0\}$ has a unique solution whereas the root-finding system set up with $\mathcal{B}_{<D}$ has no unique solution. Then there exists at least one $\tilde{Q}^{(r)} \in \mathcal{Q}$ which cannot be represented as $\mathbb{F}_{q^m}[x, \sigma]$ -linear combination of the polynomials $Q^{(1)}, \dots, Q^{(s')}$ in $\mathcal{B}_{<D}$, which contradicts the assumption that the left $\mathbb{F}_{q^m}[x, \sigma]$ -linear span of the polynomials in $\mathcal{B}_{<D}$ contains \mathcal{Q} . Therefore, we conclude that the root-finding system in (26) has a unique solution if and only if $s' = s$. ■

APPENDIX B

PROOFS AND STATEMENTS FROM SECTION IV

A. Proof of Lemma 12

Proof: A vector $\mathbf{Q} = (Q_0, \dots, Q_s) \in \mathbb{F}_{q^m}[x, \sigma]^{s+1}$ satisfies Condition (37) in Problem 2 on interpolation points in $\mathbf{U} = (\mathbf{U}^{(1)}, \mathbf{U}^{(2)}, \dots, \mathbf{U}^{(\ell)})$ if and only if each sub-block (Q_{η_r}, \dots, Q_s) satisfies (37) on the rows of $\tilde{\mathbf{U}}^{(i, r_i)}$. Using $G^{(r)}$ and $R_j^{(r)}$ as above, we can rewrite this condition, restricted to $\tilde{\mathbf{U}}^{(i, r)}$, as

$$\begin{aligned}
& \sum_{j=1}^{s+1} Q_{j-1} \left(U_{\kappa, j}^{(i)} \right)_{a_i} = 0 \quad \forall \kappa = 1, \dots, n_r^{(i)}, i = 1, \dots, \ell \\
\Leftrightarrow & \sum_{j=\eta_r+1}^{s+1} Q_{j-1} \left(\tilde{U}_{\kappa, j-\eta_r}^{(i, r_i)} \right)_{a_i} = 0 \quad \forall \kappa = 1, \dots, \nu_r^{(i)}, i \in \mathcal{J}_r \\
\Leftrightarrow & Q_{\eta_r} \left(\tilde{U}_{\kappa, 1}^{(i, r_i)} \right)_{a_i} + \sum_{j=\eta_r+2}^{s+1} Q_{j-1} \left(R_j^{(r)} \left(\tilde{U}_{\kappa, 1}^{(i, r_i)} \right) \right)_{a_i} = 0 \quad \forall \kappa, i \\
\Leftrightarrow & \left(Q_{\eta_r} + \sum_{j=\eta_r+2}^{\ell+1} Q_{j-1} R_j^{(r)} \right) \left(\tilde{U}_{\kappa, 1}^{(i, r_i)} \right)_{a_i} = 0 \quad \forall \kappa, i \\
\Leftrightarrow & Q_{\eta_r} + \sum_{j=\eta_r+2}^{\ell+1} Q_{j-1} R_j^{(r)} \stackrel{(a)}{\equiv} 0 \quad \text{mod}_r \underbrace{M_{\mathcal{B}_r}(x)}_{= G^{(r)}} \\
\Leftrightarrow & \exists \chi_r \in \mathbb{F}_{q^m}[x, \sigma] : Q_{\eta_r} + \sum_{j=\eta_r+2}^{\ell+1} Q_{j-1} R_j^{(r)} + \chi_r G^{(r)} = 0 \\
\Leftrightarrow & \exists \chi_r \in \mathbb{F}_{q^m}[x, \sigma] : (Q_{\eta_r} \quad \dots \quad Q_s \quad \chi_r) \cdot \begin{pmatrix} 1 \\ R_{\eta_r+2}^{(r)} \\ \vdots \\ R_{s+1}^{(r)} \\ G^{(r)} \end{pmatrix} = 0
\end{aligned}$$

where $\mathcal{B}_r = \left\{ \left(\tilde{U}_{\kappa, 1}^{(i, r_i)}, a_i \right) : i \in \mathcal{J}_r, \kappa = 1, \dots, \nu_r^{(i)} \right\}$. This is equivalent to (39) since the χ_r 's are independent of each other, but the Q_j are the same for each r . ■