

A data-driven model order reduction approach for Stokes flow through random porous media

Constantin Grigo^{1,*} and Phaedon-Stelios Koutsourelakis^{1,**}

¹ Department of Mechanical Engineering, Technical University of Munich, Boltzmannstr. 15, 85748 Garching

Direct numerical simulation of Stokes flow through an impermeable, rigid body matrix by finite elements requires meshes fine enough to resolve the pore-size scale and is thus a computationally expensive task. The cost is significantly amplified when randomness in the pore microstructure is present and therefore multiple simulations need to be carried out. It is well known that in the limit of scale-separation, Stokes flow can be accurately approximated by Darcy's law [1] with an effective diffusivity field depending on viscosity and the pore-matrix topology. We propose a fully probabilistic, Darcy-type, reduced-order model which, based on only a few tens of full-order Stokes model runs, is capable of learning a map from the fine-scale topology to the effective diffusivity and is maximally predictive of the fine-scale response. The reduced-order model learned can significantly accelerate uncertainty quantification tasks as well as provide quantitative confidence metrics of the predictive estimates produced.

Copyright line will be provided by the publisher

1 Introduction

Numerical simulations of physical or engineering systems are hampered by the presence of high-dimensional uncertainties in their input parameters, such as external loads, material- or geometric properties. Monte Carlo estimators, while dimension-independent, can lead to a large amount of forward model evaluations which are not computationally affordable in many cases.

A prominent approach to reduce the computational cost is by replacing the forward model by a much cheaper, yet inaccurate surrogate or emulator trained on only a small number of forward runs. Machine learning methods such as Gaussian Processes or Deep Neural Networks have grown into prominence but suffer from the curse of dimensionality and/or require an excessively large amount of data to be trained.

In this work, we introduce a fully Bayesian surrogate to Stokes flow through random porous media, which is utilizing a simplified physics emulator (Darcy flow) as its core unit and is therefore capable of dealing with large-dimensional input uncertainties (thousands) whilst only requiring few (tens) forward model runs for training.

2 Methodology

2.1 The full-order model: Stokes flow through random porous media

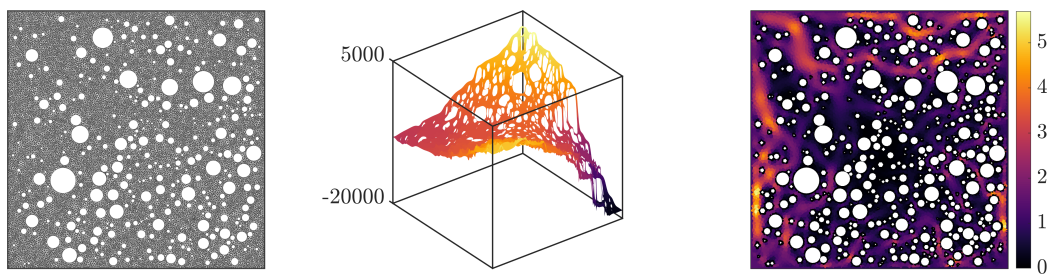


Fig. 1: FE mesh (left), pressure response p (middle) and norm of velocity field $|v|$ for Stokes flow through a typical porous medium realization with non-overlapping polydisperse circular exclusions.

We consider porous microstructures described as perforated unit square domains with impermeable inclusions. Assuming unit viscosity $\mu = 1$, the strong form of the fully resolved Stokes flow problem is given by

$$-\nabla \cdot \nabla \mathbf{v} + \nabla P = 0 \quad \text{in } \Omega_F \quad (1a)$$

$$\nabla \cdot \mathbf{v} = 0 \quad \text{in } \Omega_F \quad (1b)$$

$$\mathbf{t} = \mathbf{n} \cdot (\nabla \mathbf{v} - IP) = -P_0 \mathbf{n} \quad \text{on } \Gamma_p \quad (1c)$$

$$\mathbf{v} = \mathbf{v}_0 \quad \text{on } \Gamma_v \quad (1d)$$

$$\mathbf{v} = \mathbf{0} \quad \text{on } \Gamma_{\text{int}} \quad (1e)$$

where Ω_F is the pore domain, $\Gamma_p, \Gamma_v, \Gamma_{\text{int}}$ denote external Neumann, Dirichlet and interfacial (Dirichlet) boundaries and \mathbf{v} , P , and \mathbf{t} are the flow velocity, pressure field and Cauchy tractions, respectively. We use Taylor-Hood elements and call $\mathbf{U}_f = \begin{pmatrix} P_f \\ \mathbf{v}_f \end{pmatrix}$ the FE solution to the pressure and velocity fields p and \mathbf{v} evaluated on a regular 128×128 grid.

* Corresponding author: e-mail constantin.grigo@tum.de, phone +49 (89) 289 - 15218

** e-mail p.s.koutsourelakis@tum.de

2.2 A fully Bayesian reduced-order model

We propose a fully Bayesian, three-component reduced-order model [2], [3] comprising:

- a probabilistic map from the high-dimensional vector λ_f characterizing the random microstructure/domain (e.g. a list of centers and radii of circular exclusions) to a much lower dimensional vector λ_c representing an effective diffusivity random field; this probabilistic mapping is denoted with $p_c(\lambda_c|\lambda_f, \theta_c)$, where θ_c parametrized by θ_c ;
- a deterministic finite element solver for Darcy's equation,

$$-\nabla \cdot (\lambda_c \nabla P_c) = 0 \quad (2)$$

mimicking Stokes flow on a much coarser scale; We call $P_c = P_c(\lambda_c)$ the Darcy FE pressure response and $V_c = V_c(\lambda_c)$ the corresponding flux field, both evaluated on the same grid as the fine scale data;

- a probabilistic coarse-to-fine mapping from $U_c = \begin{pmatrix} P_c(\lambda_c) \\ V_c(\lambda_c) \end{pmatrix}$ to the fine scale response $U_f = \begin{pmatrix} P_f \\ V_f \end{pmatrix}$. We call this mapping $p_{cf}(U_f|U_c, \theta_{cf})$, parametrized by θ_{cf} ;

We pursue a fully Bayesian approach and marginalize all model parameters θ_c, θ_{cf} to get the predictive distribution

$$p(U_f|\lambda_f) = \int p_{cf}(U_f|U_c(\lambda_c), \theta_{cf}) p_c(\lambda_c|\lambda_f, \theta_c) p_{\theta_{cf}}(\theta_{cf}) p_{\theta_c}(\theta_c) d\lambda_c d\theta_c d\theta_{cf}, \quad (3)$$

where the effective Darcy diffusivity λ_c appears as a latent variable. Model training is performed using an adapted form of the Variational Relevance Vector Machine [4] suitable for latent variable models.

3 Example



Fig. 2: Predictive examples on the Stokes flow pressure response p for $N = 8$ training samples and Darcy emulator resolution 2×2 (left) and $N = 80$ using a 4×4 emulator mesh (right). The blue surface is the predictive mean ± 1 standard deviation (transparent grey). The colored surface is the true response of a test sample.

For training/testing our model, we use microstructures with totally impenetrable polydisperse spherical exclusions (see also Figure 1). The number and radii of exclusions are sampled from a (discretized) log-normal distribution. Predictive examples for low/high number of training data and different Darcy emulator discretizations are shown in Figure 2.

4 Conclusion

We have introduced a fully Bayesian, three-component probabilistic surrogate model for Stokes flow through random porous media using a much cheaper model emulator based on Darcy flow on a much coarser spatial discretization as the key component. Model evaluations on test samples show tight distributions centered around the true solution. Predictive errors improve with the number of training data and with the resolution of the Darcy-based emulator.

References

- [1] S. Whitaker, Transport in Porous Media **1**(1), 3–25 (1986).
- [2] C. Grigo and P. S. Koutsourelakis, Probabilistic Reduced-Order Modeling For Stochastic Partial Differential Equations, in: Proceedings of the 2nd International Conference on Uncertainty Quantification in Computational Sciences and Engineering (UNCECOMP 2017), (Eccomas Proceedia, 2017).
- [3] C. Grigo and P. S. Koutsourelakis, Bayesian model and dimension reduction for uncertainty propagation: applications in random media, forthcoming, November 2017.
- [4] C. M. Bishop and M. E. Tipping, Variational Relevance Vector Machines, in: Proceedings of the 16th Conference on Uncertainty in Artificial Intelligence, , UAI '00 (Morgan Kaufmann Publishers Inc., San Francisco, CA, USA, 2000), pp. 46–53.