

Gaussian Process Convolutional Dictionary Learning

Andrew H. Song, *Student member, IEEE*, Bahareh Tolooshams, *Student member, IEEE*,
and Demba Ba, *Member, IEEE*

Abstract

Convolutional dictionary learning (CDL), the problem of estimating shift-invariant templates from data, is typically conducted in the absence of a prior/structure on the templates. In data-scarce or low signal-to-noise ratio (SNR) regimes, which have received little attention from the community, learned templates overfit the data and lack smoothness, which can affect the predictive performance of downstream tasks. To address this limitation, we propose GPCDL, a convolutional dictionary learning framework that enforces priors on templates using Gaussian Processes (GPs). With the focus on smoothness, we show theoretically that imposing a GP prior is equivalent to Wiener filtering the learned templates, thereby suppressing high-frequency components and promoting smoothness. We show that the algorithm is a simple extension of the classical iteratively reweighted least squares, which allows the flexibility to experiment with different smoothness assumptions. Through simulation, we show that GPCDL learns smooth dictionaries with better accuracy than the unregularized alternative across a range of SNRs. Through an application to neural spiking data from rats, we show that learning templates by GPCDL results in a more accurate and visually-interpretable smooth dictionary, leading to superior predictive performance compared to non-regularized CDL, as well as parametric alternatives.

Index Terms

Convolutional Dictionary learning, Gaussian Process, Exponential Family, Wiener filter

I. INTRODUCTION

In recent years, the practice of modeling signals as a combination of a few repeated templates has gained popularity [1], such as in the modeling of point spread functions for molecular [2] and astronomical imaging [3], or action potentials in biological signals [4], [5], [6]. This is referred to as convolutional dictionary learning (CDL), where the goal is to estimate the shape and the locations of the shift-invariant templates [7]. The dictionary (the collection of the templates) is usually learned in a data-driven manner, without constraints.

In practice, when data are scarce or have low signal-to-noise ratio (SNR), learned dictionaries overfit the data without constraints. Consequently, the interpretability of the dictionary and its predictive performance on unobserved data suffer. The problem is aggravated for non-Gaussian distributions such as binomial, due to the non-linear mapping from dictionary to observations [8]. Notwithstanding these statistical considerations, there is evidence that the templates for naturally-occurring data could be considered *smooth* [3], [4].

The recent literature suggests that there are several approaches to learning smooth shift-invariant templates. One approach models the templates with parametric functions, such as the bi-exponential [5] function or a mixture of Gaussians [9]. Another line of work imposes total variation or Tikhonov like penalties [10], [11], [12] on the templates. More recently, smooth templates were obtained by passing learned dictionary through pre-designed lowpass filters [3], [6].

We propose an alternative, by assuming that the templates are generated from a Gaussian Process (GP) [13]. In this flexible nonparametric approach, different choices of kernels let us model different degrees of smoothness. We make the following contributions

Andrew H. Song is with the Electrical Engineering and Computer Science, Massachusetts Institute of Technology, Cambridge, MA 02139 USA (e-mail: andrew90@mit.edu).

Bahareh Tolooshams and Demba Ba are with the School of Engineering and Applied Sciences, Harvard University, Cambridge, MA 02138 USA (e-mail: btolooshams@seas.harvard.edu; demba@seas.harvard.edu).

CDL via GP regularization We introduce GPCDL, a framework for CDL with GP regularization, which can be applied to observations from the natural exponential family. We show that the learned dictionary is accurate in conditions where the unregularized alternatives overfit. For learning the templates, we show that a simple extension of the iteratively reweighted least squares allows us to easily incorporate the GP prior.

GP prior as Wiener filter We show that, under some assumptions, the GP prior acts like a lowpass Wiener filter [14], which allows GPCDL to learn smooth dictionaries. From this unique perspective, we elucidate the trade-off between the amount of training data and the parameters of the GP prior.

The paper is organized as follows: Section II and III introduce the background and the GPCDL framework. Section IV develops the interpretation of GPCDL as Wiener filtering. In Section V and VI, the results and conclusion are presented.

II. BACKGROUND

A. Notation

We denote the zero and identity matrices as $\mathbf{0}$ and \mathbf{I} , with appropriate dimensions. $A_{(k,k')}$ refers to the entry of matrix A at location (k, k') . The $\text{diag}(\cdot)$ refers to a diagonal matrix, with entries equal to the vector argument. When applied to a vector, a function operates in an element-wise manner.

B. Natural exponential family

Let $\mathbf{y}^j \in \mathbb{R}^N$ be observations from the natural exponential family [15] with mean $\boldsymbol{\mu}^j = E[\mathbf{y}^j] \in \mathbb{R}^N$, for $j = 1, \dots, J$. The log-likelihood $\log \ell(\mathbf{y}^j)$ is given by

$$\log \ell(\mathbf{y}^j) = \frac{f(\boldsymbol{\mu}^j)^T \mathbf{y}^j - b(f(\boldsymbol{\mu}^j))}{\phi} + c(\mathbf{y}^j, \phi), \quad (1)$$

where ϕ is a dispersion parameter and the functions $b(\cdot)$, $c(\cdot)$, as well as the invertible link $f(\cdot)$, are distribution-dependent.

We consider $f(\boldsymbol{\mu}^j)$ to be the sum of scaled and time-shifted copies of C finite-length templates $\{\mathbf{h}_c\}_{c=1}^C \in \mathbb{R}^K$, each localized, i.e., $K \ll N$. We express $f(\boldsymbol{\mu}^j)$ as a convolution, $f(\boldsymbol{\mu}^j) = \sum_{c=1}^C \mathbf{h}_c * \mathbf{x}_c^j + \mathbf{a}^j$, where the *code vector* $\mathbf{x}_c^j \in \mathbb{R}^{N-K+1}$ is a train of scaled impulses and $\mathbf{a}^j \in \mathbb{R}^K$ is a baseline. The entry $n_{c,i}^j$ of \mathbf{x}_c^j corresponds to the location of the i^{th} event with the amplitude $x_{c,i}^j$. Alternatively, we can write $f(\boldsymbol{\mu}^j) - \mathbf{a}^j = \sum_c \mathbf{X}_c^j \mathbf{h}_c = \sum_c \sum_{i=1}^{N_c^j} x_{c,i}^j \mathbf{S}_{c,i}^j \mathbf{h}_c$, where $\mathbf{S}_{c,i}^j = [\mathbf{0}_{K \times (n_{c,i}^j - 1)} \quad \mathbf{I}_{K \times K} \quad \mathbf{0}_{K \times (N - K - n_{c,i}^j + 1)}]^T \in \mathbb{R}^{N \times K}$ is the linear operator that shifts \mathbf{h}_c by $n_{c,i}^j$ samples and N_c^j is the number of occurrences of \mathbf{h}_c in \mathbf{y}^j [6].

C. Gaussian Process

Gaussian Processes (GPs) offer a nonparametric and flexible Bayesian approach for signal modeling [13], which we use as a smooth prior on \mathbf{h}_c . We first define functions $h_c : [0, T] \rightarrow \mathbb{R}$, $\forall c$, generated from a GP prior with zero-mean and stationary kernel $\kappa_c(t, t')$, i.e., $h_c(t) \sim \text{GP}(0, \kappa_c(t, t'))$, $\forall c$. We assume that the filter \mathbf{h}_c is sampled from $h_c(\cdot)$ and, for simplicity, with constant sampling interval Δ such that $T = K\Delta$. This yields $\mathbf{h}_c \sim \mathcal{N}(\mathbf{0}, \Sigma_c)$, where $\Sigma_c \in \mathbb{R}^{K \times K}$ is the covariance matrix and $\Sigma_{c,(k,k')} = \kappa_c(k\Delta, k'\Delta)$.

We focus on kernels in the *Matern* family [16], parameterized by ν , variance σ_c^2 , and lengthscale l_c . The parameters σ_c^2 and l_c can be chosen through maximum-likelihood estimation or cross-validation. In this work, we take the latter approach.

The power spectral density (PSD) of the kernel, denoted $\gamma_c(\omega)$ with the normalized frequency $\omega \in [-\pi, \pi]$, is obtained by taking the Fourier transform of the kernel [17]. Table I shows examples of Σ_c and the corresponding $\gamma_c(\omega)$. An example of $\gamma_c(\omega)$ for $\nu = 1.5$ is depicted in Fig. 1(a) for varying l_c . As ω increases, $\gamma_c(\omega)$ decays monotonically.

TABLE I: Kernels in the Matern family, with $\tau = (k - k')\Delta$.

ν	$\Sigma_{c,(k,k')}$	$\gamma_c(\omega)$
0.5	$\sigma_c^2 \exp\left(-\frac{\tau}{l_c}\right)$	$\frac{2\sigma_c^2 l_c}{(1 + l_c^2 \omega^2)}$
1.5	$\sigma_c^2 \left(1 + \frac{\sqrt{3}\tau}{l_c}\right) \exp\left(-\sqrt{3}\frac{\tau}{l_c}\right)$	$\frac{(4/\sqrt{3})\sigma_c^2 l_c}{(1 + l_c^2 \omega^2/3)^2}$

III. CDL WITH GP REGULARIZATION

A. Objective

Combining the likelihood and prior, we cast the GPCDL problem as minimizing the negative *log posterior*,

$$\min_{\substack{\{\mathbf{h}_c\}_{c=1}^C \\ \{\mathbf{x}_c^j\}_{c=1, j=1}^{C, J}}} \overbrace{\sum_j \frac{-f(\boldsymbol{\mu}^j)^T \mathbf{y}^j + b(f(\boldsymbol{\mu}^j))}{\phi}}^{\mathcal{L}(\mathbf{y})} + \sum_c \frac{\mathbf{h}_c^T \Sigma_c^{-1} \mathbf{h}_c}{2} \quad (2)$$

s.t. $\|\mathbf{x}_c^j\|_0 < \beta$ and $\|\mathbf{h}_c\|_2 \leq 1, \forall j, c$.

We use the ℓ_0 pseudo-norm for the sparsity constraint (number of nonzeros) with hyperparameter β . The GP prior is incorporated as a quadratic regularizer on \mathbf{h}_c . Although we focus on one-dimensional signals, both the likelihood and GP prior extend naturally to the multivariate setting.

Parametric approaches express $\{\mathbf{h}_c\}$ as combinations of parametric functions [5], [9]. Despite requiring few parameters, these approaches require a careful choice of parametric functions and parameters (e.g., the number of basis functions) to minimize model misspecification error. GPCDL is a nonparametric approach and does not suffer from misspecification issue at the expense of more parameters, i.e., the templates. By imposing structure on $\{\mathbf{h}_c\}$ through the GP prior, we effectively reduce the parameter search space, while maintaining the flexibility of the nonparametric paradigm.

We use alternating minimization to solve Eq. (2), where $\{\mathbf{h}_c\}$ and $\{\mathbf{x}_c^j\}$ are minimized by alternating between a convolutional sparse coding (CSC) step (optimization for $\{\mathbf{x}_c^j\}$) and a convolutional dictionary update (CDU) step (optimization for $\{\mathbf{h}_c\}$) [3], [6], [7]. For CSC, we use Convolutional Orthogonal Matching Pursuit (COMP) [18], [19], which is a greedy algorithm that iteratively identifies a template and its corresponding code that minimizes the residual. More details can be found in [19]. We now explore the CDU step in detail.

B. Convolutional Dictionary Update

Given the estimates for \mathbf{X}_c^j , we use Newton's method to minimize $\mathcal{L}(\mathbf{y})$ with respect to \mathbf{h}_c , referred to as iteratively reweighted least squares (IRLS) [20] for the exponential family. At iteration t , we compute its gradient and Hessian

$$\begin{aligned} \nabla_{\mathbf{h}_c} \mathcal{L}(\mathbf{y}) &= -\phi^{-1} \sum_j (\mathbf{X}_c^j)^T (\mathbf{y}^j - \boldsymbol{\mu}^{j,(t)}) + \Sigma_c^{-1} \mathbf{h}_c^{(t)}, \\ \nabla_{\mathbf{h}_c}^2 \mathcal{L}(\mathbf{y}) &= \phi^{-1} \sum_j (\mathbf{X}_c^j)^T \text{diag}((f'(\boldsymbol{\mu}^{j,(t)}))^{-1}) \mathbf{X}_c^j + \Sigma_c^{-1}, \end{aligned} \quad (3)$$

where f' denotes the derivative of f . Denoting $\mathbf{W}_c^{j,(t)} = \text{diag}((f'(\boldsymbol{\mu}^{j,(t)}))^{-1})$, we have

$$\begin{aligned} \mathbf{h}_c^{(t+1)} &= \mathbf{h}_c^{(t)} - (\nabla_{\mathbf{h}_c}^2 \mathcal{L}(\mathbf{y}))^{-1} \nabla_{\mathbf{h}_c} \mathcal{L}(\mathbf{y}) \\ &= (\phi^{-1} \sum_j (\mathbf{X}_c^j)^T \mathbf{W}_c^{j,(t)} \mathbf{X}_c^j + \Sigma_c^{-1})^{-1} \sum_j (\mathbf{X}_c^j)^T \mathbf{z}_c^{j,(t+1)}, \end{aligned} \quad (4)$$

where $\mathbf{z}_c^{j,(t+1)} = \phi^{-1}(\mathbf{W}_c^{j,(t)} \mathbf{X}_c^j \mathbf{h}_c^{(t)} + (\mathbf{y}^j - \boldsymbol{\mu}^{j,(t)})) \in \mathbb{R}^N$. After each update, we normalize $\mathbf{h}_c^{(t+1)}$ to have unit norm. We update \mathbf{h}_c in a cyclic manner until convergence and obtain $\tilde{\mathbf{h}}_c$. Note that the role of $(\mathbf{X}_c^j)^T$ is to extract the segments of $\mathbf{z}_c^{j,(t+1)}$ where $\mathbf{h}_c^{(t)}$ occurs, and take their weighted average [6]. Since $K \ll N$, the computational complexity of matrix inversion for $\Sigma_c, \nabla_{\mathbf{h}_c}^2 \mathcal{L}(\mathbf{y}) \in \mathbb{R}^{K \times K}$ is negligible compared to other operations in IRLS.

We emphasize that the CDU step seamlessly incorporates the GP constraint, as an extension of the classical IRLS algorithm [15]. Furthermore, one only needs to replace Σ_c to enforce different degrees of smoothness. This is simpler compared to approaches that utilize total-variation like penalties [10], [11], which require the derivation of different primal-dual optimization methods for different penalties [21].

IV. ANALYSIS OF CONVERGED DICTIONARY

We now analyze how GPCDL promotes the smoothness of \mathbf{h}_c . We focus mainly on the Gaussian case for intuition. We assume that the templates are non-overlapping, that is $(\mathbf{S}_{c,i}^j)^T \mathbf{S}_{c,i'}^j = \mathbf{0}$ for $i \neq i'$.

Gaussian case IRLS converges in a single iteration, with f as the identity and $\mathbf{W}_c^{j,(t)} = \mathbf{I}_{N \times N}$. This yields the residual $\mathbf{z}_c^j = \phi^{-1}(\mathbf{y}^j - \sum_{c' \neq c} \mathbf{X}_{c'}^j \mathbf{h}_{c'} - \mathbf{a}^j)$. The dispersion parameter is the observation noise variance, i.e., $\phi = \sigma_\varepsilon^2$. For simplicity, we omit the index t .

$$\begin{aligned} \mathbf{h}_c &= \left(\sigma_\varepsilon^{-2} \sum_j (\mathbf{X}_c^j)^T \mathbf{X}_c^j + \Sigma_c^{-1} \right)^{-1} \cdot \sum_j (\mathbf{X}_c^j)^T \mathbf{z}_c^j \\ &= \left(\sigma_\varepsilon^{-2} \sum_{j,i} (x_{c,i}^j)^2 \mathbf{I} + \Sigma_c^{-1} \right)^{-1} \sum_j (\mathbf{X}_c^j)^T \mathbf{z}_c^j, \end{aligned} \quad (5)$$

where the second equality follows from $(\mathbf{S}_{c,i}^j)^T \mathbf{S}_{c,i'}^j = \mathbf{0}$. The factor $\alpha^2 = \sigma_\varepsilon^{-2} \sum_{j,i} (x_{c,i}^j)^2$, which we term *code-SNR*, represents the SNR of the sparse codes, since $\sum_{j,i} (x_{c,i}^j)^2$ and σ_ε^{-2} are the energy of the codes and the noise, respectively.

Let us examine $\mathbf{F} \mathbf{h}_c$, the spectra of \mathbf{h}_c , where $\mathbf{F} \in \mathbb{C}^{K \times K}$ is a discrete Fourier transform matrix, with $\mathbf{F}_{k,k'} = \exp(-2\pi i(k-1)(k'-1)/K)$, and $\omega_K = 2\pi k/K$. Using the eigen-decomposition for a stationary kernel [22], we get

$$\Sigma_c \simeq \mathbf{F}^{-1} \text{diag}([\gamma_c(\omega_1), \dots, \gamma_c(\omega_K)]) \mathbf{F}. \quad (6)$$

Denoting $\mathbf{E}_c = \sum_j (\mathbf{X}_c^j)^T \mathbf{z}_c^j$ for notational simplicity, and using $\mathbf{F} \mathbf{F}^{-1} = \mathbf{I}$, we have

$$\begin{aligned} \mathbf{F} \mathbf{h}_c &\simeq \mathbf{F} (\alpha^2 \mathbf{I} + \mathbf{F}^{-1} \text{diag}([\gamma_c^{-1}(\omega_1), \dots, \gamma_c^{-1}(\omega_K)]) \mathbf{F})^{-1} \mathbf{E}_c \\ &= \text{diag}(\mathbf{g}) \tilde{\mathbf{F}} \mathbf{h}_c, \end{aligned} \quad (7)$$

where $\mathbf{g}_k = \gamma_c(\omega_k) / (\gamma_c(\omega_k) + \alpha^{-2})$ and $\tilde{\mathbf{h}}_c = \mathbf{E}_c / \alpha^2$. We can interpret Eq. (7) as *Wiener filter* [14], where the spectrum of each template $\tilde{\mathbf{h}}_c$, learned *without* the regularization, is filtered with gain \mathbf{g}_k at $\omega = \omega_k$.

The gain \mathbf{g}_k depends on two factors: 1) the code-SNR α^2 and 2) the PSD of the GP prior $\gamma_c(\omega_k)$. For fixed α^2 , the larger (and smaller) $\gamma_c(\omega_k)$, the closer \mathbf{g}_k to 1 (and 0). Therefore, \mathbf{g}_k acts as a lowpass filter and suppresses high-frequency content, which allows accurate learning of smooth \mathbf{h}_c . Fig. 1 demonstrates how different l_c lead to different gains \mathbf{g} . If α^2 is increased by collecting more data (increasing J), \mathbf{g}_k increases across the entire ω axis and the filtering effect diminishes. This agrees with our Bayesian intuition that with more data, the likelihood dominates the prior. Note that with increasing J , $\tilde{\mathbf{h}}_c$ itself becomes more accurate [23].

This analysis suggests that GPCDL shares the same philosophy as [3], [6], since the learned dictionary is passed through a lowpass filter. However, the filters are designed differently. For GPCDL, the Wiener filter is *data-adaptive*, as the gain \mathbf{g} is the solution to the optimization problem of Eq. (4). On the other hand, the filter is designed *a-priori* in [3], [6], without reference to the data or optimization criteria.

We note that a similar form has been studied in the spectral filtering theory for Tikhonov regularization problem [24]. Through more detailed analysis in the specific context of CDL and GP, we are able to

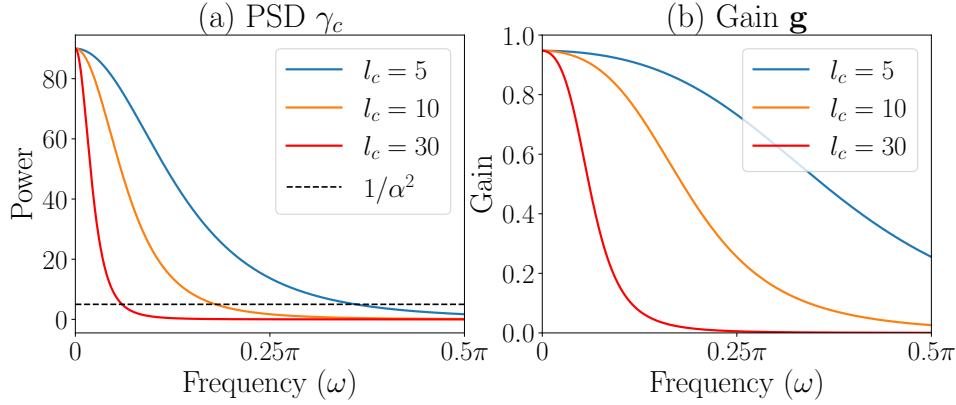


Fig. 1: (a) PSD $\gamma_c(\omega)$ for Matern kernel with $\nu = 1.5$ and varying l_c for fixed α . The variance σ_c^2 were adjusted to ensure same $\gamma_c(0)$. (b) The corresponding filter gain \mathbf{g} .

discover the specific connection between GPCDL and the Wiener filter and understand the balance between several factors that affect the smoothness of the learned dictionary. In addition, the Tikhonov regularization problem can be recovered from Eq. (2) by setting $\Sigma_c = \sigma_c^2 \mathbf{I}$.

General case For non-Gaussian distributions, two factors complicate the interpretation: 1) IRLS requires multiple iterations to converge and 2) \mathbf{W} is dependent on ω_k and iteration t . However, we conjecture that smoothing still takes place. Specifically, $\mathbf{R}^{(t)} = (\mathbf{X}_c^j)^T \mathbf{W}_c^{j,(t)} \mathbf{X}_c^j$ is still a diagonal matrix

$$\mathbf{R}_{(k,k)}^{(t)} = \phi^{-1} \sum_{j,i} (x_{c,i}^j)^2 \cdot (f'(\boldsymbol{\mu}_{n_{c,i}^j+k-1}^{j,(t)}))^{-1}, \quad (8)$$

and yields $\mathbf{g}_k = \gamma_c(\omega_k) / (\gamma_c(\omega_k) + (\mathbf{R}_{(k,k)}^{(t)})^{-1})$, computed using $\mathbf{R}^{(t)} = \mathbf{F}^{-1} \mathbf{R}^{(t)} \mathbf{F}$. Therefore, the relation between $\gamma_c(\omega_k)$ and $(\mathbf{R}_{(k,k)}^{(t)})^{-1}$ holds as in the Gaussian case. Consequently, \mathbf{g}_k filters the spectra of weighted-averaged segments from $\mathbf{z}_c^{j,(t)}$, extracted by the operator $(\mathbf{X}_c^j)^T$. Empirically, we observe that lowpass filtering operation still occurs.

V. EXPERIMENTS

We apply our framework to two datasets: 1) simulated data (Gaussian) and 2) neural spiking data from rats (Bernoulli). We use the Matern kernel with $\nu = 1.5$, fix $\sigma_c^2 = 1$, and vary l_c to control the regularization strength. For CSC, we estimate the residual threshold from the baseline period of each dataset.

A. Simulated data

Dataset We simulate Gaussian data with $\{\mathbf{h}_c^{\text{True}}\}_{c=1}^2 \in \mathbb{R}^{50}$, each appearing 4 times with magnitude uniformly sampled from $[10, 20]$, throughout the length $N = 1,000$ signal. The ground-truth filters are shown in Fig. 2 (black). The signal is perturbed with Gaussian noise with variance $\sigma_\varepsilon^2 = 5$. To evaluate the accuracy, we use the dictionary error, $\text{err}(\hat{\mathbf{h}}_c) = \sqrt{1 - \langle \hat{\mathbf{h}}_c, \mathbf{h}_c^{\text{True}} \rangle^2}$ [23]. We perturb $\mathbf{h}_c^{\text{True}}$ with Gaussian noise and obtain $\mathbf{h}_c^{\text{Init}}$. (dotted black) with $\text{err}(\mathbf{h}_c^{\text{Init}}) > 0.7$. We average the power $\omega \in [0.5\pi, \pi]$ to obtain the dispersion $\hat{\phi} = \hat{\sigma}_\varepsilon^2$. We run the alternating minimization for 15 iterations.

Results Table II shows the error, averaged over 10 independent runs, for varying SNR and lengthscale l_c . The larger the l_c , the stronger the GP regularization, resulting in considerably lower errors, as visually supported in Fig. 2. The learned $\hat{\mathbf{h}}_c$ for $l_c = 0.1$ (blue) corresponding to minimal regularization, contains high-frequency noise. With GP regularization ($l_c = 10$, red), we observe the noise is filtered out, and

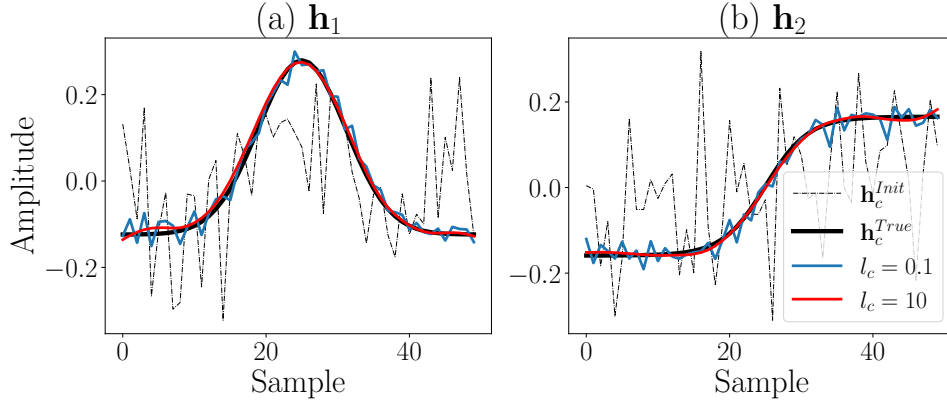


Fig. 2: Simulation results for $J=100$ and $\sigma_\varepsilon^2 = 5$.

TABLE II: Dictionary error $\text{err}(\hat{\mathbf{h}}_c)$ for simulated data with $J = \{10, 100\}$ and $\sigma_\varepsilon^2 = \{5, 10\}$.

Error	l_c	0.1		25		100	
	J	10	100	10	100	10	100
$\text{err}(\hat{\mathbf{h}}_1)$	5	0.29	0.18	0.18	0.12	0.13	0.06
$\text{err}(\hat{\mathbf{h}}_1)$	10	0.45	0.30	0.36	0.23	0.20	0.11
$\text{err}(\hat{\mathbf{h}}_2)$	5	0.32	0.18	0.21	0.11	0.10	0.06
$\text{err}(\hat{\mathbf{h}}_2)$	10	0.46	0.31	0.28	0.24	0.17	0.14

TABLE III: Metrics for two neurons with $J = 30$. MOG represents the mixture of Gaussians.

ID	l_c	Train			Test			
		0.01	25	200	0.01	25	200	MOG
1	pll	0.57	0.60	0.57	0.61	0.65	0.5	0.62
1	R^2	0.28	0.30	0.25	0.27	0.30	0.25	0.29
2	pll	0.59	0.63	0.62	0.64	0.70	0.67	0.69
2	R^2	0.22	0.24	0.23	0.18	0.23	0.21	0.23

thus $\hat{\mathbf{h}}_c$ is more accurate with the same code-SNR. As expected, the overall errors are lower with higher code-SNR, where $(J, \sigma_\varepsilon^2) = (10, 10)$ and $(100, 5)$ correspond to the lowest and the highest code-SNR, respectively. Even with high code-SNR, we observe that the GP regularization is still beneficial.

B. Neural activity data from barrel cortex

Dataset We use neural spiking data collected from the barrel cortex of mice, stimulated by a periodic whisker stimulus [25]. The experiments consist of multiple trials, with each trial $N = 3,000$ ms and $\mathbf{y}^j \in \{0, 1\}^N$. During each trial, a stimulus (Fig. 3 (b)) is applied 16 times, every 125 ms. Because of the presence of a single stimulus, we assume $C=1$ as in [19]. For $\mathbf{h}_1^{\text{init}}$, we use the first-order difference of the stimulus (dotted black). We use the logit function as the canonical link and set $\phi = 1$. We assume a constant baseline $\mathbf{a}^j = \mathbf{a}, \forall j$ and estimate it from all J segments. We also assume $\mathbf{x}_1^j = \mathbf{x}_1, \forall j$. We run 20 iterations of alternating minimization.

For each neuron, we use $J=30$ trials for training and $J_{\text{test}}=10$ trials for testing data. We perform 3-fold cross-validation on the training data to find l_1^{CV} that yields the highest predictive log-likelihood (pll). We use the entire training data to estimate $\hat{\mathbf{h}}_1$ and $\hat{\mathbf{x}}_1$. We use pll and R^2 [26] as performance metrics, where higher values indicate better performance.

Results Table III shows the metrics for two neurons. Fig. 3 (c-d) shows $\hat{\mathbf{h}}_1$ corresponding to varying l_1 for Neuron 1 with $J = 30$ (red). Both the highest pll and R^2 for the cross-validation is achieved for $l_1^{\text{CV}} = 25$. For the test data, l_1^{CV} also performs the best. We observe the two peaks in $\hat{\mathbf{h}}_1$ (red), around 30

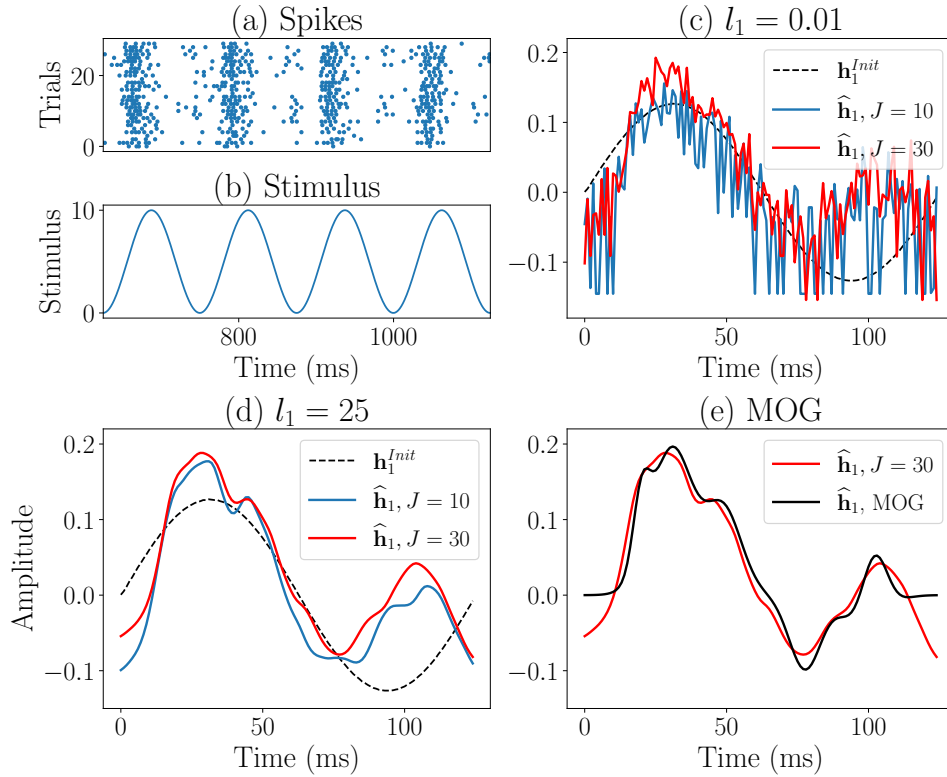


Fig. 3: Real data for Neuron 1. (a-b) Raster plot of the spikes and periodic stimulus. (c-d) $\hat{\mathbf{h}}_1$ with $J=30$ (red) and $J=10$ (blue) for various l_1 . (e) The parametric baseline, $\hat{\mathbf{h}}_1^{\text{MOG}}$

and 100 ms, validated by the repeated pattern of the strong bursts of spikes followed by the weak burst. For $l_1=0.01$, although the two peaks can be identified, $\hat{\mathbf{h}}_1$ lacks smoothness, as a result of overfitting to the *integer-valued* observations without the smoothness constraint. For $l_1=200$ with strong regularization, $\hat{\mathbf{h}}_1$ is overly smoothed and produces lower metrics.

Comparison between $J=10$ (blue) and $J=30$ demonstrates the benefits of the regularization for limited data. Without regularization (Fig. 3 (c)), $\hat{\mathbf{h}}_1$ for $J=10$ is much noisier than that for $J=30$ due to the scarcity of data, in addition to the nonlinear link. For l_1^{CV} , $\hat{\mathbf{h}}_1$ for both cases are similar, showing that the regularized dictionary is robust for limited data.

Finally, we compare $\hat{\mathbf{h}}_1$ with the mixture of Gaussians (MOG), $\mathbf{h}_1^{\text{MOG}}[k] = \sum_{d=1}^D a_d \exp(-(k-\mu_d)^2/\sigma_d^2)$. We choose $D=6$ that minimizes the Akaike Information Criterion [27] and estimate $\{a_d, \mu_d, \sigma_d^2\}_{d=1}^D$ through maximum-likelihood estimation. MOG represents a parametric approach where smoothness is guaranteed with the exponential function. Fig. 3 (e) shows that $\hat{\mathbf{h}}_1^{\text{MOG}}$ is indeed very similar to $\hat{\mathbf{h}}_1$ with l_1^{CV} . However, Table III shows that the nonparametric & regularized approaches outperform the parametric alternative in all cases, indicating the flexibility of the nonparametric approach.

VI. CONCLUSION

We proposed a framework for learning convolutional dictionaries using data from the natural exponential family by regularizing the classical objective with a Gaussian process prior. Through theoretical analysis and experiments, we show that the smoothness constraint leads to a dictionary with better performance than without regularization. In conclusion, GPCDL is a powerful framework that combines 1) the smoothness previously achieved by parametric functions, which are restrictive, or penalty functions, which are nontrivial to optimize, and 2) the flexibility of the nonparametric dictionary.

REFERENCES

- [1] M. S. Lewicki and T. Sejnowski, "Coding time-varying signals using sparse, shift-invariant representations," in *Neural Information Processing Systems (NIPS)*, 1999.
- [2] E. Betzig, G. H. Patterson, R. Sougrat, O. W. Lindwasser, S. Olenych, J. S. Bonifacino, M. W. Davidson, J. Lippincott-Schwartz, and H. F. Hess, "Imaging intracellular fluorescent proteins at nanometer resolution," *Science*, vol. 313, no. 5793, pp. 1642–1645, 2006.
- [3] B. Wohlberg and P. Wozniak, "PSF estimation in crowded astronomical imagery as a convolutional dictionary learning problem," *IEEE Signal Processing Letters*, vol. 28, pp. 374–378, 2021.
- [4] M. S. Lewicki, "A review of methods for spike sorting: the detection and classification of neural action potentials," *Network*, vol. 9, no. 4, pp. R53–R78, 1998.
- [5] J. T. Vogelstein, A. M. Packer, T. A. Machado, T. Sippy, B. Babadi, R. Yuste, and L. Paninski, "Fast nonnegative deconvolution for spike train inference from population calcium imaging," *Journal of Neurophysiology*, vol. 104, no. 6, pp. 3691–3704, 2010.
- [6] A. H. Song, F. J. Flores, and D. Ba, "Convolutional dictionary learning with grid refinement," *IEEE Transactions on Signal Processing*, vol. 68, pp. 2558–2573, 2020.
- [7] C. Garcia-Cardona and B. Wohlberg, "Convolutional dictionary learning: A comparative review and new algorithms," *IEEE Transactions on Computational Imaging*, vol. 4, no. 3, pp. 366–381, 2018.
- [8] R. Giryes and M. Elad, "Sparsity-based poisson denoising with dictionary learning," *IEEE Transactions on Image Processing*, vol. 23, no. 12, pp. 5057–5069, 2014.
- [9] N. Sadras, B. Pesaran, and M. M. Shanechi, "A point-process matched filter for event detection and decoding from population spike trains," *Journal of Neural Engineering*, vol. 16, no. 6, 2019.
- [10] L. Huo, X. Feng, C. Pan, S. Xiang, and C. Huo, "Learning smooth dictionary for image denoising," in *2013 Ninth International Conference on Natural Computation (ICNC)*, 2013, pp. 1388–1392.
- [11] E. Dohmatob, A. Mensch, G. Varoquaux, and B. Thirion, "Learning brain regions via large-scale online structured sparse dictionary-learning," in *Neural Information Processing Systems (NIPS)*, 2016.
- [12] L. Yan, H. Liu, S. Zhong, and H. Fang, "Semi-blind spectral deconvolution with adaptive tikhonov regularization," *Applied Spectroscopy*, vol. 66, no. 11, pp. 1334–1346, 2012.
- [13] C. E. Rasmussen and C. K. I. Williams, *Gaussian Processes for Machine Learning*. The MIT Press, 2005.
- [14] N. Wiener, *Extrapolation, Interpolation, and Smoothing of Stationary Time Series*. The MIT Press, 1964.
- [15] P. McCullagh and J. Nelder, *Generalized Linear Models*. Chapman & Hall/CRC, 1989.
- [16] B. Matern, *Spatial Variation*. Springer-Verlag, 1960.
- [17] S. Bochner, *Lecture on Fourier Integrals*. Princeton University Press, 1959.
- [18] A. Lozano, G. Swirszcz, and N. Abe, "Group orthogonal matching pursuit for logistic regression," *Journal of Machine Learning Research*, vol. 15, pp. 452–460, 2011.
- [19] B. Tolooshams, A. Song, S. Temereanca, and D. Ba, "Convolutional dictionary learning based auto-encoders for natural exponential-family distributions," in *Proceedings of the 37th International Conference on Machine Learning*, 2020, pp. 9493–9503.
- [20] L. Fahrmeir and G. Tutz, *Multivariate statistical modelling based on generalized linear models*. Springer Science & Business Media, 2013.
- [21] A. Chambolle, V. Caselles, M. Novaga, D. Cremers, and T. Pock, "An introduction to total variation for image analysis," 2009.
- [22] R. E. Turner and M. Sahani, "Time-frequency analysis as probabilistic inference," *IEEE Transactions on Signal Processing*, vol. 62, no. 23, pp. 6171–6183, 2014.
- [23] A. Agarwal, A. Anandkumar, P. Jain, P. Netrapalli, and R. Tandon, "Learning sparsely used overcomplete dictionaries via alternating minimization," *SIAM Journal on Optimization*, vol. 26, pp. 2775–2799, 2016.
- [24] D. P. O'Leary, "Near-optimal parameters for tikhonov and other regularization methods," *SIAM Journal on Scientific Computing*, vol. 23, no. 4, pp. 1161–1171, 2001.
- [25] S. Temereanca, E. N. Brown, and D. J. Simons, "Rapid changes in thalamic firing synchrony during repetitive whisker stimulation," *Journal of Neuroscience*, vol. 28, no. 44, pp. 11 153–11 164, 2008.
- [26] Y. Zhao and I. M. Park, "Variational latent gaussian process for recovering single-trial dynamics from population spike trains," *Neural Computation*, vol. 29, no. 5, pp. 1293–1316, 2017.
- [27] H. Akaike, "Likelihood of a model and information criteria," *Journal of Econometrics*, vol. 16, no. 1, pp. 3–14, 1981.