

IoD-Crypt: A Lightweight Cryptographic Framework for Internet of Drones

Muslum Ozgur Ozmen, Rouzbeh Behnia, Attila A. Yavuz, *Member, IEEE*

Abstract—Internet of Drones (IoD) is expected to play a central role in many civilian and military applications, that require sensitive and mission-critical information to be processed. It is therefore vital to ensure the security and privacy of IoD. However, unlike traditional networks, IoD has a broader attack surface and is highly energy-constrained, which hinder the direct adoption of standard cryptographic protocols for IoD.

We propose an energy-efficient cryptographic framework (namely IoD-Crypt), which can potentially meet the requirements of battery-limited IoD. Specifically, IoD-Crypt utilizes special precomputation techniques and self-certified primitives to gain significant computation and communication efficiency over the standard public key cryptography (PKC) suites. Our integrations and optimizations are broadly applicable to key exchange, digital signature and public key encryption schemes that encompass generic applications of PKC in IoD. We prove that IoD-Crypt is secure in the random oracle model. We fully implemented IoD-Crypt on two common drone processors, namely 8-bit AVR and 32-bit ARM, and conducted an in-depth energy analysis. Our experiments (on both platforms) showed that IoD-Crypt offers up to $48\times$ less energy consumption compared to standard techniques. We have open-sourced our implementations for wide adoption and public testing purposes.

Index Terms—internet of drones, drone security, network security, public key cryptography, lightweight cryptography

I. INTRODUCTION

Internet of Drones (IoD), as an emerging mobile Internet of Things (IoT) system, is a layered network control architecture that is designed to control and coordinate unmanned aerial vehicles (UAVs or drones) [1]. IoD has many applications including, but not limited to, military operations, package delivery, traffic control, environmental monitoring and disaster recovery [1], [2], [3], [4], [5], [6]. Due to the sensitive and strategic information involved in IoD, it is essential to guarantee their security and privacy. However, due to the low computational power, the energy and bandwidth limitations, this becomes a highly challenging task [3].

While there have been extensive studies on the optimization of security mechanisms on IoT, their direct adoption for IoD might not yield feasible and secure solutions. This has been further emphasized in a recent study that investigated the attacks (and their potential countermeasures) on IoT applications [7]. In [7], the authors point out that *the majority of the attack*

vectors could be mitigated if the existing security mechanisms and standards were properly implemented considering the requirements and characteristics of such systems. Therefore, there is a critical need to harness the state-of-the-art security mechanisms and algorithmic optimizations to offer a viable cryptographic solution for IoD, with minimal impact to the battery lives of resource-constrained drones.

We outline the security vulnerabilities and the state-of-the-art solutions that are considered for aerial drones as follows.

A. Overview of Existing Cryptographic Approaches

- **Security Vulnerabilities and Solutions:** In [8], Pleban et al. showed a successful hack and hijack of an *AR.Drone 2.0* (equipped with a 32-bit ARM processor) resulted from the lack of cryptographically secure communication channels. Son et al. [9] pointed out that most of the commodity (civilian) drone telemetry systems do not use cryptography to secure the communication. Thus, they proposed a fingerprinting method that may provide some authentication for drones.

There has been a lot of work on the identification of the security vulnerabilities of the current drone configurations [10], [11], [12]. For instance, Shin et al. [10] showed how to extract frequency hopping sequence of FHSS-type drone controllers using a software defined radio. Son et al. [11] demonstrated attacks that can cause drones to crash by exploiting the resonance frequency of MEMS gyroscopes. Habibi et al. [12] demonstrated stealth attacks (with potential defense strategies combining software and hardware) that alter the sensors' data and even change the direction of the drone. Another vulnerability outlined in [13] targets the MAVLink protocol and results in disabling the ongoing mission of the attacked drone. Garg et al. [14] proposed a framework based on probabilistic data structures that considers UAVs as intermediate aerial nodes to facilitate real-time analysis and cyber-threat detection mechanisms.

Recently, Lin et al. [3] identified the differences of drone networks from traditional ones and the potential challenges towards securing drones. *Their study showed that the design and deployment of specifically tailored lightweight cryptographic protocols are essential for energy-constrained drones.*

- **Cryptographic Techniques:** The earlier studies [15], [16] suggest the adoption of conventional cryptographic techniques such as RSA and AES on FPGAs to provide efficient solutions. Symmetric ciphers with white-box cryptography [17] were also considered in drone settings to target the mitigations of drone capturing attacks. Recently, certificateless cryptographic protocols were proposed for drone-based smart city applications [18]. These protocols aim to minimize the certification

Muslum Ozgur Ozmen, Rouzbeh Behnia and Attila A. Yavuz are with the Department of Computer Science and Engineering, University of South Florida, Tampa, FL, USA.

E-mail: {ozmen,behnia}@mail.usf.edu, attilaayavuz@usf.edu

Part of this work is completed when Muslum Ozgur Ozmen and Rouzbeh Behnia were with the Department of Electrical Engineering and Computer Science, Oregon State University, Corvallis, OR, USA.

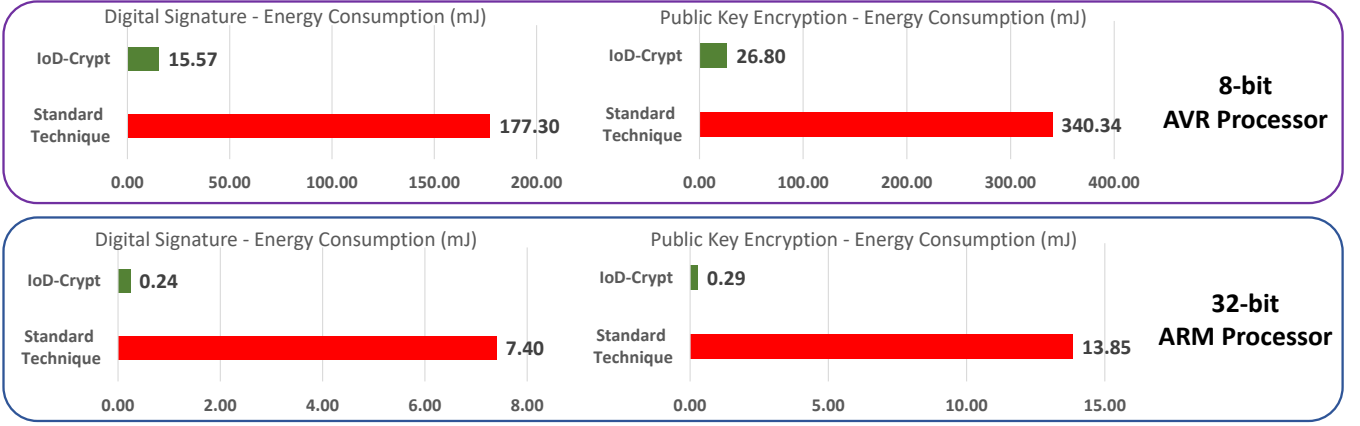


Fig. 1: Energy consumption of IoD-Crypt compared to standard PKI techniques (ECDSA, ECIES on standardized elliptic curves) on two common drone processors.

overhead (e.g., transmission) that might be costly for drones. However, they might still be computationally expensive for energy-constrained drones since they include multiple elliptic curve (EC) scalar multiplications [18]. Cheon et al. [19] proposed a linearly homomorphic authenticated encryption scheme to secure drone systems, but this scheme might also be too costly for resource-constrained drones, due to heavy homomorphic computations.

There is a significant need for an *open-source, energy-efficient, and comprehensive cryptographic framework* which can vastly enhance the state-of-the-art crypto schemes.

B. Our Contributions

In this paper, we created a cryptographic framework that we refer to as *IoD-Crypt*, which can meet some of the stringent energy and bandwidth needs of IoD applications.

Below, we give some desirable features of IoD-Crypt.

- **A Comprehensive Energy-Efficient Cryptographic Framework:** IoD-Crypt exploits the synergies among various cryptographic primitives such as efficient elliptic curves and constant storage precomputation techniques while avoiding the costly certification overheads by employing a self-certified cryptographic system. We apply our optimizations to a wide-variety of standard suites such as a key exchange, a digital signature, and a public key encryption. Our theoretical and experimental analysis, inlined with the requirements of IoD outlined in [1], [3], confirms that IoD-Crypt can meet the needs of IoD, specifically, in drone-to-drone and drone-to-infrastructure scenarios.

- **Improved Side-Channel Resiliency:** Some of the optimization techniques we employed in our framework aim to speed up EC scalar multiplication by converting it to EC additions [20], [21]. For instance, the digital signature (BPV-SC-FourQ-Schnorr) and public key encryption (DBPV-SC-FourQ-ECIES) schemes that are proposed as a part of the IoD-Crypt framework, do not require any EC scalar multiplication in their signing and encryption, respectively. Therefore, they achieve improved side-channel resiliency as compared to the base schemes by avoiding the attacks that

target EC scalar multiplication [22], [23].

- **Cryptographic Energy Usage Analysis on Two Common Platforms:** We identify two microprocessors, namely, 8-bit AVR [12], [24], [25] and 32-bit ARM [26], [27], from different families that are commonly used in small aerial drones (e.g., Crazyflie [26]). We implemented our framework on both of these processors and assessed the energy consumption. Moreover, we tested the standard techniques and provided an in-depth comparison in §VI. Our results showed that IoD-Crypt offers up to 13× and 48× lower energy consumption on 8-bit AVR and 32-bit ARM, respectively.

- **Broad Applicability to Various Cryptographic Constructs:** We identify various other (Elliptic Curve) Discrete Logarithm Problem (DLP) based schemes that can benefit from our proposed methods (see §IV-A). We discuss how IoD-Crypt can enhance the performance of such schemes.

- **Open-Source Cryptographic Framework for Wide Adoption:** We open-sourced our optimized framework for wide adoption and testing purposes at the link below.

<https://github.com/ozgurozmen/IoD-Crypt>

- **Potential Applications to IoTs:** The techniques used in IoD-Crypt can be useful for other IoT applications that require energy efficiency. Specifically, any IoT application relying on energy-limited devices (e.g., medical implantables, wireless sensors in smart cities/homes) can benefit from IoD-Crypt. Moreover, 8-bit AVR and 32-bit ARM processors, on which we tested IoD-Crypt, are not only common in drones but also in various other IoT applications [28], [29].

Differences between this article and its preliminary versions in [2], [21]: In this article, we harness the proposed techniques in two preliminary works to propose an integrated framework, IoD-Crypt. We provide improved implementations on drone microcontrollers that includes algorithmic optimizations. (i) We improve our framework, Dronecrypt, proposed in [2] to further enhance its efficiency and energy consumption, with the techniques in [21]. (ii) In Dronecrypt, only 32-bit ARM processor was considered and in [21], only 8-bit AVR processor was considered. Whereas, in this version,

we implement our improved framework on both 8-bit AVR drone processor [12], [24], [25], and 32-bit ARM processor (that Crazyflie 2.0 is equipped with [26], [27]). We evaluate our improved framework in terms of efficiency, energy consumption, and storage overhead. (iii) We provide the security proof of self-certified keys in [30] for the first time in this paper, that were proposed/adopted without a security proof in [21], [30]. (iv) We provide a formal security analysis of IoD-Crypt by capturing the security properties of its underlying cryptographic primitives. (v) We propose new parameter sets for our optimizations that offers higher security. (vi) We discuss how IoD-Crypt meets the well-established requirements of IoD networks presented in [1], [3] and elaborate on the broader impacts of our optimizations and proposed framework, specifically, we highlight some other EC-based schemes that can benefit from our optimization.

II. BUILDING BLOCKS

We first outline our notation in Table I.

TABLE I: Notation followed to describe schemes.

F_p	Finite Field
$\mathbf{G}$	Generator Group Point
N	A large prime
$\langle x, \mathbf{U} \rangle$	Private/Public key pair
$\langle d, \mathbf{D} \rangle$	System Wide Private/Public key pair
Γ	Precomputation Table
$\mathcal{E}_k$	IND-CPA Encryption via key k
$\mathcal{D}_k$	IND-CPA Decryption via key k
$\times$	Elliptic Curve Scalar Multiplication (Emul)
$\cdot$	Multiplication in F_q
KDF	Key Derivation Function
H	Cryptographic Hash Function $H : \{0, 1\}^* \rightarrow \mathbb{Z}_N$

EC points are shown in capital bold letters (e.g., $\mathbf{B}$)

1) *FourQ Curve* [31]: FourQ is a special EC that is defined by the complete twisted Edwards equation [32] $\mathcal{E}/F_{p^2} : -x^2 + y^2 = 1 + dx^2y^2$. FourQ is known to be one of the fastest elliptic curves that admits 128-bit security level [31]. Moreover, with extended twisted Edwards coordinates, FourQ offers the fastest EC addition algorithms [31], that is extensively used in our optimizations. All of our schemes are realized on FourQ.

2) *Boyko-Peinado-Venkatesan (BPV) Generator* [20]: BPV generator is a precomputation technique that converts an EC scalar multiplication to multiple EC additions with the cost of a small constant-size table storage. The security of BPV on EC discrete logarithm problem (DLP) setting is well-investigated [33], [34] and depends on the affine hidden subset sum problem. The offline (key generation) and online algorithms of BPV are described in Algorithm 1.

3) *Arazi-Qi (AQ) Self-Certified Key Exchange* [30]: AQ self-certified key exchange minimizes the certificate transmission and verification overhead. In Algorithm 2, we give key generation and shared secret algorithms where the keys are generated and distributed by a key generation center (KGC).

Nodes store the value $x_a \times \mathbf{D}$ so that the shared secret is calculated with a single EC scalar multiplication. One can also apply a technique presented in [30] to ensure that, if required, nodes can obtain AQ keys without exposing their private keys to the KGC. An ephemeral key exchange algorithm is

Algorithm 1 BPV Generator [20]

$(\Gamma, v, k) \leftarrow \text{BPV.Offline}(1^\kappa)$:

- 1: Generate BPV parameters (v, k) , where k and v are the number of pairs to be precomputed and the number of elements to be randomly selected out of k pairs, respectively, for $2 < v < k$.
- 2: $r'_i \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{R}'_i \leftarrow r'_i \times \mathbf{G}$, $i = 0, \dots, k-1$.
- 3: Set precomputation table $\Gamma = \{r'_i, \mathbf{R}'_i\}_{i=0}^{k-1}$.

$(r, \mathbf{R}) \leftarrow \text{BPV.Online}(\Gamma, v, k, \text{params})$:

- 1: Generate a random set $S \subset [0, k-1]$, where $|S| = v$.
- 2: $r \leftarrow \sum_{i \in S} r'_i \bmod N$, $\mathbf{R} \leftarrow \sum_{i \in S} \mathbf{R}'_i$.

Algorithm 2 AQ Self-Certified (SC) Scheme [30]

$(d, \mathbf{D}) \leftarrow \text{AQ.Setup}(1^\kappa)$ (offline)

- 1: $d \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{D} \leftarrow d \times \mathbf{G}$

$(x_a, \mathbf{U}_a) \leftarrow \text{AQ.Kg}(1^\kappa, ID_a)$ (offline)

- 1: $b_a \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{U}_a \leftarrow b_a \times \mathbf{G}$.
- 2: $x_a \leftarrow [H(ID_a, \mathbf{U}_a) \cdot b_a + d]$

$(\mathbf{K}_{ab}, \mathbf{K}_{ba}) \leftarrow \text{AQ.SharedSecret}(ID_a, \mathbf{U}_a, ID_b, \mathbf{U}_b)$

Node A

Node B

Send $(ID_a, \mathbf{U}_a)$ $\rightarrow$

$\leftarrow$ Send $(ID_b, \mathbf{U}_b)$

Node A: $\mathbf{K}_{ab} = x_a \times [H(ID_b || \mathbf{U}_b) \times \mathbf{U}_b + \mathbf{D}]$

Node B: $\mathbf{K}_{ba} = x_b \times [H(ID_a || \mathbf{U}_a) \times \mathbf{U}_a + \mathbf{D}]$

also proposed using AQ keys, namely, AQ-Hang [35]. In AQ-Hang, for each key exchange, a fresh ECDH key is calculated and added to the AQ shared secret to calculate ephemeral keys that are forward secure and self-certified.

III. MODELS

A. System Model

Self-certified cryptography requires a trusted key generation center to generate and distribute the keys to the entities in the system. Therefore, we assume that there is a trusted authority that can compute and distribute the self-certified keys to the drones. This is a feasible assumption as Federal Aviation Administration (FAA) requires that all drones between 0.6 to 55 lb should be registered with the U.S. Department of Transportation [1]. For instance, as the trusted authority, U.S. Department of Transportation (or FAA) can issue the keys to the drones.

As depicted in Figure 2, our main system components are the drones, and there are also recipients that communicate with the drones. These recipients may include entities such as Zone Service Providers (ZSPs), control stations or servers. For example, ZSPs provide navigation information and coordinate drones in a predetermined area, control stations can be used to

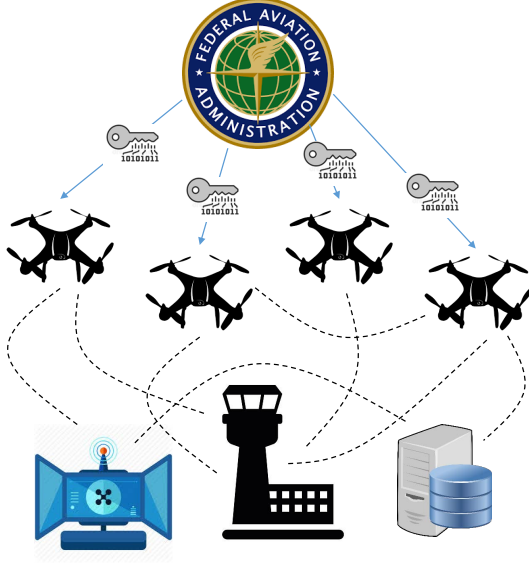


Fig. 2: Our system model.

send commands to non-autonomous drones, and servers can be used to store the sensors' data received from the drones [1], [3], [4]. The communication among these entities and drones occurs over a (insecure) broadcast channel and therefore it should be secured. Note that IoD networks are energy constrained, the components are mobile and the communication range is limited [1], [3].

B. Security Model

We assume that only the KGC is trusted. Following [36], we consider a probabilistic polynomial time (PPT) adversary $\mathcal{A}$ which is able to tap the communications between parties and intercept/modify messages. $\mathcal{A}$ is also able to request the key pairs of any user ID in the system via the $(U_{ID}, x_{ID}) \leftarrow \text{KeyQry}(ID)$ oracle. When the key pair of a user is exposed via the $\text{KeyQry}(\cdot)$ oracle the user will be marked as *corrupted*. Since the keys are self-certified, we assume that the adversary is able to verify the validity of the keys via the $\text{KeyVer}(\cdot)$ oracle.

Inspired by the work of Canetti and Krawczyk [36], we define the security of a key generation scheme in the following definition. To capture a real-world scenario, given the system-wide public key, we assume that $\mathcal{A}$ is able to observe a polynomially-bounded number of key pairs. $\mathcal{A}$ is also able to verify the validity of any key pair via the $\text{KeyVer}(\cdot)$ oracle. At some point, $\mathcal{A}$ outputs a key pair for the target user T . $\mathcal{A}$ wins the experiment if the key pair is valid and T was never queried to $\text{KeyQry}(\cdot)$ oracle.

Definition 1. A self-certified key generation scheme $SC\text{-}KG = (\text{Setup}, Kg)$ is secure if $\mathcal{A}$ has a negligible advantage in the following experiment $\text{Expt}_{\mathcal{A}}^{KG\text{-}Security}$ with a challenger $\mathcal{C}$.

- $(\text{params}) \leftarrow SC\text{-}KG.\text{Setup}(1^\kappa)$
- $(U_T, x_T) \leftarrow \mathcal{A}^{\text{KeyQry}(\cdot), \text{KeyVer}(\cdot)}(\text{params})$
- If $1 \leftarrow \text{KeyVer}(U_T, x_T)$, return 1. Else return 0.

$\mathcal{A}$ wins if user T was never queried to the $\text{KeyQry}(\cdot)$ oracle. The advantage $\text{Adv}_{\mathcal{A}}^{KG\text{-}Security}$ of $\mathcal{A}$ is defined as $\Pr[\text{Expt}_{\mathcal{A}}^{KG\text{-}Security} = 1]$.

We define the notion of existential unforgeability under chosen message attack (EU-CMA) for a signature scheme $SGN = (Kg, \text{Sig}, \text{Ver})$ through the following definition.

Definition 2. Existentially Unforgeability under Chosen Message Attack (EU-CMA) experiment $\text{Expt}_{SGN}^{EU\text{-}CMA}$ for a signature scheme $SGN = (Kg, \text{Sig}, \text{Ver})$ is defined as follows.

- $(sk, pk) \leftarrow SGN.Kg(1^\kappa)$
- $(m^*, \sigma^*) \leftarrow \mathcal{A}^{SGN.\text{Sig}(\cdot)}(pk)$

$\mathcal{A}$ wins the above experiment if $1 \leftarrow SGN.\text{Ver}(m^*, \sigma^*, pk)$ and m^* was not queried to $SGN.\text{Sig}(\cdot)$ oracle. The EU-CMA advantage $\text{Adv}_{SGN}^{EU\text{-}CMA}$ of $\mathcal{A}$ is defined as $\Pr[\text{Expt}_{SGN}^{EU\text{-}CMA} = 1]$

We define the notion of indistinguishability under chosen message attack (IND-CPA) for encryption scheme $\Sigma = (Kg, \text{Enc}, \text{Dec})$ through the following definition.

Definition 3. IND-CPA experiment $\text{Expt}_{\Sigma}^{IND\text{-}CPA}$ for an encryption scheme $\Sigma = (Kg, \text{Enc}, \text{Dec})$ between the adversary $\mathcal{A}$ and a challenger $\mathcal{C}$ is defined as follows.

- $(sk, pk) \leftarrow \Sigma.Kg(1^\kappa)$
- $(m_0, m_1) \leftarrow \mathcal{A}^{\Sigma.\text{Enc}(\cdot)}(pk)$
- $\mathcal{C}$ flips a coin $b \leftarrow \{0, 1\}$, computes $c_b \leftarrow \Sigma.\text{Enc}(m_b, pk)$ and returns c_b to $\mathcal{A}$.
- $b' \leftarrow \mathcal{A}^{\Sigma.\text{Enc}(\cdot)}(pk)$

$\mathcal{A}$ wins the above experiment if $b = b'$. The IND-CPA advantage $\text{Adv}_{\Sigma}^{IND\text{-}CPA}$ of $\mathcal{A}$ is defined as $\Pr[b = b'] \leq \frac{1}{2} + \epsilon$.

IV. PROPOSED FRAMEWORK

Design Rationale: Our main idea is as follows.

(i) The transmission and verification of certificates introduce a significant communication and computation burden which might be expensive for many IoD applications. Moreover, drones are required to be registered with central authorities (e.g., FAA). We observed that self-certified cryptographic keys as in [30] can be used to bridge this gap and enhance the security and performance of IoD. Specifically, we integrate self-certified keys into Schnorr signatures [37] and Elliptic Curve Integrated Encryption Scheme (ECIES) [38] to achieve efficient authentication and confidentiality tools. We refer to such improved schemes as BPV-SC-FourQ-Schnorr and DBPV-SC-FourQ-ECIES, respectively. Therefore, our approach eliminates the burden of certificates and harnesses a central trusted authority for the initial key distribution that fits IoD in compliance with the FAA requirements.

(ii) We alleviate the computational overhead of our schemes by harnessing special precomputation techniques such as the BPV precomputation technique (see Algorithm 1). We adopt a variation of the BPV technique, the Designated BPV (i.e., DBPV) [21], which permits an efficient use of BPV in ECIES. Finally, we realize all of our improved schemes on FourQ curve [39], which is one of the most computationally efficient ECs. Specifically, the efficiency of EC additions in FourQ complements BPV/DBPV techniques.

(iii) The AQ self-certified system [30] has not shown to be provably secure. We fill this research gap by providing a formal security proof (in the random oracle model) for the AQ self-certified keys. We then analyze the security of our proposed schemes by capturing the integration of self-certified keys and DBPV into Schnorr and ECIES. Our proposed framework consists of a signature scheme and a CPA secure encryption scheme to achieve authentication and confidentiality, respectively.

1) *BPV-SC-FourQ-Schnorr*: We adopt the BPV technique in the Schnorr signature scheme to speed up the EC scalar multiplication required in Schnorr. Moreover, we use AQ public/private key pair in our Schnorr algorithms to avoid the burden of communicating certificates by achieving self-certification. In PKI-based schemes, before the signature verification, the public key of the signer (i.e., via its certificate) should be verified. Note that $[H(ID_b||U_b) \times U_b + D]$ part in the verification step is equivalent to verifying a certificate without any extra communication cost. Moreover, it can be calculated and stored before the online steps. Our scheme is provided in Algorithm 3.

Algorithm 3 BPV-SC-FourQ-Schnorr with AQ Keys

$(\Gamma, x, \mathbf{U}) \leftarrow \text{BPV-SC-FourQ-Schnorr.Kg}(1^\kappa)$:

- 1: KGC generates its keys $d \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{D} \leftarrow d \times \mathbf{G}$
- 2: $b \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{U} \leftarrow b \times \mathbf{G}$.
- 3: $x \leftarrow [H(ID, \mathbf{U}) \cdot b + d]$.
- 4: Generate (v, k) as in BPV.Offline($\cdot$) Step 1
- 5: $r'_i \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{R}'_i \leftarrow r'_i \times \mathbf{G}$, $i = 0, \dots, k-1$.
- 6: Set precomputation table $\Gamma = \{r'_i, \mathbf{R}'_i\}_{i=0}^{k-1}$.

$(s, e) \leftarrow \text{BPV-SC-FourQ-Schnorr.Sig}(m, x, \Gamma)$:

- 1: Generate a random set $S \subset [0, k-1]$, where $|S| = v$.
- 2: $r \leftarrow \sum_{i \in S} r'_i \bmod N$, $\mathbf{R} \leftarrow \sum_{i \in S} \mathbf{R}'_i$.
- 3: $e \leftarrow H(m||\mathbf{R})$, $s \leftarrow (r - e \cdot x) \bmod N$

$b \leftarrow \text{BPV-SC-FourQ-Schnorr.Ver}(m, \langle s, e \rangle, \mathbf{U}, ID)$:

- 1: $\mathbf{R}' \leftarrow e \times [H(ID||\mathbf{U}) \times \mathbf{U} + \mathbf{D}] + s \times \mathbf{G}$
 - 2: If $e = H(m||\mathbf{R}')$ then set $b = 1$ as *valid*, else $b = 0$.
-

2) *DBPV-SC-FourQ-ECIES*: ECIES is a public key encryption scheme also included in TinyECC [40], that offers forward-secure authentication and encryption. In the standard ECIES scheme, two EC scalar multiplications are required, one to generate ephemeral key pair, and one to generate a one-time key. We also adopt the Designated BPV technique that allows to speed up both of these EC scalar multiplications in ECIES by replacing them with EC additions [21].

The BPV precomputation technique is extended for “Designated” elliptic curve points, where not only the EC scalar multiplication over the generator ($\mathbf{G}$) but also over other precomputed curve points are stored [21]. This significantly benefits the public key encryption schemes (e.g., ECIES [38]) where an EC scalar multiplication is required over the receiver’s public key. Although DBPV eliminates EC scalar multiplications,

the caveat is the small storage overhead. However, public key encryption schemes are usually suitable for applications where multiple entities (e.g., drones) send messages/reports to a single command center/base station (e.g., ZSPs) using their public key. This allows easy adoption of DBPV to public key encryption schemes (especially in the IoD networks) since the storage overhead introduced would be tolerable, which is confirmed by our experiments (see §VI).

For the ECIES scheme, as in Algorithm 4, we generate the designated precomputation table over $[H(ID||\mathbf{U}) \times \mathbf{U} + \mathbf{D}]$, that is based on the public key of the receiver.

Algorithm 4 DBPV-SC-FourQ-ECIES with AQ Keys

$(\Gamma, x, \mathbf{U}) \leftarrow \text{DBPV-SC-FourQ-ECIES.Kg}(1^\kappa)$:

- 1: KGC generates its keys $d \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{D} \leftarrow d \times \mathbf{G}$
- 2: $b \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{U} \leftarrow b \times \mathbf{G}$.
- 3: $x \leftarrow [H(ID, \mathbf{U}) \cdot b + d]$.
- 4: Generate (v, k) as in BPV.Offline($\cdot$) Step 1
- 5: $r'_i \xleftarrow{\$} \mathbb{Z}_N^*$, $\mathbf{R}'_i \leftarrow r'_i \times \mathbf{G}$, $\mathbf{S}'_i \leftarrow r'_i \times [H(ID||\mathbf{U}) \times \mathbf{U} + \mathbf{D}]$, $i = 0, \dots, k-1$.
- 6: Set precomputation table $\Gamma = \{r'_i, \mathbf{R}'_i, \mathbf{S}'_i\}_{i=0}^{k-1}$.

$(c, d, \mathbf{R}) \leftarrow \text{DBPV-SC-FourQ-ECIES.Enc}(m, \mathbf{U}, ID, \Gamma)$:

- 1: Generate a random set $S \subset [0, k-1]$, where $|S| = v$.
- 2: $r \leftarrow \sum_{i \in S} r'_i \bmod N$, $\mathbf{R} \leftarrow \sum_{i \in S} \mathbf{R}'_i$, $\mathbf{S} \leftarrow \sum_{i \in S} \mathbf{S}'_i$.
- 3: $(k_{enc}, k_{MAC}) \leftarrow \text{KDF}(\mathbf{S})$
- 4: $c \leftarrow \mathcal{E}_{k_{enc}}(m)$
- 5: $d \leftarrow \text{MAC}_{k_{MAC}}(c)$

$m \leftarrow \text{DBPV-SC-FourQ-ECIES.Dec}(x, \langle c, d, \mathbf{R} \rangle)$:

- 1: $\mathbf{S}' \leftarrow y \times \mathbf{R}$
 - 2: $(k_{enc}, k_{MAC}) \leftarrow \text{KDF}(\mathbf{S}')$
 - 3: If $d \neq \text{MAC}_{k_{MAC}}(c)$ return *invalid*
 - 4: $m \leftarrow \mathcal{D}_{k_{enc}}(c)$
-

We also complement our optimized public-key primitives by adopting lightweight symmetric ciphers. We consider ChaCha stream cipher and Poly1305 authenticator [41], due to their fast operations and well-studied security [42].

A. Broad Application to IoD and EC-based Schemes

We discuss how IoD-Crypt can meet some of the needs of IoD networks as outlined in [1], [3]. First and foremost, the energy efficiency of IoD-Crypt makes it a suitable choice for IoD. Our experiments showed that IoD-Crypt offers high energy efficiency on small drones that are equipped with 8-bit and 32-bit processors (see §VI). Since IoD networks consist of energy-constrained small drones [3], IoD-Crypt techniques are preferable over the standard techniques. Moreover, since the IoD networks usually use broadcasting for message delivery and may carry highly sensitive information, public key cryptographic tools may be useful due to their scalability, non-repudiation and public verifiability.

Moreover, the proposed techniques in IoD-Crypt framework can benefit various other ECDLP based schemes, that can be useful for securing IoD networks. For instance, in [18], certificateless key encapsulation and encryption techniques are proposed to secure drone communications in smart cities. The EC scalar multiplications in the certificateless hybrid encryption scheme in [18] can be accelerated with DBPV. Similarly, it can also benefit from the adoption of FourQ curve, especially when considered with the DBPV due to its optimized EC addition. In [43], [44], efficient digital signature and signcryption schemes were proposed. Although these schemes include bilinear pairing and therefore, cannot adopt FourQ curve, they can benefit from IoD-Crypt optimizations. In [43], signer needs to perform an EC scalar multiplication that can be accelerated with BPV, and in [44], at the signcryption algorithm, DBPV can be utilized to speed up a couple of EC scalar multiplications that are necessary to generate an ephemeral key.

B. Limitations and Potential Remedies

High energy and computational efficiency of IoD-Crypt comes with a trade-off due to the adopted optimization methods. First, the precomputation technique used in IoD-Crypt requires storing a constant-size table at the signer/sender. However, we show that with the correct parameter choices, it is even possible to store this table in highly resource-constrained 8-bit AVR processors. Moreover, IoD-Crypt requires a trusted authority (e.g., KGC) to compute and deliver keys to the drones, to remove the certificate transmission and verification overhead. As explained in our system model in §III-A, since drones should be registered with authorities (e.g., FAA or U.S. Department of Transportation), we believe this is a plausible assumption for the envisioned IoD applications.

V. SECURITY ANALYSIS

Theorem 1. *If an adversary $\mathcal{A}$ wins the experiment in Definition 1 with non-negligible probability after making q_k key queries and q_h hash queries, then one can build another algorithm $\mathcal{C}$ that runs $\mathcal{A}$ as a subroutine and can solve the Diffie-Hellman Problem with a non-negligible probability.*

Proof. $\mathcal{C}$ runs the $\text{AQ.Setup}(\cdot)$ algorithm and passes $\mathbf{D}$ to $\mathcal{A}$. $\mathcal{C}$ aims to solve the Discrete Logarithm (DL) problem on the input of $\mathbf{D}$. $\mathcal{C}$ keeps tables L_h and L_k to keep track of random oracle queries and key queries, respectively.

Setup $RO(\cdot)$ Oracle: $\mathcal{C}$ implements a function $H\text{-Sim}$ to handle $RO(\cdot)$ queries to random oracles H . That is, the cryptographic hash functions H are modeled as random oracles via $H\text{-Sim}$ as follows.

- i) $h \leftarrow H\text{-Sim}(ID||\mathbf{U}_{ID}, L_h)$: If $R \in L_h$ then $H\text{-Sim}$ returns the corresponding value $h \leftarrow L_m(ID||\mathbf{U}_{ID})$. Otherwise, it returns $h \xleftarrow{\$} \mathbb{Z}_N^*$ as the answer, and inserts $(ID||\mathbf{U}_{ID}, h)$ into L_m .

Queries of $\mathcal{A}$: $\mathcal{A}$ can query $RO(\cdot)$ and $\text{KeyQry}(\cdot)$ oracles on any message of its choice up to q_H and q_k times, respectively.

- 1) *Handle $RO(\cdot)$ queries:* $\mathcal{A}$'s queries on H is handled by $H\text{-Sim}$ function as described above.

- 2) *Handle $\text{KeyQry}(\cdot)$ queries:* To answer $\mathcal{A}$'s key queries on any user of its choice ID , $\mathcal{C}$ inserts ID into L_k and continues as follows.

- i) Pick $x_{ID} \xleftarrow{\$} \mathbb{Z}_N^*$ and $h \xleftarrow{\$} \mathbb{Z}_N^*$.
- ii) Compute $\mathbf{U}_{ID} \leftarrow h^{-1} \times (x_{ID} \times \mathbf{G} - \mathbf{D})$.
- iii) $\mathcal{C}$ checks if $L_k(ID||\mathbf{U}_{ID}) \neq \perp$, $\mathcal{C}$ aborts and outputs 0. Else, it sets $L_k(ID||\mathbf{U}_{ID}) \leftarrow h$.
- iv) Lastly, $\mathcal{C}$ outputs $(x_{ID}, \mathbf{U}_{ID})$ and sets $L_k(ID) \leftarrow (x_{ID}, \mathbf{U}_{ID})$.

Output of $\mathcal{A}$: Finally, $\mathcal{A}$ outputs a forgery key pair for any user of its choice ID^* as $(x_{ID^*}, \mathbf{U}_{ID^*})$. By Definition 1, $\mathcal{A}$ wins the if the below conditions hold.

- i) $1 \leftarrow \text{KeyVer}(x_{ID^*}, \mathbf{U}_{ID^*}, ID^*)$
- ii) $ID^* \notin L_k$

$\mathcal{C}$'s Solution to the DH problem: If $\mathcal{A}$ fails to output a key pair, $\mathcal{C}$ also fails in solving the DL problem, and therefore, $\mathcal{C}$ aborts and returns 0.

Otherwise, if $\mathcal{A}$ outputs a successful forgery $(x_{ID^*}, \mathbf{U}_{ID^*})$, using the forking lemma [45], $\mathcal{C}$ can rewind $\mathcal{A}$ to get a second forgery for user ID^* as $(\tilde{x}_{ID^*}, \tilde{\mathbf{U}}_{ID^*})$ where $x_{ID^*} \neq \tilde{x}_{ID^*}$ and $\mathbf{U}_{ID^*} = \tilde{\mathbf{U}}_{ID^*}$ with an overwhelming probability. Given the forgeries $(x_{ID^*}, \mathbf{U}_{ID^*})$ and $(\tilde{x}_{ID^*}, \tilde{\mathbf{U}}_{ID^*})$ on ID^* , based on [45], we know that $H(ID^*||\mathbf{U}_{ID}) \neq H(ID^*||\tilde{\mathbf{U}}_{ID})$.

Given $1 \leftarrow \text{KeyVer}(x_{ID^*}, \mathbf{U}_{ID^*}, ID^*)$ and $1 \leftarrow \text{KeyVer}(\tilde{x}_{ID^*}, \tilde{\mathbf{U}}_{ID^*}, ID^*)$, $\mathcal{C}$ computes $b \leftarrow \frac{x_{ID^*} - \tilde{x}_{ID^*}}{H(ID^*||\mathbf{U}_{ID}) - H(ID^*||\tilde{\mathbf{U}}_{ID})}$ and solve for the discrete logarithm of $\mathbf{D}$ as $d \leftarrow x_{ID^*} - H(ID^*||\mathbf{U}_{ID}) \cdot b$. $\square$

Theorem 2. *The signature scheme proposed in Algorithm 3 is EU-CMA secure in the sense of Definition 2.*

Proof. Based on the results of Theorem 1, we know that the self-certified key used in Algorithm 3 is secure. Moreover, The distribution of keys generated by Algorithm 2 is indistinguishable from uniform random due [37]. As shown in the previous works [20], [33], one can see that the distribution of BPV output r is statistically close to the uniform random with the appropriate choices of parameters (v, k) . Following this, if the ephemeral randomness r in BPV-SC-FourQ-Schnorr.Sig Step 2 is obtained from BPV generator, then BPV-SC-FourQ-Schnorr is secure given the hardness of the Affine Hidden Subset Sum problem [33], [46]. Therefore, based on these results, the signature scheme proposed in Algorithm 3 is secure in the sense of Definition 2 under the DL problem. $\square$

Theorem 3. *The encryption scheme proposed in Algorithm 4 is IND-CPA secure in the sense of Definition 3.*

Proof. The security and properties of the self-certified keys adopted in Algorithm 4 follows from the first part of the proof in Theorem 2. The original BPV, as shown in Algorithm 1 computes $\mathbf{R}$ by multiplying a random r with the generator of the group $\mathcal{E}(\mathcal{F}_{p^2}[N])$. However, due to the property of the group $\mathcal{E}(\mathcal{F}_{p^2}[N])$, in the DBPV method used in Algorithm 4, the public key of the user, $(x \cdot H(ID||\mathbf{U}) \cdot b) \times \mathbf{G}$, is also a generator of the group. Therefore, proving the randomness of

TABLE II: Comparison of Public Key Primitives on 8-bit AVR Processor

Protocol	CPU Cycles	CPU Time (s)	Memory [†] (Byte)	Bandwidth (Byte)	Energy Consumption (mJ)	Certificate Overhead
<i>Standard Techniques</i>						
ECDH	25,840,000	1.61	32	32	161.52	Yes
Ephemeral ECDH	54,380,000	3.40	32	32	339.86	Yes
ECDSA-Sign	28,370,000	1.77	32	64	177.30	Yes
ECDSA-Verify	28,960,000	1.81	32	64	181.01	Yes
ECIES-Encrypt	54,450,000	3.40	32	32 + cl + MAC	340.34	Yes
ECIES-Decrypt	25,920,000	1.62	32	32 + cl + MAC	161.99	Yes
<i>IoD-Crypt</i>						
AQ	6,940,000	0.43	32	32	43.38	No
BPV-AQ-Hash	9,140,000	0.57	16416	32	57.14	No
BPV-SC-FourQ-Schnorr.Sig	2,490,000	0.15	16416	64	15.57	No
BPV-SC-FourQ-Schnorr.Ver	8,310,000	0.52	32	64	51.94	No
DBPV-SC-FourQ-ECIES.Enc	4,290,000	0.27	24608	32 + cl + MAC	26.80	No
DBPV-SC-FourQ-ECIES.Dec	6,980,000	0.44	32	32 + cl + MAC	43.61	No

[†] Memory denotes private key size for sign/encrypt schemes as signer/sender stores it, memory denotes public key size for verify/decrypt schemes as verifier/receiver stores it.

the BPV output (as also studied in [20], [33]) for the DBPV method is identical to the original BPV method. Based on these results, the encryption scheme proposed in Algorithm 4 is secure in the sense of Definition 3, and the proof can be obtained identical as in [38]. $\square$

Parameter Choice: The security of our proposed schemes depend on the underlying curve and BPV/DBPV parameter choice of (v, k) . As the underlying curve, we select FourQ, that offers 128-bit security level and very fast curve operations such as EC addition [31]. Security of BPV/DBPV depends on the v -out-of- k different combinations that could be created with the precomputed table. Moreover, the selection of v and k have a trade-off between storage and computation, where increasing k increases the storage and increasing v increases the computation. We offer two parameter sets, specifically $v = 28, k = 256$ and $v = 18, k = 1024$ that offer 2^{128} different combinations, and therefore 128-bit security level. From these two, we focus on $v = 28, k = 256$ since it requires $4\times$ less storage, which can easily fit highly resource-constrained processors such as 8-bit AVR.

VI. PERFORMANCE ANALYSIS AND COMPARISON

We fully implemented IoD-Crypt on two common drone microprocessors and assessed the performance and energy efficiency of our schemes. We measured the energy consumption with the formula $E = V \cdot I \cdot t$, following the works [21], [2], [47]. We compare the costs of our optimized techniques with the standard ones, specifically, we implemented ECDH, ECDSA and ECIES protocols on the standardized secp256k1 curve, and adopted AES and HMAC as the symmetric ciphers.

A. Performance on 8-bit AVR Processor

Hardware Configurations: We implemented IoD-Crypt targeting an 8-bit AVR ATmega 2560 processor. ATmega 2560 has a maximum frequency of 16 MHz and it is equipped with 8 KB SRAM and 256 KB flash memory. ATmega 2560 operates at $V = 5\text{ V}$ and $I = 20\text{ mA}$ while running at 16 MHz (full capacity), that is used to estimate the energy consumption. Since we used IAR Embedded Workbench to

TABLE III: Comparison of Symmetric Ciphers on 8-bit AVR

Protocol	(KB/s)	CPU Cycles [†]	CPU Time (ms)	Energy Cons. (μJ)
<i>Standard Techniques</i>				
AES	29.339	19,500	1.22	122.34
AES-GCM	8.890	76,500	4.78	478.15
HMAC [‡]	22.017	182,200	11.39	1138.69
<i>IoD-Crypt</i>				
CHACHA20	65.670	8,300	0.52	521.89
CHACHA-POLY	23.687	35,500	2.22	222.03
POLY1305	37.169	21,400	1.34	133.81

[†] CPU cycles presented here are for a 32-byte message.

[‡] SHA256 is used as the standard hash function for HMAC.

develop IoD-Crypt, our codes can be easily tested/used in other 8-bit AVR processors.

Implementation: We implemented the public key primitives of IoD-Crypt using the open-source implementation of FourQ library on microprocessors [47], which provides the basic EC operations such as EC scalar multiplication, EC addition. As for the symmetric primitives, we used Weatherley's library [48]. We used the cycle-accurate simulator of IAR Embedded Workbench to benchmark our schemes, as in [47]. For the standard public key primitives, we used micro-ecc [49], that offers the lightweight implementations of standard elliptic curves for microprocessors.

The results of our experiments are presented in Table II for the public key primitives and in Table III for the symmetric ones. As shown, IoD-Crypt primitives outperform their counterparts in computation time and energy consumption. On the other hand, they require a storage of 16 KB for the adoption of BPV and 24 KB for DBPV. However, these precomputation tables are stored as a part of the flash memory of ATmega 2560 and they take less than 10% of the memory. Moreover, the standard public key techniques take a few seconds, that might be infeasible for time-critical IoD applications, whereas IoD-Crypt signature generation takes 150 ms and public key encryption takes 270 ms.

B. Performance on 32-bit ARM Processor

Hardware Configurations: We targeted an actual drone for our tests on 32-bit ARM processor, namely Crazyflie 2.0 [26].

TABLE IV: Comparison of Public Key Primitives on 32-bit ARM Processor

Protocol	CPU Cycles	CPU Time (ms)	Memory [†] (Byte)	Bandwidth (Byte)	Energy Consumption (mJ)	Certificate Overhead
<i>Standard Techniques</i>						
ECDH	8,710,000	51.84	32	32	6.84	Yes
Ephemeral ECDH	17,611,000	104.83	32	32	13.84	Yes
ECDSA-Sign	9,412,000	56.02	32	64	7.40	Yes
ECDSA-Verify	8,169,000	48.62	32	64	6.42	Yes
ECIES-Encrypt	17,625,000	104.91	32	32 + cl + MAC	13.85	Yes
ECIES-Decrypt	8,818,000	52.49	32	32 + cl + MAC	6.93	Yes
<i>IoD-Crypt</i>						
AQ	556,000	3.33	32	32	0.44	No
BPV-AQ-Hash	764,000	4.55	16416	32	0.60	No
BPV-SC-FourQ-Schnorr.Sig	302,000	1.80	16416	64	0.24	No
BPV-SC-FourQ-Schnorr.Ver	695,000	4.14	32	64	0.55	No
DBPV-SC-FourQ-ECIES.Enc	374,000	2.23	24608	32 + cl + MAC	0.29	No
DBPV-SC-FourQ-ECIES.Dec	570,000	3.39	32	32 + cl + MAC	0.45	No

[†] Memory denotes private key size for sign/encrypt schemes as signer/sender stores it, memory denotes public key size for verify/decrypt schemes as verifier/receiver stores it.

TABLE V: Comparison of Symmetric Ciphers on 32-bit ARM

Protocol	(MB/s)	CPU Cycles [†]	CPU Time (μ s)	Energy Cons. (μ J)
<i>Standard Techniques</i>				
AES	0.926	5,540	32.96	4.35
AES-GCM	0.377	13,600	80.95	10.68
HMAC [‡]	3.338	1,540	9.14	1.21
<i>IoD-Crypt</i>				
CHACHA20	3.554	1,440	8.59	1.13
CHACHA-POLY	2.619	1,960	11.65	1.54
POLY1305	13.709	370	2.23	0.29

[†] CPU cycles presented here are for a 32-byte message.

[‡] SHA256 is used as the standard hash function for HMAC.

Crazyflie 2.0 is equipped with an STM32F4 processor (32-bit ARM Cortex M-4 architecture) that has 192 KB SRAM and 1 MB flash memory, and operates at 168 MHz. At max frequency, the processor requires 3.3 V and 40 mA.

Implementation: We used the Microsoft FourQ library to implement IoD-Crypt for 32-bit ARM processor [31], [47]. This library provided the basic EC operations which we used to build the protocols with the optimization techniques. For our counterparts, we used micro-ecc [49] and for symmetric primitives, we used Wolfcrypt library [50].

Table IV and Table V show the benchmarks of IoD-Crypt and the standard techniques on STM32F4 processor. Our experiments showed that IoD-Crypt offers up to 48 $\times$ less energy consumption. Moreover, IoD-Crypt can support to very high message throughputs due to its high efficiency. More specifically, with IoD-Crypt, an STM32F4 processor can compute 555 signatures and encrypt 448 messages per second. In our experiments, we stored the precomputation tables on the SRAM.

C. Performance on Commodity Hardware

Considering the recipient side (e.g., command centers, ZSPs, and servers) that are involved in IoD networks are equipped with high-end processors, we also measured the costs of IoD-Crypt on a commodity hardware. In our experiments, we used an Intel i7 Skylake 2.6 GHz CPU running with Linux 16.04. Our results showed that these processors can support up to a very large number of message throughputs so that they can

communicate with a large drone fleet easily. More specifically, signing a message (with BPV-SC-FourQ-Schnorr.Sig) only takes around 10 μ s and encrypting a message (with DBPV-SC-FourQ-ECIES.Enc) takes around 15 μ s. Verification and decryption algorithms in IoD-Crypt only take 40–45 μ s. Therefore, IoD-Crypt supports the secure communication of thousands of messages, and thereby permits a better quality-of-service and response time, wherein recipients (e.g., ZSPs) may handle many drones simultaneously. We open-sourced our codes on the 64-bit processor as well, to complete our framework.

VII. CONCLUSION

In this paper, we propose IoD-Crypt, an efficient public-key based cryptographic framework that is tailored for the stringent energy and network requirements of IoD. IoD-Crypt eliminates (i) the conventional PKI overhead with self-certified keys and (ii) EC scalar multiplications with BPV and DBPV techniques, and adopts FourQ curve that offers very fast curve operations (e.g., EC addition). We prove that our improved schemes in IoD-Crypt are secure, and provide their implementation on two common drone processors, namely 8-bit AVR and 32-bit ARM. Our experiments showed that IoD-Crypt offers up to 13 $\times$ and 48 $\times$ less energy consumption compared to standard techniques, on 8-bit AVR and 32-bit ARM, respectively.

REFERENCES

- [1] M. Gharibi, R. Boutaba, and S. L. Waslander, "Internet of drones," *IEEE Access*, vol. 4, pp. 1148–1162, 2016.
- [2] M. O. Ozmen and A. A. Yavuz, "Dronecrypt - an efficient cryptographic framework for small aerial drones," in *Milcom 2018 Track 3 - Cyber Security and Trusted Computing (Milcom 2018 Track 3)*, Los Angeles, USA, Oct. 2018.
- [3] C. Lin, D. He, N. Kumar, K. R. Choo, A. Vinel, and X. Huang, "Security and privacy for the internet of drones: Challenges and solutions," *IEEE Communications Magazine*, vol. 56, no. 1, pp. 64–69, Jan 2018.
- [4] R. Clarke, "Understanding the drone epidemic," *Computer Law & Security Review*, vol. 30, no. 3, pp. 230–246, 2014.
- [5] P. Kumar, S. Garg, A. Singh, S. Batra, N. Kumar, and I. You, "Mvo-based 2-d path planning scheme for providing quality of service in uav environment," *IEEE Internet of Things Journal*, vol. 5, no. 3, pp. 1698–1707, June 2018.

- [6] P. Perazzo, F. B. Sorbelli, M. Conti, G. Dini, and C. M. Pinotti, "Drone path planning for secure positioning and secure position verification," *IEEE Transactions on Mobile Computing*, vol. 16, no. 9, pp. 2478–2493, Sep. 2017.
- [7] I. Stelios, P. Kotzanikolaou, M. Psarakis, C. Alcaraz, and J. Lopez, "A survey of iot-enabled cyberattacks: Assessing attack paths to critical infrastructures and services," *IEEE Communications Surveys Tutorials*, pp. 1–1, 2018.
- [8] R. C. Johann-Sebastian Pleban, Ricardo Band, "Hacking and securing the ar.drone 2.0 quadcopter: investigations for improving the security of a toy," pp. 9030 – 9030 – 12, 2014.
- [9] Y. Son, J. Noh, J. Choi, and Y. Kim, "Gyrosfinger: Fingerprinting drones for location tracking based on the outputs of mems gyroscopes," *ACM Trans. Priv. Secur.*, vol. 21, no. 2, pp. 10:1–10:25, Feb. 2018.
- [10] H. Shin, K. Choi, Y. Park, J. Choi, and Y. Kim, "Security analysis of fhss-type drone controller," in *Revised Selected Papers of the 16th International Workshop on Information Security Applications - Volume 9503*, ser. WISA 2015. New York, NY, USA: Springer-Verlag New York, Inc., 2016, pp. 240–253.
- [11] Y. Son, H. Shin, D. Kim, Y. Park, J. Noh, K. Choi, J. Choi, and Y. Kim, "Rocking drones with intentional sound noise on gyroscopic sensors," in *Proceedings of the 24th USENIX Conference on Security Symposium*, ser. SEC'15. Berkeley, CA, USA: USENIX Association, 2015, pp. 881–896.
- [12] J. Habibi, A. Gupta, S. Carlsony, A. Panicker, and E. Bertino, "Mavr: Code reuse stealthy attacks and mitigation on unmanned aerial vehicles," in *2015 IEEE 35th International Conference on Distributed Computing Systems*, June 2015, pp. 642–652.
- [13] Y. Kwon, J. Yu, B. Cho, Y. Eun, and K. Park, "Empirical analysis of mavlink protocol vulnerability for attacking unmanned aerial vehicles," *IEEE Access*, vol. 6, pp. 43 203–43 212, 2018.
- [14] S. Garg, A. Singh, S. Batra, N. Kumar, and L. T. Yang, "Uav-empowered edge computing environment for cyber-threat detection in smart vehicles," *IEEE Network*, vol. 32, no. 3, pp. 42–51, May 2018.
- [15] J. A. Steinmann, R. F. Babiceanu, and R. Seker, "Uas security: Encryption key negotiation for partitioned data," in *2016 Integrated Communications Navigation and Surveillance (ICNS)*, April 2016, pp. 1E4–1–1E4–7.
- [16] A. Shoufan, H. AlNoon, and J. Baek, *Secure Communication in Civil Drones*. Cham: Springer International Publishing, 2015, pp. 177–195.
- [17] S.-H. Seo, J. Won, E. Bertino, Y. Kang, and D. Choi, "A security framework for a drone delivery service," in *Proceedings of the 2nd Workshop on Micro Aerial Vehicle Networks, Systems, and Applications for Civilian Use*, ser. DroNet '16. ACM, 2016, pp. 29–34.
- [18] J. Won, S. H. Seo, and E. Bertino, "Certificateless cryptographic protocols for efficient drone-based smart city applications," *IEEE Access*, vol. 5, pp. 3721–3749, 2017.
- [19] J. H. Cheon, K. Han, S. Hong, H. J. Kim, J. Kim, S. Kim, H. Seo, H. Shim, and Y. Song, "Toward a secure drone system: Flying with real-time homomorphic authenticated encryption," *IEEE Access*, vol. 6, pp. 24 325–24 339, 2018.
- [20] V. Boyko, M. Peinado, and R. Venkatesan, "Speeding up discrete log and factoring based schemes via precomputations," in *Advances in Cryptology — EUROCRYPT'98: International Conference on the Theory and Application of Cryptographic Techniques Espoo, Finland, May 31 – June 4, 1998 Proceedings*. Springer Berlin Heidelberg, 1998, pp. 221–235.
- [21] M. O. Ozmen and A. A. Yavuz, "Low-cost standard public key cryptography services for wireless iot systems," in *Proceedings of the 2017 Workshop on Internet of Things Security and Privacy*, ser. IoTS&P '17. New York, NY, USA: ACM, 2017, pp. 65–70.
- [22] É. Brier and M. Joye, "Weierstraß elliptic curves and side-channel attacks," in *Public Key Cryptography*, D. Naccache and P. Paillier, Eds. Springer Berlin Heidelberg, 2002, pp. 335–345.
- [23] D. Genkin, L. Valenta, and Y. Yarom, "May the fourth be with you: A microarchitectural side channel attack on several real-world applications of curve25519," in *Proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security*, ser. CCS '17. New York, NY, USA: ACM, 2017, pp. 845–858.
- [24] J.-T. Zou, K.-L. Su, and H. Tso, "The modeling and implementation of tri-rotor flying robot," *Artificial Life and Robotics*, vol. 17, no. 1, pp. 86–91, Oct 2012.
- [25] E. Czerwinski, M. Szewc, I. Wojtunik, J. Awrejcewicz, and P. Olejnik, "Mathematical model, computer aided design and programming of a multifunctional flying object," *Aviation*, vol. 18, no. 1, pp. 28–39, 2014.
- [26] A. Bitcraze, "Crazyflie 2.0 nano quadcopter," 2016. [Online]. Available: <http://www.bitcraze.io>
- [27] J. A. Preiss, W. Honig, G. S. Sukhatme, and N. Ayanian, "Crazyswarm: A large nano-quadcopter swarm," in *2017 IEEE International Conference on Robotics and Automation (ICRA)*, May 2017, pp. 3299–3304.
- [28] Z. Liu, X. Huang, Z. Hu, M. K. Khan, H. Seo, and L. Zhou, "On emerging family of elliptic curves to secure internet of things: Ecc comes of age," *IEEE Transactions on Dependable and Secure Computing*, vol. 14, no. 3, pp. 237–248, May 2017.
- [29] O. Hahm, E. Baccelli, H. Petersen, and N. Tsiftes, "Operating systems for low-end devices in the internet of things: A survey," *IEEE Internet of Things Journal*, vol. 3, no. 5, pp. 720–734, Oct 2016.
- [30] O. Arazi and H. Qi, "Self-certified group key generation for ad hoc clusters in wireless sensor networks," in *Proceedings of IEEE International Conference on Computer Communications and Networks (ICCCN '05)*, October 2005, pp. 359–364.
- [31] C. Costello and P. Longa, *FourQ: Four-Dimensional Decompositions on a Q-curve over the Mersenne Prime*. Springer Berlin Heidelberg, 2015, pp. 214–235.
- [32] D. J. Bernstein, P. Birkner, M. Joye, T. Lange, and C. Peters, "Twisted edwards curves," in *Progress in Cryptology – AFRICACRYPT 2008*, S. Vaudenay, Ed. Springer Berlin Heidelberg, 2008, pp. 389–405.
- [33] G. Ateniese, G. Bianchi, A. T. Caposelle, C. Petrioli, and D. Spenza, "Low-cost standard signatures for energy-harvesting wireless sensor networks," *ACM Trans. Embed. Comput. Syst.*, vol. 16, no. 3, pp. 64:1–64:23, apr 2017.
- [34] J.-S. Coron, D. M'Raihi, and C. Tymen, "Fast generation of pairs (k, [k]p) for koblitz elliptic curves," in *Selected Areas in Cryptography: 8th Annual International Workshop, SAC 2001 Toronto, Ontario, Canada, August 16–17, 2001 Revised Papers*, S. Vaudenay and A. M. Youssef, Eds. Springer Berlin Heidelberg, 2001, pp. 151–164.
- [35] I. Hang, M. Ullmann, and C. Wieschebrink, "Short paper: A new identity-based dh key-agreement protocol for wireless sensor networks based on the arazi-qi scheme," in *Proceedings of the Fourth ACM Conference on Wireless Network Security*, ser. WiSec '11. New York, NY, USA: ACM, 2011, pp. 139–144.
- [36] R. Canetti and H. Krawczyk, "Analysis of key-exchange protocols and their use for building secure channels," in *Proceedings of the International Conference on the Theory and Application of Cryptographic Techniques: Advances in Cryptology*, ser. EUROCRYPT '01. London, UK, UK: Springer-Verlag, 2001, pp. 453–474.
- [37] C. Schnorr, "Efficient signature generation by smart cards," *Journal of Cryptology*, vol. 4, no. 3, pp. 161–174, 1991.
- [38] D. Pointcheval, "Psec-3: Provably secure elliptic curve encryption scheme," 2000.
- [39] C. Costello and P. Longa, "FourQ: Four-dimensional decompositions on a Q-curve over the mersenne prime," in *Advances in Cryptology – ASIACRYPT 2015*, T. Iwata and J. H. Cheon, Eds. Springer Berlin Heidelberg, 2015, pp. 214–235.
- [40] A. Liu and P. Ning, "Tinyecc: A configurable library for elliptic curve cryptography in wireless sensor networks," in *Proceedings of the 7th international conference on Information processing in sensor networks*, ser. IPSN '08. Washington, DC, USA: IEEE Computer Society, 2008, pp. 245–256.
- [41] Y. Nir and A. Langley, "ChaCha20 and Poly1305 for IETF Protocols," RFC 7539, May 2015. [Online]. Available: <https://rfc-editor.org/rfc/rfc7539.txt>
- [42] G. Procter, "A security analysis of the composition of chacha20 and poly1305," *Cryptology ePrint Archive*, Report 2014/613, 2014, <http://eprint.iacr.org/2014/613>.
- [43] J. Li, H. Teng, X. Huang, Y. Zhang, and J. Zhou, "A forward-secure certificate-based signature scheme," *The Computer Journal*, vol. 58, no. 4, pp. 853–866, 2015.
- [44] A. Karati, S. H. Islam, G. P. Biswas, M. Z. A. Bhuiyan, P. Vijayakumar, and M. Karupiah, "Provably secure identity-based signcryption scheme for crowdsourced industrial internet of things environments," *IEEE Internet of Things Journal*, vol. 5, no. 4, pp. 2904–2914, Aug 2018.
- [45] M. Bellare and G. Neven, "Multi-signatures in the plain public-key model and a general forking lemma," in *Proceedings of the 13th ACM Conference on Computer and Communications Security*, ser. CCS '06. New York, NY, USA: ACM, 2006, pp. 390–399.
- [46] P. Nguyen and J. Stern, "The hardness of the hidden subset sum problem and its cryptographic implications," in *Advances in Cryptology — CRYPTO'99: 19th Annual International Cryptology Conference Santa Barbara, California, USA, August 15–19, 1999 Proceedings*. Springer Berlin Heidelberg, 1999, pp. 31–46.
- [47] Z. Liu, P. Longa, G. C. C. F. Pereira, O. Reparaz, and H. Seo, "FourQ on embedded devices with strong countermeasures against side-channel attacks," in *Cryptographic Hardware and Embedded Systems – CHES*

2017, W. Fischer and N. Homma, Eds. Cham: Springer International Publishing, 2017, pp. 665–686.

- [48] R. Weatherley, “Arduino cryptolibs,” Github Repository, 2016. [Online]. Available: <https://github.com/rweather/arduinoilibs/tree/master/libraries/Crypto>
- [49] K. MacKay, “micro-ecc: Ecdh and ecdsa for 8-bit, 32-bit, and 64-bit processors,” Github Repository. [Online]. Available: <https://github.com/kmackay/micro-ecc>
- [50] wolfSSL, Github Repository, 2017. [Online]. Available: <https://github.com/wolfSSL/wolfssl/tree/master/wolfcrypt>



Muslum Ozgur Ozmen received the bachelor’s degree in electrical and electronics engineering from the Bilkent University, Turkey and the M.S. degree in computer science from Oregon State University. He is currently pursuing a PhD degree in computer science with the Department of Computer Science and Engineering, University of South Florida. His research interests include lightweight cryptography for IoT systems (drones and medical devices), digital signatures, privacy enhancing technologies (dynamic symmetric and public key based searchable encryption) and post-quantum cryptography.



Rouzbeh Behnia received an M.S. degree from Multimedia University, Malaysia in 2013. He was a recipient of an FRGS grant during his time as a lecturer in Multimedia University and was awarded a Researcher Award in 2016. In 2016, he received an Outstanding Graduate Scholar award from the School of Electrical Engineering and Computer Science, Oregon State University. He is currently pursuing a Ph.D. in Computer Science at the University of South Florida. His research interests include post-quantum cryptography, privacy enhancing technologies and efficient authentication schemes.



Attila Altay Yavuz (M ‘11) is an Assistant Professor in the Department of Computer Science and Engineering, University of South Florida (August 2018). He was an Assistant Professor in the School of Electrical Engineering and Computer Science, Oregon State University (2014-2018). He was a member of the security and privacy research group at the Robert Bosch Research and Technology Center North America (2011-2014). He received his PhD degree in Computer Science from North Carolina State University in August 2011. He received his

MS degree in Computer Science from Bogazici University (2006) in Istanbul, Turkey. He is broadly interested in design, analysis and application of cryptographic tools and protocols to enhance the security of computer networks and systems. Attila Altay Yavuz is a recipient of NSF CAREER Award (2017). His research on privacy enhancing technologies (searchable encryption) and intra-vehicular network security are in the process of technology transfer with potential world-wide deployments. He has authored more than 40 research articles in top conferences and journals along with several patents. He is a member of IEEE and ACM.