

Audio declipping performance enhancement via crossfading

Pavel Závíška, Pavel Rajmic, and Ondřej Mokrý

Abstract—Some audio declipping methods produce waveforms that do not fully respect the physical process of clipping, which is why we refer to them as inconsistent. This letter reports what effect on perception it has if the solution by inconsistent methods is forced consistent by postprocessing. We first propose a simple sample replacement method, then we identify its main weaknesses and propose an improved variant. The experiments show that the vast majority of inconsistent declipping methods significantly benefit from the proposed approach in terms of objective perceptual metrics. In particular, we show that the SSPEW method based on social sparsity combined with the proposed method performs comparable to top methods from the consistent class, but at a computational cost of one order of magnitude lower.

Index Terms—clipping, crossfade, declipping, optimization, sparsity, reliable samples

I. INTRODUCTION

Clipping is a nonlinear distortion of signals, occurring in the case of lack of available dynamic range. The peak values of a signal are clipped (saturated). In audio, this leads to undesirable, unpleasant perceptual artifacts. Typically, the best option is to avoid clipping beforehand. In cases where clipping can no longer be prevented, there is a need for a means of estimating the original signal. Such a process is then called declipping.

There are numerous methods aiming at declipping signals. Since it is clearly an ill-conditioned task, any declipping method must build on some assumption about the behavior of a signal. In audio, which is the focus of this letter, different methods are based on Bayesian modeling [1], on the autoregressive hypothesis [2], on low-rank assumptions of matrices [3], [4], but most of them are based on the sparsity of signal coefficients with respect to a suitable time-frequency transform [5], [6]. For more references, see the declipping survey [7] and a recent overview [8].

For this letter, it will be sufficient to distinguish between methods that produce declipping solutions that are consistent in the reliable part of the signal and methods that do not do so. Here, the reliable part refers to samples that have not been affected by clipping, i.e., a set of samples that fitted within the prescribed dynamic range. For illustration, Fig. 1 shows an observed clipped signal, together with the original and two declipping solutions; one of them is consistent and the other is not.

The work of Pavel Závíška, Pavel Rajmic, and Ondřej Mokrý was supported by the Czech Science Foundation (GAČR) Project No. 20-29009S.

All three authors are with the Signal Processing Laboratory, Brno University of Technology, 61600 Brno, Czech Republic (e-mail: xzavis01@vutbr.cz; rajmic@feec.vutbr.cz; xmokry12@vutbr.cz).

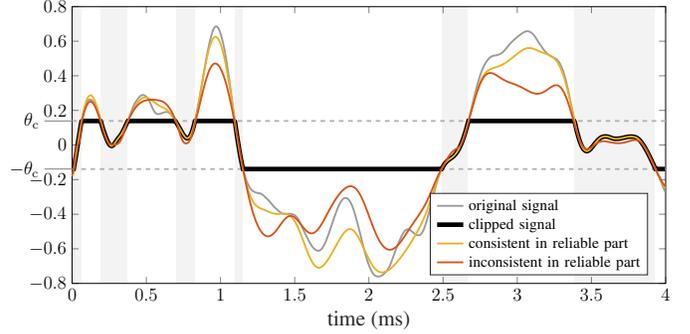


Fig. 1. A short piece of a clipped signal, accompanied by its original version (unavailable in practice) and by two types of reconstruction. The solution consistent in the reliable part is identical to the observed signal in that respective part, while the other is not. The scalars $-\theta_c, \theta_c$ are clipping thresholds, playing the role of the limits of the dynamic range.

The described declipping inconsistency is undeniably in conflict with the observation and with the clipping model. On the other hand, inconsistent methods are typically faster, precisely because of the non-strict feasibility requirement. What would happen if, for such methods, the observed reliable samples were taken and put in their place in the current inconsistent solution? This step would make the solution consistent and compatible with the clipping model. Certain signal fidelity measures would improve automatically, such as the signal to distortion ratio (SDR),

$$\text{SDR}(\mathbf{u}, \mathbf{v}) = 20 \log_{10} \frac{\|\mathbf{u}\|_2}{\|\mathbf{u} - \mathbf{v}\|_2}, \quad (1)$$

when evaluated on the whole original and estimated signals as $\text{SDR}(\mathbf{x}_{\text{orig}}, \hat{\mathbf{x}})$.

In audio, however, more attention is paid to the perceptual quality, and it is known that the SDR values seldom predict it well. Thus, the interest of this letter lies in exploring how the *perceptual* quality of the signal reconstruction changes when inconsistent samples in the solution are reconsidered with the help of reliable samples.

Section II starts with the straightforward replacement, and it shows that such a simple act indeed improves the objective perceptual metrics. On the other hand, it also shows its weaknesses, leading to a more inventive, though still conceptually simple and computationally cheap treatment. Section III then discusses in greater detail a particular inconsistent algorithm, SSPEW. The section answers the question whether the proposed techniques can improve this already successful algorithm such that it outperforms the state-of-the-art audio declipping algorithms.

II. WHAT SHALL WE DO WITH THE RELIABLE SAMPLES?

In this section, we will examine to what extent the signal reconstruction quality is affected when (re)using the reliable samples. Note again that such a postprocessing step makes sense only for declipping methods that produce solutions inconsistent in the reliable part. Specifically, we will follow up on the declipping survey [7] and work with the inconsistent methods included there: The Constrained Orthogonal Matching Pursuit (C-OMP [9]), Plain and Perceptually-motivated Compressed Sensing L1 (CSL1, PCSL1 [10]), Parabola-weighted Compressed Sensing L1 (PWCSL1 [7]), Declipping with Empirical Wiener shrinkage and Social Sparsity Declipping with Persistent Empirical Wiener (EW, PEW [11]), and Dictionary Learning (DL [12]).

Also, the audio database used in the experiments is identical to the one used in the declipping survey [7]. The corpus consists of 10 musical excerpts in mono, sampled at 44.1 kHz with a bit depth of 16 bps and with an approximate duration of 7 seconds. The samples originally come from the EBU SQAM database¹ and they cover a range of audio signal characteristics. Per each signal, 7 degraded versions were obtained by (artificial) clipping using 7 variants of the symmetric thresholds $-\theta_c, \theta_c$. These were computed according to prescribed input signal-to-distortion ratios, defined as $\text{SDR}(\mathbf{x}_{\text{orig}}, \mathbf{x}_{\text{clip}})$, ranging from 1 dB to 20 dB.

For the perceptual quality assessment, the PEAQ (Perceptual Evaluation of Audio Quality) metric was used. The output of PEAQ is the Objective Difference Grade (ODG), which predicts the human rating of the difference between the degraded (or reconstructed) and reference signals. Possible values from -4 to 0 correspond to the scale “very annoying”—“annoying”—“slightly annoying”—“perceptible, but not annoying”—“imperceptible”. We use the MATLAB code² implemented according to the revised version of PEAQ (BS.1387-1) [13].

As another evaluation metric taking the human auditory system into account, the PEMO-Q [14] for Matlab³ was used. PEMO-Q computes the perceptual similarity measure (PSM), which can be mapped to the ODG score as used in the PEAQ.

A. Basic Replacement Strategy (RR as Replace Reliable)

The basic approach has already been indicated: the samples of the reconstructed signal are simply substituted with the reliable samples in all parts where the signal was not clipped. Fig. 2 illustrates such an approach. At the same time, this figure reveals the main, not unexpected problem of RR, which is the risk of creating sharp transitions between the newly recreated reliable parts and the rest of the signal. Perceptually, a non-smooth phenomenon like this results in an undesirable occurrence of broadband spectral components.

Yet, the gain in the perceptual quality of the declipped audio obtained by the simple replacement strategy can outweigh the just described disadvantage, as visible in Fig. 3. This figure shows the average PEAQ ODG improvement obtained using

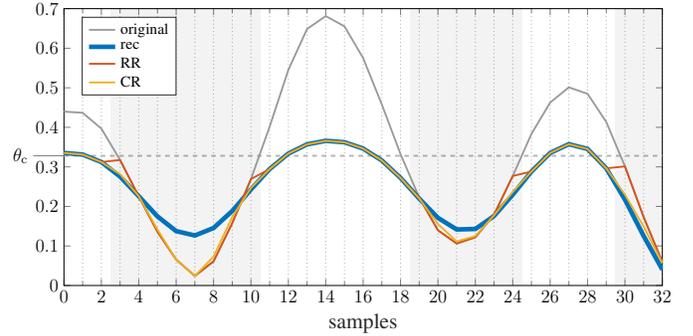


Fig. 2. Demonstration of the replacement strategies on a short piece of audio signal. Non-smooth transitions are present when the straightforward substitution (RR) is applied, but they are smoothed out when crossfading (CR) is applied.

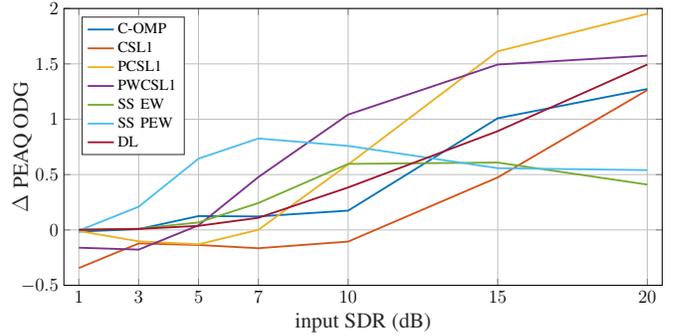


Fig. 3. Average ODG improvements using the basic (RR) strategy, compared to the initial declipping.

the basic replacement strategy. The average is computed over the ODG values of individual excerpts. The depicted values of Δ PEAQ ODG suggest that the RR strategy is, for some declipping methods, not suitable at low input SDR levels (i.e., a low number of reliable samples). Generally, the improvement grows with increasing input SDR, even up to two ODG grades in the case of the PCSL1 algorithm and 20 dB input SDR. Note that the replacement (and thus the improvement) comes essentially for free from the computational viewpoint.

B. Advanced Strategy (CR as Crossfade Reliable)

The smarter strategy of enhancing the perceived quality stems from the simple one, but now avoiding sharp jumps on the borders between the reliable and the clipped regions. This is achieved by crossfading the inconsistent declipping solution with the observed signal such that the reconstructed signal gradually blends into the reliable parts of the signal.

The crossfading transition can be performed either in the clipped part, in the reliable part, or in the middle affecting both parts. Transition in the clipped part preserves all the reliable samples but is affected by the observed clipped samples. A crossfade in the reliable part ensures the smoothest transition from the clipped to the reliable part, although some of the reliable samples are altered this way.

There are several types of crossfade used in practice. In this paper, we examined the simple linear crossfade, which is usually used for highly correlated material, and the smooth crossfade, whose curve follows the squared sine function.

¹<https://tech.ebu.ch/publications/sqamcd>

²<http://www-mmsp.ece.mcgill.ca/Documents/Software/>

³<https://www.hoerthede.de/de/f-e-produkte/pemo-q.html>

An important parameter of a crossfade is the length of the crossfaded section, which determines the number of modified samples. In the case of transition in the reliable part, the longer the transition is, the smoother one signal blends into the other; however, more samples will then differ from the ground truth. Hand in hand with specifying the crossfade length, it must be decided how to treat segments that are shorter than the predefined length. These can be either ignored (keeping the samples from the restored signal unaltered), replaced using the RR strategy or the length of the crossfade can be shortened to fit the length of the processed segment.

Different setups for the CR strategy are thus available. Experimenting with the possible combinations showed convincingly that the transition *in the reliable part* produced the best perceptual results according to both PEAQ and PEMO-Q. But in terms of the width and shape of the crossfades and of the way of treating the short segments, the results vary according to the evaluation metric. PEAQ seems to respond positively to the smooth crossfade and to ignoring the processing of shorter segments, while PEMO-Q favors the linear transition and adaptive shortening of the short transitions. Nonetheless, the differences between these setups are negligible (up to 0.1 on the ODG scale).

To allow a concluding statement about the impact of the proposed CR strategy, the same experiment as with the RR strategy was conducted. As for the setup, the transition in the reliable part and an 8-sample-long smooth crossfade with adaptive shortening were used, based on the above discussion. Fig. 4 displays the average PEAQ ODG and PEMO-Q ODG values. The individual declipping algorithms are distinguished using different bar colors. Within a single bar, the lightest shade represents the quality of the originally declipped, inconsistent signal. The respective medium shade marks the results of the RR strategy, and finally, the darkest shade corresponds to CR. In addition, the black dotted lines represent the average ODG value of the clipped signals, and the black dashed lines indicate the best ODG result obtained in the survey [7].

The PEAQ results in Fig. 4 (left) suggest a significant improvement of the reconstruction quality when the advanced crossfading method is applied, especially at medium and high input SDRs. The CR method always performs better or at least on par with the RR strategy. However, in some cases of very harsh clipping (input SDR of 1 and 3 dB), both replacement methods can decrease the PEAQ score of the declipped signal. The results displayed in Fig. 4 (right) indicate PEMO-Q being more conservative in comparison to PEAQ, but even in this case the CR strategy usually leads to an improvement, compared to RR.

III. A CLOSER LOOK AT SS PEW

In the audio declipping survey [7], the method based on the so-called social sparsity (SS) with persistent empirical Wiener (PEW) shrinkage [11], [15] ranked high. SS PEW was in fact the overall best-performing method in terms of the SDR. In terms of PEMO-Q, SS PEW was also one of the top-performing methods, being outperformed only slightly by two of the competitors, namely the parabola-weighted ℓ_1 minimization (PW ℓ_1) and the non-negative matrix factorization

(NMF). However, PEAQ placed SS PEW a bit deeper in the racing list.

PW ℓ_1 and NMF are actually fully consistent approaches, and the NMF is computationally much more expensive in comparison with other declipping methods [7]. Since SS PEW produces generally inconsistent solutions, a question arises as to how much we can enhance the declipping quality of SS PEW by using the RR or CR methods. How will it compare with PW ℓ_1 and NMF then? Besides this, would it even be possible to reduce the computational time by computing fewer SS PEW iterations, while still being able to reach the competitive quality of reconstruction with the help of the RR or CR strategies?

The algorithms based on social sparsity approximate the solution to the following optimization problem:

$$\min_{\mathbf{z}} \left\{ \frac{1}{2} \|M_{\text{R}}D\mathbf{z} - M_{\text{R}}\mathbf{y}\|_2^2 + \frac{1}{2} \|h(M_{\text{H}}D\mathbf{z} - M_{\text{H}}\theta_c\mathbf{1})\|_2^2 + \frac{1}{2} \|h(-M_{\text{L}}D\mathbf{z} - M_{\text{L}}\theta_c\mathbf{1})\|_2^2 + \lambda R(\mathbf{z}) \right\}. \quad (2)$$

The first term penalizes the ℓ_2 error in the reliable region, which is captured by the mask operator M_{R} . The vector $\mathbf{z} \in \mathbb{C}^P$ represents coefficients approximating the signal $\mathbf{y} \in \mathbb{R}^N$ with respect to a selected time-frequency (TF) transform, here a synthesis operator $D: \mathbb{C}^P \rightarrow \mathbb{R}^N$. In the second and third terms, M_{H} and M_{L} are masks selecting only samples clipped from above and from below, respectively. The deviation of the solution from the feasible (i.e., consistent) set in these clipped regions is penalized using the hinge function h , defined as the identity for its negative arguments, and zero otherwise. Finally, R is a sparsity-enforcing regularizer. The authors of [11] suggest four types of shrinkage operator related to R for use in practical algorithms. The best-performing operator in audio declipping turned out to be the Persistent Empirical Wiener (PEW) [7], [8], [11]:

$$\mathcal{S}_{\lambda}^{\text{PEW}}(z_{ft}) = z_{ft} \cdot \max \left(1 - \frac{\lambda^2}{\|\mathcal{N}(z_{ft})\|_2^2}, 0 \right). \quad (3)$$

The indexes t and f specify the location of a coefficient in time and frequency, respectively, and $\mathcal{N}(z_{ft})$ denotes the TF neighborhood of the coefficient at location (f, t) .

The parameter λ in (2) balances sparsity and data fidelity. Larger values of λ lead to a solution of higher sparsity (meaning fewer coefficients) but also of greater deviance from the solution consistency, and vice versa. To accelerate the overall convergence, the algorithm proposed in [11] implements the adaptive restart strategy [16]; the optimization actually starts with a larger λ and it is decreased after every few hundred iterations until the target value of λ is reached. This way, outer and inner iterations are recognized.

Figs. 5 and 6 demonstrate the convergence of the SDR computed in the clipped and reliable parts, respectively. The plots show that while the SDR continues to grow in the reliable part with the increasing number of iterations, the SDR in the clipped part stabilizes after reaching a certain value. The pictures show SDR for the particular case when $\lambda = 10^{-4}$, which is in agreement with the setup from [7], but such behavior has also been verified for $\lambda = 10^{-5}$. In other words,

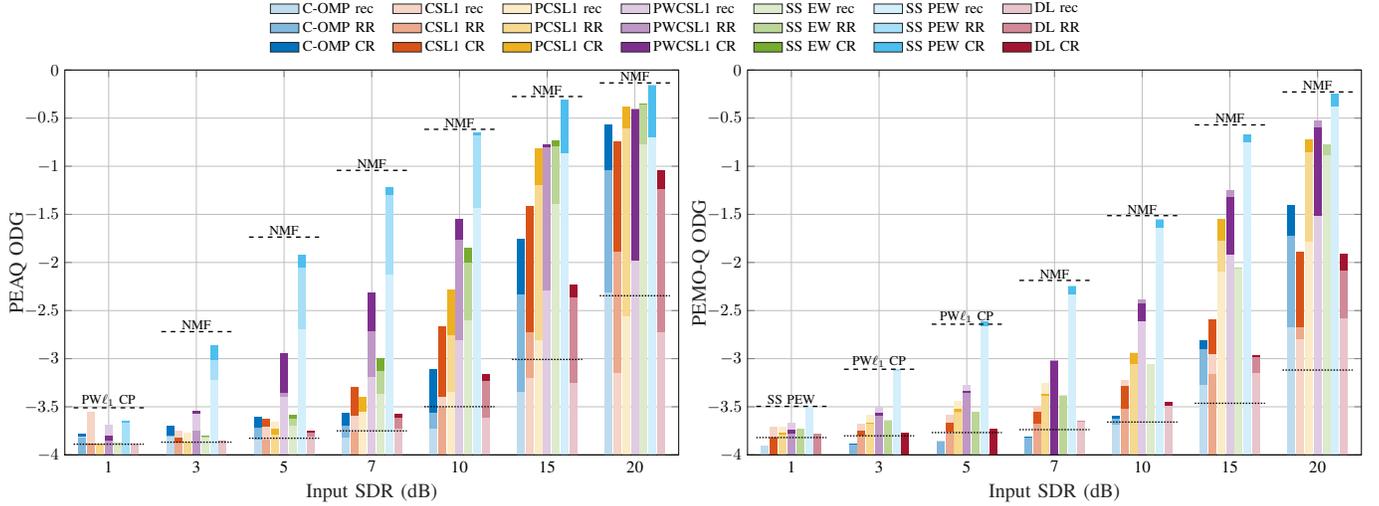


Fig. 4. Average PEAQ (left) and PEMO-Q (right) ODG values for inconsistent restoration (lightest color shade), RR strategy (medium shade) and CR strategy (darkest shade). Each group of bars is crossed by a horizontal dotted line; these mark the ODGs of the clipped signals. The dashed lines are present to indicate the best possible ODG results achieved by a method from the survey [7].

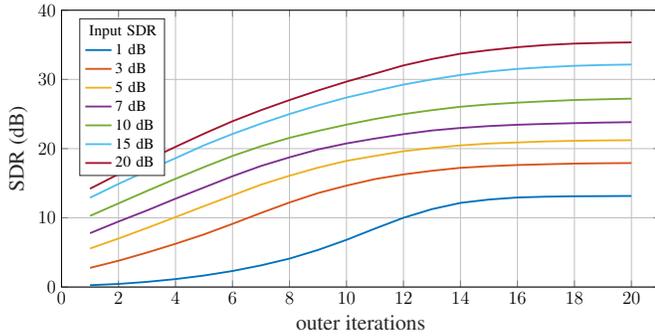


Fig. 5. Average SDR in the clipped part in the course of iterations, with $\lambda = 10^{-4}$.

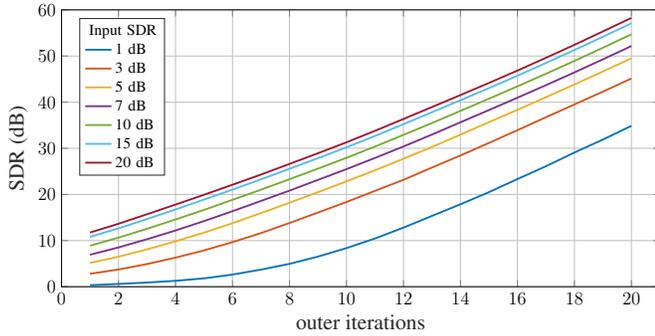


Fig. 6. Average SDR in the reliable part in the course of iterations, with $\lambda = 10^{-4}$.

from a certain point on, iterations only minimize the difference in the reliable samples. This observation supports the above-proposed idea of terminating the iterations of SS PEW earlier and applying the RR/CR postprocessing.

To examine if the presented hypotheses are true, we have performed an experiment: The SS PEW was run for 20 (outer) iterations, but after each iteration, the PEAQ and PEMO-Q ODG were computed for the current declipping solution, with the CR applied. Fig. 7 not only shows that the CR strategy raises the limit of the achievable ODG via SS PEW (this fact was also visible in Fig. 4). More importantly, it

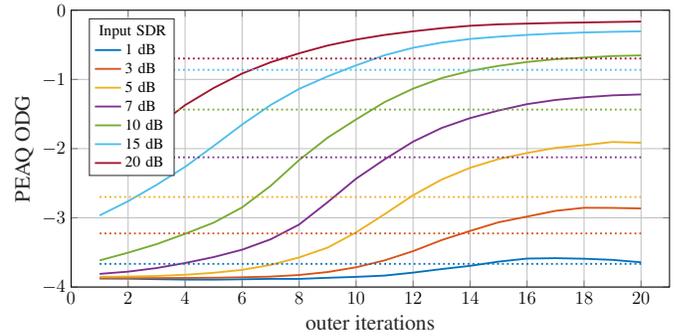


Fig. 7. Average course of PEAQ ODG values for SSPEW followed by CR through iterations. The dotted lines indicate the best ODG score achievable by the pure SS PEW (after 20 iterations with $\lambda = 10^{-4}$).

shows that by applying the CR, results perceptually similar to the performance of a pure SS PEW can be reached with significantly fewer iterations (the savings range from one third to two thirds of computational power, depending on the input SDR).

IV. CONCLUSION

We have shown that results of inconsistent audio declipping methods can perceptually be significantly improved using a computationally cheap technique, based on crossfading the regions of the signal. In particular, the SS PEW method postprocessed with the proposed strategy becomes the top-performing inconsistent method and its quality almost reaches the quality of the best-performing consistent declipper (NMF in the majority of cases). This is especially attractive, considering that the NMF method is at least 15 times slower than the SS PEW. In addition, we have shown that the SS PEW can be accelerated about twice without sacrificing perceptual quality.

Since this letter can be viewed as a follow-up to the audio declipping survey [7], the results are appended to the website

<https://rajmic.github.io/declipping2020>

where the audio samples are directly playable. Also the Matlab source codes are available through the link on that website.

REFERENCES

- [1] W. Fong and S. Godsill, "Monte carlo smoothing for non-linearly distorted signals," in *2001 IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP)*, vol. 6, May 2001, pp. 3997–4000.
- [2] A. Dahimene, M. Noureddine, and A. Azrar, "A simple algorithm for the restoration of clipped speech signal," *Informatica*, vol. 32, pp. 183–188, 2008.
- [3] Ç. Bilen, A. Ozerov, and P. Pérez, "Audio declipping via nonnegative matrix factorization," in *2015 IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*, Oct 2015, pp. 1–5.
- [4] T. Takahashi, K. Uruma, K. Konishi, and T. Furukawa, "Block adaptive algorithm for signal declipping based on null space alternating optimization," *IEICE Transactions on Information and Systems*, vol. E98.D, no. 1, pp. 206–209, 2015.
- [5] S. Kitić, N. Bertin, and R. Gribonval, "Sparsity and cosparsity for audio declipping: a flexible non-convex approach," in *LVA/ICA 2015 – The 12th International Conference on Latent Variable Analysis and Signal Separation*, Aug 2015, pp. 243–250.
- [6] P. Závřška, P. Rajmic, and J. Schimmel, "Psychoacoustically motivated audio declipping based on weighted l1 minimization," in *2019 42nd International Conference on Telecommunications and Signal Processing (TSP)*, July 2019, pp. 338–342.
- [7] P. Závřška, P. Rajmic, A. Ozerov, and L. Rencker, "A survey and an extensive evaluation of popular audio declipping methods," *IEEE Journal of Selected Topics in Signal Processing*, vol. 15, no. 1, pp. 5–24, 2021.
- [8] C. Gaultier, S. Kitić, R. Gribonval, and N. Bertin, "Sparsity-based audio declipping methods: selected overview, new algorithms, and large-scale evaluation," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 29, pp. 1174–1187, 2021.
- [9] A. Adler, V. Emiya, M. Jafari, M. Elad, R. Gribonval, and M. Plumbley, "A constrained matching pursuit approach to audio declipping," in *2011 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, May 2011, pp. 329–332.
- [10] B. Defraene, N. Mansour, S. D. Hertogh, T. van Waterschoot, M. Diehl, and M. Moonen, "Declipping of audio signals using perceptual compressed sensing," *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 21, no. 12, pp. 2627–2637, 2013.
- [11] K. Siedenburg, M. Kowalski, and M. Dorfler, "Audio declipping with social sparsity," in *2014 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, May 2014, pp. 1577–1581.
- [12] L. Rencker, F. Bach, W. Wang, and M. D. Plumbley, "Consistent dictionary learning for signal declipping," in *LVA/ICA 2018 – The 12th International Conference on Latent Variable Analysis and Signal Separation*, July 2018, pp. 446–455.
- [13] P. Kabal, "An examination and interpretation of ITU-R BS.1387: Perceptual evaluation of audio quality," MMSP Lab Technical Report, Dept. Electrical & Computer Engineering, McGill University, Tech. Rep., May 2002.
- [14] R. Huber and B. Kollmeier, "PEMO-Q—A new method for objective audio quality assessment using a model of auditory perception," *IEEE Trans. Audio Speech Language Proc.*, vol. 14, no. 6, pp. 1902–1911, 2006.
- [15] K. Siedenburg, "Persistent Empirical Wiener Estimation With Adaptive Threshold Selection for Audio Denoising," in *Proceedings of the 9th Sound and Music Computing Conference*, July 2012, pp. 426–433.
- [16] B. O'Donoghue and E. Candes, "Adaptive restart for accelerated gradient schemes," *Foundations of Computational Mathematics*, vol. 15, no. 3, pp. 715–732, 2013.