

Entanglement Access Control for the Quantum Internet

Laszlo Gyongyosi*

Sandor Imre†

Abstract

Quantum entanglement is a crucial element of establishing the entangled network structure of the quantum Internet. Here we define a method to achieve controlled entanglement access in the quantum Internet. The proposed model defines different levels of entanglement accessibility for the users of the quantum network. The path cost is determined by an integrated criterion on the entanglement fidelities between the quantum nodes and the probabilities of entangled connections of an entangled path. We reveal the connection between the number of available entangled paths and the accessible fidelity of entanglement and reliability in the end nodes. The scheme provides an efficient model for entanglement access control in the experimental quantum Internet.

1 Introduction

In the quantum Internet, the quantum nodes share quantum entanglement among one other, which provides an entangled ground-base network structure for the various quantum networking protocols [1–20]. In a quantum Internet scenario, the aim of the quantum repeater elements is to extend the range of entanglement through several steps [20–24, 27, 28, 30–36]. The available entanglement at the end points has several critical parameters, most importantly the fidelity of the established entanglement (fidelity of entanglement [25, 26]) and the probability of the existence of a given entangled connection [1, 8]. In an experimental setting, these critical parameters are time-varying since the noise of local quantum memories that store the shared entanglement in the quantum nodes evolves over time, and the probability of entangled connections (shared entanglement between a node pair) also changes dynamically [1, 5, 6, 37–47].

In the quantum Internet, several entangled paths (paths formulated by several entangled connections) could exist between a given source-target quantum node pair [1, 5, 6, 47–64]. This fact allows us to introduce a method that utilizes this multipath property to change these critical parameters via the number of entangled paths associated with a given end-to-end node pair: the available fidelity of entanglement and the probability of an entangled connection. The model utilizes the reliability (probability) of the entangled connections and the entanglement fidelity coefficient as primary metrics. The decomposition is motivated by the fact that a maximization of the entanglement throughput (number of transmitted Bell states per a given time unit at a particular fidelity)

*School of Electronics and Computer Science, University of Southampton, Southampton SO17 1BJ, U.K., and Department of Networked Systems and Services, Budapest University of Technology and Economics, 1117 Budapest, Hungary, and MTA-BME Information Systems Research Group, Hungarian Academy of Sciences, 1051 Budapest, Hungary.

†Department of Networked Systems and Services, Budapest University of Technology and Economics, 1117 Budapest, Hungary.

parameter requires also the maximization of the connection probability, and the entanglement fidelity.

In this work, we define a method for entanglement access control in entangled quantum networks. The entanglement differentiation is achieved via a controlled variability of entanglement fidelity and entangled connection probability between source and target quantum nodes in a quantum repeater network. The proposed approach allows us to define different priority levels of entanglement access for the legal users of the quantum network with respect to the number of available paths. The number of available paths injects an additional degree of freedom to the quantum network, allowing for the selection of the entanglement fidelity and connection reliability for the end nodes. In a straightforward application of our method, the high-priority demands are associated with high fidelity and high connection probability in the end nodes of the user, while the lower-priority users get lower fidelity and lower connection probability in their end nodes. To achieve the differentiation, we define the appropriate cost and path cost functions and the criteria regarding the entanglement fidelity and connection probability for the quantum nodes and entangled connections of the entangled path. The entanglement differentiation utilizes a different number of paths between the source and target nodes allowing a distinction to be made between single-path and multipath scenarios. In a single-path setting, only one entangled path exists between source and target nodes, and therefore the fidelity of entanglement and the probability of existence of the entangled connections between the end nodes are determined only by the nodes of the given entangled path. In a multipath scenario, more than one path exists from a source to a target.

In our model, a given criterion regarding the entanglement fidelity of the local nodes has to be satisfied for all node pairs on the path referred to as integrated connection probability and fidelity criterion for all entangled connections of the entangled path. The integrated criterion allows us to reach a given entanglement fidelity and a given connection probability between the end nodes of the quantum network.

Our solution utilizes time-varying parameters since the cost functions deal with the evolution of the entanglement fidelity parameter and the connection probabilities, which evolve over time. We define the entanglement access control algorithm for an arbitrary topology quantum repeater network. We also reveal the computational complexity of the method.

The novel contributions of our manuscript are as follows:

1. *We define a method to achieve controlled entanglement accessibility in the quantum Internet.*
2. *The algorithm defines entangled paths between the source and target nodes in function of a particular path cost function.*
3. *The path cost is determined by an integrated criterion on the entanglement fidelity and the probability of entangled connection.*
4. *The proposed scheme has moderate complexity, providing an efficient entanglement accessibility differentiation, allowing for the construction of different priority levels of entanglement accessibility for users.*
5. *The results can be straightforwardly applied in the entangled quantum networks of the quantum Internet.*

This paper is organized as follows. In Section 2, the basic components of the model are summarized. In Section 3, the entanglement accessibility methods are discussed. Section 4 proposes

the integrated criterion related to entanglement fidelity. Section 5 defines the entanglement access control algorithm. Finally, Section 6 concludes the results.

2 System Model

2.1 Entangled Network

The quantum Internet setting is modeled as follows [8]. Let V refer to the nodes of an entangled quantum network N , with a transmitter quantum node $A \in V$, a receiver quantum node $B \in V$, and quantum repeater nodes $R_i \in V$, $i = 1, \dots, q$. Let $E = \{E_j\}$, $j = 1, \dots, m$, refer to a set of edges between the nodes of V , where each E_j identifies an L_l -level entangled connection, $l = 1, \dots, r$, between quantum nodes x_j and y_j of edge E_j , respectively. The entanglement levels of the entangled connections in the entangled quantum network structure are defined as follows.

2.1.1 Entanglement Levels in the Quantum Internet

In a quantum Internet setting, an $N = (V, E)$ entangled quantum network consists of single-hop and multi-hop entangled connections, such that the single-hop entangled nodes¹ are directly connected through an L_1 -level entanglement, while the multi-hop entangled nodes communicate through L_l -level entanglement. Focusing on the doubling architecture [1, 5, 6] in the entanglement distribution procedure, the number of spanned nodes is doubled in each level of entanglement swapping (entanglement swapping is applied in an intermediate node to create a longer distance entanglement [1]). Therefore, the $d(x, y)_{L_l}$ hop distance in N for the L_l -level entangled connection between $x, y \in V$ is denoted by [8]

$$d(x, y)_{L_l} = 2^{l-1}, \quad (1)$$

with $d(x, y)_{L_l} - 1$ intermediate quantum nodes between x and y . Therefore, $l = 1$ refers to a direct entangled connection between two quantum nodes x and y without intermediate quantum repeaters, while $l > 1$ identifies a multilevel entanglement.

2.1.2 Entanglement Fidelity

Let

$$|\beta_{00}\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle) \quad (2)$$

be the target Bell state subject to be created at the end of the entanglement distribution procedure between a particular source node A and receiver node B . The entanglement fidelity F at an actually created noisy quantum system σ between A and B is

$$F(\sigma) = \langle \beta_{00} | \sigma | \beta_{00} \rangle, \quad (3)$$

where F is a value between 0 and 1, $F = 1$ for a perfect Bell state and $F < 1$ for an imperfect state. The F entanglement fidelity represents the accuracy of our information about a quantum state [1, 5, 6]. The fidelity in (3) measures the amount of overlap between the $|\beta_{00}\rangle$ target state (2) and the density matrix σ that represents our system. In the entanglement distribution procedure, the usage of the F entanglement fidelity metric rather than other correlation measure functions

¹The l -level entangled nodes x, y refer to quantum nodes x and y connected by an entangled connection L_l .

(concurrence, negativity, quantum discord, quantum coherent information, etc.) [4] is motivated by the fact that the fidelity of entanglement is an improvable parameter in a practical setting. The improvement of the fidelity is realizable by the so-called entanglement purification process [1]. The entanglement purification takes imperfect entangled states and outputs a higher-fidelity entangled system. Without loss of generality, in an experimental quantum Internet setting, an aim is to reach $F \geq 0.98$ over long distances [1, 5, 6].

2.1.3 Practical Implementation

An experimental quantum network refers to a set of source users (quantum nodes), destination users (quantum nodes), several intermediate quantum repeaters between them, and to a set of physical node-to-node connections between the physical nodes (the physical attributes of the $l = 1$ level connections identify the physical attributes of the physical links between the neighboring nodes). A quantum node is a quantum device with internal quantum memory \mathcal{M} , and with the capability of performing local operations (such as the internal processes connected to entanglement purification, entanglement swapping, error correction, etc.) [28, 38–64]. In a practical setting, the node-to-node entanglement distribution can be implemented by an optical fiber network or via a wireless optical system (free-space channel [29] or a quantum-based satellite communication channel [30]). A physical link \mathcal{N} is characterized by a particular link loss $\mathcal{L}(\mathcal{N})$. For a standard-quality optical fiber \mathcal{N} , the average link loss is $\mathcal{L}(\mathcal{N}) \approx 3.4$ dB, while the maximum of the tolerable link loss for an optical fiber system is $\mathcal{L}(\mathcal{N}) \approx 4.3$ dB [1, 6].

In an practical entangled quantum network, the $l > 1$ level entangled connections refers to the case when the source and target quantum nodes are not directly connected by a physical link, but by an entangled connection that spans several quantum repeaters. An $l > 1$ level entangled connection is formulated by several node-to-node interactions through the physical links in the physical layer.

3 Entanglement Access

3.1 Entanglement Fidelity Criterion

First, we characterize the entanglement fidelity criterion for a given node pair. Using the criterion, we then derive the probability of the existence of single-path and multipath sets with m end-to-end connection-disjoint entangled paths [65, 66] between source and target nodes. The end-to-end connection-disjoint entangled paths share no any common entangled connection between a source node A and a receiver node B .

A given entangled connection L_l is characterized by a particular fidelity F^* , whose quantity classifies the entangled connection, such that $F^* \geq F_{crit}$, where F_{crit} is a critical lower bound on the fidelity of entanglement.

Let $E(x, y)$ refer to the entangled connection between a node pair (x, y) , and let $F_{\Delta}(x, y)$ be the difference of the fidelity of entanglement in quantum nodes x and y , as

$$F_{\Delta}(x, y) = |F_x - F_y| < \hat{F}_{\Delta}, \quad (4)$$

where \hat{F}_{Δ} is a maximal allowed fidelity distance, $F_x \geq F_{crit}$, and $F_y \geq F_{crit}$. Since the entangled connections are assumed to be time-varying in the network [65, 66], the probability that $F_{\Delta}(x, y) <$

\hat{F}_Δ holds at a given time t for an entangled connection $E_{L_t}(x, y)$ is as

$$\Pr(F_\Delta(x, y) < \hat{F}_\Delta) = \int_0^{\hat{F}_\Delta} \delta(z) dz, \quad (5)$$

where $\delta(F_\Delta(x, y))$ is the probability density function of entanglement fidelity distance.

3.1.1 Single-Path Entanglement Accessibility

Let \mathcal{P}^S refer to a single path between A_{ρ, U_k} and B_{ρ, U_k} , $k = 1, \dots, K$, where ρ is a demand, A_{ρ, U_k} and B_{ρ, U_k} are the sender and destination nodes associated with the demand ρ of user U_k , K is the number of users. The single entangled path setting means that entanglement can be distributed from A_{ρ, U_k} to B_{ρ, U_k} through only one given path in the network N . Let it be assumed that \mathcal{P}^S consists of g entangled connections; then the $\Pr(\mathcal{P}^S)$ probability that a given single path \mathcal{P}^S exists between A_{ρ, U_k} and B_{ρ, U_k} with the fidelity criterion is expressed as

$$\begin{aligned} \Pr(\mathcal{P}^S) &= \prod_{E_{L_t}(x, y) \in \mathcal{P}^S} \Pr(F_\Delta(x, y) < \hat{F}_\Delta) \\ &= \left(\int_0^{\hat{F}_\Delta} \delta(z) dz \right)^g. \end{aligned} \quad (6)$$

3.1.2 Multipath Entanglement Accessibility

Let \mathcal{P}_i^M , $i = 1, \dots, m$, refer to the i th multipath between A_{ρ, U_k} and B_{ρ, U_k} , which means that entanglement can be distributed from A_{ρ, U_k} to B_{ρ, U_k} through a set \mathcal{P}_M of m end-to-end connection-disjoint entangled paths as $\mathcal{P}_M = \{\mathcal{P}_1^M, \dots, \mathcal{P}_m^M\}$ in the network N . The $\Pr(\mathcal{P}_M)$ probability [65] that A_{ρ, U_k} and B_{ρ, U_k} share a common entanglement with the fidelity criterion is as

$$\Pr(\mathcal{P}_M) = 1 - \prod_{S=1}^m (1 - \Pr(\mathcal{P}^S)) = 1 - \prod_{S=1}^m \left(1 - \left(\int_0^{\hat{F}_\Delta} \delta(z) dz \right)^{g_S} \right), \quad (7)$$

where S is a path index, and g_S is the number of entangled connections associated with \mathcal{P}^S .

Based on the distribution of $F_\Delta(x, y)$ fidelity distances between the node pairs of the network, the formulas of (6) and (7) can be derived in a more exact form².

4 Integrated Criterion on Connection Probability and Fidelity

The integrated criterion extends the results of Section 3 to include the criterion on the probability of the existence of a given entangled connection between a node pair of a path. Using the integrated

² Assuming an exponential distribution of $F_\Delta(x, y)$, $\Pr(\mathcal{P}^S) = \int_0^{\hat{F}_\Delta} \lambda e^{-\lambda z} dz = 1 - e^{-\lambda \hat{F}_\Delta}$, where λ is a distribution coefficient, while $\Pr(\mathcal{P}_M) = 1 - \prod_{S=1}^m (1 - (1 - e^{-\lambda \hat{F}_\Delta})^{g_S})$.

criterion on the connection probability and entanglement fidelity, we derive the probability of existence of single-path and multipath sets with m end-to-end connection-disjoint entangled paths [65] between source and target nodes.

In our model, the fidelity of shared entanglement evolves in time for a given node pair (x, y) . For each quantum node i at a time t , let $\Psi_i(t)$ be defined as

$$\Psi_i(t) = (\Pr(E_{L_l}(i, j, t)), F_i(t))^T, \quad (8)$$

where $\Pr(E_{L_l}(i, j, t))$ is the probability of an L_l -level entangled connection with a node j determined in node i at a time t , while $F_i(t)$ is the fidelity of entanglement determined in node i at a time t .

For a node pair (x, y) , according to local quantities, the following distance can be defined:

$$\Delta(\Pr(E_{L_l}(t))) = |\Pr(E_{L_l}(x, y, t)) - \Pr(E_{L_l}(y, x, t))|, \quad (9)$$

where $\Pr(E_{L_l}(x, y, t))$, and $\Pr(E_{L_l}(y, x, t))$ are the connection probability quantities determined in nodes x and y , and the fidelity distance $F_\Delta(t)$ is described by

$$F_\Delta(t) = |F_x(t) - F_y(t)|, \quad (10)$$

where $F_x(t)$, and $F_y(t)$ are the fidelity quantities determined in nodes x and y .

A distance of $\Psi_x(t)$ and $\Psi_y(t)$ for a node pair (x, y) at a particular time t is expressed via $\gamma_{x,y}(t)$, as

$$\begin{aligned} \gamma_{x,y}(t) &= |\Psi_x(t) - \Psi_y(t)| \\ &= \left((\Pr(E_{L_l}(x, y, t)) - \Pr(E_{L_l}(y, x, t)))^2 + (F_x(t) - F_y(t))^2 \right)^{\frac{1}{2}}. \end{aligned} \quad (11)$$

Since the connection probability and the entanglement fidelity parameters evolve over time, after Δt from an initial time t_0 , the quantity $\Psi_x(t_0 + \Delta t)$ of a given node x evolves as

$$\Psi_x(t_0 + \Delta t) = \Psi_x(t_0) + \chi_x(t_0, \Delta t), \quad (12)$$

where $\chi_x(t_0, \Delta t)$ is expressed as

$$\chi_x(t_0, \Delta t) = \begin{pmatrix} \chi_x^{\Pr(E_{L_l}(x,y))}(t_0, \Delta t) \\ \chi_x^{F_x}(t_0, \Delta t) \end{pmatrix} = \begin{pmatrix} \int_{t_0}^{t_0+\Delta t} \phi_x^{\Pr(E_{L_l}(x,y))}(q) dq \\ \int_{t_0}^{t_0+\Delta t} \phi_x^{F_x}(q) dq \end{pmatrix}, \quad (13)$$

where $\delta(\gamma_{x,y})$ is the probability density function of distance function $\gamma_{x,y}$, and $\phi_x^{\Pr(E_{L_l}(x,y))}$ and $\phi_x^{F_x}$ are expressed as the connection probability and entanglement fidelity evolution functions of node x .

For a given node pair (x, y) , the particular upper bound $\gamma_{x,y}^{\max}$ on the maximal allowable distance between $\Psi_x(t_0 + \Delta t)$ and $\Psi_y(t_0 + \Delta t)$ at time $t_0 + \Delta t$ leads to a limit while (x, y) can be referred to as entangled:

$$\begin{aligned} \gamma_{x,y}(t_0 + \Delta t) &= |\Psi_x(t_0 + \Delta t) - \Psi_y(t_0 + \Delta t)| \\ &= |\Psi_x(t_0) + \chi_x(t_0, \Delta t) - \Psi_y(t_0) - \chi_y(t_0, \Delta t)| \leq \gamma_{x,y}^{\max}. \end{aligned} \quad (14)$$

If $\gamma_{x,y}(t_0 + \Delta t)$ exceeds $\gamma_{x,y}^{\max}$, then the difference of the local entangled connection probabilities and entanglement fidelities are above a critical limit; therefore, the node pair (x, y) is referred to as unentangled.

Using (11) and (13), (14) can be rewritten as

$$\gamma_{x,y}(t_0 + \Delta t) = \left((\Pr(E_{L_l}(x, y, t_0 + \Delta t)) - \Pr(E_{L_l}(y, x, t_0 + \Delta t)))^2 + (F_x(t_0 + \Delta t) - F_y(t_0 + \Delta t))^2 \right)^{\frac{1}{2}}, \quad (15)$$

which leads to

$$\begin{aligned} & \gamma_{x,y}(t_0 + \Delta t) \\ = & \left(\left(\Pr(E_{L_l}(x, y, t_0)) + \int_{t_0}^{t_0 + \Delta t} \phi_x^{\Pr(E_{L_l}(x, y))}(q) dq - \left(\Pr(E_{L_l}(y, x, t_0)) + \int_{t_0}^{t_0 + \Delta t} \phi_y^{\Pr(E_{L_l}(y, x))}(q) dq \right) \right)^2 \right. \\ & \left. + \left(F_x(t_0) + \int_{t_0}^{t_0 + \Delta t} \phi_x^{F_x}(q) dq - \left(F_y(t_0) + \int_{t_0}^{t_0 + \Delta t} \phi_y^{F_y}(q) dq \right) \right)^2 \right)^{\frac{1}{2}}. \end{aligned} \quad (16)$$

A representation of $F_\Delta(t_0)$ and $F_\Delta(t_0 + \Delta t)$ for a node pair (x, y) is depicted in Fig. 1. The $\Pr(E_{L_l}(x, y))$ connection probability is assumed to be different in the nodes at a particular time.

4.1 Single-Path Entanglement Accessibility

After these derivations, the $\Pr(\mathcal{P}^S(t_0 + \Delta t))$ probability of a \mathcal{P}^S single path in function of the connection probability and entanglement fidelity in the nodes of the path (e.g., connection probability criterion and fidelity criterion for all entangled connections of the path) is as follows.

Using $\gamma_{x,y}(t_0 + \Delta t)$ in (16), the probability of the existence of a given single path \mathcal{P}^S with g_S entangled connections between A_{ρ, U_k} and B_{ρ, U_k} with a connection probability criterion and fidelity criterion for all entangled connections (see (6)) at time $t_0 + \Delta t$ can therefore be rewritten as

$$\begin{aligned} & \Pr(\mathcal{P}^S(t_0 + \Delta t)) \\ = & \prod_{E_{L_l}(x, y) \in \mathcal{P}^S} \Pr(\gamma_{x,y}(t_0 + \Delta t) < \gamma_{x,y}^{\max}) \\ = & \left(\int_0^{\gamma_{x,y}^{\max}} \delta(q) dq \right)^{g_S}, \end{aligned} \quad (17)$$

where

$$\Pr(\gamma_{x,y}(t_0 + \Delta t) < \gamma_{x,y}^{\max}) = \int_0^{\gamma_{x,y}^{\max}} \delta(q) dq. \quad (18)$$

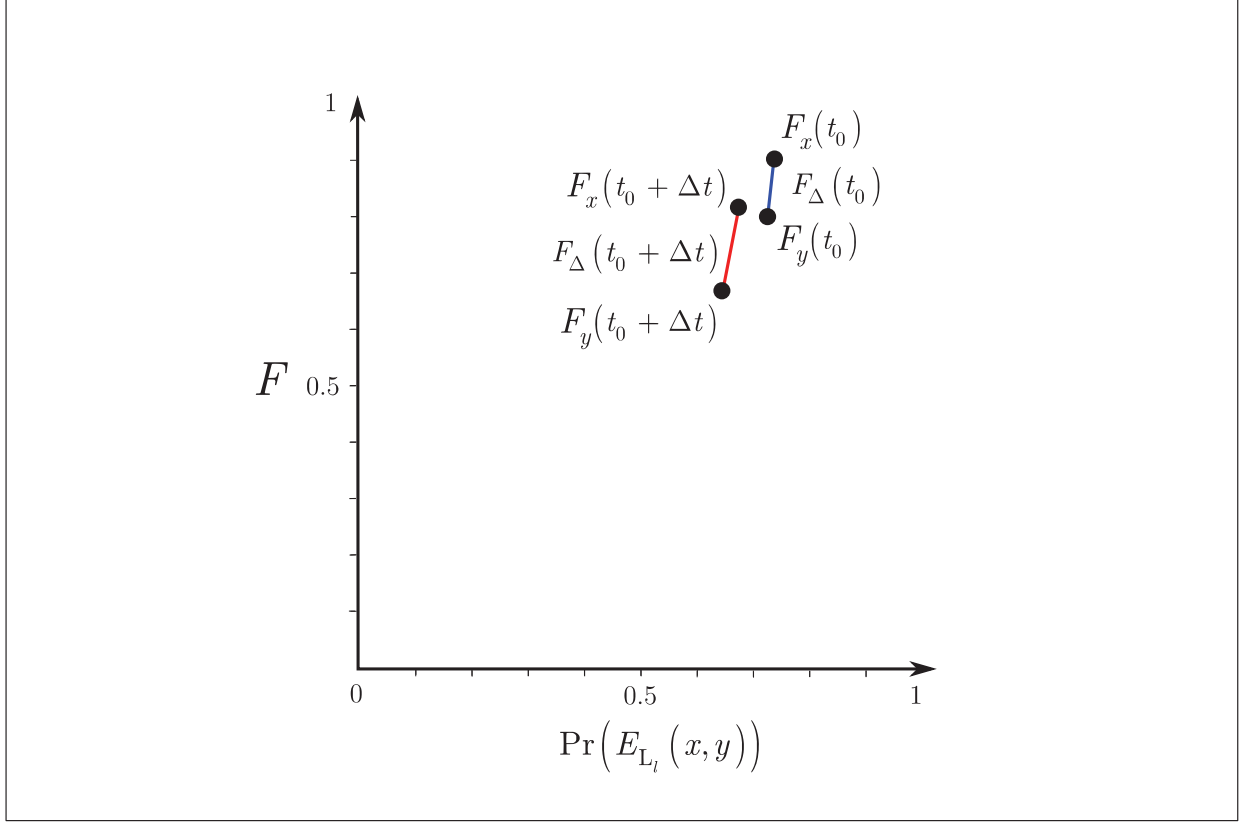


Figure 1: Evolution of $F_{\Delta}(t)$ and $\Pr(E_{L_l}(x, y))$ for a node pair (x, y) at $t = t_0$ and $t = t_0 + \Delta t$. $F_{\Delta}(t_0)$ is $|F_x(t_0) - F_y(t_0)|$, where $F_x(t_0), F_y(t_0)$ are the fidelities of shared entanglement in the nodes, $F_{\Delta}(t_0 + \Delta t)$ yields the difference $|F_x(t_0 + \Delta t) - F_y(t_0 + \Delta t)|$.

4.2 Multipath Entanglement Accessibility

For the multipath scenario, (7) can be written via (16) as follows. For a given set of m end-to-end connection-disjoint entangled paths expressed as $\mathcal{P}_M = \{\mathcal{P}_1^M, \dots, \mathcal{P}_m^M\}$ between A_{ρ, U_k} and B_{ρ, U_k} , the $\Pr(\mathcal{P}_M(t_0 + \Delta t))$ probability that A_{ρ, U_k} and B_{ρ, U_k} share a common entanglement with a connection probability criterion and fidelity criterion at time $t_0 + \Delta t$ is expressed as

$$\begin{aligned} \Pr(\mathcal{P}_M(t_0 + \Delta t)) &= 1 - \prod_{S=1}^m (1 - \Pr(\mathcal{P}^S(t_0 + \Delta t))) \\ &= 1 - \prod_{S=1}^m \left(1 - \left(\int_0^{\gamma_{x,y}^{\max}} \delta(q) dq \right)^{g_S} \right). \end{aligned} \quad (19)$$

5 Control of Entanglement Access

The entanglement access control algorithm establishes a number of connection-disjoint entangled paths between a source node and a target node. Changing the number m of connection-disjoint entangled paths allows us to modify both the probability of entanglement between the source and target nodes and the fidelity of available entanglement in the end nodes.

For the algorithm, a $c(E_{L_l}(x, y))$ cost function [65] of a given entangled connection $E_{L_l}(x, y)$ is defined as

$$c(E_{L_l}(x, y)) = \left(\left(\chi_x^{\text{Pr}(E_{L_l}(x, y))}(t_0, \Delta t) - \chi_y^{\text{Pr}(E_{L_l}(y, x))}(t_0, \Delta t) \right)^2 + \left(\chi_x^{F_x}(t_0, \Delta t) - \chi_y^{F_y}(t_0, \Delta t) \right)^2 \right)^{\frac{1}{2}}, \quad (20)$$

where

$$\chi_x^{\text{Pr}(E_{L_l}(x, y))}(t_0, \Delta t) = \int_{t_0}^{t_0 + \Delta t} \phi_x^{\text{Pr}(E_{L_l}(x, y))}(q) dq, \quad (21)$$

$$\chi_x^{F_x}(t_0, \Delta t) = \int_{t_0}^{t_0 + \Delta t} \phi_x^{F_x}(q) dq, \quad (22)$$

and

$$\chi_y^{\text{Pr}(E_{L_l}(y, x))}(t_0, \Delta t) = \int_{t_0}^{t_0 + \Delta t} \phi_y^{\text{Pr}(E_{L_l}(y, x))}(q) dq, \quad (23)$$

$$\chi_y^{F_y}(t_0, \Delta t) = \int_{t_0}^{t_0 + \Delta t} \phi_y^{F_y}(q) dq. \quad (24)$$

Let N be the actual quantum repeater network with $|V|$ quantum nodes. A given L_l -level entangled connection between a node pair (x, y) is expressed as $E_{L_l}(x, y)$.

Let A_{ρ, U_k} and B_{ρ, U_k} be the source and target quantum nodes of a demand ρ associated with user U_k . Using (20) and a given entangled path \mathcal{P} with a set of q quantum repeaters R_i , $i = 1, \dots, q$, and a set \mathcal{S} entangled connections, as

$$\mathcal{S} = \{E_{L_l}(A_{\rho, U_k}, R_1), \dots, E_{L_l}(R_q, B_{\rho, U_k})\}, \quad (25)$$

the cost of path \mathcal{P} is defined as

$$c(\mathcal{P}) = c(E_{L_l}(A_{\rho, U_k}, R_1)) + \dots + c(E_{L_l}(R_q, B_{\rho, U_k})). \quad (26)$$

The $\mathcal{D}_{\mathcal{A}}$ entanglement access control algorithm outputs a set of $\mathcal{P}_M = \{\mathcal{P}_1^M, \dots, \mathcal{P}_m^M\}$, which contains the m connection-disjoint entangled paths between A_{ρ, U_k} and B_{ρ, U_k} .

In function of m , \mathcal{U}_C priority classes can be defined for the users of the quantum Internet. A high priority user gets a high value of m , while lower priority users get lower values of m . The actual value of m for a particular user class \mathcal{U}_C can be determined in function of the current network conditions.

The steps are given in Algorithm 1.

Algorithm 1 Entanglement access control in the quantum Internet

- Step 1** At a given $\mathcal{U}_C(U_k)$ priority class of user U_k , set the number m of accessible entangled paths for a particular demand ρ of a given user U_k .
- Step 2.** For the given demand ρ , establish m connection-disjoint entangled connections from A_{ρ,U_k} with the direct neighbor nodes of A_{ρ,U_k} in the following manner.
- Step 3.** For all entangled connections of A_{ρ,U_k} , determine the path cost $c(\mathcal{P}_i^M)$, $i = 1, \dots, m$ via (26) using the entangled connection cost $c(E_{L_l}(A_{\rho,U_k}, R_i))$ from (20), where R_i is a quantum repeater node.
- Step 4.** For all next neighbor nodes R_j of quantum repeater R_i , establish entanglement from quantum repeater R_i to quantum repeater R_j . Compute $\chi_{R_i}^{\Pr(E_{L_l}(R_i, R_j))}(t_0, \Delta t)$, $\chi_{R_j}^{\Pr(E_{L_l}(R_j, R_i))}(t_0, \Delta t)$, $\chi_{R_i}^{F_{R_i}}(t_0, \Delta t)$ and $\chi_{R_j}^{F_{R_j}}(t_0, \Delta t)$ via (21)-(24), and increase the $c(\mathcal{P}_i^M)$ path cost by $c(E_{L_l}(R_i, R_j))$.
- Step 5.** If quantum repeater R_j has no entangled connections with R_i , then establish entanglement with a different neighbor R_k of R_j from R_i towards B_{ρ,U_k} . Compute $\chi_{R_i}^{\Pr(E_{L_l}(R_i, R_k))}(t_0, \Delta t)$, $\chi_{R_k}^{\Pr(E_{L_l}(R_k, R_i))}(t_0, \Delta t)$, $\chi_{R_i}^{F_{R_i}}(t_0, \Delta t)$ and $\chi_{R_k}^{F_{R_k}}(t_0, \Delta t)$ via (21)-(24), and increase the $c(\mathcal{P}_i^M)$ path cost by $c(E_{L_l}(R_i, R_k))$.
- Step 6.** Repeat the steps until B_{ρ,U_k} is reached. Output set $\mathcal{P}_M = \{\mathcal{P}_1^M, \dots, \mathcal{P}_m^M\}$ and the path costs $c(\mathcal{P}_i^M)$ for all paths of \mathcal{P}_M .
- Step 7.** Evaluate the $\Pr(\mathcal{P}_M)$ probability for user U_k via (19). If $\Pr(\mathcal{P}_M) < \Pr_{U_k}^*(\mathcal{P}_M)$, where $\Pr_{U_k}^*(\mathcal{P}_M)$ is the critical lower bound on $\Pr(\mathcal{P}_M)$ set for U_k , then increase m , $m = m + 1$. If $\Pr(\mathcal{P}_M) \geq \langle \Pr_{U_k}(\mathcal{P}_M) \rangle$, where $\langle \Pr_{U_k}(\mathcal{P}_M) \rangle$ is the maximal allowed value of $\Pr(\mathcal{P}_M)$ for U_k , then decrease m , $m = m - 1$. If $\Pr_{U_k}^*(\mathcal{P}_M) \leq \Pr(\mathcal{P}_M) < \langle \Pr_{U_k}(\mathcal{P}_M) \rangle$, then leave m unchanged.
- Step 8.** Repeat steps 1-7 for all U_k , $k = 1, \dots, K$.
-

5.1 Description

A brief description of the \mathcal{D}_A entanglement access control algorithm is as follows.

Step 1 sets m for a user U_k by the $\mathcal{U}_C(U_k)$ priority class of the user. The $\mathcal{U}_C(U_k)$ determines the available value(s) of m for U_k .

In Step 2, entanglement is established between the source node A_{ρ,U_k} of the given demand of the user and the neighboring quantum repeaters. The relevant metrics quantities are also calculated in this step.

Using the derived quantities of Step 2, in Step 3, the cost paths are derived via (26) using the entangled connection cost formula of (20).

Steps 4-5 deal with the intermediate quantum repeater nodes associated with the given demand. These steps also ensure that entanglement is distributed through the cheapest path $c(\mathcal{P}')$ from a source node A_{ρ,U_k} towards B_{ρ,U_k} , via a given intermediate repeater node R_i . It is ensured in our model that if the intermediate repeater node R_i also shares entanglement with a quantum repeater R_j , then node R_j will not establish entanglement with B_{ρ,U_k} , since B_{ρ,U_k} can be reached via R_i , which is on the cheapest path $c(\mathcal{P}')$.

Step 6 outputs the set of m end-to-end connection-disjoint entangled paths between A_{ρ,U_k} and B_{ρ,U_k} and the path costs for all paths.

Step 7 determines the $\Pr(\mathcal{P}_M)$ probability for user U_k via (19), and updates the actual value of m if needed.

Finally, Step 8 extends the steps for all users.

In Fig. 2 a multipath entanglement accessibility is depicted in a quantum Internet setting with heterogeneous entanglement levels. The network situation depicts connection-disjoint entangled paths that share no common entangled connection between a source node A_{δ,U_i} and a receiver node B_{δ,U_i} . The entangled paths are characterized by the derived formulas.

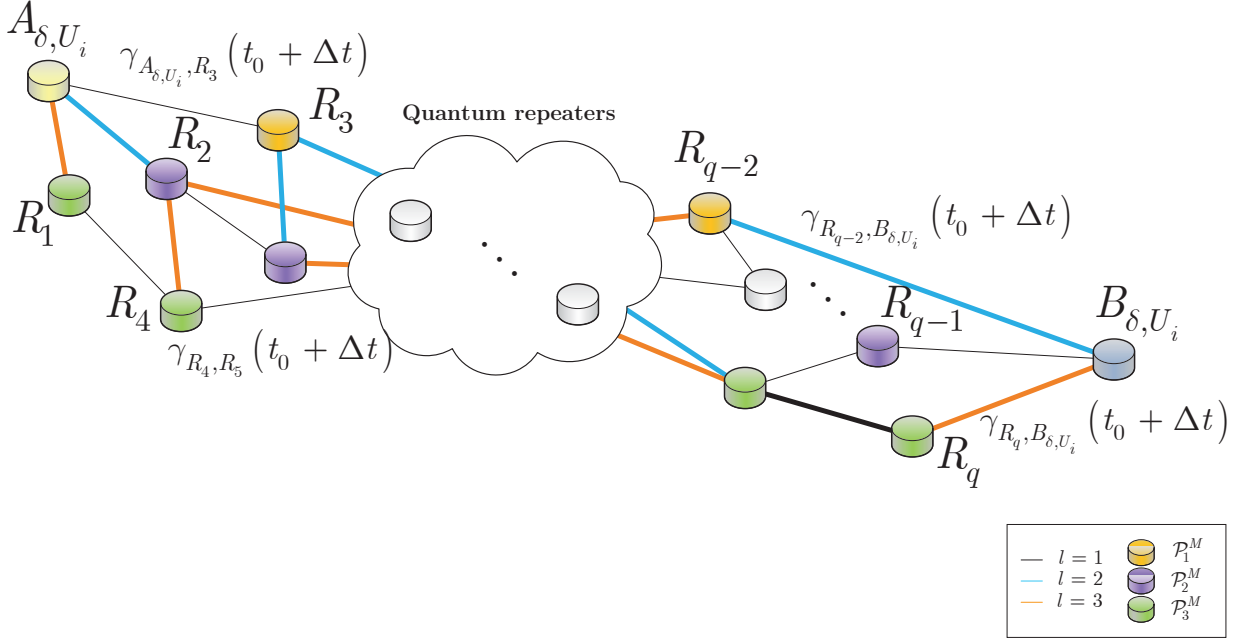


Figure 2: A quantum Internet setting with $m = 3$ connection-disjoint entangled paths \mathcal{P}_1^M , \mathcal{P}_2^M and \mathcal{P}_3^M between an i th source quantum node A_{δ,U_i} and target quantum node B_{δ,U_i} with demand ρ , and q intermediate R_i quantum repeaters, $i = 1, \dots, q$. The entangled paths consist of $l = 1$ level (direct) and multilevel, $l = 2, 3$ level entangled connections. The quantum nodes of \mathcal{P}_1^M are depicted by orange, the nodes of \mathcal{P}_2^M by purple, and the nodes of \mathcal{P}_3^M by green. The $\gamma_{x,y}(t_0 + \Delta t)$ coefficients are derived for all entangled connections of the paths.

5.2 Computational Complexity

For a given quantum network N with $|V|$ quantum nodes, the computational complexity of the \mathcal{D}_A entanglement access control algorithm for a given demand ρ is at most $\mathcal{O}(|V|)$, since the problem is analogous to the establishment of a path by message broadcasting [65].

5.3 Numerical Evidence

We provide a numerical evidence on the distribution of the \mathcal{P}^S and \mathcal{P}_M path probabilities.

Let us set $F_{crit} = 0.98$ for the lower bound on the fidelity of entanglement between all node pairs x and y , $F_x \geq F_{crit}$, and $F_y \geq F_{crit}$. Then, the maximal allowed fidelity distance is set as $\hat{F}_\Delta = 1 - 0.98 = 0.02$.

Then, let us assume that a \mathcal{P}^S single path between A_{ρ, U_k} and B_{ρ, U_k} consist of g entangled connections with different l entanglement levels between the nodes of the path \mathcal{P}^S . For the $\mathcal{P}_M = \{\mathcal{P}_1^M, \dots, \mathcal{P}_m^M\}$ multipath scenario, each entangled path consist of g_S entangled connections with different l entanglement levels between the nodes of each entangled path of \mathcal{P}_M .

For simplicity let us assume that the number of entangled connections is set as $g_S = g = 10$ for all entangled paths, and the distribution of the $\Pr(F_\Delta(x, y) < \hat{F}_\Delta)$ probabilities for the entangled connections of a \mathcal{P}^S single path at $\hat{F}_\Delta = 0.02$ is as depicted in Fig. 3(a). The distribution of the $\Pr(F_\Delta(x, y) < \hat{F}_\Delta)$ probabilities for the entangled connections of a \mathcal{P}_M multipath with $m = 5$ at $\hat{F}_\Delta = 0.02$ is distributed as depicted in Fig. 3(b). The resulting $\Pr(\mathcal{P}^S)$ and $\Pr(\mathcal{P}_M)$ probabilities are depicted in Fig. 3(c).

The numerical analysis revealed that $\Pr(\mathcal{P}_S) \approx 0.4171$ for a \mathcal{P}_S single entangled path at the particular $\Pr(F_\Delta(x, y) < \hat{F}_\Delta)$ connection-level values of the path (given in Fig. 3(a)). The \mathcal{P}_M multipath setting at connection-level values of Fig. 3(b), at $m = 4$ doubles the success probability of the single path setting with $\Pr(\mathcal{P}_M) \approx 0.8549$, while at $m = 5$, the resulting probability is $\Pr(\mathcal{P}_M) \approx 0.9476$.

6 Conclusions

In this work, we defined a method to achieve entanglement access control in the quantum Internet. The algorithm utilizes different paths between the source and target nodes in function of a particular path cost function. The path cost function uses the local entanglement fidelities of the nodes and the probability of the existence of the entangled connections. Increasing the number of available paths leads to a multipath setting, which allows the parties to establish high fidelity entanglement with reliable entangled connections between the end nodes. The proposed scheme has moderate complexity, and it is particularly convenient for the entangled quantum network structure of the quantum Internet.

Acknowledgements

This work was partially supported by the National Research Development and Innovation Office of Hungary (Project No. 2017-1.2.1-NKP-2017-00001), by the Hungarian Scientific Research Fund - OTKA K-112125 and in part by the BME Artificial Intelligence FIKP grant of EMMI (BME FIKP-MI/SC).

References

- [1] Van Meter, R. *Quantum Networking*. ISBN 1118648927, 9781118648926, John Wiley and Sons Ltd (2014).

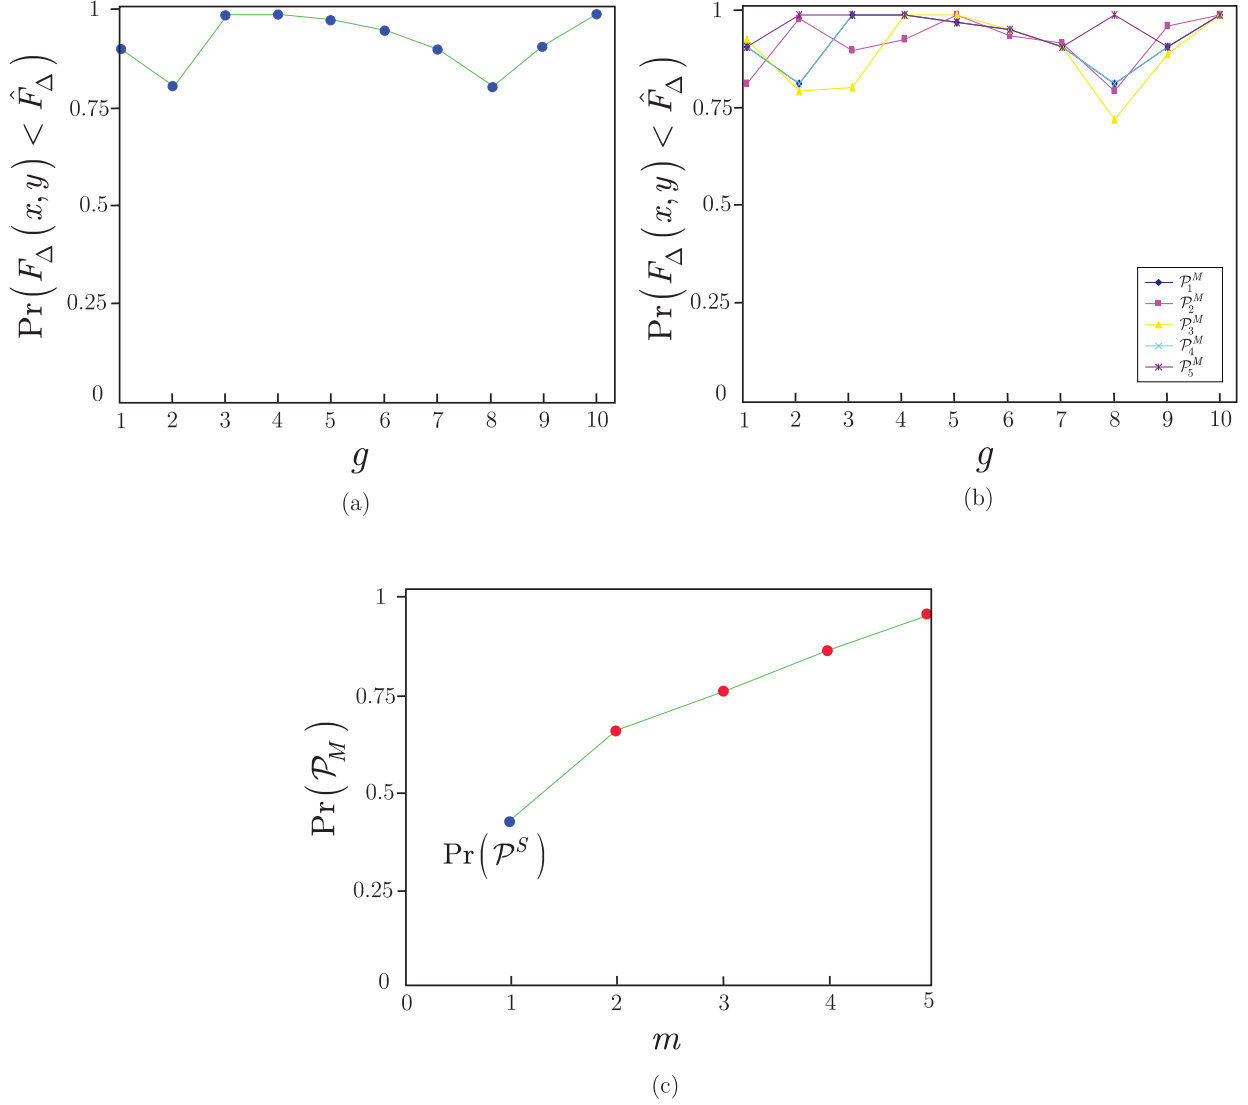


Figure 3: The probability of shared entanglement between the source and the destination with the fidelity criterion at a single entangled path and at a multipath setting, $F_{crit} = 0.98$, $\hat{F}_\Delta = 0.02$, $g_S = g = 10$. (a): A distribution of the $\Pr(F_\Delta(x, y) < \hat{F}_\Delta)$ probabilities for the g entangled connections of a \mathcal{P}^S single path. (b): A distribution of the $\Pr(F_\Delta(x, y) < \hat{F}_\Delta)$ probabilities for the $g_S = g$ entangled connections of a $\mathcal{P}_M = \{\mathcal{P}_1^M, \dots, \mathcal{P}_m^M\}$ multipath setting, $m = 5$. (c): The $\Pr(\mathcal{P}_M)$ probabilities in function of m . The $\Pr(\mathcal{P}_S)$ single path probability is yielded at $m = 1$.

[2] Lloyd, S., Shapiro, J. H., Wong, F. N. C., Kumar, P., Shahriar, S. M. and Yuen, H. P. Infrastructure for the quantum Internet. *ACM SIGCOMM Computer Communication Review*, 34, 9–20 (2004).

[3] Kimble, H. J. The quantum Internet. *Nature*, 453:1023–1030 (2008).

- [4] Gyongyosi, L., Imre, S. and Nguyen, H. V. A Survey on Quantum Channel Capacities, *IEEE Communications Surveys and Tutorials*, doi: 10.1109/COMST.2017.2786748 (2018).
- [5] Van Meter, R., Ladd, T. D., Munro, W. J. and Nemoto, K. System Design for a Long-Line Quantum Repeater, *IEEE/ACM Transactions on Networking* 17(3), 1002-1013, (2009).
- [6] Van Meter, R., Satoh, T., Ladd, T. D., Munro, W. J. and Nemoto, K. Path selection for quantum repeater networks, *Networking Science*, Volume 3, Issue 1–4, pp 82–95, (2013).
- [7] Van Meter, R. and Devitt, S. J. Local and Distributed Quantum Computation, *IEEE Computer* 49(9), 31-42 (2016).
- [8] Gyongyosi, L. and Imre, S. Decentralized Base-Graph Routing for the Quantum Internet, *Physical Review A*, American Physical Society, DOI: 10.1103/PhysRevA.98.022310, <https://link.aps.org/doi/10.1103/PhysRevA.98.022310>, (2018).
- [9] Gyongyosi, L. and Imre, S. Dynamic topology resilience for quantum networks, *Proc. SPIE 10547*, Advances in Photonics of Quantum Computing, Memory, and Communication XI, 105470Z; doi: 10.1117/12.2288707 (2018).
- [10] Gyongyosi, L. and Imre, S. Topology Adaption for the Quantum Internet, *Quantum Information Processing*, Springer Nature, DOI: 10.1007/s11128-018-2064-x, (2018).
- [11] Gyongyosi, L. and Imre, S. Adaptive Routing for Quantum Memory Failures in the Quantum Internet, *Quantum Information Processing*, Springer Nature, DOI: 10.1007/s11128-018-2153-x, (2018).
- [12] Pirandola, S., Laurenza, R., Ottaviani, C. and Banchi, L. Fundamental limits of repeaterless quantum communications, *Nature Communications*, 15043, doi:10.1038/ncomms15043 (2017).
- [13] Pirandola, S., Braunstein, S. L., Laurenza, R., Ottaviani, C., Cope, T. P. W., Spedalieri, G. and Banchi, L. Theory of channel simulation and bounds for private communication, *Quantum Sci. Technol.* 3, 035009 (2018).
- [14] Pirandola, S. Capacities of repeater-assisted quantum communications, *arXiv:1601.00966* (2016).
- [15] Laurenza, R. and Pirandola, S. General bounds for sender-receiver capacities in multipoint quantum communications, *Phys. Rev. A* 96, 032318 (2017).
- [16] Gyongyosi, L. and Imre, S. Multilayer Optimization for the Quantum Internet, *Scientific Reports*, Nature, DOI:10.1038/s41598-018-30957-x, (2018).
- [17] Gyongyosi, L. and Imre, S. Entanglement Availability Differentiation Service for the Quantum Internet, *Scientific Reports*, Nature, (DOI:10.1038/s41598-018-28801-3), <https://www.nature.com/articles/s41598-018-28801-3>, (2018).
- [18] Gyongyosi, L. and Imre, S. Entanglement-Gradient Routing for Quantum Networks, *Scientific Reports*, Nature, (DOI:10.1038/s41598-017-14394-w), <https://www.nature.com/articles/s41598-017-14394-w>, (2017).

- [19] Imre, S. and Gyongyosi, L. *Advanced Quantum Communications - An Engineering Approach*. New Jersey, Wiley-IEEE Press (2013).
- [20] Caleffi, M. End-to-End Entanglement Rate: Toward a Quantum Route Metric, 2017 *IEEE Globecom*, DOI: 10.1109/GLOCOMW.2017.8269080, (2018).
- [21] Caleffi, M. Optimal Routing for Quantum Networks, *IEEE Access*, Vol 5, DOI: 10.1109/ACCESS.2017.2763325 (2017).
- [22] Caleffi, M., Cacciapuoti, A. S. and Bianchi, G. Quantum Internet: from Communication to Distributed Computing, *arXiv:1805.04360* (2018).
- [23] Castelvecchi, D. The quantum internet has arrived, *Nature*, News and Comment, <https://www.nature.com/articles/d41586-018-01835-3>, (2018).
- [24] Cacciapuoti, A. S., Caleffi, M., Tafuri, F., Cataliotti, F. S., Gherardini, S. and Bianchi, G. Quantum Internet: Networking Challenges in Distributed Quantum Computing, *arXiv:1810.08421* (2018).
- [25] Nielsen, M. A. The entanglement fidelity and quantum error correction, *arXiv:quant-ph/9606012* (1996).
- [26] Schumacher, B. Sending quantum entanglement through noisy channels, *Phys Rev A*. 54(4), 2614-2628 (1996).
- [27] Petz, D. *Quantum Information Theory and Quantum Statistics*, Springer-Verlag, Heidelberg, Hiv: 6. (2008).
- [28] Kok, P., Munro, W. J., Nemoto, K., Ralph, T. C., Dowling, J. P. and Milburn, G. J., Linear optical quantum computing with photonic qubits, *Rev. Mod. Phys.* 79, 135-174 (2007).
- [29] Fedrizzi, A., Ursin, R., Herbst, T., Nespoli, M., Prevedel, R., Scheidl, T., Tiefenbacher, F., Jennewein, T. and Zeilinger, A. High-fidelity transmission of entanglement over a high-loss free-space channel, *Nature Physics*, 5(6):389–392, (2009).
- [30] Bacsardi, L. On the Way to Quantum-Based Satellite Communication, *IEEE Comm. Mag.* 51:(08) pp. 50-55. (2013).
- [31] Biamonte, J. et al. Quantum Machine Learning. *Nature*, 549, 195-202 (2017).
- [32] Lloyd, S., Mohseni, M. and Rebentrost, P. Quantum algorithms for supervised and unsupervised machine learning. *arXiv:1307.0411* (2013).
- [33] Lloyd, S., Mohseni, M. and Rebentrost, P. Quantum principal component analysis. *Nature Physics*, 10, 631 (2014).
- [34] Lloyd, S. Capacity of the noisy quantum channel. *Physical Rev. A*, 55:1613–1622 (1997).
- [35] Lloyd, S. The Universe as Quantum Computer, *A Computable Universe: Understanding and exploring Nature as computation*, Zenil, H. ed., World Scientific, Singapore, *arXiv:1312.4455v1* (2013).

- [36] Shor, P. W. Scheme for reducing decoherence in quantum computer memory. *Phys. Rev. A*, 52, R2493-R2496 (1995).
- [37] Shor, P. W. Fault-tolerant quantum computation, *37th Symposium on Foundations of Computing*, IEEE Computer Society Press, pp. 56-65 (1996).
- [38] Chou, C., Laurat, J., Deng, H., Choi, K. S., de Riedmatten, H., Felinto, D. and Kimble, H. J. Functional quantum nodes for entanglement distribution over scalable quantum networks. *Science*, 316(5829):1316–1320 (2007).
- [39] Muralidharan, S., Kim, J., Lutkenhaus, N., Lukin, M. D. and Jiang, L. Ultrafast and Fault-Tolerant Quantum Communication across Long Distances, *Phys. Rev. Lett.* 112, 250501 (2014).
- [40] Yuan, Z., Chen, Y., Zhao, B., Chen, S., Schmiedmayer, J. and Pan, J. W. Experimental Demonstration of a BDCZ Quantum Repeater Node, *Nature* 454, 1098-1101 (2008).
- [41] Kobayashi, H., Le Gall, F., Nishimura, H. and Rotteler, M. General scheme for perfect quantum network coding with free classical communication, *Lecture Notes in Computer Science* (Automata, Languages and Programming SE-52 vol. 5555), Springer) pp 622-633 (2009).
- [42] Hayashi, M. Prior entanglement between senders enables perfect quantum network coding with modification, *Physical Review A*, Vol.76, 040301(R) (2007).
- [43] Hayashi, M., Iwama, K., Nishimura, H., Raymond, R. and Yamashita, S, Quantum network coding, *Lecture Notes in Computer Science* (STACS 2007 SE52 vol. 4393) ed Thomas, W. and Weil, P. (Berlin Heidelberg: Springer) (2007).
- [44] Chen, L. and Hayashi, M. Multicopy and stochastic transformation of multipartite pure states, *Physical Review A*, Vol.83, No.2, 022331, (2011).
- [45] Schoute, E., Mancinska, L., Islam, T., Kerenidis, I. and Wehner, S. Shortcuts to quantum network routing, *arXiv:1610.05238* (2016).
- [46] Lloyd, S. and Weedbrook, C. Quantum generative adversarial learning. *Phys. Rev. Lett.*, 121, arXiv:1804.09139 (2018).
- [47] Gisin, N. and Thew, R. Quantum Communication. *Nature Photon.* 1, 165-171 (2007).
- [48] Xiao, Y. F., Gong, Q. Optical microcavity: from fundamental physics to functional photonics devices. *Science Bulletin*, 61, 185-186 (2016).
- [49] Zhang, W. et al. Quantum Secure Direct Communication with Quantum Memory. *Phys. Rev. Lett.* 118, 220501 (2017).
- [50] Gyongyosi, L. and Imre, S. A Survey on Quantum Computing Technology, *Computer Science Review*, Elsevier, DOI: 10.1016/j.Cosrev.2018.11.002, ISSN: 1574-0137 (2018).
- [51] Enk, S. J., Cirac, J. I. and Zoller, P. Photonic channels for quantum communication. *Science*, 279, 205-208 (1998).
- [52] Briegel, H. J., Dur, W., Cirac, J. I. and Zoller, P. Quantum repeaters: the role of imperfect local operations in quantum communication. *Phys. Rev. Lett.* 81, 5932-5935 (1998).

- [53] Dur, W., Briegel, H. J., Cirac, J. I. and Zoller, P. Quantum repeaters based on entanglement purification. *Phys. Rev. A*, 59, 169-181 (1999).
- [54] Duan, L. M., Lukin, M. D., Cirac, J. I. and Zoller, P. Long-distance quantum communication with atomic ensembles and linear optics. *Nature*, 414, 413-418 (2001).
- [55] Van Loock, P., Ladd, T. D., Sanaka, K., Yamaguchi, F., Nemoto, K., Munro, W. J. and Yamamoto, Y. Hybrid quantum repeater using bright coherent light. *Phys. Rev. Lett.*, 96, 240501 (2006).
- [56] Zhao, B., Chen, Z. B., Chen, Y. A., Schmiedmayer, J. and Pan, J. W. Robust creation of entanglement between remote memory qubits. *Phys. Rev. Lett.* 98, 240502 (2007).
- [57] Goebel, A. M., Wagenknecht, G., Zhang, Q., Chen, Y., Chen, K., Schmiedmayer, J. and Pan, J. W. Multistage Entanglement Swapping. *Phys. Rev. Lett.* 101, 080403 (2008).
- [58] Simon, C., de Riedmatten, H., Afzelius, M., Sangouard, N., Zbinden, H. and Gisin N. Quantum Repeaters with Photon Pair Sources and Multimode Memories. *Phys. Rev. Lett.* 98, 190503 (2007).
- [59] Tittel, W., Afzelius, M., Chaneliere, T., Cone, R. L., Kroll, S., Moiseev, S. A. and Sellars, M. Photon-echo quantum memory in solid state systems. *Laser Photon. Rev.* 4, 244-267 (2009).
- [60] Sangouard, N., Dubessy, R. and Simon, C. Quantum repeaters based on single trapped ions. *Phys. Rev. A*, 79, 042340 (2009).
- [61] Dur, W. and Briegel, H. J. Entanglement purification and quantum error correction. *Rep. Prog. Phys.* 70, 1381-1424 (2007).
- [62] Sheng, Y. B., Zhou, L. Distributed secure quantum machine learning. *Science Bulletin*, 62, 1025-1019 (2017).
- [63] Leung, D., Oppenheim, J. and Winter, A. Quantum network communication; the butterfly and beyond, *IEEE Trans. Inf. Theory* 56, 3478-90. (2010).
- [64] Kobayashi, H., Le Gall, F., Nishimura, H. and Rotteler, M. Perfect quantum network communication protocol based on classical network coding, *Proceedings of 2010 IEEE International Symposium on Information Theory (ISIT)* pp 2686-90. (2010).
- [65] Rak, J. *Resilient Routing in Communication Networks*, Springer (2015).
- [66] Rak, J. k-penalty: A Novel Approach to Find k-disjoint Paths with Differentiated Path Costs, *IEEE Commun. Lett.*, vol. 14, no. 4, pp. 354-356, (2010).