

Exact controllability for wave equation on general quantum graphs with non-smooth controls

Sergei A. Avdonin and Julian K. Edward

January 1, 2023

Abstract

In this paper we study the exact controllability problem for the wave equation on a finite metric graph with the Kirchhoff-Neumann matching conditions. Among all vertices and edges we choose certain active vertices and edges, and give a constructive proof that the wave equation on the graph is exactly controllable if $H^1(0, T)$ Neumann controllers are placed at the active vertices and $L^2(0, T)$ Dirichlet controllers are placed at the active edges. The proofs for the shape and velocity controllability are purely dynamical, while the proof for the exact controllability utilizes both dynamical and moment method approaches. The control time for this construction is determined by the chosen orientation and path decomposition of the graph.

1 Introduction

Controllability properties of the wave equation is a fundamental topic in the control theory for partial differential equations. Many powerful methods were used to prove controllability of the wave equation in various spatial domains under the action of various types of controls (see, e.g. [31, 33, 34, 36] and references therein). Control problems for the wave equation on graphs have important applications in science and engineering and were studied in many papers (see the monographs [10, 24, 30]; the surveys [2, 37]; and references therein). They also have deep connection with inverse problem on graphs, see, e.g. [12, 20] for tree graph examples. In this paper we consider the exact controllability problem for the equation $u_{tt} - u_{xx} + q(x)u = 0$ on metric graphs with the Kirchhoff-Neumann matching conditions. For graphs without cycles (trees) this problem was studied (in slightly different but essentially equivalent forms) in, e.g. [13, 20, 24, 29, 30]. It was proved that the system is exactly controllable if Dirichlet controllers act at all or at all but one of the boundary vertices. In [17] a constructive proof for controllability of the wave equation on a tree graph was proposed, in which the graph was represented as a union of disjoint paths with each path starting from a controlled boundary vertex. The sharp controllability time was also indicated in that paper.

Until recently, little was known about controllability of the wave equation (or any other partial differential equation) on graphs with cycles. It was only proved that the wave equation on graphs with cycles is never exactly boundary controllable [10]; it may be spectrally (boundary) controllable, but this property is very unstable with respect to small perturbations of the system parameters (see, e.g. [5, 6]). Historically, the first work on controllability of the wave equation on graphs was the paper by S. Rolewicz [Rolewicz(1970)]. He considered the system with Dirichlet controls at all vertices, i.e. the system of strings connected by common controls at the internal vertices. Complete solution of the problem of exact and spectral controllability for such systems was obtained in [10, Sec. VII.1].

An important step forward recently was the work by [18], who gave a constructive proof for the controllability of the wave equation on a general graph with the Kirchhoff-Neumann matching conditions. Their construction generalized the idea of controllability on trees in [17]. However, to prove controllability of systems on graphs with cycles requires not only boundary but also internal controls, as was proposed in [3]. Given an undirected graph, they first gave it an acyclic orientation, and then constructed an active set of vertices and edge directions based on the chosen orientation, such that the active vertices include all source vertices specific to the orientation; the active edge directions include all but one of the outgoing directions at every vertex. Then Neumann controllers are placed at the active vertices, and Dirichlet controllers are placed at the active edge directions. The shape and velocity controllability are proved using a constructive dynamical method. The exact controllability was then proved by combining the shape and velocity control functions via the method of moments.

One important restriction made in [18] is that the controls had relatively high regularity: Dirichlet controls were assumed to be in a subset of $H^1(0, T)$, while the Neumann controls were in $L^2(0, T)$, where T is the appropriate controllability time. It is natural to consider a rougher set of controls. In this paper, we prove an exact controllability assuming L^2 -Dirichlet controls and $H^1(0, T)'$ -Neumann controls, where $H^1(0, T)'$ is the dual of $H^1(0, T)$. To the best of our knowledge, for such controls it is not even known the appropriate state spaces for which the initial boundary value problem (IBVP) is well posed. In addition, there are significant technical obstructions to implementing the local, dynamical arguments used in [18] for proving velocity controllability. In particular, we are unaware of any natural way to define the restriction $H^1(0, T)' \mapsto H^1(a, b)'$ where (a, b) is a proper subset of $(0, T)$. To avoid these issue, we instead prove velocity control in a *more* regular category, and then use the identity

$$\frac{\partial^2}{\partial t^2} u^{\mathbf{f}}(x, t) = u^{\mathbf{f}''}(x, t)$$

to obtain velocity control in the rougher category. Here \mathbf{f} is the vector of controls, and $u^{\mathbf{f}}$ is the associated solution to the IBVP. This argument can be compared with the work of [25], where controllability in *less* regular spaces is used to prove controllability in *more* regular spaces.

The paper is organized as follows. Section 2.1 introduces the quantum graph and formulates the control problem, then discusses well-posedness. In Section 3, the orientation of the graph and the placement of the controls is presented, and then shape and velocity control results are proven. For readability we assume in this section that $q = 0$; the necessary modifications for $q \neq 0$ are given in the Appendix. In Section 4, we formulate the shape and velocity controllability results in terms of moment problems, and then prove the solvability of the moment problem associated to exact controllability.

2 Well-posedness

2.1 Preliminaries

Let $\Omega(V, E)$ be a finite, undirected, connected graph, where V, E are the sets of vertices and edges of Ω respectively. Each edge in E is associated with two vertices in V called its endpoints. Here we require both $V = \{v_i : i \in I\}$ and $E = \{e_j : j \in J\}$ to be nonempty; and the two endpoints of an edge to be distinct. That is, our graphs contain no loops; we will use this assumption in Section 3 when introducing acyclic orientations on graphs. This assumption is not restrictive. Since we admit multiple edges between two vertices, a loop can be considered as two edges between two vertices. In this paper it is convenient to consider I and J as disjoint subsets of \mathbb{N} .

An undirected edge e_j between v_i and v_k is denoted as $e_j(v_i, v_k)$. The set of indices of the edges incident to v_i is denoted by $J(v_i)$. The set, $\Gamma = \{v_i \in V : |J(v_i)| = 1\}$, plays the role of the graph

boundary. Here we use $|\cdot|$ to denote the cardinality of a set of features on a graph.

We recall that a graph is called a **metric graph** if every edge $e_j \in E$ is identified with an interval $(0, l_j)$ of the real line with a positive length l_j . The graph Ω determines naturally the Hilbert space of square integrable functions \mathcal{H} on Ω such that $y_j := y|_{e_j} \in L^2(0, l_j)$ for every $j \in J$. We define the space \mathcal{H}^1 of continuous functions y on Ω such that $y_j \in H^1(0, l_j) \forall j \in J$ and $y|_\Gamma = 0$. Let \mathcal{H}^{-1} be the dual space of \mathcal{H}^1 . We further introduce the space \mathcal{H}^2 of functions $y \in \mathcal{H}^1$ such that $y_j \in H^2(e_j)$ for every $j \in J$ and, for every $v_i \in V \setminus \Gamma$, the equality

$$\sum_{j \in J(v_i)} \partial y_j(v_i) = 0 \quad (2.1)$$

holds. Here (and everywhere later on) $\partial y_j(v_i)$ denotes the derivative of y at the vertex v_i taken along the edge e_j in the direction outwards the vertex. Vertex conditions (2.1) (together with continuity at v) are called the **Kirchhoff-Neumann** (KN) conditions for the internal vertices.

Let q be a real valued function (potential) such that $q|_{e_j} \in C[0, l_j]$. We define the self adjoint (Schrödinger) operator A on the graph Ω whose operation is

$$(Ay)_j = -y_j''(x) + q_j(x)y_j(x), \quad \forall j \in J, \quad (2.2)$$

in \mathcal{H} with the operator domain \mathcal{H}^2 .

Consider the following initial boundary value problem (IBVP):

$$w_{tt} - w_{xx} + q(x)w = p(x, t) \quad \text{in } \{\Omega \setminus V\} \times (0, T), \quad (2.3)$$

$$w_j(v_i, t) = w_k(v_i, t) \text{ for } j, k \in J(v_i), v_i \in V \setminus \Gamma, t \in [0, T], \quad (2.4)$$

$$\sum_{j \in J(v_i)} \partial w_j(v_i, t) = 0 \quad \text{at each vertex } v_i \in V \setminus \Gamma, t \in [0, T], \quad (2.5)$$

$$w_j(v_i, t) = 0 \quad \text{at each vertex } v_i \in \Gamma, t \in [0, T], \quad (2.6)$$

$$w|_{t=0} = w^0, \quad w_t|_{t=0} = w^1 \quad \text{in } \Omega. \quad (2.7)$$

Here $T > 0$, $p \in L^1(0, T; \mathcal{H})$, $w^0 \in \mathcal{H}^1$, and $w^1 \in \mathcal{H}$. Using the Fourier method, one can show (see Lemma 2.2 below) that this IBVP has a unique generalized solution such that for any $i \in I, j \in J$,

$$w \in C([0, T]; \mathcal{H}^1), \quad w_t \in C([0, T]; \mathcal{H}), \quad w(v_i, \cdot) \in H^1(0, T), \quad \partial w_j(v_i, \cdot) \in L^2(0, T) \quad (2.8)$$

We now parametrize a set of observations, using sets $I^* \subset I \setminus \Gamma$, and $J^* \subset J$. We denote $V^* = \{v_i \in V, i \in I^*\}$. If $j \in J^*$, we define $i = \iota(j)$ to be one of the vertices at the end of e_j ; here ι is a function from J^* to I . Define $J^*(v_i)$ to be the set $J^* \cap J(v_i)$, and $J^c(v_i) = J(v_i) \setminus J^*$. We will call $\{I^*, J^*, \iota\}$ the active set. Our observations will be $w(v_i, t)$, $i \in I^*$, and $\partial w_j(v_i, t)$, with $j \in J^*(v_i)$, $i = \iota(j)$. The observability inequality is then

$$\|w^0\|_{\mathcal{H}^1}^2 + \|w^1\|_{\mathcal{H}}^2 + \|p\|_{L^1(0, T; \mathcal{H}^1)}^2 \leq C \left(\sum_{i \in I^*} \int_0^T |w(v_i, T-t)|^2 dt + \sum_{j \in J^*, i = \iota(j)} \int_0^T |\partial w_j(v_i, T-t)|^2 dt \right).$$

Here, w^0, w^1 are arbitrary, and C is a constant independent of w^0, w^1 . We emphasize that our observations are feasible and nondestructive, and hence the corresponding exact control problem will be natural.

We can now define the system we wish to control. The control system dual to (2.3)–(2.7) with the active set $\{I^*, J^*, \iota\}$ can be written as follows:

$$u_{tt} - u_{xx} + q(x)u = 0 \quad \text{in } \{\Omega \setminus V\} \times (0, T), \quad (2.9)$$

$$\sum_{j \in J(v_i)} \partial u_j(v_i, t) = \begin{cases} 0, & v_i \notin \Gamma, i \in I \setminus I^*, \\ \tilde{f}_i(t), & v_i \notin \Gamma, i \in I^*, \end{cases} \quad (2.10)$$

$$u_j(v_i, t) = f_i(t), \quad v_i \in \Gamma, i = \iota(j), j \in J^*, \quad (2.11)$$

$$u_j(v_i, t) = 0, \quad v_i \in \Gamma, i = \iota(j), j \notin J^*, \quad (2.12)$$

$$\begin{cases} u_j(v_i, t) - u_k(v_i, t) = f_j(t), & i \in I \setminus \Gamma, j \in J^*(v_i), k \in J^c(v_i), \\ u_j(v_i, t) - u_k(v_i, t) = 0, & i \in I \setminus \Gamma, j, k \in J^c(v_i), \end{cases} \quad (2.13)$$

$$u|_{t=0} = u_t|_{t=0} = 0 \quad \text{in } \Omega. \quad (2.14)$$

In this paper we assume that $f_i \in L^2(0, T)$, and $\tilde{f}_i \in H^1(0, T)'$. We will refer to $f_i(t)$ with $i \in I^*$, as a ‘‘vertex control’’, and to $f_j(t)$ with $j \in J^*$ as an ‘‘edge control’’. We will state our controllability result in the next section.

We conclude this section by defining the relevant spectral data. Let $\{(\omega_n^2, \varphi_n) : n \geq 1\}$ be the eigenvalues and normalized eigenfunctions of the operator L , i.e. φ_n solves the following eigenvalue problem:

$$-\varphi_n'' + q(x)\varphi_n = \omega_n^2 \varphi_n \quad \text{on } \{\Omega \setminus V\}, \quad (2.15)$$

$$\sum_{j \in J(v_i)} \partial(\varphi_n)_j(v_i) = 0, \quad v_i \in V \setminus \Gamma, \quad \varphi_n|_{\Gamma} = 0, \quad (2.16)$$

$$(\varphi_n)_j(v_i) = (\varphi_n)_k(v_i), \quad j, k \in J(v_i), \quad v_i \in V \setminus \Gamma. \quad (2.17)$$

where $(\varphi_n)_j$ is the restriction of φ_n to edge e_j .

2.2 Well-posedness, Part 1

The main goal of this section is to determine the spaces for which the system (2.9)-(2.14) is well-posed. For general graphs with L^2 Dirichlet controls applied at the boundary, it is well known (see, e.g. [29, 15]) that the mapping $t \mapsto u(\cdot, t)$ is in $C(0, T; \mathcal{H}) \cap C^1(0, T; \mathcal{H}^{-1})$. However, this is not the case for controls applied in the interior, as our next example shows.

Example 2.1. Consider the star graph consisting of three copies of $(0, l)$ with central vertex identified with $x = 0$ for each edge. We set $q = 0$, and assume a single Neumann control $\tilde{f}(t)$ is applied at $x = 0$. Letting $g(t) = u(0, t)$, for $t < l$ we have $u_j(x, t) = g(t - x)$ so that

$$\tilde{f}(t) = \sum_{j=1}^3 \partial_x u_j(0, t) = 3g'(t).$$

Let $\phi \in \mathcal{H}_0^1$. Then assuming for the moment that \tilde{f} is sufficiently regular, from integration by parts we have

$$\begin{aligned} \int_{\Omega} \phi u_t &= \sum_j \int_0^l \phi_j(x) g'(t - x) dx \\ &= \sum_j \int_0^l \phi_j'(x) g(t - x) dx + 3\phi(0)g(t). \end{aligned}$$

I propose to use $f(\cdot)$, not $f(*)$, below and everywhere. Thus $\langle \phi(\cdot), u_t(\cdot, t) \rangle_{1, -1}$ being continuous in t for $g \in L^2(0, T)$ requires $\phi(0) = 0$. Here $\langle \cdot, \cdot \rangle_{1, -1}$ is the pairing $\mathcal{H}^1 - \mathcal{H}^{-1}$.

With this example in mind, we parametrize the internal vertices associated either to an edge or vertex control. We define $\bar{I} = \{i \in I : i \in I^* \text{ or } J^*(v_i) \neq \emptyset\}$ and

$$\mathcal{H}_b^1 = \{\phi \in \mathcal{H}_0^1 : \phi(v_i) = 0 \forall i \in \bar{I}\}, \quad \mathcal{H}_b^2 = \{\phi \in \mathcal{H}_b^1 : \phi|_{e_j} \in H^2(e_j), \forall j \in J\},$$

$$\mathcal{H}_0^1 = \{\phi \in \mathcal{H}_0^1 : \phi(v_i) = 0 \forall i \in I^*\}.$$

In this section, we will prove that the velocity belongs to $(\mathcal{H}_0^1)'$, the dual space of \mathcal{H}_0^1 . We remark in passing that for such a velocity, the Dirac delta function δ_{v_i} would be non-trivial only if $i \in I \setminus I^*$.

We also define

$$H_0^1(0, T) = \{g \in H^1(0, T) : g(0) = g(T) = 0\}, \quad H_0^2(0, T) = \{g \in H^2(0, T) : g(0) = g'(0) = g(T) = g'(T) = 0\}.$$

We will use two kinds of controls: “smooth” and “rough”. For all edge controls, including boundary, $f_j \in H_0^2(0, T)$ for smooth controls and $f_j \in L^2(0, T)$ for rough controls, while all vertex controls will satisfy $\tilde{f}_i \in H_0^1(0, T)$ or $H^1(0, T)'$, correspondingly.

The corresponding control spaces for the system (2.9)-(2.14) are:

$$\mathcal{F}_2^T = (H_0^1(0, T))^{|I^*|} \times (H_0^2(0, T))^{|J^*|}; \quad \mathcal{F}_0^T = (H^1(0, T)')^{|I^*|} \times (L^2(0, T))^{|J^*|}.$$

Theorem 1.

A) Given $\mathbf{f} \in \mathcal{F}_2^T$, there exists a unique solution $u^{\mathbf{f}}$ solving (2.9)-(2.14), such that

$$u^{\mathbf{f}}(x, t) \in C(0, T; \mathcal{H}^2) \cap C^1(0, T; \mathcal{H}^1).$$

B) Given $\mathbf{f} \in \mathcal{F}_0^T$, there exists a unique solution $u^{\mathbf{f}}$ solving (2.9)-(2.14), such that

$$u^{\mathbf{f}}(x, t) \in C(0, T; \mathcal{H}) \cap C^1(0, T; (\mathcal{H}_0^1)').$$

The proof of part A, where the solution u will be classical, is left to the reader.

We begin the proof of part B by proving the following, slightly weaker result.

Proposition 1. Given $\mathbf{f} \in \mathcal{F}_0^T$, there exists a unique solution $u^{\mathbf{f}}$ solving (2.9)-(2.14), such that

$$u^{\mathbf{f}}(x, t) \in C(0, T; \mathcal{H}) \cap C^1(0, T; (\mathcal{H}_0^1)').$$

Proof of proposition:

We consider the weak formulation of the problem. Thus we now consider the problem (2.3)-(2.7) with $w_0 = w_1 = 0$. In what follows, when convenient, we will denote the function w determined by p by w^p . Assuming classical solutions, multiplying (2.3) by u and then integrating by parts, we get

$$\int_Q pu \, dxdt = \int_0^T \left[\sum_{j \in J^*(v_i), i=\iota(j)} \partial w_j(v_i, T-t) f_j(t) - \sum_{i \in I^*} w(v_i, T-t) \tilde{f}_i(t) \right] dt. \quad (2.18)$$

Thus, for a given $\mathbf{f} \in \mathcal{F}_0^T$, we will define u to be the weak solution as the solution of the system (2.9)-(2.14) if

$$\int_Q p(x, t)u(x, t) \, dxdt = \int_0^T \sum_{j \in J^*, i=\iota(j)} \partial w_j(v_i, t) f_j(t) \, dt - \sum_{i \in I^*} \langle w(v_i, t) \tilde{f}_i(t) \rangle_{1, -1}. \quad (2.19)$$

holds for all $p \in L^1(0, T; \mathcal{H})$. Here $\langle *, * \rangle_{1, -1}$ is the pairing $H^1(0, T) - H^1(0, T)'$.

We now consider the regularity of w^p .

Lemma 2.2. Assume that $q_j \in C^1[0, l_j]$ and q is continuous at the interior vertices.

A) Suppose $p \in L^1(0, T; \mathcal{H})$. Then $w^p \in C(0, T; \mathcal{H}_0^1) \cap C^1(0, T; \mathcal{H})$. Furthermore, for all $v_i \in V$,

$$\int_0^T |w_j(v_i, t)|^2 dt \leq C \|p\|_{L^1(0, T; \mathcal{H})}^2. \quad (2.20)$$

Finally, for all $i \in I$, and all $j \in J(v_i)$,

$$\int_0^T |\partial w_j(v_i, t)|^2 + |w_t(v_i, t)|^2 \leq C \|p\|_{L^1(0, T; \mathcal{H})}^2. \quad (2.21)$$

Here C is independent of p .

B) Suppose $p = \frac{\partial}{\partial t} P$, with $P \in L^1(0, T; \mathcal{H}_b^1)$. Then $w^p \in C(0, T; \mathcal{H}) \cap C^1(0, T; (\mathcal{H}_b^1)')$. Furthermore, for all $v_i \in V$,

$$\int_0^T |w(v_i, t)|^2 dt \leq C \|P\|_{L^1(0, T; \mathcal{H}_b^1)}^2. \quad (2.22)$$

Finally, for all $i \in \bar{I}$, and all $j \in J(v_i)$

$$\int_0^T |\partial w_j(v_i, t)|^2 + |w_t(v_i, t)|^2 \leq C \|P\|_{L^1(0, T; \mathcal{H}_b^1)}^2. \quad (2.23)$$

Here C is independent of f .

Proof: Let $Q = \Omega \times [0, T]$. $\|w_t(*, t)\|_{L^2(\Omega)} + \|w_x(*, t)\|_{L^2(\Omega)}$ To prove the continuity results and (2.20), we use a Fourier series argument. Recall we denote the eigenvalues and unit eigenfunctions for our system by $\{(\omega_j^2, \varphi_j)\}_1^\infty$. Here the eigenvalues are listed in increasing order. Assume for the moment that $\lambda_j^2 > 0$ for all j . Letting $p = \sum_j p_j(t) \varphi_n(x)$, standard calculations give

$$w(x, t) = \sum_{j=1}^{\infty} \left(\frac{1}{\omega_j} \int_0^t \sin(\omega_j(t-s)) ds \right) \varphi_j(x). \quad (2.24)$$

In what follows, assume first that p is regular, and denote $\|*\|$ the L^2 -norm on Ω . Then

$$\begin{aligned} \|w_x(*, t)\|^2 &= \langle \partial_x^2 w(*, t), w(*, t) \rangle_{\mathcal{H}} \\ &= \sum_j \left(\int_0^t \sin(\omega_j(t-s)) p_j(s) ds \right)^2 \\ &\leq t \left(\sum_j \int_0^t |p_j(s)|^2 ds \right) \\ &\leq t \int_0^t \sum_j |p_j(s)|^2 ds. \end{aligned}$$

Hence,

$$\begin{aligned} \|w_x(*, t)\| &\leq \sqrt{T} \int_0^T \left(\sum_j |p_j(s)|^2 \right)^{1/2} ds \\ &\leq \sqrt{T} \|p\|_{L^1(0, T; \mathcal{H})}, \quad t \in [0, T]. \end{aligned}$$

We conclude

$$\|w_x\|_{L^\infty(0, T; \mathcal{H})} \leq C \|p\|_{L^1(0, T; \mathcal{H})}.$$

It follows by a density argument that $w \in C(0, T; \mathcal{H}_0^1)$. A similar argument shows $w \in C^1(0, T; \mathcal{H})$. This proves (2.20).

The argument above can easily be adapted to the case where for some j we have $\omega_j^2 \leq 0$. For $\omega_j < 0$, it suffices to replace $\sin(\omega_j(t-s))$ by $\sinh(|\omega_j|(t-s))$, and for $\omega_j = 0$ we can replace $\sin(\omega_j(t-s))$ by $(t-s)$.

To prove (2.21), we use a multiplier argument. Fix any vertex v_i . Now parametrize the incident edges by $(0, l_j)$ with v_i corresponding to $x = 0$. Let $h(x)$ be some smooth cut-off function with $h(0) = 1$, $h'_j(0^+) = 0$, and $h(x) = 0$ for $x > \min(l_j/2)$, and set $h = 0$ elsewhere on Ω , and further assume $h'(x) \leq 0$. Then

$$\begin{aligned} \int_Q hw_x p &= \sum_{j \in J(v_i)} \int_0^T \int_{e_j} hw_x (w_{tt} - w_{xx} + qw) dx dt \\ &= \frac{-1}{2} \sum_{j \in J(v_i)} \int_0^T \int_0^{l_j} h \partial_x (w_t^2 + w_x^2) - hq \partial_x (w^2) dx dt + \int_{\Omega} [hw_x w_t]_0^T dx \\ &= \frac{1}{2} \sum_{j \in J(v_i)} \int_0^T \int_0^{l_j} h_x (w_t^2 + w_x^2) - (hq)_x w^2 dx dt + \int_{\Omega} [hw_x w_t]_0^T dx \\ &\quad + \frac{1}{2} \sum_{j \in J(v_i)} \int_0^T w_t(0, t)^2 + \partial_x w_j(0, t)^2 - q_j(0^+) w(0, t)^2 dt. \end{aligned}$$

The estimate (2.21) now follows from $w \in C(0, T; \mathcal{H}_0^1) \cap C^1(0, T; \mathcal{H})$.

We now prove part B of the Lemma, which is an adaptation of Lions ([33], Thm. 4.2, p. 46). Let θ solve

$$\theta_{tt} - \theta_{xx} + q(x)\theta = P(x, t) \quad \text{in } \{\Omega \setminus V\} \times (0, T), \quad (2.25)$$

$$\theta|_{t=T} = \theta_t|_{t=T} = 0, \quad (2.26)$$

$$\theta_j(v_i, t) = \theta_k(v_i, t) \text{ for } j, k \in J(v_i), v_i \in V \setminus \Gamma, t \in [0, T], \quad (2.27)$$

$$\sum_{j \in J(v_i)} \partial \theta_j(v_i, t) = 0 \text{ at each vertex } v_i \in V \setminus \Gamma, t \in [0, T], \quad (2.28)$$

$$\theta_j(v_i, t) = 0 \text{ at each vertex } v_i \in \Gamma, t \in [0, T]. \quad (2.29)$$

The inclusion $\theta \in C(0, T; \mathcal{H})$ can be proven using the multiplier $h\theta_x$; the details are left to the reader.

Clearly $\theta_t = w$. Let v_i be any interior vertex. We wish to prove an upper bound for

$$\int_0^T w(v_i, t)^2 + w_t(v_i, t)^2 + \partial_x w_j(v_i, t)^2 dt = \int_0^T \theta_t(v_i, t)^2 + \theta_{tt}(v_i, t)^2 + \partial_x \theta_t(v_i, t)^2 dt. \quad (2.30)$$

First, using (2.27), (2.28), one can check that for sufficiently smooth θ ,

$$\int_{\Omega} \theta_{tt} \theta_{xxt} = - \int_{\Omega} \theta_{tx} \theta_{xt}.$$

Assume for the moment that P is regular in t and vanishes near $t = 0, T$. We multiply (2.25) by θ_{xxt} and integrate by parts as above over Ω to get

$$\frac{d}{dt} \int_{\Omega} (\theta_{xx}^2 + \theta_{xt}^2 dx) = \int_{\Omega} (P_x \theta_{xt} - q_x \theta \theta_{xt} - q \theta_x \theta_{xt}) dx + \sum_{v_i \in V \setminus \Gamma} \left((P(v_i, t) - q(v_i) \theta(v_i, t)) \sum_{j \in J(v_i)} (\theta_j)_{xt}(v_i, t) \right).$$

The boundary terms on the right hand side of the equation above vanish because of the continuity of q at interior vertices and (2.5). A simple exercise in analysis now gives

$$\|\theta\|_{C(0,T;\mathcal{H}_b^2)\cap C^1(0,T;\mathcal{H}_b^1)} \leq C\|P\|_{L^1(0,T;\mathcal{H}_b^1)}. \quad (2.31)$$

By density, this estimate will hold for all $P \in L^1(0,T;\mathcal{H}_b^1)$. Equation (2.22) now follows.

We now prove (2.23), so assume $i \in \bar{I}$. For the moment in this paragraph, we assume P is regular in t and vanishes at $t = 0, T$. In what follows we will use h as in the proof of Part A to localize to the edges incident to v_i . We multiply (2.25) by $\theta_{xt}(x,t)h(x)$ and integrate over Q to get

$$\begin{aligned} \int_Q \theta_{ttx} h P \, dx dt &= -\frac{1}{2} \int_Q h_x (\theta_{tt}^2 + \theta_{tx}^2) \, dx dt - \frac{1}{2} \int_0^T \theta_{tt}(v_i, t)^2 + \theta_{xt}(v_i, t)^2 dt \\ &\quad + \int_\Omega \theta_{tx}(x, 0) \theta_{xx}(x, 0) h(x) \, dx - \int_Q \theta_{xt} h q \theta_t \, dx dt \\ &\quad - \int_\Omega \theta_{xt}(x, 0) h(x) q(x) \theta(x, 0) \, dx. \end{aligned} \quad (2.32)$$

Integration by parts on the left hand side, together with $\theta_{tt} = \theta_{xx} - q\theta + P$, gives

$$\int_Q \theta_{ttx} h P \, dx dt = - \int_Q \theta_{xx}(hP)_x - q\theta(hP)_x + \frac{h_x}{2} P^2 \, dx dt + \sum_{j \in J(v_i)} \int_0^T (-\theta_{tt}(v_i, t) P(v_i, t) + \frac{1}{2} P(v_i, t)^2) dt.$$

The last two terms vanish because $P(v_i, t) = 0$, $i \in \bar{I}$. Remark: it is precisely in the last equation where the assumption $P(v_i, t) = 0$ seems essential. Inserting this along with $\theta_{tt} = \theta_{xx} - q\theta + P$ into (2.32) gives

$$\begin{aligned} \frac{1}{2} \int_0^T \theta_{tt}(v_i, t)^2 + \theta_{xt}(v_i, t)^2 dt &= - \int_Q h_x (\theta_{xx}(-q\theta + P) + \frac{1}{2}(q^2\theta^2 + \theta_{xx}^2 + \theta_{tx}^2)) \, dx dt + \int_\Omega \theta_{tx}(x, 0) \theta_{xx}(x, 0) h(x) \, dx \\ &\quad - \int_Q (q\theta(P_h)_x + \theta_{xt} h q \theta_t - \theta_{xx}(hP)_x) \, dx dt - \int_\Omega \theta_{xt}(x, 0) h q(x) \theta(x, 0) \, dx. \end{aligned}$$

Thus by (2.31),

$$\int_0^T \theta_{tt}(v_i, t)^2 + \theta_{tx}(v_i, t)^2 dt = \int_0^T w_t(v_i, t)^2 + w_x(v_i, t)^2 dt \leq \|P\|_{L^1(0,T;\mathcal{H}_b^1)}.$$

This inequality was proven for P regular in t and vanishing at $t = 0$, but by density it will hold for $P \in L^1(0,T;\mathcal{H}_b^1)$. The lemma is proven.

Proof of Proposition 1.

We write

$$\mathbf{f} = \langle \tilde{f}_1, \dots, \tilde{f}_{|I^*|}, f_1, \dots, f_{|J^*|} \rangle. \quad (2.33)$$

By linearity, it suffices to prove (2.19) when all but one component is zero. We prove the result for $\mathbf{f} = \langle \tilde{f}_1, 0, \dots, 0 \rangle$, leaving the result for Dirichlet controls to the reader. For readability, we rewrite $\langle \tilde{f}_1, 0, \dots, 0 \rangle$ as $g(t) \in H_*^1(0,T)$, and assume the vertex associated to g is v_1 .

By Part A of Lemma 2.2, the left hand side of (2.19) is a bounded linear functional on $L^1(0,T;\mathcal{H})$. Thus, there exists a unique $u \in L^\infty(0,T;\mathcal{H})$ such that (2.19) holds, and furthermore there exists C such that

$$\sup_t \|u(*, t)\|_{\mathcal{H}} \leq C \|g\|_{H^1(0,T)}. \quad (2.34)$$

That $u \in C(0, T; \mathcal{H})$ follows by the following argument density argument. Clearly for regular g_n , $u^{g_n} \in C(0, T; \mathcal{H})$. Suppose $g_n \rightarrow g$ in $H^1(0, T)'$. It follows by (2.34) that

$$\sup_t \|u^g(x, t) - u^{g_n}(x, t)\|_{\mathcal{H}} \rightarrow 0.$$

Continuity of $t \mapsto u^g$ follows.

We now prove continuity of $t \mapsto u_t^g$. Assume for the moment $P \in C_0^\infty(0, T; \mathcal{H}_b^1)$ and hence vanishes at $t = 0, T$. Setting $p = \partial_t P$ in (2.19) and then integrating by parts, we get

$$\langle g(*), w^p(v_1, *) \rangle_{-1,1} = - \int_0^T \int_{\Omega} P u_t \, dx dt.$$

By Lemma 2.2 part B, the left hand side of this equation defines a bounded linear functional on $L^1(0, T; \mathcal{H}_b^1)$, and hence $u_t \in L^\infty(0, T; (\mathcal{H}_b^1)')$ and

$$\sup_t \|u_t(*, t)\|_{(\mathcal{H}_b^1)'} \leq C \|g\|_{H^1(0, T)'}$$

Continuity follows from another density argument.

The following technical result will be important in proving our exact control result.

Proposition 2. Let $\mathbf{f} \in \mathcal{F}_2^T$. Then

$$\partial_t^2 u_t^{\mathbf{f}}(*, t) = u_t^{\mathbf{f}''}(*, t), \tag{2.35}$$

this equation holding in $C(0, T; (\mathcal{H}_0^1)')$.

We remark this equation holds trivially for \mathbf{f} sufficiently regular. Also, for component $\tilde{f}_i \in H_0^1(0, T)$, we interpret \tilde{f}_i'' as follows. Defining $D_t : H^1(0, T) \mapsto L^2(0, T)$ by $D_t h(t) = h'(t)$, we have $D_t^* : L(0, T) \mapsto H^1(0, T)'$. Then

$$\tilde{f}_i'' = -D_t^* D_t \tilde{f}_i \in H^1(0, T)'.$$

Proof of proposition: We define $g(t)$ as in the proof of Theorem 1, see (2.33). For this proof, we denote $C_*^1(0, T) = \{g \in C^1(0, T) : g(0) = 0\}$. It suffices to prove

$$\partial_t^2 u^g(x, t) = u^{g''}(x, t)$$

as elements of $C(0, T; \mathcal{H})$. Since $g'' \in H^1(0, T)'$, we have by Theorem 1 that $u^{g''}$ solves (2.9)-(2.14). We now prove

$$\langle w^p(v_1, *), g''(*) \rangle_{H^1(0, T), (H^1)'(0, T)} = - \int_Q \partial_t^2 u^g(x, t) p(x, t) \, dx dt, \quad \forall p \in L^1(0, T; \mathcal{H});$$

the proposition will then follow by (2.19) and uniqueness of the weak solution. Assume for the moment $p \in C_0^\infty(0, T; \mathcal{H}_0^1)$, and hence

$$w_{xx}^p(x, T) = w_{xxt}^p(x, T) = 0,$$

and $w_{ttxx}^p \in C(0, T; \mathcal{H})$. Also assume for the moment that $g \in C_*^1(0, T)$, so that u^g has a classical solution. In the argument that follows, we will integrate by parts in x . Thus, we assume that Ω is

a directed graph, and for each edge we have the identification $e_j = \{x \in (a_j, b_j)\}$, with b_j always chosen to be the incoming vertex.

Hence,

$$\begin{aligned}
\int_Q \partial_t^2 u^g(x, t) p(x, t) \, dx dt &= \int_Q u_{tt}^g (w_{tt} - w_{xx} + qw) \, dx dt \\
&= \int_Q u_{tt}^g w_{tt} - u^g w_{xxtt} + q u^g w_{tt} \, dx dt \\
&= \int_0^T \sum_{j \in J} [-u^g w_{ttx} + u_x^g w_{tt}]_{a_j}^{b_j} \, dt \\
&= \int_0^T \sum_{i \in I} \sum_{j \in J(v_i)} ((u_j^g(v_i, t)(w_j)_{ttx}(v_i, t) - (u_j^g)_x(v_i, t)(w_j)_{tt}(v_i, t)) \, dt \\
&= - \int_0^T g(t) w_{tt}(v_1, t) \, dt \\
&= \int_0^T g'(t) w_t(v_1, t) \, dt \\
&= \langle D_t g(*), D_t w(v_1, *) \rangle_{L^2(0, T), L^2(0, T)} \\
&= - \langle g'', w(v_1, *) \rangle_{H^1(0, T)', H^1(0, T)}. \tag{2.36}
\end{aligned}$$

This identity is proven for all $p \in C_0^\infty(0, T; \mathcal{H}_0^1)$ and $g \in C_*^1(0, T)$. We now use two density arguments. An exercise in Fourier series shows that for $g \in H_*^1(0, T)$, we have

$$\|\partial_t^2 u^g\|_{L^2(0, T; \mathcal{H})} \leq C \|g\|_{H^1(0, T)}.$$

Thus letting $g_n \in C_*^1(0, T)$ approach g in $H^1(0, T)$, we see that (2.36) holds for $g \in H_*^1(0, T)$. Now let $p_n \in C_0^1(0, T; \mathcal{H})$ be such that $p_n \rightarrow p$ in $L^1(0, T; \mathcal{H}_0^1)$. Thus we have $w^{p_n}(v_1, t) \rightarrow w^p(v_1, t)$ in $H^1(0, T)$ by Lemma 2.2, part A. Since $\partial_t^2 u^g \in L^\infty(0, T; \mathcal{H})$, we conclude (2.36) holds for all p in $L^1(0, T; \mathcal{H})$. The proposition is proved.

2.3 The forward problem on an interval

In this section we discuss two IBVP problems of the wave equation on an interval $[0, l]$ with Dirichlet boundary conditions. The solutions will be used in solving forward and control problems on general graphs later. We first consider the following problem:

$$\begin{cases} (u)_{tt} - (u)_{xx} + q(x)u = 0, & 0 < x < l, \ 0 < t < T \\ u|_{t \leq 0} = 0, & u(0, t) = f(t), \quad u(l, t) = 0. \end{cases} \tag{2.37}$$

We will refer to f as the Dirichlet control function or simply, Dirichlet control. For $f \in H_*^1(0, T)$, the system (2.37) has a unique solution $u^{f, DD} \in C([0, T]; H^1(0, l))$. This solution can be presented

by the so-called folding ruler formula [17]:

$$\begin{aligned}
u^{f,DD,0}(x,t) &= f(t-x) + \int_x^t \omega(x,s)f(t-s) ds \\
&\quad - f(t-2l+x) - \int_{2l-x}^t \omega(2l-x,s)f(t-s) ds \\
&\quad + f(t-2l-x) + \int_{2l+x}^t \omega(2l+x,s)f(t-s) ds \\
&\quad - f(t-4l+x) - \int_{4l-x}^t \omega(4l-x,s)f(t-s) ds + \dots \\
&= \sum_{n=0}^{\lfloor \frac{t-x}{2l} \rfloor} \left(f(t-2nl-x) + \int_{2nl+x}^t \omega(2nl+x,s)f(t-s) ds \right) \\
&\quad - \sum_{n=1}^{\lfloor \frac{t+x}{2l} \rfloor} \left(f(t-2nl+x) + \int_{2nl-x}^t \omega(2nl-x,s)f(t-s) ds \right) \quad (2.38)
\end{aligned}$$

where $\lfloor \cdot \rfloor$ is the floor function; $\omega(x,t)$ is a solution to the Goursat problem

$$\begin{cases} (\omega)_{tt} - (\omega)_{xx} + q(x)\omega = 0, & 0 < x < \infty, \\ \omega(0,t) = 0, \omega(x,x) = -\frac{1}{2} \int_0^x q(s) ds, \end{cases} \quad (2.39)$$

in which the potential $q(x)$ is extended to the semi-axis $x > 0$ by the rule $q(2nl \pm x) = q(x)$ for all $n \in \mathbb{N}$.

The folding ruler formula gives convenient presentations of the solution with various boundary conditions and will be used in many constructions of this paper. More details about this formula can be found in [17]. When the Dirichlet control function $f \in H_*^1(0,T)$ is applied at $x = l$, the IBVP

$$\begin{cases} (u)_{tt} - (u)_{xx} + q(x)u = 0, & 0 < x < l, t > 0 \\ u|_{t \leq 0} = 0, \quad u(0,t) = 0, \quad u(l,t) = g(t). \end{cases} \quad (2.40)$$

can be solved by changing of variables in (2.37). We put $p(x) = q(l-x)$ and extend p by letting $p(2nl \pm x) = p(x)$. Let $\bar{\omega}(x,t)$ be the solution to the Goursat problem (2.39) where $q(x)$ is replaced with $p(x)$, then

$$\begin{aligned}
u^{0,DD,f}(x,t) &= f(t-l+x) + \int_{l-x}^t \bar{\omega}(l-x,s)f(t-s) ds \\
&\quad - f(t-l-x) - \int_{l+x}^t \bar{\omega}(l+x,s)f(t-s) ds + \dots \quad (2.41)
\end{aligned}$$

When Dirichlet control functions $f(t)$ and $g(t)$ from $H_*^1(0,T)$ are applied at $x = 0$ and $x = l$ respectively, the solution to for the wave equation (2.9) on e with zero initial condition is denoted as $u^{f,DD,g}$. By the superposition principle, $u^{f,DD,g}(t) = u^{f,DD,0}(t) + u^{0,DD,g}(t)$.

2.4 Well-posedness, Part 2

In this section, we complete the proof of Theorem 1

We need to sharpen our results about the regularity of u_t at interval vertices v_i for which no Neumann control is applied, i.e. $i \notin I^*$. By locality, it suffices to consider the behaviour in a small

neighborhood of v_i , so in what follows we can consider a star graph where the edges $\{e_j\}_1^N$ are identified with the intervals $\{(0, l_j)\}$ and the central vertex v_i is identified with $x = 0$. By linearity it is sufficient to assume there is a single Dirichlet control at v_i . Let u be the solution to the system (2.9)-(2.14), and set $g_j(t) = u_j(0, t)$.

Assume the single control f is applied at $x = 0$ on edge e_2 . Thus

$$g_2(t) = g_1(t) + f(t), \quad g_j(t) = g_1(t), \quad j = 3, \dots, N. \quad (2.42)$$

For the moment, assume f , and hence g_j , is regular. Suppose for the moment that T is small, so for $t < T$ we can disregard any reflected waves, and

$$u_j(x, t) = g_j(t - x) + \int_x^t k_j(x, s)g_j(t - s)ds.$$

Thus the equation $\sum \partial u_j(0, t) = 0$ implies

$$0 = \sum_j g_j'(t) - \int_0^t \partial k_j(0, s)g_j(t - s)ds.$$

Integrating this, and using $g_j(0) = 0$, we get

$$0 = \sum_j g_j(t) - \int_0^t \int_0^r \partial k_j(0, s)g_j(r - s) dsdr. \quad (2.43)$$

Hence

$$\sum_j (g_j(t) - \int_0^t \int_0^r \partial k_j(0, s)g_j(r - s) dsdr) = -f(t) + \int_0^t \int_0^r \partial k_2(0, s)f(r - s) dsdr.$$

A standard integral equations argument now shows that $f \in L^2(0, T)$ implies $g_j \in L^2(0, T)$.

Now let $\phi \in \mathcal{H}_0^1$. Denoting the pairing $\mathcal{H}^{-1} - \mathcal{H}_0^1$ by $\langle *, * \rangle$, we have

$$\begin{aligned} \langle u_t, \phi \rangle &= \sum_j \int_0^{l_j} \phi_j(x)(u_j)_t(x, t)dx \\ &= \sum_j \int_0^{l_j} \phi_j(x)(g_j'(t - x) + \int_x^t k_j(x, s)g_j'(t - s)ds) \\ &= \sum_j \int_0^{l_j} \phi_j'(x)g_j(t - x)dx + \phi(0) \sum_j g_j(t) \\ &\quad + \sum_j \int_x^{l_j} \phi_j(x)(k_j(x, x)g_j(t - x) + \int_x^t (k_j)_s(x, s)g_j(t - s)ds) dx. \end{aligned}$$

This equation was derived assuming f, g_j were regular, but by density it also holds for $f \in L^2(0, T)$. Inserting (2.43) into (2.44), we see that for $f \in L^2(0, T)$, the mapping $t \mapsto \langle u_t, \phi \rangle$ is continuous. Hence the mapping $t \mapsto u_t$ is in $C(0, T; \mathcal{H}^{-1})$. This completes the proof of Theorem 1 for small t . For larger t , one must account for reflected waves. Although this causes more terms to appear in the formula for $\langle u_t, \phi \rangle$, the formulas for reflected waves implicit in (2.38) implies the continuity remains unchanged.

3 Shape and velocity controllability on graphs

In this section we prove the shape and velocity controllability on general graphs. For readability, the proof and examples are given for the case of zero potentials. The corresponding equations for nonzero potentials are presented in the Appendix.

3.1 Geometric preliminaries

In [17], shape/velocity controllability on a tree graph with Dirichlet boundary control was proved by representing a tree graph with a union of paths, and controlling the final shape/velocity on one path at a time. This approach was extended to general graphs in [18], and we now adopt the approach and notation of that paper.

Let $\vec{\Omega} = (V, \vec{E})$ be a directed graph obtained by orienting edges in Ω . We denote a directed edge e_j from v_i to v_k as $e_j(v_i, v_k)$. When $e_j(v_i, v_k)$ is identified with the interval $(0, l_j)$, v_i is identified with $x = 0$ and v_k is identified with $x = l_j$. We denote the sets of indices for all outgoing edges of v_i by $J^+(v_i)$ and for all incoming edges by $J^-(v_i)$. Since orienting Ω does not add or delete vertices or edges to/from the graph, we refer to the vertices and edges in $\vec{\Omega}$ by the same names as in Ω .

It was proven in [18] that for any graph Ω , there is a directed acyclic graph (DAG), $\vec{\Omega} = (V, \vec{E})$ based on Ω . For the rest of the text we assume all directed graphs are acyclic. See Figure 1 for a DAG $\vec{\Omega}$ based on a graph Ω .

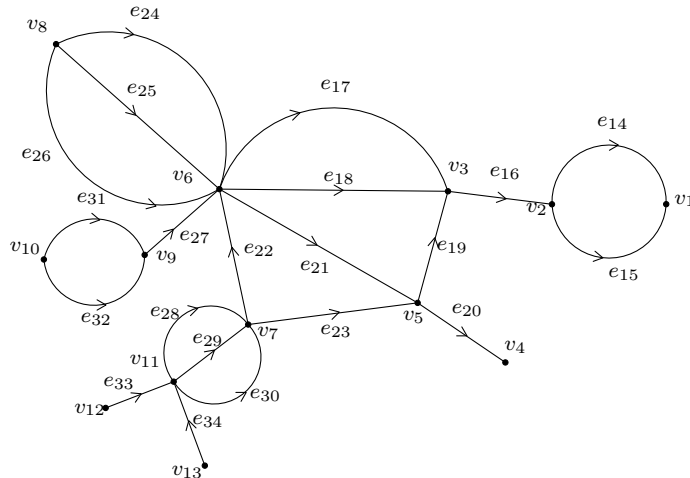


Figure 1: A DAG $\vec{\Omega}$ based on Ω .

In a directed graph $\vec{\Omega}$, a **source** is a vertex without incoming edges; a **sink** is a vertex without outgoing edges. We denote the sets of sources and sinks by $\vec{\Omega}^+$ and $\vec{\Omega}^-$ respectively.

The following lemma, proven in [18], ensures a linear **what does "linear" order mean?** ordering of vertices that is consistent with edge directions exists. Such a linear ordering is critical in solving the control problem.

Lemma 3.1. Any DAG $\vec{\Omega}$ has at least one linear ordering $W(V, <)$ of the set V such that for every directed path from v_i to v_k , $v_k < v_i$ **should this be $k < i$?**in the ordering.

Definition 3.2. Let $\vec{\Omega}$ be a DAG of Ω . Let U be a union of directed paths. We say U is a **tangle-free (TF) path union** of Ω if U satisfies the conditions:

1. The direction of all edges are the same as the direction of all paths they are on.

2. All paths are disjoint except for the starting and finishing vertices.
3. If a finishing vertex v of a path is the starting vertex of another path, there must be an incoming edge of v that is not a finishing edge, and an outgoing edge of v that is not a starting edge.
4. $\vec{\Omega} = \cup_{P \in U} P$.

Definition 3.3. We say I^* is the **single-track (ST) active set of vertex indices** of $\vec{\Omega}$ if

$$I^* = \{i : v_i \in \Omega^+\}, \quad (3.1)$$

J^* is a **ST active set of edge indices** if for all $v_i \in I \setminus \Gamma$,

$$J^*(v_i) = \text{all but one elements of } J^+(v_i), \quad (3.2)$$

and for $v_i \in \Gamma$,

$$J^*(v_i) = J^+(v_i). \quad (3.3)$$

The set $\{I^*, J^*\}$ is then called a **ST active set**.

Example 3.4. For the DAG $\vec{\Omega}$ in Figure 1, a ST active set is $V^* = \{v_8, v_{10}\}$, $J^*(v_1) = \emptyset$, $J^*(v_2) = \{15\}$, $J^*(v_3) = \emptyset$, $J^*(v_4) = \emptyset$, $J^*(v_5) = \{19\}$, $J^*(v_6) = \{18, 21\}$, $J^*(v_7) = \{23\}$, $J^*(v_8) = \{25, 26\}$, $J^*(v_9) = \emptyset$, $J^*(v_{10}) = \{32\}$, $J^*(v_{11}) = \{29, 30\}$, $J^*(v_{12}) = \{33\}$, $J^*(v_{13}) = \{34\}$. See Figure 2.

One ST path union associated with $\{I^*, J^*\}$ is then $P_1 = (v_8, e_{24}, v_6, e_{17}, v_3, e_{16}, v_2, e_{14}, v_1)$, $P_2 = (v_8, e_{26}, v_6)$, $P_3 = (v_8, e_{25}, v_6)$, $P_4 = (v_6, e_{18}, v_3)$, $P_5 = (v_5, e_{19}, v_3)$, $P_6 = (v_2, e_{15}, v_1)$, $P_7 = (v_{10}, e_{31}, v_9, e_{27}, v_6)$, $P_8 = (v_{10}, e_{32}, v_9)$, $P_9 = (v_{12}, e_{33}, v_{11}, e_{28}, v_7, e_{22}, v_6)$, $P_{10} = (v_{13}, e_{34}, v_{11})$, $P_{11} = (v_{11}, e_{29}, v_7)$, $P_{12} = (v_{11}, e_{30}, v_7)$, $P_{13} = (v_6, e_{21}, v_5, e_{20}, v_4)$, $P_{14} = (v_7, e_{23}, v_5)$.

Note that $|U| = |I^*| + |J^*| = 14$.

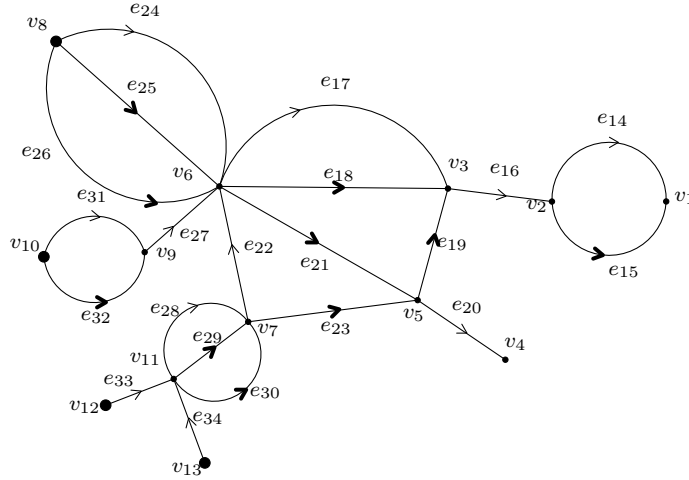


Figure 2: $\vec{\Omega}$ with ST active vertices and edges emphasized.

We list some facts about a DAG of Ω for which $\{I^*, J^*\}$ is a ST active set. These facts were proven for a slightly different setting in [18], but are easily seen to still apply here.

1. For each $i \in I^*$, there will be $|J(v_i)| - 1$ active edges incident to v_i .
2. There is a bijection between controls and heads of paths in U . In particular, at every head of path, there will either be an edge control or a vertex control.

Definition 3.5. Let U be a TF path union of a DAG $\vec{\Omega}$. We define **depth** of an edge $e_j(v_i, v_k)$ in $\vec{\Omega}, U$, recursively as

$$\text{depth}(e_j(v_i, v_k)) = \begin{cases} l_j, & v_k \text{ is a finishing edge in } U, \\ l_j + \max_{r \in J^+(v_k)} \text{depth}(e_r), & \text{otherwise.} \end{cases} \quad (3.4)$$

Depth of an edge depends on the choice of orientation and TF path union.

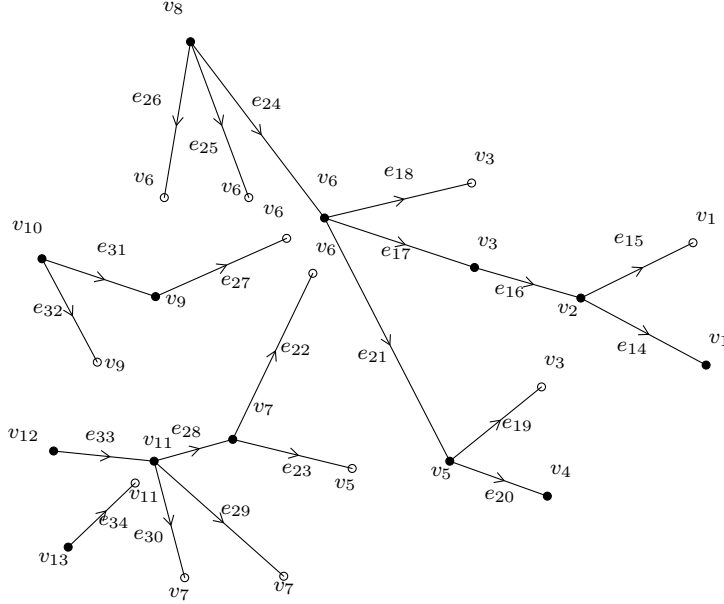


Figure 3: The forest graph obtained from $\vec{\Omega}$ by disconnecting every path in U at its finishing vertex.

Intuitively, the depths of an edge can be viewed as the maximum length of the directed paths starting from the edge in the forest graph obtained from $\vec{\Omega}$, by disconnecting every path in U at its finishing vertex. See Figure 3 for example, where the depth of e_{17} is $\max(l_{17}+l_{16}+l_{15}, l_{17}+l_{16}+l_{14})$. The depth of e_{24} is $\max(l_{24}+l_{18}, l_{24}+l_{17}+l_{16}+l_{15}, l_{24}+l_{17}+l_{16}+l_{14}, l_{24}+l_{21}+l_{19}, l_{24}+l_{21}+l_{20})$.

3.2 Vertex relations

In this section, we rewrite the vertex relations (2.10), (2.13) in a way that is convenient for our proofs of shape and velocity control. The ideas here are adapted from [17].

Let \mathbf{g} be a vector function, such that for any $v_i \in V \setminus \Gamma$, $g_i(t) = u_j(v_i, t)$, $j \in J^c(v_i)$. For $v_i \notin \Gamma$, let

$$h_{ji}(t) = \begin{cases} g_i(t) + f_j(t), & j \in J^*(v_i), \\ g_i(t), & j \in J^c(v_i). \end{cases} \quad (3.5)$$

In what follows, we will without risk of confusion drop the subscript i from h_{ji} .

It will be useful to adapt the following notation. For edge $e_j(v_i, v_k) = (0, l_j)$, we denote $u_j^{h_j, DD, g_k}$ to be the solution to

$$\begin{aligned} u_{tt} - u_{xx} + q(x)u &= 0, & (x, t) \in (0, l_j) \times (0, T), \\ u(0, t) &= h_j(t), \\ u(l_j, t) &= g_k(t), \\ u(x, 0) = u_t(x, 0) &= 0. \end{aligned}$$

Then it is easy to see that the solution u to (2.9)-(2.14) satisfies $u_j(x, t) = u_j^{h_j, DD, g_k}(x, t)$, whose formula can be found in Section 2.3.

Suppose first that $v_i \in V^*$, so v_i has only outgoing edges. For all $j \in J^+(v_i) \cap J^-(\Gamma)$, we have $u_j = u_j^{h_j, DD, 0}$. **Notation question: is the DD superscript necessary? In this paper, we have no u^{ND} , etc** For all $j \in J^+(v_i) \setminus J^-(\Gamma)$, $u_j(x, t) = u_j^{h_j, DD, g_{k(j)}}$, where $k(j)$ is the finishing vertex of e_j . Therefore, using (2.38) and (2.41),

$$\begin{aligned}
\tilde{f}_i(t) &= \sum_{j \in J(v_i)} \partial u_j(v_i, t) \\
&= \sum_{j \in J^+(v_i) \setminus J^-(\Gamma)} [-h'_j(t) - 2h'_j(t - 2l_j) - 2h'_j(t - 4l_j) + \dots] \\
&\quad + \sum_{j \in J^+(v_i) \setminus J^-(\Gamma)} [2g'_{k(j)}(t - l_j) + 2g'_{k(j)}(t - 3l_j) + \dots] \\
&\quad + \sum_{j \in J^+(v_i) \cap J^-(\Gamma)} [-h'_j(t) - 2h'_j(t - 2l_j) - 2h'_j(t - 4l_j) + \dots] \\
&\quad + \text{integral terms.} \tag{3.6}
\end{aligned}$$

Now we consider $v_i \in V \setminus V^*$. Every $v_i \in (V \setminus V^*) \setminus \Gamma$ has incoming edges and possible outgoing edges. For all $j \in J^-(v_i)$, $u_j(x, t) = u_j^{h_j, DD, g_i}$. If v_i has outgoing edges, for all $j \in J^+(v_i) \setminus J^-(\Gamma)$, we have $u_j(x, t) = u_j^{h_j, DD, g_{k(j)}}$; for all $j \in J^+(v_i) \cap J^-(\Gamma)$, we have $u_j(x, t) = u_j^{h_j, DD, 0}$. Therefore

$$\begin{aligned}
0 &= \sum_{j \in J^-(v_i) \cap J^+(\Gamma)} [2f'_j(t - l_j) + 2f'_j(t - 3l_j) + \dots] \\
&\quad + \sum_{j \in J^-(v_i) \cap J^+(\Gamma)} [-g'_i(t) + 2g'_i(t - 2l_j) - 2g'_i(t - 4l_j) + \dots] \\
&\quad + \sum_{j \in J^-(v_i) \setminus J^+(\Gamma)} [2h'_j(t - l_j) + 2h'_j(t - 3l_j) + \dots] \\
&\quad + \sum_{j \in J^-(v_i) \setminus J^+(\Gamma)} [-g'_i(t) - 2g'_i(t - 2l_j) - 2g'_i(t - 4l_j) + \dots] \\
&\quad + \sum_{j \in J^+(v_i) \setminus J^-(\Gamma)} [-h'_j(t) - 2h'_j(t - 2l_j) - 2h'_j(t - 4l_j) + \dots] \\
&\quad + \sum_{j \in J^+(v_i) \cap J^-(\Gamma)} [-h'_j(t) - 2h'_j(t - 2l_j) - 2h'_j(t - 4l_j) + \dots] \\
&\quad + \sum_{j \in J^+(v_i) \setminus J^-(\Gamma)} [2g'_{k(j)}(t - l_j) + 2g'_{k(j)}(t - 3l_j) + \dots] \\
&\quad + \text{integral terms.} \tag{3.7}
\end{aligned}$$

For given control function $\mathbf{f}(t)$, each of $|V| - |\Gamma|$ equations representing the vertex conditions (2.10)-(2.13) is in the form of either (3.6) or (3.7).

3.3 Proofs of shape and velocity controllability

Theorem 2. Let $\vec{\Omega}$ be a DAG of Ω , $\{I^*, J^*\}$ be a ST active set, and U be the associated path union. Let

$$T_* := \max_{j \in J} \text{depth}(e_j). \quad (3.8)$$

1. For any $\phi \in \mathcal{H}$ and $T \geq T_*$, there exists $\mathbf{f} \in \mathcal{F}_0^T$ on $\{I^*, J^*\}$, such that $u_j(x, T) = \phi_j(x)$, where $u_j := u^{\mathbf{f}}|_{e_j}$ and $\phi_j(x) := \phi|_{e_j}(x)$ for all $j \in J$ and $x \in [0, l_j]$.
2. For any $\psi \in \mathcal{H}_0^1$ and $T > T_*$, there exists $\mathbf{f} \in \mathcal{F}_2^T$ such that $(u_j)_t(x, T) = \psi_j(x)$, where $u_j := u^{\mathbf{f}}|_{e_j}$ and $\psi_j(x) := \psi|_{e_j}(x)$ for all $j \in J$ and $x \in [0, l_j]$.
3. Let the greatest lower bound for both shape and velocity controllability on Ω be T_{inf} , then

$$T_{inf} = \min_{\vec{\Omega}, U} \max_{j \in J} \text{depth}(e_j, \vec{\Omega}, U).$$

Proof We prove Part 2, and thereby implicitly Part 3; the proof of Part 1 is similar. Broadly speaking, the proof reduces the solving of control functions for the graph to solving integral equations on each edge, an iterative process where the wave on an edge is related to the wave on the neighboring edges using the vertex relations developed in Section 2.3.

For the proof, we adopt the following notation:

$$H_*^n(a, b) = \{\phi \in H^n(a, b) : \frac{d^m \phi}{dt^m}(a) = 0, m = 0, \dots, n-1\}.$$

We show $\mathbf{f}(t) \in \mathcal{F}_2^T$ can be constructed in such a way that if the four rules listed below are followed, $\mathbf{f}(t)$ is a solution to the velocity control problem (2.9)–(2.14).

For every $v_i \in \vec{\Omega}^-$, we pick one incoming edge $e_{m(i)}$ such that $l_{m(i)} = \min_{j \in J^-(v_i)} l_j$, and refer to $e_{m(i)}$ as the controlling edge of v_i . Note that for $v_i \in \Gamma \cap \vec{\Omega}^-$, its controlling edge is the unique incoming edge of this vertex. For $v_i \in \vec{\Omega}^- \setminus \Gamma$, the choice of controlling edge is not unique; let

$$0 < \epsilon < \min_{j \in J} \{l_j, T - T_*\}. \quad (3.9)$$

The four rules for constructing the velocity control functions are:

1. If v_i is a sink with degree 1, let $e_j(v_k, v_i)$ be its incoming edge, then $h_j(t) = 0$ when t is outside of $[T - l_j, T]$.
2. If v_i is a sink with degree more than 1, then $g_i(t)$ is a continuous function whose support is on $(T - \epsilon, T]$, and $g_i(T) = \phi(v_i)$. Let $e_{m(i)}$ be its controlling edge; then $h_{m(i)}(t) = 0$ when t is outside of $[T - l_{m(i)} - \epsilon, T]$. For all other incoming edges e_j , $h_j(t) = 0$ when t is outside of $[T - l_j, T]$.
3. If v_i is not a sink or source, there is only one incoming edge (also denoted as $e_{m(i)}$) that is not a finishing edge of a path in U . For all incoming edges $e_j(v_k, v_i)$ that are finishing edges of paths in U , $h_j(t) = 0$ when t is outside of $[T - l_j, T]$. Thus from all incoming edges of v_i , only $h_{m(i)}(t)$ will have an impact on $g_i(t)$ for $t \leq T$.
4. On every $e_j(v_k, v_i)$ such that either $j \in J^*$ or $k \in I^*$, and $v_i \in \Gamma$

$$\partial_t u_j(x, T) = u_j^{h'_j, DD}(x, T) = \psi_j(x), \quad x \in [0, l_j]. \quad (3.10)$$

On every $e_j(v_k, v_i)$ such that either $j \in J^*$ or $k \in I^*$, and $v_i \notin \Gamma$,

$$\partial_t u_j(x, T) = u_j^{h'_j, DD, g'_i}(x, T) = \psi_j(x), \quad x \in [0, l_j]. \quad (3.11)$$

Suppose the graph contains more than one edge. We now construct $h_j(t)$ for all $j \in J$, and derive entries of $\mathbf{f}(t)$ and $\mathbf{g}(t)$ from $h_j(t)$, following the linear ordering of V . Let v_1, \dots, v_n be a linear ordering of V by Lemma 3.1. At every v_i , we calculate $f_j(t)$ for $j \in J^*(v_i)$ and $\tilde{f}_i(t)$ if $i \in I^*$ based on the known $h_j(t)$ for $j \in J^-(v_i)$ for all $v_l < v_i$. Then we construct $h_j(t)$ for $j \in J^-(v_i)$. The detailed steps are described below.

The first vertex, v_1 , is a sink.

Suppose first that v_1 is a boundary vertex, and suppose $J^-(v_i) = \{j\}$. In what follows, we identify e_j with $(0, l_j)$ with $x = l_j$ identified with v_1 . We construct a function $h_j(t)$, supported on $[T - l_j, T]$, by the formula

$$\partial_t u_j^{h_j, DD, 0}(x, T) = \psi_j(x).$$

We set $h_j(t) = 0$ for $t < T - l_j$ in (2.38), and $\tilde{h}_j(t) = h_j(t + (T - l_j))$. Then

$$\psi_j(x) = \tilde{h}'_j(l_j - x) + \int_x^{l_j} \omega_j(x, s) \tilde{h}'_j(l_j - s) ds, \quad x \in (0, l_j);$$

here ω_j is the corresponding Goursat kernel for e_j . This equation is a VESK, and thus has a unique solution $\tilde{h}'_j \in H^1(0, l_j)$. Furthermore, the equation above gives we $\tilde{h}'_j(0) = \psi_j(l_j) = 0$. Translating again in time, $h'_j \in H_*^1(T - l_j, T)$. We set $h'_j(t) = 0$ for $t < T - l_j$, and integrate using $h_j(0) = 0$. We get $h_j \in H_*^2(0, T)$.

Now suppose v_1 is not a boundary vertex. We choose $g_1(t)$, smooth and vanishing for $t < T - \epsilon$, such $g'_1(T) = \psi(v_1)$. We label its controlling edge $e_{m(1)}$, which we identify with the interval $(0, l_{m(1)})$ with v_1 corresponding to $x = l_{m(1)}$. By (3.7), (2.38), and (2.41), we get

$$\begin{aligned} & 2h'_{m(1)}(t - l_{m(1)}) + 2w_{m(1)}(l_{m(1)}, l_{m(1)})h_{m(1)}(t - l_{m(1)}) - 2 \int_{l_{m(1)}}^t (\omega_{m(1)})_x(l_{m(1)}, s)h_{m(1)}(t - s)ds \\ &= - \sum_{j \in J^-(v_1)} (g'_1(t) - \int_0^t (\bar{\omega}_j)_x(0, s)g_1(t - s)ds), \quad t \in (T - \epsilon, T). \end{aligned} \quad (3.12)$$

Here, $\omega_j, \bar{\omega}_j$ are the Goursat kernels associated to e_j . Denote by $\alpha(t)$ various functions that are known, including the right hand side of (3.12). Integrating this equation and using $h_{m(1)}(0) = 0$, we can rewrite the associated integral equation as

$$h_{m(1)}(t) + \int_0^t k(s, t)h_{m(1)}(s) ds = \alpha(t), \quad t \in (T - l_{m(1)} - \epsilon, T - l_{m(1)}).$$

with continuous kernel k . Thus we solve this VESK to get $h_{m(1)}(t)$ for $t \in (T - l_{m(1)} - \epsilon, T - l_{m(1)})$. We then set $h_{m(1)}(t) = 0$ for $t < T - l_{m(1)} - \epsilon$. The portion of $h_{m(1)}(t)$ on $(T - l_{m(1)}, T)$ is solved as follows. Let $\tilde{h}_{m(1)}(t) = h_{m(1)}(t + (T - l_{m(1)}))$. Then (3.11) can be written

$$\begin{aligned} \psi_{m(1)}(x) &= \tilde{h}'_{m(1)}(l_{m(1)} - x) + \int_x^T \omega_{m(1)}(x, s) \tilde{h}'_{m(1)}(l_{m(1)} - s) ds \\ &\quad - \tilde{h}'_{m(1)}(-l_{m(1)} + x) - \int_{2l_{m(1)} - x}^T \omega_{m(1)}(2l_{m(1)} - x, s) \tilde{h}'_{m(1)}(l_{m(1)} - s) ds \\ &\quad + g'_1(T - l_{m(1)} + x) + \int_{l_{m(1)} - x}^T \bar{\omega}_{m(1)}(l_{m(1)} - x, s) g'_1(t - s) ds, \quad x \in (0, l_{m(1)}). \end{aligned}$$

All terms in this equation are known except for the first two on the right hand side, so we can solve for $\tilde{h}'_{m(1)}(t)$, and hence $h'_{m(1)}(t)$ for $t \in (T - l_{m(1)}, T)$. We next show that $h'_{m(1)}(t)$ is continuous at $t = T - l_{m(1)}$. Letting $x \rightarrow l_{m(1)}^+$ in the equation above, we get

$$h'_{m(1)}((T - l_{m(1)})^+) = h'_{m(1)}((T - l_{m(1)})^-),$$

and hence $h'_{m(1)}$ extends to $H_*^1(T - l_{m(1)} - \epsilon, T)$. Since the initial value of $h_{m(1)}(t)$ is 0, one can integrate to find $h_{m(1)}(t)$ on $[T - l_{m(1)} - \epsilon, T - l_{m(1)}]$.

For every other incoming edge e_j , $j \neq m(1)$, $h_j(t)$ is supported on $[T - l_j, T]$. It can be computed as follows. Setting $\tilde{h}_j(t) = h_j(t + (T - l_j))$, we have for $x \in (0, l_j)$

$$\tilde{h}'_j(l_j - x) + \int_x^{l_j} \omega_j(x, s) \tilde{h}'_j(l_j - s) ds + g'_1(T - l_j + x) + \int_{l_j - x}^T \bar{\omega}_j(l_j - x, s) g'_1(t - s) ds = \psi_j(x), \quad (3.13)$$

we solve this VESK for \tilde{h}'_j and hence h'_j . We then integrate h'_j , and extend all $h_j(t)$ to the $t < T - l_j$ by 0. This completes our treatment of v_1 .

Now we make the inductive hypothesis that up to some $i \in \{2, \dots, n\}$, for every $v_l < v_i$ and all its incoming edges $e_j(v_k, v_l)$, we have constructed $h_j(t)$, such that

$$h_j(t) \in H_*^2[T - \text{depth}^*(e_j), T], \quad (3.14)$$

where

$$\text{depth}^*(e_j(v_i, v_k)) := \begin{cases} l_j & v_k \in \Omega^- \cap \Gamma \\ l_j + \epsilon & v_k \in \Omega^- \setminus \Gamma, e_j \text{ is the controlling edge of } v_i, \\ l_j, & v_k \in \Omega^- \setminus \Gamma, e_j \text{ is not the controlling edge of } v_i, \\ l_j, & v_k \notin \Omega^-, e_j \text{ is a finishing edge of a path in } U, \\ l_j + \max_{r \in J^+(v_k)} \text{depth}^*(e_r), & \text{otherwise.} \end{cases} \quad (3.15)$$

One can prove from (3.4) and (3.15) and by induction for any $j \in J$,

$$0 \leq \text{depth}^*(e_j) - \text{depth}(e_j) \leq \epsilon. \quad (3.16)$$

Thus by (3.8), (3.9), and (3.16),

$$T - \text{depth}^*(e_j) > 0 \text{ for any } j \in J. \quad (3.17)$$

Moreover, as a part of the inductive hypothesis, we assume for all $v_l < v_i$ (when $i = 2$, the case is trivial), we have computed $f_j(t)$ for all $j \in J^*(v_l)$ and $\tilde{f}_l(t)$ if $v_l \in V^*$, and

$$f_j(t) \in \hat{H}^2(T - \delta^*(v_l), T), \quad \tilde{f}_l(t) \in H_*^1(T - \delta^*(v_l), T),$$

where

$$\delta^*(v_l) := \max_{s \in J^+(v_l)} \text{depth}^*(e_s). \quad (3.18)$$

By (3.16) and (3.18),

$$T - \delta^*(v_i) > 0 \text{ for any } v_i \in V. \quad (3.19)$$

Note that the inductive hypothesis also implies we have solved for $g_l \in H_*^2(T - \text{depth}^*(e_j), T)$ for all $v_l < v_i$.

There are three cases at v_i :

Case 1, v_i is a sink. We compute $h_j(t)$ for all $j \in J^-(v_i)$ in the same way we compute $h_j(t)$ for all $j \in J^-(v_1)$.

Case 2, v_i is neither a sink nor a source, so $i \notin I^*$.

We first compute $f_j(t)$ for $j \in J^*(v_i)$. At this point we have computed $h_j(t)$ for all $j \in J^+(v_i)$, since each $j \in J^+(v_i)$ is in some $J^-(v_l)$ for some $v_l < v_i$. For the one and only path in U through

v_i , let the incoming edge of v_i on U be $e_{m(i)}$, and the outgoing edge of v_i in U be $e_{r(i)}$. Since no control is applied on $e_{r(i)}$,

$$g_i(t) = h_{r(i)}(t), \quad \forall t, \quad (3.20)$$

and thus g_i is uniquely determined as an element of $H_*^2(T - \delta^*(v_i))$.

For all $j \in J^*(v_i)$,

$$f_j(t) = h_j(t) - g_i(t). \quad (3.21)$$

Since each $g_s(t) = h_s(t) = 0$ for $t \leq T - \text{depth}^*(e_s)$ for all $s \in J^+(v_i)$, $f_j(t) = 0$ for $t \leq T - \delta^*(v_i)$. Moreover, since $\psi(\cdot)$ is continuous at v_i , $h_j(T) = g_i(T) = \psi(v_i)$. Thus $f_j(T) = 0$. So

$$f_j(t) \in \hat{H}^2(T - \delta^*(v_i), T). \quad (3.22)$$

Now we calculate the boundary conditions at the starting vertices of the incoming edges of v_i . We first discuss $e_{m(i)}$. Let $v_{k(m(i))}$ be its starting vertex. By Rule 3, (3.7) simplifies to

$$\begin{aligned} 0 &= 2(h'_{m(i)}(t - l_{m(i)}) + \omega_{m(i)}(l_{m(i)}, l_{m(i)})h_{m(i)}(t - l_{m(i)}) - \int_{l_{m(i)}}^t (\omega_{m(i)})_x(l_{m(i)}, s)h_{m(i)}(s - l_{m(i)})ds) \\ &\quad + [2h'_{m(i)}(t - 3l_{m(i)}) + \dots] \\ &\quad + [-g'_i(t) - 2g'_i(t - 2l_{m(i)}) - 2g'_i(t - 4l_{m(i)}) + \dots] \\ &\quad + \sum_{j \in J^+(v_i) \setminus J^-(\Gamma)} [-h'_j(t) - 2h'_j(t - 2l_j) - 2h'_j(t - 4l_j) + \dots] \\ &\quad + \sum_{j \in J^+(v_i) \setminus J^-(\Gamma)} [2g'_{k(j)}(t - l_j) + 2g'_{k(j)}(t - 3l_j) + \dots] \\ &\quad + \sum_{j \in J^+(v_i) \cap J^-(\Gamma)} [-h'_j(t) - 2h'_j(t - 2l_j) - 2h'_j(t - 4l_j) + \dots]. \end{aligned} \quad (3.23)$$

In (3.23), the only unknown function is $h_{m(i)}(t)$. By the inductive hypothesis, for each $j \neq m(i)$, we have $h'_j(t) \in H_*^1[T - \text{depth}^*(e_j), T]$, thus the sum fourth and sixth lines of (3.23) is in the space $H_*^1[T - \max_{j \in J^+(v_i)}(\text{depth}^*(e_j)), T]$. For the fifth line of (3.23), we have $g'_{k(j)}(t) \in H_*^1[T - \text{depth}^*(e_l), T]$ for some $l \in J^+(v_k(j))$. Thus the entire fifth line is in the space $H_*^1[T - \max_{j \in J^+(v_i)}(\text{depth}^*(e_j)), T]$. By the inductive hypotheses and (3.20), $g'_i \in H_*^1[T - \text{depth}^*(e_{r(i)}), T]$. Therefore the $h'_{m(i)}(t)$ obtained from (3.23) is in the following space: $H_*^1[T - \text{depth}^*(e_{m(i)}), T - l_{m(i)}]$. We now use (3.23) to solve for $h'_{m(i)}(t)$ for $t < T - l_{m(i)}$. In what follows, we denote by $\alpha(t)$ various known functions. Assume first $t < 3l_{m(i)}$. Recalling that we set $h_{m(i)}(t) = 0$ for $t < 0$, we have

$$\alpha(t) = h'_{m(i)}(t - l_{m(i)}) + \omega_{m(i)}(l_{m(i)}, l_{m(i)})h_{m(i)}(t - l_{m(i)}) - \int_{l_{m(i)}}^t (\omega_{m(i)})_x(l_{m(i)}, s)h_{m(i)}(s - l_{m(i)})ds. \quad (3.24)$$

We can solve for $h'_{m(i)}(t)$ with $t < 2l_{m(i)}$ similarly to how we solved (3.12); the details are left to the reader. Next, we suppose $t < 5l_{m(i)}$. Then (3.24) again holds, and we solve for $h'_{m(i)}$ with $t < 4l_{m(i)}$. We can iterate this until we have solved for $h'_{m(i)}(t)$ with $t < T - l_{m(i)}$.

The portion of $h'_{m(i)}(t)$ on the interval $(T - l_{m(i)}, T)$ controls the final velocity on $e_{m(i)}$. Therefore, we solve

$$\begin{aligned} \partial_t u_{m(i)}^{h_{m(i)}, DD, g_i}(x, T) &= h'_{m(i)}(T - x) + \int_x^T \omega_{m(i)}(x, s)h'_{m(i)}(T - s)ds \\ &\quad - h'_{m(i)}(T - 2l_{m(i)} + x) + \dots + g'_i(T - l_{m(i)} + x) - \dots = \psi_{m(i)}(x). \end{aligned}$$

The first two terms on the right hand side are the only unknown functions here, so we solve this VESK for $h'_{m(i)}(t)$ on $(T - l_{m(i)}, T)$. Letting $x \rightarrow l_{m(i)}^-$, we calculate $h'_{m(i)}((T - l_{m(i)})^-) = h'_{m(i)}((T - l_{m(i)})^+)$, so that $h'_{m(i)}(t)$ extends to a continuous function at $x = T - l_{m(i)}$, and so $h'_{m(i)} \in H_*^1[T - \text{depth}^*(e_{m(i)}), T]$. Integrating, we get $h_{m(i)} \in H_*^2[T - \text{depth}^*(e_{m(i)}), T]$.

For all other $j \in J^-(v_i)$, where $j \neq m(i)$, let $v_{k(j)}$ be the starting vertex of e_j . We find $h_j(t)$ as in (3.13) by solving

$$\partial_t u_j^{h_j, DD, g_i}(x, T) = h'_j(T - x) + \int_x^T \omega_j(x, s) h'_j(T - s) ds + g'_i(T - l_j + x) + \dots = \psi_j(x).$$

The terms involving g_i and ψ_j are all known, so we can solve this VESK for $h'_j(t)$. By Principle 3, $h_j(t)$ is supported on $[T - l_j, T]$, so integrating h'_j we solve for $h_j(t) \in H_*^2[T - l_j, T]$.

Case 3, v_i is a source, so either $i \in I^*$ or $v_i \in \Gamma$ with its edge active.

Suppose first $i \in I^*$. For each $j \in J(v_i)$, we label $v_{k(j)}$ the vertex of e_j other than v_i . By the inductive hypotheses, we have solved for $h_j \in H_*^2(T - \text{depth}^*(e_j), T)$ and $g_{k(j)} \in H_*^2(0, T)$. Thus, in (3.6), all terms on the right hand side are known. Thus we have solved for $\tilde{f}_i \in H_0^1(T - \delta^*(v_i), T)$.

Next we solve for f_j for $j \in J^*(v_i)$. Let $e_{r(i)}$ be the one uncontrolled edge from v_i . Then we solve for $g_i(t)$ using (3.20). Then $f_j \in H_*^2(T - \text{depth}^*(e_j), T)$ is found using (3.21). By continuity of $u_*(\cdot, T)$, we have $h_j(T) = g_i(T)$, and hence $f_j(T) = 0$. Similarly, by the continuity of $u_t(\cdot, T)$, we have $h'_j(T) = g'_i(T)$, and hence $f_j(T)' = 0$. Hence $f_j \in H_0^2(T - \text{depth}^*(e_j), T)$.

Finally, if $v_i \in \Gamma$ with its edge $e_j(v_i, v_k)$ active, then by the inductive hypothesis h_i has already been calculated and we have $f_i = h_i \in H_0^2(T - \delta^*(v_i), T)$. This finishes Case 3.

The induction has been established. \square

Corollary 1. Assume 0 is not an eigenvalue of A . Let $\psi \in \mathcal{H}^{-1}(\Omega)$. Then there exist $\mathbf{f} \in \mathcal{F}_0^T$ such that

$$u_t^{\mathbf{f}}(\cdot, T) = \psi(\cdot).$$

Proof: Because zero is not an eigenvalue, and because \mathcal{H}^{-1} can be constructed by the Spectral Theorem, the mapping

$$A : \mathcal{H}_0^1(\Omega) \mapsto \mathcal{H}^{-1}(\Omega)$$

is an isometry. Thus, using (2.35), there exist $\tilde{\psi} \in \mathcal{H}_0^1$ and $\tilde{\mathbf{f}} \in \mathcal{F}_2^T$ such that

$$\begin{aligned} \psi &= A\tilde{\psi}, \\ &= Au_t^{\tilde{\mathbf{f}}}(\cdot, T), \\ &= \partial_t^2 u_t^{\tilde{\mathbf{f}}}(\cdot, T) = u_t^{\tilde{\mathbf{f}}''}(\cdot, T), \end{aligned}$$

so it would suffice to set $\mathbf{f} = \tilde{\mathbf{f}}'' \in \mathcal{F}_0^T$. \square

4 Exact controllability on graphs

The proof of the exact controllability of our system uses the spectral representation of the solution $u^{\mathbf{f}}$. Let $\{(\omega_n^2, \varphi_n) : n \geq 1\}$ be the eigenvalues and normalized eigenfunctions of the operator A , i.e. φ_n solves the following eigenvalue problem:

$$-\varphi_n'' + q(x)\varphi_n = \omega_n^2 \varphi_n \quad \text{on } \{\Omega \setminus V\}, \quad (4.1)$$

$$\sum_{j \in J(v_i)} \partial(\varphi_n)_j(v_i) = 0, \quad i \in I, \quad (4.2)$$

$$(\varphi_n)_j(v_i) = (\varphi_n)_k(v_i), \quad j, k \in J(v_i), i \in I. \quad (4.3)$$

where $(\varphi_n)_j$ is the restriction of φ_n to edge e_j .

The following properties of this spectral problem are well known, see, e.g. [22], [15].

Lemma 4.1. The eigenvalues $\{\omega_n^2\}_1^\infty$ associated to (4.1)-(4.3), satisfy the relations

$$cn \leq |\omega_n| + 1 \leq Cn,$$

with some positive constants c and C independent of n . The associated unit norm eigenfunctions satisfy the relations

$$|\varphi_n(v_i)| \leq c_1, \quad |(\varphi_n)'_j(v_i)| \leq c_2 n, \quad i \in I, j \in J$$

with some positive constants c_1, c_2 independent of n, j, v_i .

Theorem 3. Suppose 0 is not an eigenvalue of A . Let $\vec{\Omega}$ be a DAG of Ω , and $\{I^*, J^*\}$ be a ST active set. For any $(\phi, \psi) \in \mathcal{H} \times (\mathcal{H}_0^1)'$, and $T > T_*$, there exists $f \in \mathcal{F}_0^{2T}$ such that

$$u_j(x, 2T) = \phi_j(x), \quad u_t(*, 2T) = \psi(*)$$

where $u_j := u^f|_{e_j}$, $\phi_j(x) := \phi|_{e_j}(x)$, and $x \in [0, l_j]$.

Proof: For this proof, we adopt the notation

$$\kappa_n^j = (\varphi_n)'_j(v_{l(j)}).$$

The solution of the IBVP (2.9)–(2.14) can be presented in a form of the series

$$u(x, t) = \sum_{n=1}^{\infty} a_n(t) \varphi_n(x). \quad (4.4)$$

Assume for the moment that the controls are all regular. To find the coefficients a_n , let $w(x, t) = \mu(t) \varphi_n(x)$ in the integral identity (2.19), where μ is an arbitrary test function in $C_0^2[0, T]$. We obtain the initial value problem

$$a_n''(t) + \omega_n^2 a_n(t) = \sum_{j \in J^*} \kappa_n^j f_j(t) - \sum_{i \in I^*} f_i'(t) \varphi_n(v_i), \quad a_n(0) = a_n'(0) = 0.$$

By variation of parameters, we get

$$a_n(T) = \int_0^T \left[\sum_{j \in J^*} \kappa_n^j f_j(t) - \sum_{i \in I^*} \tilde{f}_i(t) \varphi_n(v_i) \right] \frac{\sin \omega_n(T-t)}{\omega_n} dt. \quad (4.5)$$

We assume here that $\omega_n > 0$. If $\omega_n = 0$, instead of $\frac{\sin \omega_n(T-t)}{\omega_n}$ we put $T-t$, and if $\omega_n < 0$, we put $\frac{\sinh \omega_n(T-t)}{\omega_n}$. To interpret (4.5) for $\tilde{f}_i \in H^1(0, T)'$, we rewrite it

$$a_n(T) = \sum_{j \in J^*} \kappa_n^j \int_0^T f_j(t) \frac{\sin \omega_n(T-t)}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle \tilde{f}_i(*), \frac{\sin \omega_n(T-*)}{\omega_n} \rangle. \quad (4.6)$$

Here and below, $\langle *, * \rangle$ refers to either the pairing $H^1(0, T)' - H^1(0, T)$ or the pairing $H^1(0, 2T)' - H^1(0, 2T)$; which one will be clear in context. Differentiating in T ,

$$a_n'(T) = \sum_{j \in J^*} \kappa_n^j \int_0^T f_j(t) \cos \omega_n(T-t) dt - \sum_{i \in I^*} \varphi_n(v_i) \langle \tilde{f}_i(*), \cos(\omega_n(T-*)) \rangle. \quad (4.7)$$

We now apply the classical relations between the Fourier method, the moment problem, and control theory (see, e.g. [10, Ch. III]), which show the equivalence between solvability to the moment problem (4.6) (resp. (4.7)) and solvability of the shape (resp. velocity) control problem that we have already solved by Theorem 2 and Corollary 1. Thus given arbitrary sequences $\{a_n\}, \{\frac{b_n}{\omega_n}\} \in \ell^2$, there exist controls $f_{j,0}, f_{j,1} \in L^2(0, T)$ and $\tilde{f}_{i,0}, \tilde{f}_{i,1} \in H^1(0, T)'$ such that

$$a_n = \sum_{j \in J^*} \kappa_n^j \int_0^T f_{j,0}(t) \frac{\sin \omega_n(T-t)}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle \tilde{f}_{i,0}(*), \frac{\sin \omega_n(T-*)}{\omega_n} \rangle, \quad (4.8)$$

$$\frac{b_n}{\omega_n} = \sum_{j \in J^*} \kappa_n^j \int_0^T f_{j,1}(t) \frac{\cos \omega_n(T-t)}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle \tilde{f}_{i,1}(*), \frac{\cos \omega_n(T-t)}{\omega_n} \rangle. \quad (4.9)$$

We now adapt an odd-even trick used in [17] to extend the controls above to $[0, 2T]$ and to solve the exact control problem. Specifically, we extend

1. $f_{j,0}(t)$ to be odd about $t = T$,
2. $f_{j,1}(t)$ to be even about $t = T$.

For $\tilde{f}_{i,0}$, we define its “odd” extension $F_{i,0}$ as follows. Define $R : H^1(T, 2T) \mapsto H^1(0, T)$ by $(R\zeta)(T-s) = \zeta(T+s)$. Then

$$\langle F_{i,0}, \zeta \rangle = \langle \tilde{f}_{i,0}, \zeta|_{(0,T)} \rangle - \langle \tilde{f}_{i,0}, R(\zeta|_{(T,2T)}) \rangle, \forall \zeta \in H^1(0, 2T).$$

For $\tilde{f}_{i,1}$, we define its “even” extension $F_{i,1}$ by

$$\langle F_{i,1}, \zeta \rangle = \langle \tilde{f}_{i,1}, \zeta|_{(0,T)} \rangle + \langle \tilde{f}_{i,1}, R(\zeta|_{(T,2T)}) \rangle, \forall \zeta \in H^1(0, 2T).$$

Then we define

$$f_j(t) = \frac{f_{j,0}(t) + f_{j,1}(t)}{2} \in L^2(0, 2T), F_i = \frac{F_{i,0} + F_{i,1}}{2} \in H^1(0, 2T)'.$$

Applying these to (4.8),(4.9), we get

$$a_n = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{\sin \omega_n(T-t)}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{\sin \omega_n(T-*)}{\omega_n} \rangle, \quad (4.10)$$

$$\frac{b_n}{\omega_n} = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{\cos \omega_n(T-*)}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{\cos \omega_n(T-*)}{\omega_n} \rangle. \quad (4.11)$$

These equations are equivalent to

$$\frac{b_n}{\omega_n} + ia_n = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{e^{i\omega_n(T-t)}}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{e^{i\omega_n(T-t)}}{\omega_n} \rangle. \quad (4.12)$$

$$\frac{b_n}{\omega_n} - ia_n = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{e^{-i\omega_n(T-t)}}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{e^{-i\omega_n(T-t)}}{\omega_n} \rangle. \quad (4.13)$$

Solvability of these moment problems is clearly equivalent to solvability of

$$\frac{b_n}{\omega_n} + ia_n = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{e^{i\omega_n(2T-t)}}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{e^{i\omega_n(2T-t)}}{\omega_n} \rangle, \quad (4.14)$$

$$\frac{b_n}{\omega_n} - ia_n = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{e^{-i\omega_n(2T-t)}}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{e^{-i\omega_n(2T-t)}}{\omega_n} \rangle. \quad (4.15)$$

and hence equivalent to

$$\frac{b_n}{\omega_n} = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{\cos(\omega_n(2T-t))}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{\cos(\omega_n(2T-t))}{\omega_n} \rangle. \quad (4.16)$$

$$a_n = \sum_{j \in J^*} \kappa_n^j \int_0^{2T} f_j(t) \frac{\sin(\omega_n(2T-t))}{\omega_n} dt - \sum_{i \in I^*} \varphi_n(v_i) \langle F_i(*), \frac{\sin(\omega_n(2T-t))}{\omega_n} \rangle. \quad (4.17)$$

Thus, for arbitrary sequences $\{a_n\}, \{b_n/\omega_n\} \in \ell^2$, there exist functions $f_j \in L^2(0, 2T), F_i \in H^1(0, 2T)'$ solving the moment problems (4.16)(4.17). Inspection of (4.8),(4.9), and using the classical relations between the Fourier method, the moment problem, and control theory (see, e.g. [10, Ch. III]), shows that this is equivalent to solving the exact control problem. Theorem 3 is proved.

Acknowledgments

The research of Sergei Avdonin was supported in part by the National Science Foundation, grant DMS 1909869.

References

- [Ali Mehmeti(1994)] Felix Ali Mehmeti. Nonlinear waves in networks. Mathematical Research, 80: 171 pp., 1994.
- [Ali Mehmeti and Meister(1989)] Felix Ali Mehmeti and E Meister. Regular solutions of transmission and interaction problems for wave equations. Mathematical Methods in the Applied Sciences, 11(5):665–685, 1989.
- [1] F. Al-Musallam, S. A. Avdonin, N. Avdonina and J. Edward, Control and inverse problems for networks of vibrating strings with attached masses, Nanosystems: Physics, Chemistry, and Mathematics, **7** (2016), 835–841.
- [2] S. Avdonin, Control problems on quantum graphs. In: Analysis on Graphs and Its Applications. Proceedings of Symposia in Pure Mathematics. AMS, vol. 77, pp. 507–521 (2008)
- [3] S. Avdonin, Control, observation and identification problems for the wave equation on metric graphs, IFAC-PapersOnLine, **52** (2019), 52–57.
- [4] Sergei A Avdonin, Boris P Belinskiy, and Sergei A Ivanov. On controllability of an elastic ring. Applied Mathematics and Optimization, 60(1):71–103, 2009.
- [5] Sergei Avdonin, Boris Belinskiy, and Luciano Pandolfi. Controllability of a nonhomogeneous string and ring under time dependent tension. Mathematical Modelling of Natural Phenomena, 5(4):4–31, 2010.
- [6] S. A. Avdonin, M. I. Belishev and S. A. Ivanov, Matrix inverse problem for the equation $u_{tt} - u_{xx} + Q(x)u = 0$, Math. USSR Sbornik, **7** (1992), 287–310.
- [7] S. Avdonin and J. Edward, Exact controllability for string with attached masses, SIAM J. Optim. Cont., **56** (2018), 945–980.

- [8] S. Avdonin and J. Edward, Controllability for string with attached masses and Riesz bases for asymmetric spaces, Mathematical Control & Related Fields, **9** (2019), 453–494.
- [9] S. Avdonin and J. Edward, An inverse problem for quantum trees, Networks and Heterogeneous Media, **16**, (2021), No. 2, 317–339.
- [10] S. A. Avdonin and S. A. Ivanov, Families of Exponentials. The Method of Moments in Controllability Problems for Distributed Parameter Systems, Cambridge University Press, New York, London, Melbourne, 1995.
- [11] S. Avdonin and V. Mikhaylov, The boundary control approach to inverse spectral theory, Inverse Problems, **26** (2010), 045009.
- [12] S. Avdonin and P. Kurasov, Inverse problems for quantum trees, Inverse Probl. Imaging, **2** (2008), 1–21.
- [13] Sergei Avdonin and Victor Mikhaylov. Controllability of partial differential equations on graphs. Applicationes Mathematicae, 4(35):379–393, 2008.
- [14] S. Avdonin and W. Moran, Ingham type inequalities and Riesz bases of divided differences, Int. J. Appl. Math. Comput. Sci., **11** (2001), no. 4, 101–118.
- [15] S. Avdonin and S. Nicaise, Source identification problems for the wave equation on graphs. Inverse Problems, **31** (2015), 095007.
- [16] S. Avdonin, J. Edward, and Y. Zhao, Shape, velocity, and exact controllability for the wave equation on a graph with cycle, in submission.
- [17] S. Avdonin and Y. Zhao, Exact controllability of the 1-D wave equation on finite metric tree graphs, Appl. Math. Optim., (2021), **83**, no. 3, 2303–2326.
- [18] S. Avdonin and Y. Zhao, Exact controllability of the wave equation on graphs, Appl. Math. Optim. 85 (2022), no. 2, Paper No. 1, 44 pp.
- [19] M. I. Belishev, Boundary spectral inverse problem on a class of graphs (trees) by the BC method, Inverse Problems, **20** (2004), no. 3, 647–672.
- [20] M. I. Belishev On the boundary controllability of a dynamical system described by the wave equation on a class of graphs (on trees). J. Math. Sci. (N.Y.), **132** (2006), no. 1, 11–25.
- [21] M. I. Belishev and A. F. Vakulenko, Inverse problems on graphs: Recovering the tree of strings by the BC-method, J. Inv. Ill-Posed Problems, **14** (2006), 29–46.
- [22] G. Berkolaiko and P. Kuchment, Introduction to Quantum Graphs, (Mathematical Surveys and Monographs), American Mathematical Society: Providence, RI, USA, 2013; Volume 186.
- [23] J. Boman, P. Kurasov, and R. Suhr, Schrödinger operators on graphs and geometry II. Spectral estimates for L_1 -potentials and an Ambartsumian theorem. Integral Equations Operator Theory, **90** (2018), no. 3, Paper No. 40, 24.
- [24] R. Dager and E. Zuazua, Wave Propagation, Observation and Control in 1-d Flexible Multi-structures, in Mathematiques and Applications (Berlin), 50. Springer-Verlag, Berlin, 2006.
- [25] S. Ervedoza and E. Zuazua, A systematic method for building smooth controls for smooth data, Discrete and Continuous Dyn. Systems, 14 (2010), 1375–1401.

- [Harary()] Frank Harary. Graph theory. 1969. Addison-Wesley, Reading, MA.
- [Kac and Pivovarchik(2011)] I Kac and V Pivovarchik. On multiplicity of a quantum graph spectrum. Journal of Physics A: Mathematical and Theoretical, 44(10):105301, 2011.
- [Knuth(1997)] Donald Ervin Knuth. The Art of Computer Programming: Fundamental Algorithms. Fundamental Algorithms. Addison-Wesley, 1997.
- [26] P. Kurasov Inverse problems for Aharonov-Bohm rings, Math. Proc. Cambridge Philos. Soc., **148** (2010), no. 2, 331–362.
- [27] P. Kurasov Inverse scattering for lasso graph, Journal of Mathematical Physics, **54** (2013), 042103.
- [28] P. Kurasov Quantum Graphs: Spectral Theory and Inverse Problems, Springer, 2022.
- [29] J. Lagnese, G. Leugering and E. J. P. G. Schmidt, Modelling, Analysis, and Control of Dynamical Elastic Multilink Structures, Birkhauser, Basel, 1994.
- [30] John E Lagnese, G“unter Leugering, and EJP Georg Schmidt. Modeling, analysis and control of dynamic elastic multi-link structures. Springer Science and Business Media, 2012
- [31] I. Lasiecka and R. Triggiani, Control theory for partial differential equations: continuous and approximation theories. II. Abstract hyperbolic-like systems over a finite time horizon, Encyclopedia of Mathematics and its Applications, **75**, Cambridge University Press, Cambridge, 2000.
- [32] G. Leugering, C. Rodriguez and Y. Wang, Nodal profile control for networks of geometrically exact beams. J. Math. Pures Appl. (9) 155 (2021), 111–139.
- [33] J.-L. Lions, Exact controllability, perturbations and stabilization of distributed systems. Vol. 1. Exact controllability. Research in Applied Mathematics, 8. Masson, Paris, 1988.
- [Rolewicz(1970)] S. Rolewicz. On controllability of systems of strings. Studia Math., 36(2), 110–110, 1970.
- [34] D. L. Russell, Controllability and stabilizability theory for linear partial differential equations: recent progress and open questions, SIAM Rev., **20** (1978), no. 4, 639–739.
- [Szwarcfiter et al.(1985)Szwarcfiter, Persiano, and Oliveira] Jayme L Szwarcfiter, Ronaldo CM Persiano, and Antonio AF Oliveira. Orientations with single source and sink. Discrete applied mathematics, 10(3):313–321, 1985.
- [West et al.(2001)] Douglas Brent West. Introduction to graph theory, volume 2. Prentice hall Upper Saddle River, 2001.
- [35] K. Zhuang, G. Leugering and T. Li, Exact boundary controllability of nodal profile for Saint-Venant system on a network with loops, J. Math. Pures Appl., **9** (2019), no. 129, 34–60.
- [36] Enrique Zuazua. Controllability and observability of partial differential equations: some results and open problems. In Handbook of differential equations: evolutionary equations, volume 3, pages 527–621. Elsevier, 2007.
- [37] Enrique Zuazua. Control and stabilization of waves on 1-d networks. In Modelling and optimisation of flows on networks, pages 463–493. 2013. Lecture Notes in Math., 2062, Springer, Heidelberg.