

On the Complexity of Enumerating Prime Implicants from Decision-DNNF Circuits

Alexis de Colnet¹ and Pierre Marquis^{1,2}

¹Univ. Artois, CNRS, Centre de Recherche en Informatique de Lens (CRIL), F-62300 Lens, France

²Institut Universitaire de France

{decolnet, marquis}@cril.fr

Abstract

We consider the problem Enum-*IP* of enumerating prime implicants of Boolean functions represented by decision decomposable negation normal form (dec-DNNF) circuits. We study Enum-*IP* from dec-DNNF within the framework of enumeration complexity and prove that it is in OutputP, the class of output polynomial enumeration problems, and more precisely in IncP, the class of polynomial incremental time enumeration problems. We then focus on two closely related, but seemingly harder, enumeration problems where further restrictions are put on the prime implicants to be generated. In the first problem, one is only interested in prime implicants representing subset-minimal abductive explanations, a notion much investigated in AI for more than three decades. In the second problem, the target is prime implicants representing sufficient reasons, a recent yet important notion in the emerging field of eXplainable AI, since they aim to explain predictions achieved by machine learning classifiers. We provide evidence showing that enumerating specific prime implicants corresponding to subset-minimal abductive explanations or to sufficient reasons is not in OutputP.

1 Introduction

Prime implicants are a key concept when dealing with Boolean functions since the notion has been introduced seven decades ago [Quine, 1952]. Within AI, prime implicants (or the dual concept of prime implicates) have been considered for modeling and solving a number of problems, including compiling knowledge [Reiter and de Kleer, 1987] and generating explanations of various kinds. This is the case in logic-based abductive reasoning (see e.g., [Selman and Levesque, 1990; Eiter and Gottlob, 1995]), a form of inference required in a number of applications when the available knowledge base is incomplete (e.g., in medicine) and because of such an incompleteness, it cannot alone explain the observations that are made about the state of the world. Abduction gave rise to much research in AI for the past three decades, especially because it is closely connected to other reasoning settings, including truth main-

tenance [de Kleer, 1986], assumption-based reasoning and closed-world reasoning (see e.g., [Marquis, 2000] for a survey). Formally, the explanations one looks for are terms over a preset alphabet (composed of the so-called abducible variables, e.g., representing diseases) such that the manifestations that are reported (e.g., some symptoms) are logical consequences of the background knowledge when completed by such a term. In order to avoid trivial explanations, one also asks those terms to be consistent with the knowledge base. Explanations that are the less demanding ones from a logical standpoint (i.e., subset-minimal ones) can be characterized as specific prime implicants. More recently, deriving explanations justifying why certain predictions have been made has appeared as essential for ensuring trustworthy Machine Learning (ML) technologies [Miller, 2019; Molnar, 2019]. In the research area of eXplainable AI (XAI), recent work has shown how ML classifiers of various types (including black boxes) can be associated with Boolean circuits (alias transparent or “white” boxes), exhibiting the same input-output behaviours [Narodytska *et al.*, 2018; Shih *et al.*, 2018a; Shih *et al.*, 2019]. Thanks to such mappings, XAI queries about classifiers can be delegated to the corresponding circuits. The notion of sufficient reason of an instance given a Boolean function f modeling a binary classifier has been introduced in [Darwiche and Hirth, 2020]. Given an instance a (a simply is an assignment, i.e., a vector of truth values given to each of the n variables) such that $f(a) = 1$ (resp. $f(a) = 0$), a sufficient reason for a is a subset-minimal partial assignment a' which is coherent with a (i.e., a and a' give the same values to the variables that are assigned in a') and which satisfies the property that for every extension a'' of a' we have $f(a'') = 1$ (resp. $f(a'') = 0$). The features assigned in a' (and the way they are assigned) can be viewed as explaining why a has been classified by f as a positive (or as a negative) instance.

Whatever the way prime implicants are used, generating them is in general a computationally demanding task, for at least two reasons. On the one hand, deriving a single prime implicant of a Boolean function represented by a propositional formula (or circuit) is NP-hard since such a formula is satisfiable when it has a prime implicant, and it is valid precisely when this prime implicant is the empty term. On the other hand, a source of complexity is the number of prime implicants that may prevent from computing them all. In-

deed, it is well-known that the number of prime implicants of a Boolean function can be exponential in the number of variables of the function, and, for many representations of the function, also exponential in the size of the representation (just consider the parity function as a matter of example). In more detail, the number of prime implicants of a Boolean function can be larger than the number of assignments satisfying the function [Dunham and Fridshal, 1959]; there also exist families of Boolean functions over n variables having $\Omega(\frac{3^n}{n})$ prime implicants [Chandra and Markowsky, 1978].

In this paper, we focus on the issue of *enumerating prime implicants of a Boolean function represented by a decision decomposable negation normal form circuit (alias a dec-DNNF circuit)*. The question is to determine whether such prime implicants *can be enumerated “efficiently”*, which is obviously not the case when the circuit considered is unconstrained (as explained above, in such a case, computing a single prime implicant is already hard). This question is important for all the problems listed previously, when prime implicants represent explanations: since they are typically too numerous to be computed as a whole, it makes sense to derive them in an incremental way, with some performance guarantees in the generation; this lets the user who asked for an explanation deciding what to do after each derivation, namely to stop the enumeration process since he/she is satisfied by the explanation that has been provided, or alternatively to ask for a further explanation.

The dec-DNNF language [Oztok and Darwiche, 2014; Darwiche, 2001] and its subsets FBDD (free binary decision diagrams) [Gergov and Meinel, 1994], OBDD (ordered binary decision diagrams) [Bryant, 1986] and even DT (the set of all binary decision trees over Boolean variables, see e.g., [Wegener, 2000, Chapter 2]) appear at first sight as good candidates for representing the function in the perspective of enumerating “efficiently” its prime implicants. Indeed, they are known as tractable representation languages (they support in polynomial time many queries and transformations from the so-called knowledge compilation map [Darwiche and Marquis, 2002; Koriche *et al.*, 2013]).

The main contribution of the paper is as follows. We give a polynomial incremental time algorithm for enumerating the prime implicants of a Boolean function f represented by a dec-DNNF circuit Σ . Given Σ and a positive integer k , this algorithm returns k prime implicants of Σ in $O(\text{poly}(k + |\Sigma|))$ time, or returns all prime implicants of Σ if there are fewer than k . This shows that enumerating prime implicants from dec-DNNF is in the enumeration complexity class IncP [Strozecki, 2019]. We also provide evidence showing that enumerating specific prime implicants corresponding to subset-minimal abductive explanations or to sufficient reasons is not in OutputP: on the one hand, computing a single subset-minimal abductive explanation from an OBDD circuit or a decision tree is NP-hard; on the other hand, the existence of an output polynomial time algorithm for enumerating sufficient reasons from an OBDD circuit or a decision tree would lead to an output polynomial time algorithm for enumerating the minimal transversals of a hypergraph, thus answering a long-standing question related to

monotone dualization [Eiter *et al.*, 2008].

The rest of the paper is organized as follows. We start with some preliminaries (Section 2) where the language of dec-DNNF circuits and the framework used to study enumeration problems are presented. We formally define the problem Enum-IP of enumerating prime implicants. Then in Section 3 we show that generating the set of *all* prime implicants from a dec-DNNF circuit is feasible in output polynomial time. From there, we show in Section 4 that Enum-IP from dec-DNNF is in fact in IncP and point out a polynomial incremental time enumeration algorithm. Finally, in Section 5 we focus on subset-minimal abductive explanations and sufficient reasons and show that for each of the two cases, the enumeration issue is seemingly harder than in the case when all prime implicants are considered. All the proofs are reported in a final appendix.


2 Preliminaries

A Boolean function over n variables x_1, \dots, x_n is a mapping f from $\{0, 1\}^n$ to $\{0, 1\}$. The set of variables of f is denoted by $\text{var}(f)$. The assignments to $\text{var}(f)$ mapped to 1 by f are called *satisfying assignments* of f . A literal upon variable x is either x or its negation \bar{x} and a *term* is a conjunction of literals. We often omit the conjunction symbols when writing terms, for instance we may shorten $a \wedge \bar{c}$ into $a\bar{c}$. We define the *empty term* t_\emptyset as the term over zero literal. The empty term verifies $t \wedge t_\emptyset = t$ for every term t . Given $\ell \in \{x, \bar{x}\}$, we denote by $f|\ell$ the Boolean function over $\text{var}(f) \setminus \{x\}$ whose satisfying assignments coincide with that of $f \wedge \ell$. We use the usual symbols $\wedge, \vee, \neg, \models$ to denote conjunction, disjunction, negation, and entailment. Given a set S of terms, $\max(S, \models)$ denotes the subset of terms of S that do not entail another term in S . An *implicant* of a Boolean function f is a term t whose satisfying assignments also satisfy f , i.e., $t \models f$. An implicant t is *prime* when no term $t - \ell$ obtained by removing a literal ℓ from t is an implicant of f .

2.1 Compilation Languages

Compilation languages are often seen as classes of circuits. Let PS be a countable set of propositional variables. A circuit in *negation normal form* (NNF) is a directed acyclic graph (DAG) whose leaves are labelled with 0 (*false*), 1 (*true*), or a literal built upon $x \in PS$, and whose internal nodes are labelled with \wedge or \vee connectives; we call them \wedge -nodes and \vee -nodes. An NNF circuit computes a Boolean function over the variables appearing in it. For v a node of an NNF circuit Σ , $\text{var}(v)$ denotes the set of variables labelling leaves under v in Σ and Σ_v denotes the subcircuit of Σ rooted at v . The language of *decomposable* NNF (DNNF) contains the NNF circuits where \wedge -nodes are decomposable, that is, the children v_1, \dots, v_m of every \wedge -node v are such that $\text{var}(v_i) \cap \text{var}(v_j) = \emptyset$ for all $i \neq j$. The language of *deterministic, decomposable* NNF (d-DNNF) contains the DNNF circuits Σ where \vee -nodes are deterministic, that is, the children v_1, \dots, v_m of every \vee -node v are such that $\Sigma_{v_i} \wedge \Sigma_{v_j}$ is inconsistent for all $i \neq j$. Finally, the language of *decision* DNNF (dec-DNNF) is that of circuits whose leaves are labelled with 0, 1, or a literal built upon

$x \in PS$, and whose internal nodes are decision nodes and \wedge -nodes. Whenever n is a decision node labelled by variable x in a dec-DNNF circuit Σ , the circuit Σ_n given by



is viewed as a compact representation of the d-

DNNF circuit (see Definition 2.6 and Figure

2 in [Darwiche and Marquis, 2002]).

Thus, a decision node n is labelled by a variable and has two children: the 0-child (node u on the previous picture) and the 1-child (node v on the previous picture). If n is labelled by x and Σ_u (resp. Σ_v) represents the function f_0 (resp. f_1), then Σ_n represents the function $(\bar{x} \wedge f_0) \vee (x \wedge f_1)$. For instance, Figure 1a gives a dec-DNNF circuit whose deepest decision node computes $(\bar{s} \wedge 1) \vee (s \wedge p)$. It is worth mentioning that all Boolean functions on finitely many variables can be represented in dec-DNNF, or indeed in any of its subsets like FBDD, OBDD, and DT.

Let Σ be a dec-DNNF circuit. The size of Σ , denoted by $|\Sigma|$ is its number of edges. From a dec-DNNF circuit Σ , one can easily derive in polynomial time a dec-DNNF circuit equivalent to Σ where every \wedge -node has exactly two children. Since it is computationally harmless, for the sake of simplicity, our enumeration algorithms suppose that the dec-DNNF circuits satisfy this condition, so that their size is at most twice their number of nodes. In the same vein, we suppose that our dec-DNNF circuits have been *reduced*, i.e., every node v in Σ such that Σ_v computes the 0 function reduces to a leaf labelled by 0. Testing the satisfiability of a dec-DNNF circuit is feasible in linear time [Darwiche and Marquis, 2002], so reducing a dec-DNNF circuit also is a polynomial-time operation.

2.2 Enumeration Complexity

We now recall some enumeration complexity classes as described in [Strozecki, 2019]. Let V be an alphabet and let A be a binary predicate in $V^* \times V^*$. Given an instance $x \in V^*$ (the input), $A(x)$ (the set of solutions) denotes the set of all $y \in V^*$ such that $A(x, y)$. The enumeration problem $\text{Enum}\cdot A$ is the function mapping x to $A(x)$. $\text{Enum}\cdot A$ is in the class EnumP if for every $y \in A(x)$, $|y|$ is polynomial in $|x|$, and if deciding whether y is in $A(x)$ is in P . EnumP does not capture the complexity of *computing* the set of solutions $A(x)$, it serves more as a counterpart of NP for enumeration problems.

The model used for the enumeration of solutions is the random access machine (RAM) model. See [Strozecki, 2019] for details on why RAM have been chosen for this task. A RAM solves $\text{Enum}\cdot A$ if, for all x , it returns a sequence y_1, \dots, y_m of pairwise distinct elements such that $\{y_1, \dots, y_m\} = A(x)$. $\text{Enum}\cdot A$ is in OutputP if there is a RAM solving $\text{Enum}\cdot A$ in time $O(\text{poly}(|x| + |A(x)|))$ on every input x . OutputP is a relevant enumeration class when the whole set of solutions is explicitly asked for. For instance, the dualization of a monotone CNF formula ϕ is the task of generating a DNF formula equivalent to ϕ . Because of the monotony condition on ϕ , the terms used in any smallest DNF

formula equivalent to ϕ are precisely its prime implicants. Thus, the dualization problem boils down to enumerating *all* the prime implicants of ϕ .

For other applications, computing only a fixed number of solutions may be enough. A RAM solves $\text{Enum}\cdot A$ in incremental time $f(t)g(n)$ if on every x , it runs in time $O(f(t)g(|x|))$ and returns a sequence y_1, \dots, y_t of t pairwise distinct elements of $A(x)$ when $t \leq |A(x)|$, and the whole set $A(x)$ when $t > |A(x)|$. $\text{Enum}\cdot A$ is in IncP if there is a RAM that solves A in incremental time $O(t^a n^b)$ for some constants a and b . IncP has a characterization that uses the function problem $\text{AnotherSol}\cdot A$ which, given x and $S \subseteq A(x)$, returns $y \in A(x) \setminus S$ when $S \neq A(x)$, and *false* otherwise.

Proposition 1 ([Strozecki, 2019]). *A problem $\text{Enum}\cdot A$ in EnumP is in IncP if and only if $\text{AnotherSol}\cdot A$ is in FP .*

Note that OutputP is thought to be distinct from IncP [Strozecki, 2019].

3 Enum-IP from dec-DNNF is in OutputP

Let us first consider the problem of enumerating the prime implicants of a Boolean function f given as a dec-DNNF circuit Σ , for short the prime implicants of Σ . Let $IP(\Sigma, t)$ be the binary predicate representing the relation that t is a prime implicant of Σ . Then $IP(\Sigma)$ denotes the set of prime implicants of Σ . We extend the notation $IP(\cdot)$ to any Boolean function f . To be able to speak of prime implicants enumeration from circuits other than dec-DNNF ones we write “ $\text{Enum}\cdot IP$ from L ” with L the language Σ belongs to.

We start with a couple of easy results. First of all, since there is a linear-time procedure to verify that a term is an implicant of a dec-DNNF circuit, there is a polynomial-time algorithm to decide whether a given a term is a prime implicant of a dec-DNNF circuits, thus:

Proposition 2. *$\text{Enum}\cdot IP$ from dec-DNNF is in EnumP .*

In addition, it is known that $\text{Enum}\cdot IP$ from OBDD is in OutputP [Madre and Coudert, 1991], and it is almost straightforward to extend this result to dec-DNNF. To make it precise, let us briefly describe the output polynomial construction of $IP(\Sigma)$ for Σ , a dec-DNNF circuit. The construction is based on the three following, folklore propositions (for the sake of completeness, a proof for each of them is nonetheless reported as a supplementary material).

Proposition 3. *Let f and g be Boolean functions, then $IP(f \wedge g) = \max(\{t \wedge t' \mid t \in IP(f), t' \in IP(g)\}, \models)$. Furthermore if $\text{var}(f) \cap \text{var}(g) = \emptyset$, then $IP(f \wedge g) = \{t \wedge t' \mid t \in IP(f), t' \in IP(g)\}$.*

Proposition 4. *Let f a Boolean function, let x be a variable, and let $\ell \in \{x, \bar{x}\}$. Consider $t \in IP(f|\ell)$. If $t \models f|\bar{\ell}$, then $t \in IP(f)$, otherwise $t \wedge \ell \in IP(f)$.*

Proposition 5. *Let f be a Boolean function and let x be a variable.*

$$\begin{aligned} IP(f) &= \{t \wedge \bar{x} \mid t \in IP(f|\bar{x}), t \not\models f|x\} \\ &\cup \{t \wedge x \mid t \in IP(f|x), t \not\models f|\bar{x}\} \\ &\cup IP(f|\bar{x} \wedge f|x) \end{aligned}$$

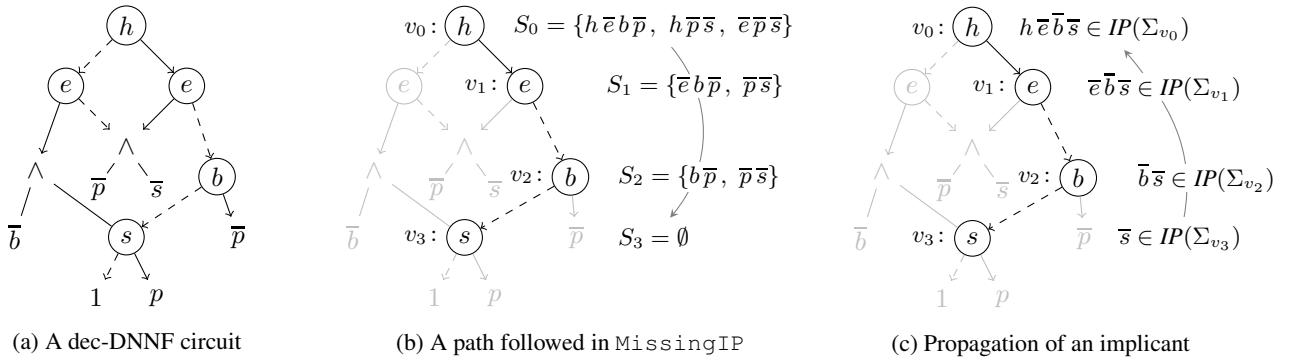


Figure 1: Generation of a new prime implicant from a dec-DNNF circuit

Note that $t \in IP(f|\bar{x})$ (resp. $IP(f|x)$) entails $f|x$ (resp. $f|\bar{x}$) if and only if t is subsumed by some term in $IP(f|\bar{x} \wedge f|x)$. As a consequence, from $IP(f|\bar{x})$ and $IP(f|x)$, one can construct $IP(f|\bar{x} \wedge f|x)$ in polynomial time thanks to Proposition 3 and we use it to derive $IP(f)$ thanks to Proposition 5.

We also have that (see the algorithm for conditioning a prime implicant representation provided in [Darwiche and Marquis, 2002]):

Proposition 6. *Let f a Boolean function and let x be a variable, then $|IP(f)| \geq \max(|IP(f|\bar{x})|, |IP(f|x)|)$.*

Consider now a dec-DNNF circuit Σ and an internal node v with two children u and w . If the sets $IP(\Sigma_u)$ and $IP(\Sigma_w)$ are provided, then $IP(\Sigma_v)$ is obtained in polynomial time using Proposition 3 if v is a decomposable \wedge -gate, and using Proposition 5 if v is a decision node. Furthermore, in both cases, we have $|IP(\Sigma_v)| \geq \max(|IP(\Sigma_u)|, |IP(\Sigma_w)|)$. These observations lead to a simple algorithm that generates $IP(\Sigma)$ by computing the sets $IP(\Sigma_v)$ for every node v of Σ considered in a bottom-up way. Since constructing the set of prime implicants for any node given that of its children is tractable, since this set is smaller than $|IP(\Sigma)|$, and since it is computed only once, the algorithm runs in time $O(\text{poly}(|\Sigma| + |IP(\Sigma)|))$. Thus, we get:

Proposition 7. *Enum-IP from dec-DNNF is in OutputP.*

Example 1. We give the construction of the sets of prime implicants for the nodes v_1, v_2, v_3 in the dec-DNNF circuit Σ represented on Figure 1b.

v_3 : the sets of prime implicants of the children are $IP(1) = \{t_\emptyset\}$ and $IP(p) = \{p\}$. Using Proposition 5 we have that $\bar{s} \wedge t_\emptyset = \bar{s}$ and $\Sigma_{v_3}|s = p$, so $\bar{s} \wedge t_\emptyset \not\models \Sigma_{v_3}|s$ showing that $\bar{s} \in IP(\Sigma_{v_3})$. We also have that $\Sigma_{v_3}|\bar{s} = 1$, so $s p \models \Sigma_{v_3}|\bar{s}$ showing that $s p \notin IP(\Sigma_{v_3})$. Finally, we have that $IP(\Sigma_{v_3}|s \wedge \Sigma_{v_3}|\bar{s}) = \{p\}$ by Proposition 3, so $IP(\Sigma_{v_3}) = \{\bar{s}, p\}$.

v_2 : the sets of prime implicants of the children are $IP(\bar{p}) = \{\bar{p}\}$ and $IP(\Sigma_{v_3})$ so we compute $IP(\Sigma_{v_2}) = \{b\bar{p}, \bar{b}\bar{s}, \bar{b}p, \bar{p}\bar{s}\}$

v_1 : the sets of prime implicants of the children are $IP(\bar{p} \wedge \bar{s}) = \{\bar{p}\bar{s}\}$ and $IP(\Sigma_{v_2})$ so we compute $IP(\Sigma_{v_1}) = \{\bar{e}\bar{b}p, \bar{e}b\bar{p}, \bar{e}\bar{b}\bar{s}, \bar{p}\bar{s}\}$

4 Enum-IP from dec-DNNF is in IncP

We now investigate Enum-IP from dec-DNNF from the incremental enumeration perspective. Based on Proposition 1, we design a tractable algorithm `AnotherIP` for solving the problem `AnotherSol-IP`, thus showing that Enum-IP from dec-DNNF is in IncP.

4.1 Solving the decision variant of AnotherSol-IP

We first consider the decision variant of `AnotherSol-IP` from dec-DNNF: given a dec-DNNF circuit Σ and a set $S \subseteq IP(\Sigma)$, return *false* if and only if $S \neq IP(\Sigma)$. Recall from the discussion preceding Proposition 7 that there is a bottom-up procedure for generating all prime implicants of the dec-DNNF circuit Σ . To address the decision variant of `AnotherSol-IP` on inputs Σ and S , a reverse, top-down search is performed, assuming that S is $IP(\Sigma)$ until finding a contradiction.

Before defining what a contradiction means in this setting, a few notations are useful. For t a term and X a set of variables, t_X denotes the restriction of t to variables in X . Note that if X and $\text{var}(t)$ are disjoint, then t_X is the empty term t_\emptyset .

Proposition 8. *Let Σ be a dec-DNNF circuit and let $S \subseteq IP(\Sigma)$. If the root of Σ is an \wedge -node, let u and w be its children and let $S_u = \{t_{\text{var}(\Sigma_u)} \mid t \in S\}$ and $S_w = \{t_{\text{var}(\Sigma_w)} \mid t \in S\}$. Then $S_u \subseteq IP(\Sigma_u)$ and $S_w \subseteq IP(\Sigma_w)$ hold, and*

$$S = IP(\Sigma) \text{ iff } S_u = IP(\Sigma_u) \text{ and } S_w = IP(\Sigma_w) \\ \text{and } S = \{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}.$$

Proposition 9. *Let Σ be a dec-DNNF circuit whose root is a decision node labelled by x . Let u be its 0-child and w be its 1-child. Given $S \subseteq IP(\Sigma)$, let $S_u = \{t \mid t \wedge \bar{x} \in S\} \cup (S \cap IP(\Sigma_u))$, $S_w = \{t \mid t \wedge x \in S\} \cup (S \cap IP(\Sigma_w))$ and $S' = \{t \mid t \in S, x \notin \text{var}(t)\}$. Then $S_u \subseteq IP(\Sigma_u)$ and $S_w \subseteq IP(\Sigma_w)$ hold, and*

$$S = IP(\Sigma) \text{ iff } S_u = IP(\Sigma_u) \text{ and } S_w = IP(\Sigma_w) \\ \text{and } S' = \max(\{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}, \models).$$

Let v be the root of the dec-DNNF circuit Σ and let $S \subseteq IP(\Sigma)$. We say that we have a *contradiction* at node v when

- (c1) $S = \emptyset$ while Σ is satisfiable, or
- (c2) v is a decision node, $S_u = IP(\Sigma_u)$ and $S_w = IP(\Sigma_w)$, but $S' \neq \max(\{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}, \models)$, or

Algorithm 1: MissingIP(Σ, S, P)

Promises: Σ is reduced, $S \subseteq IP(\Sigma)$

- 1 Let v be the root of Σ and let $P' \leftarrow P \cup \{v\}$
- 2 **if** $\lambda(v) = |S|$ **then** return *false*
- 3 **if** $S = \emptyset$ **then**
- 4 | **if** v is labelled by 0 **then** set $\lambda(v)$ to 0, return *false*
- 5 | **else** return (GenerateIP(Σ, P'))
- 6 **end**
- 7 **if** v is a \wedge -node with children u and w **then**
- 8 | Build S_u and S_w as in Proposition 8
- 9 | $r \leftarrow$ MissingIP(Σ_u, S_u, P')
- 10 | **if** $r \neq \text{false}$ **then** return r
- 11 | $r \leftarrow$ MissingIP(Σ_w, S_w, P')
- 12 | **if** $r \neq \text{false}$ **then** return r
- 13 | $S^* \leftarrow \{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}$
- 14 | **if** $S \neq S^*$ **then** for any $t \in S^* \setminus S$ return (t, P')
- 15 **else if** v is a decision node with children u and w **then**
- 16 | Build S_u, S_w, S' as in Proposition 9
- 17 | $r \leftarrow$ MissingIP(Σ_u, S_u, P')
- 18 | **if** $r \neq \text{false}$ **then** return r
- 19 | $r \leftarrow$ MissingIP(Σ_w, S_w, P')
- 20 | **if** $r \neq \text{false}$ **then** return r
- 21 | $S^* \leftarrow \max(\{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}, \models)$
- 22 | **if** $S^* \neq S'$ **then** for any $t \in S^* \setminus S'$ return (t, P')
- 23 **end**
- 24 Set $\lambda(v)$ to $|S|$ and return *false*

(c3) v is a decomposable \wedge -node and $S_u = IP(\Sigma_u)$ and $S_w = IP(\Sigma_w)$ but $S \neq \{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}$.

A contradiction guarantees that $S \neq IP(\Sigma)$. The contradiction (c1) is easy to check. Contradictions (c2) and (c3) on the other hand require to show that $S_u = IP(\Sigma_u)$ and $S_w = IP(\Sigma_w)$. When v is an internal node, with children u and w , if there is no contradiction (c1) at v , we use Propositions 8 and 9 to build from S two sets S_u and S_w that we recursively compare to $IP(\Sigma_u)$ and $IP(\Sigma_w)$. Either the recursion ends under u or w on a contradiction, in which case $S \neq IP(\Sigma)$, or it stops by itself (i.e., when reaching the leaves of the circuit), which shows that $S_u = IP(\Sigma_u)$ and $S_w = IP(\Sigma_w)$, and then we can check whether there is contradiction (c2) (resp. (c3)) at node v if it is a decision node (resp. decomposable node). If there is none, then $S = IP(\Sigma)$.

The procedure is given by Algorithm MissingIP. The inputs are a dec-DNNF circuit Σ , a set $S \subseteq IP(\Sigma)$ and a path P in Σ (which will be useful later). A function λ mapping the nodes of Σ to integers is used for memoization purposes. Initially $\lambda(v) = -1$ for every node v , but $\lambda(v)$ may be assigned a non-negative value at some point. More precisely, the first time a call MissingIP(Σ_v, S, P) returns *false*, we learn that $S = IP(\Sigma_v)$ and set $\lambda(v)$ to $|S|$. Then for each later call MissingIP(Σ_v, S', P') with $S' \subseteq IP(\Sigma_v)$, we check whether $S' = IP(\Sigma_v)$ by verifying that $\lambda(v) = |S'|$.

Proposition 10. *Given a reduced dec-DNNF circuit Σ and $S \subseteq IP(\Sigma)$, MissingIP(Σ, S, \emptyset) runs in time $O(\text{poly}(|S| + |\Sigma|))$, and it returns *false* if and only if $S = IP(\Sigma)$.*

Algorithm 2: GenerateIP(Σ)

Promise: Σ is satisfiable

- 1 Find a satisfying assignment a of Σ
- 2 Let $t = \bigwedge_{a(x)=1} x \wedge \bigwedge_{a(x)=0} \bar{x}$
- 3 **while** there is $\ell \in t$ such that $t - \ell \models \Sigma$ **do**
- 4 | Remove ℓ from t
- 5 **end**
- 6 Return t

4.2 Augmenting an incomplete subset of $IP(\Sigma)$

We build upon MissingIP so that, when $S \neq IP(\Sigma)$, we also return a prime implicant in $IP(\Sigma) \setminus S$. The idea is to use the path P to keep track of the ancestor nodes that were visited before reaching a contradiction and to use P to construct a prime implicant in $IP(\Sigma) \setminus S$. As an example, consider calling MissingIP(Σ, S_0, \emptyset) with Σ the dec-DNNF circuit of Figure 1a and $S_0 = \{h\bar{e}b\bar{p}, h\bar{p}\bar{s}, \bar{e}\bar{p}\bar{s}\}$ a set of prime implicants of Σ . Figure 1b shows a scenario when MissingIP(Σ, S_0, \emptyset) calls MissingIP($\Sigma_{v_1}, S_1, (v_0)$), which calls in turn MissingIP($\Sigma_{v_2}, S_2, (v_0, v_1)$), which finally calls MissingIP($\Sigma_{v_3}, S_3, (v_0, v_1, v_2)$). Since $S_3 = \emptyset$ and Σ_{v_3} is reduced and different from 0, the algorithm has reached a contradiction (c1) at node v_3 and has not returned *false*, thus indicating that $S_0 \neq IP(\Sigma)$. MissingIP has followed the path $P = (v_0, v_1, v_2, v_3)$ to reach that contradiction and has kept it in memory. This path P can then be used to generate a prime implicant in $IP(\Sigma) \setminus S_0$. First MissingIP returns the path P to v_3 as well as a prime implicant of Σ_{v_3} , say it is \bar{s} . Then we construct a prime implicant of Σ_{v_2} upon \bar{s} , here since v_3 is the 0-child of v_2 and since \bar{s} does not entail the 1-child of v_2 we obtain $\bar{b}\bar{s} \in IP(\Sigma_{v_2})$. Then we construct a prime implicant of Σ_{v_1} upon $\bar{b}\bar{s}$, here since since v_2 is the 0-child of v_1 and since $\bar{b}\bar{s}$ does not entail the 1-child of v_1 we obtain $\bar{e}\bar{b}\bar{s} \in IP(\Sigma_{v_1})$. Repeating the step one more time leads to $h\bar{e}\bar{b}\bar{s} \in IP(\Sigma_{v_0}) = IP(\Sigma)$. The procedure is illustrated in Figure 1c. In this example, for generating a new prime implicant of Σ , we have created $t \in \Sigma_{v_3} \setminus S_3$ and augmented it using Proposition 4 as we travelled backwards along P . We say that we have *propagated* t along the path P .

Accordingly, the algorithm AnotherIP to generate a new prime implicant breaks into two steps. First MissingIP(Σ, S, P) searches for a contradiction. It returns *false* if $S = IP(\Sigma)$ or a pair (t, P) with P the path followed to reach a node v where a contradiction has been found (like v_3 in the example), and t a prime of Σ_v that could not be derived from S . The procedure GenerateIP is used to generate t . GenerateIP runs in polynomial time thanks to linear-time implicant check on dec-DNNF circuits. Finally PropagateIP is called to propagate t along the path P .

The next proposition shows the correctness of AnotherIP:

Proposition 11. *Let Σ be a reduced dec-DNNF circuit and let $S \subseteq IP(\Sigma)$. AnotherIP(Σ, S) runs in time $O(\text{poly}(|S| + |\Sigma|))$. It returns *false* if $S = IP(\Sigma)$, otherwise it returns a prime implicant of Σ that does not belong to S .*

On this basis, the existence of a polynomial incremental

Algorithm 3: $\text{Propagate}(\Sigma, t, P = (v_0, \dots, v_i))$

Promise: Σ is reduced, its root is v_0 , P is a path in Σ

- 1 **if** $|P| = 1$ **then** return t
- 2 **if** v_{i-1} is a \wedge -node with children u and w **then**
- 3 **if** $v_i = u$ **then** $t' \leftarrow \text{GenerateIP}(\Sigma_w)$
- 4 **if** $v_i = w$ **then** $t' \leftarrow \text{GenerateIP}(\Sigma_u)$
- 5 **else if** v_{i-1} is a decision node for variable x with 0-child u and 1-child w **then**
- 6 **if** $v_i = u$ **then**
- 7 **if** $t \models \Sigma_w$ **then** $t' \leftarrow t_\emptyset$ **else** $t' \leftarrow \bar{x}$
- 8 **else**
- 9 **if** $t \models \Sigma_u$ **then** $t' \leftarrow t_\emptyset$ **else** $t' \leftarrow x$
- 10 **end**
- 11 $\text{Propagate}(\Sigma, t \wedge t', (v_0, \dots, v_{i-1}))$

Algorithm 4: $\text{AnotherIP}(\Sigma, S)$

Promise: Σ is reduced, $S \subseteq IP(\Sigma)$

- 1 $r \leftarrow \text{MissingIP}^*(\Sigma, S, \emptyset)$
- 2 **if** $r = \text{false}$ **then** return false
- 3 **else if** $r = (t, P)$ **then** return $\text{Propagate}(\Sigma, t, P)$

time enumeration of prime implicants for dec-DNNF circuits can be easily established:

Proposition 12. *Enum-IP from dec-DNNF is in IncP.*

5 Enumerating Specific Prime Implicants

For some applications, enumerating all prime implicants of f makes sense, even though there can be exponentially many. We have already mentioned the dualization of monotone CNF formulae as an example. In this section, we describe two problems that ask for generating only specific prime implicants, representing respectively subset-minimal abductive explanations and sufficient reasons.

To illustrate the two notions we use the function f computed by the dec-DNNF circuit of Figure 1a as a toy example. f encodes a very incomplete characterization of human-like creatures in Tolkien’s Middle Earth based on four physical attributes: presence of beard and facial hair (b), small size (s), human-like skin (h), pointy ears (p), plus the indication of whether the creature is enrolled in the armies of evil (e). We imagine that there are only seven possible creatures: hobbits ($h \bar{b} p s \bar{e}$), elves ($h \bar{b} p \bar{s} \bar{e}$), dwarfs ($h b \bar{p} s \bar{e}$), men and women ($h * \bar{p} \bar{s} *$),¹ ents ($\bar{h} * \bar{p} \bar{s} \bar{e}$), orcs ($\bar{h} \bar{b} p * e$) and trolls ($\bar{h} \bar{b} \bar{p} \bar{s} e$). The satisfying assignments of f describe these creatures. Its prime implicants are the smallest combinations of attributes which guarantee the existence of a creature in our Middle Earth.

5.1 Abductive Explanations

Abductive explanations (see e.g., [Selman and Levesque, 1990; Eiter and Gottlob, 1995])

¹* denotes that both choices are possible for the variable, typically here humans may fight for evil, humans and ents may or may not have beards, and orcs have a wide range of size.

can be defined as follows:

Definition 1 (Abductive explanation). Given a Boolean function f over variables X , a subset $H \subseteq X$, and a term m on $X \setminus H$, an *abductive explanation* is a term t on H such that $f \wedge t$ is satisfiable and $f \wedge t \models m$.

The abduction problem asks whether an abductive explanation t exists for the input (f, H, m) .

Example 2. Consider our toy example. We look for combinations of physical attributes that guarantee that the creature is evil. This is an abduction problem with $H = \{h, b, p, s\}$ and $m = e$. For instance the term $\bar{h} \wedge p$ is an abductive explanation because there exist creatures with pointy ears and a skin that is not human-like, and all of them are evil (in this case only the orcs fit this description).

It is easy to see that an abductive explanation t is in fact an implicant of $\neg f \vee m$ with the conditions that $f \wedge t$ is satisfiable and that t is restricted to variables in H (the abducibles). Furthermore, since abduction is not a truth-preserving form of inference, one is often interested in generating subset-minimal abductive explanations only (i.e., the logically weakest abductive explanations); they correspond to the *prime* implicants of $\neg f \vee m$ such that $f \wedge t$ is satisfiable and t is restricted to variables in H .

Obviously enough, the abduction problem we focus on (the existence of an abductive explanation) is the same, would we consider subset-minimal abductive explanations or not. Indeed, deciding whether an abductive explanation exists is equivalent to deciding whether a subset-minimal abductive explanation exists. Unfortunately, the condition that only variables in H are allowed in abductive explanations is already too demanding from an enumeration perspective.

Proposition 13. *Unless $P = NP$, there is no polynomial-time algorithm which, given an OBDD circuit or a decision tree computing a function f over X and a set $Y \subseteq X$, decides whether f has an implicant t with $\text{var}(t) \subseteq Y$.*

5.2 Sufficient Reasons

The notion of sufficient reason² [Darwiche and Hirth, 2020] (aka prime implicant explanation [Shih *et al.*, 2018b]) is defined as follows:

Definition 2 (Sufficient reason). Given a Boolean function f , let a be any assignment to a superset of $\text{var}(f)$. A *sufficient reason* for a is a prime implicant t of f (resp. $\neg f$) such that a satisfies t , provided that a satisfies f (resp. $\neg f$). The set of all sufficient reasons for a given f is denoted by $SR(f, a)$ (resp. $SR(\neg f, a)$) when a satisfies f (resp. $\neg f$).

Example 3. Consider again our toy example. There is no creature which is small, has human-like skin, pointy ears, no facial hair, and is evil. Finding the reasons of why such a creature cannot exist, means finding sufficient reasons for the assignment a defined by $a(h) = a(p) = a(s) = a(e) = 1$

²This concept is also referred to as “abductive explanations” [Ignatiev *et al.*, 2019; Ignatiev *et al.*, 2020]; in the following, we stick to “sufficient reason” to avoid any confusion with the (distinct) concept of abductive explanations as discussed in the previous section.

and $a(b) = 0$ given $\neg f$. In this case $hpe \in SR(\neg f, a)$ explains why such a creature cannot exist: there are no creatures that are evil and have both human-like skin and pointy ears, but there are such creatures that are non-evil (hobbits and elves), and there are evil creatures that have pointy ears (orcs) or human-like skin (men). There are other sufficient reasons for a given $\neg f$, for instance $hse \in SR(\neg f, a)$.

We define the problem Enum·SR similarly to Enum·IP. A couple of results about the complexity of computing sufficient reasons have been pointed out for the past few years. Obviously enough, when no assumption is made on the representation of f , computing a single sufficient reason for an assignment a is already NP-hard (for pretty much the same reasons as for the prime implicant case, i.e., f is valid iff for any a , the unique sufficient reason for a given f is the empty term). Furthermore, the number of sufficient reasons for an assignment a given f can be exponential in the number of variables even when f is represented in DT [Audemard *et al.*, 2021]. Contrary to abductive explanations, it is computationally easy to generate a single sufficient reason from $SR(\Sigma, a)$ when Σ is an OBDD circuit or a decision tree representing f . A greedy algorithm can be used to this end: if a satisfies Σ (resp. $\neg\Sigma$), then start with the canonical term having a as its unique satisfying assignment and remove literals from this term while ensuring that it still is an implicant of Σ (resp. $\neg\Sigma$), until no more literal can be removed. In addition, when Σ is in DT, we can generate in polynomial time a monotone CNF formula Ψ such that $IP(\Psi) = SR(\Sigma, a)$ (see [Darwiche and Marquis, 2021] for details), and then take advantage of a quasi-polynomial time algorithm for enumerating the elements of $IP(\Psi)$ [Gurvich and Khachiyan, 1999]. Contrastingly, deciding whether a preset number of sufficient reasons for a given a exists is intractable (NP-hard), even when the Boolean function f is monotone (see Theorem 3 in [Marques-Silva *et al.*, 2021]).

In the following, we complete those results by providing evidence that Enum·SR from any language among dec-DNNF, OBDD, or DT is a difficult problem, despite the fact that those languages are quite convenient for many reasoning tasks [Darwiche and Marquis, 2002; Koriche *et al.*, 2013].

Let us first give an inductive computation of $SR(\Sigma, a)$ similar to that of $IP(\Sigma)$.

Proposition 14. *Let f and g be Boolean functions with $var(f) \cap var(g) = \emptyset$ and let a be a truth assignment to a superset of $var(f) \cup var(g)$, then $SR(f \wedge g, a) = \{t \wedge t' \mid t \in SR(f, a), t' \in SR(g, a)\}$.*

Proposition 15. *Let f be a Boolean function, let a be a truth assignment to a superset of $var(f)$ and let $x \in var(f)$. If a satisfies the literal ℓ on variable x then*

$$SR(f, a) = \{t \wedge \ell \mid t \in SR(f|\ell, a), t \not\models f|\bar{\ell}\} \\ \cup SR(f|\bar{x} \wedge f|x, a).$$

By Proposition 6, $|IP(f)| \geq \max(|IP(f|\bar{x})|, |IP(f|x)|)$. In a sense this means that using $IP(f|\bar{x})$ and $IP(f|x)$ to generate $IP(f)$ is not a waste of resources since all these implicants are kept in some form through $IP(f)$. This led to our output polynomial procedure to generate $IP(f)$ for OBDD and

more generally for dec-DNNF circuits. On the other hand, it is not guaranteed that $SR(f, a)$ is larger than $SR(f|x, a)$ and $SR(f|\bar{x}, a)$ so there is no straightforward adaptation of this procedure from Enum·IP to Enum·SR.

Example 4. Let Σ be the dec-DNNF circuit of Figure 1a. Consider the dec-DNNF circuit Σ_{v_1} rooted at node v_1 , as spotted in Figure 1b. The assignment a to $\{b, e, p, s\}$ defined by $a(b) = a(e) = 1$ and $a(p) = a(s) = 0$ satisfies Σ_{v_1} . Recall that the set $IP(\Sigma_{v_1})$ has been constructed in Example 1 and observe that $SR(\Sigma_{v_1}, a) = \{\bar{p}\bar{s}\}$. Now the 0-child of v_1 is v_2 and looking at the set $IP(\Sigma_{v_2})$ constructed in Example 1, we see that $SR(\Sigma_{v_2}, a) = \{\bar{p}\bar{s}, b\bar{p}\}$. Since $\Sigma_{v_2} = \Sigma_{v_1}|\bar{e}$, we have that $|SR(\Sigma_{v_1}, a)| < \max(|SR(\Sigma_{v_1}|\bar{e}, a)|, |SR(\Sigma_{v_1}|e, a)|)$.

Actually, we give evidence that enumerating sufficient reasons from dec-DNNF, and even from OBDD or DT, is not in OutputP by reducing to it the problem of enumerating the minimal transversals of a hypergraph, a well-known problem whose membership to OutputP is a long-standing question. Formally:

Proposition 16. *If Enum·SR from OBDD is in OutputP or Enum·SR from DT is in OutputP, then enumerating the minimal transversals of a hypergraph is in OutputP.*

6 Conclusion

Most applications of prime implicants for Boolean function analysis use only a fraction of the many prime implicants a Boolean function may have. Especially, in the context of logic-based abduction, subset-minimal assumptions to be added to the available background knowledge in order to be able to derive some given manifestations are looked for; in the propositional case, they correspond to specific prime implicants. Furthermore, in an eXplainable AI perspective, specific prime implicants known as sufficient reasons are used to explain the predictions of machine learning algorithms.

In our work, we have studied the enumeration of general and specific prime implicants of Boolean functions represented as dec-DNNF circuits. It was known that these circuits enable efficient reasoning on Boolean functions. Our results show that when it comes to prime implicants enumeration, dec-DNNF circuits have benefits as well as limitations. Our take-home message is that, while dec-DNNF circuits enable enumerating general prime implicants in incremental polynomial time, there are strong pieces of evidence against the existence of any output-polynomial time procedure for enumerating specific prime implicants from dec-DNNF circuits. More precisely, if a procedure for enumerating subset-minimal abductive explanations were to exist, then P = NP would follow. Similarly, if there were an output-polynomial time algorithm for enumerating sufficient reasons from dec-DNNF circuits, then the enumeration of the minimal transversals of a hypergraph would be in OutputP. Though this is considered unlikely in enumeration complexity, we think that proving a stronger statement would be a valuable contribution. We let this task open for future research.

Acknowledgments

Many thanks to the anonymous reviewers for their comments and insights. This work has benefited from the supports of the PING/ACK project (ANR-18-CE40-0011) and of the AI Chair EXPEKCTATION (ANR-19-CHIA-0005-01) of the French National Research Agency. It was also partially supported by TAILOR, a project funded by EU Horizon 2020 research and innovation programme under GA No 952215.

References

- [Audemard *et al.*, 2021] G. Audemard, S. Bellart, Louenas Bounia, F. Koriche, J.-M. Lagniez, and P. Marquis. On the explanatory power of decision trees. *CoRR*, abs/2108.05266, 2021.
- [Bryant, 1986] R. E. Bryant. Graph-based algorithms for Boolean function manipulation. *IEEE Transactions on Computers*, C-35(8):677–692, 1986.
- [Chandra and Markowsky, 1978] A.K. Chandra and G. Markowsky. On the number of prime implicants. *Discrete Mathematics*, 24:7–11, 1978.
- [Darwiche and Hirth, 2020] A. Darwiche and A. Hirth. On the reasons behind decisions. In *Proc. of ECAI’20*, pages 712–720, 2020.
- [Darwiche and Marquis, 2002] A. Darwiche and P. Marquis. A knowledge compilation map. *J. Artif. Intell. Res.*, 17:229–264, 2002.
- [Darwiche and Marquis, 2021] A. Darwiche and P. Marquis. On quantifying literals in Boolean logic and its applications to explainable ai. *J. Artif. Intell. Res.*, 72:285–328, 2021.
- [Darwiche, 2001] A. Darwiche. Decomposable negation normal form. *Journal of the Association for Computing Machinery*, 48(4):608–647, 2001.
- [de Kleer, 1986] J. de Kleer. An assumption-based tms. *Artificial Intelligence*, 28:127–167, 1986.
- [Dunham and Fridshal, 1959] B. Dunham and B. Fridshal. The problem of simplifying logical expressions. *Journal of Symbolic Logic*, 1959.
- [Eiter and Gottlob, 1995] Th. Eiter and G. Gottlob. The complexity of logic-based abduction. *Journal of the ACM*, 42(1):3–42, 1995.
- [Eiter *et al.*, 2008] Th. Eiter, K. Makino, and G. Gottlob. Computational aspects of monotone dualization: A brief survey. *Discret. Appl. Math.*, 156(11):2035–2049, 2008.
- [Gergov and Meinel, 1994] J. Gergov and C. Meinel. Efficient analysis and manipulation of OBDDs can be extended to FBDDs. *IEEE Transactions on Computers*, 43(10):1197–1209, 1994.
- [Gurvich and Khachiyan, 1999] V. Gurvich and L. Khachiyan. On generating the irredundant conjunctive and disjunctive normal forms of monotone Boolean functions. *Discret. Appl. Math.*, 96-97:363–373, 1999.
- [Ignatiev *et al.*, 2019] A. Ignatiev, N. Narodytska, and J. Marques-Silva. Abduction-based explanations for machine learning models. In *Proc. of AAAI’19*, pages 1511–1519, 2019.
- [Ignatiev *et al.*, 2020] A. Ignatiev, N. Narodytska, N. Asher, and J. Marques-Silva. On relating ‘why?’ and ‘why not?’ explanations. *CoRR*, abs/2012.11067, 2020.
- [Kavvadias *et al.*, 1993] D. J. Kavvadias, Ch. H. Papadimitriou, and M. Sideri. On horn envelopes and hypergraph transversals. In *Proc. of ISAAC ’93*, pages 399–405, 1993.
- [Koriche *et al.*, 2013] F. Koriche, J.-M. Lagniez, P. Marquis, and S. Thomas. Knowledge compilation for model counting: Affine decision trees. In *Proc. of IJCAI’13*, pages 947–953, 2013.
- [Madre and Coudert, 1991] J.-C. Madre and O. Coudert. A logically complete reasoning maintenance system based on a logical constraint solver. In *Proc. of IJCAI’91*, pages 294–299, 1991.
- [Marques-Silva *et al.*, 2021] J. Marques-Silva, Th. Gerspacher, M. C. Cooper, A. Ignatiev, and N. Narodytska. Explanations for monotonic classifiers. In *Proc. of ICML’21*, pages 7469–7479, 2021.
- [Marquis, 1993] P. Marquis. Skeptical abduction. *Int. J. Artif. Intell. Tools*, 2(4):511–540, 1993.
- [Marquis, 2000] P. Marquis. *Consequence finding algorithms*, volume 5 of *Handbook on Defeasible Reasoning and Uncertainty Management Systems*, chapter 2, pages 41–145. Kluwer Academic Publisher, 2000.
- [Miller, 2019] T. Miller. Explanation in artificial intelligence: Insights from the social sciences. *Artificial Intelligence*, 267:1–38, 2019.
- [Molnar, 2019] Ch. Molnar. *Interpretable Machine Learning - A Guide for Making Black Box Models Explainable*. Leanpub, 2019.
- [Narodytska *et al.*, 2018] N. Narodytska, S. Prasad Kavisviswanathan, L. Ryzhyk, M. Sagiv, and T. Walsh. Verifying properties of binarized deep neural networks. In *Proc. of AAAI’18*, pages 6615–6624, 2018.
- [Oztok and Darwiche, 2014] U. Oztok and A. Darwiche. On compiling CNF into Decision-DNNF. In *Proc. of CP’14*, pages 42–57, 2014.
- [Quine, 1952] W.V.O. Quine. The problem of simplifying truth functions. *American Mathematical Monthly*, 59:521–531, 1952.
- [Reiter and de Kleer, 1987] R. Reiter and J. de Kleer. Foundations of assumption-based truth maintenance systems: preliminary report. In *Proc. of AAAI’87*, pages 183–188, 1987.
- [Selman and Levesque, 1990] B. Selman and H. Levesque. Abductive and default reasoning: a computational core. In *Proc. of AAAI’90*, pages 343–348, 1990.
- [Shih *et al.*, 2018a] A. Shih, A. Choi, and A. Darwiche. Formal verification of Bayesian network classifiers. In *Proc. of PGM’18*, pages 427–438, 2018.

[Shih *et al.*, 2018b] A. Shih, A. Choi, and A. Darwiche. A symbolic approach to explaining Bayesian network classifiers. In *Proc. of IJCAI'18*, pages 5103–5111, 2018.

[Shih *et al.*, 2019] A. Shih, A. Choi, and A. Darwiche. Compiling Bayesian networks into decision graphs. In *Proc. of AAAI'19*, pages 7966–7974, 2019.

[Strozecki, 2019] Y. Strozecki. Enumeration complexity. *Bull. EATCS*, 129, 2019.

[Wegener, 2000] Ingo Wegener. *Branching Programs and Binary Decision Diagrams*. SIAM, 2000.

Appendix: Proofs

Proposition 2. *Enum-IP from dec-DNNF is in EnumP.*

Proof. Direct from the fact that dec-DNNF is a sublanguage of *deterministic* DNNF (d-DNNF) and d-DNNF supports polynomial time implicant check [Darwiche and Marquis, 2002]. \square

Proposition 3. *Let f and g be Boolean functions, then $IP(f \wedge g) = \max(\{t \wedge t' \mid t \in IP(f), t' \in IP(g)\}, \models)$. Furthermore if $var(f) \cap var(g) = \emptyset$, then $IP(f \wedge g) = \{t \wedge t' \mid t \in IP(f), t' \in IP(g)\}$.*

Proof. A proof of $IP(f \wedge g) = \max(\{t \wedge t' \mid t \in IP(f), t' \in IP(g)\}, \models)$ can be found e.g., in [Marquis, 1993].

In the case where $var(f) \cap var(g) = \emptyset$, the terms in $IP(f)$ contain only variables from $var(f)$ and the terms in $IP(g)$ contain only variables from $var(g)$. We denote $lit(f) = \{x, \bar{x} \mid x \in var(f)\}$. Let $t_f, t'_f \in IP(f)$ and $t_g, t'_g \in IP(g)$ such that $t_f \wedge t_g \models t'_f \wedge t'_g$. Looking at terms as sets of literals this means that $t'_f \cup t'_g \subseteq t_f \cup t_g$. But then $t'_f \subseteq t_f$ since $(t_f \cup t_g) \cap lit(f) = t_f$ and $(t'_f \cup t'_g) \cap lit(f) = t'_f$. This means that $t_f \models t'_f$ and therefore $t_f = t'_f$. A similar argument gives that $t_g = t'_g$. This shows that when $var(f) \cap var(g) = \emptyset$, $IP(f \wedge g) = \max(\{t \wedge t' \mid t \in IP(f), t' \in IP(g)\}, \models) = \{t \wedge t' \mid t \in IP(f), t' \in IP(g)\}$. \square

Proposition 4. *Let f a Boolean function, let x be a variable, and let $\ell \in \{x, \bar{x}\}$. Consider $t \in IP(f|\ell)$. If $t \models f|\bar{\ell}$ then $t \in IP(f)$, otherwise $t \wedge \ell \in IP(f)$.*

Proof. Suppose $t \models f|\bar{\ell}$. Then t is an implicant of f since $t \models (f|\bar{x} \wedge f|x) \models ((\bar{x} \wedge f|\bar{x}) \vee (x \wedge f|x)) \equiv f$. To prove that it is prime let t' be a strict subterm of t and assume $t' \models f$. We have $x \notin var(t)$ since $x \notin var(f|\ell)$, so $t'|\ell = t'$. If $t' \models f$ then $t' = t'|\ell \models f|\ell$ and t is not a prime implicant of $f|\ell$, a contradiction.

Suppose $t \not\models f|\bar{\ell}$. Then $t \wedge \ell$ is an implicant of f since $t \wedge \ell \models (\ell \wedge f|\ell) \models ((\bar{x} \wedge f|\bar{x}) \vee (x \wedge f|x)) \equiv f$. To prove that it is prime, let t' be a strict subterm of $t \wedge \ell$ and assume $t' \models f$. If $\ell \notin t'$ then $t' = t'|\ell \models f|\ell$ and t is not a prime implicant of $f|\ell$, a contradiction. If however $\ell \in t'$, then write $t' = t'' \wedge \ell$ and observe that $t'' = t'|\ell \models f|\ell$, so t is not a prime implicant of $f|\ell$, another contradiction. \square

Proposition 5. *Let f be a Boolean function and let x be a variable.*

$$IP(f) = \{t \wedge \bar{x} \mid t \in IP(f|\bar{x}), t \not\models f|x\} \\ \cup \{t \wedge x \mid t \in IP(f|x), t \not\models f|\bar{x}\} \\ \cup IP(f|\bar{x} \wedge f|x)$$

Proof. We derive $\{t \wedge \bar{x} \mid t \in IP(f|\bar{x}), t \not\models f|x\} \cup \{t \wedge x \mid t \in IP(f|x), t \not\models f|\bar{x}\} \subseteq IP(f)$ from Proposition 4.

Now we show that $IP(f|\bar{x} \wedge f|x) \subseteq IP(f)$. Let $t \in IP(f|\bar{x} \wedge f|x)$, then $t \models f|\bar{x}$ and $t \models f|x$. Since $x \notin var(f|\bar{x}) \cup var(f|x)$ we have that $x \notin var(t)$. First we prove that t is an implicant of f . If we had $t \not\models f$ then $t|\bar{x} \not\models f|\bar{x}$ or $t|x \not\models f|x$ would hold, but $t|\bar{x} = t|x = t$ so $t \models f$. Now to prove that it is a prime implicant. Let $\ell \in t$ and let t' be the term t deprived from ℓ . If $t' \models f$ were to hold then so would $t'|\bar{x} \models f|\bar{x}$ and $t'|\bar{x} \models f|x$. But since $t'|\bar{x} = t'|x = t'$, this would mean that $t' \models f|\bar{x} \wedge f|x$ and therefore t would not be a prime implicant of $f|\bar{x} \wedge f|x$, a contradiction. This shows that $IP(f|\bar{x} \wedge f|x) \subseteq IP(f)$.

We have established that

$$IP(f) \supseteq \{t \wedge \bar{x} \mid t \in IP(f|\bar{x}), t \not\models f|x\} \\ \cup \{t \wedge x \mid t \in IP(f|x), t \not\models f|\bar{x}\} \\ \cup IP(f|\bar{x} \wedge f|x)$$

and now we show the reverse inclusion. Let $t \in IP(f)$. Assume $t = t_0 \wedge \bar{x}$. $t \models f$ implies that $t|\bar{x} \models f|\bar{x}$, or in other words, that $t_0 \models f|\bar{x}$. If t_0 was not a prime implicant of $f|\bar{x}$, that is, if there was $t'_0 \subset t_0$ such that $t'_0 \models f|\bar{x}$, then we would also have $t'_0 \wedge \bar{x} \models f$ and therefore t would not be a prime implicant of f . So $t_0 \in IP(f|\bar{x})$. Now if $t_0 \models f|x$ then we would have $t_0 \models f|\bar{x} \wedge f|x \models f$, so t would not be a prime implicant of f , a contradiction. This shows that if \bar{x} is in t , then $t \in \{t_0 \wedge \bar{x} \mid t_0 \in IP(f|\bar{x}), t_0 \not\models f|x\}$. A symmetrical proof gives that if x is in t , then $t \in \{t_1 \wedge x \mid t_1 \in IP(f|x), t_1 \not\models f|\bar{x}\}$.

Finally if neither x nor \bar{x} is in t , then $t = t|\bar{x} \models f|\bar{x}$ and $t = t|x \models f|x$, and therefore $t \models f|\bar{x} \wedge f|x$. Now if t was not a prime implicant of $f|\bar{x} \wedge f|x$ then there would be some $t' \subset t$ in $IP(f|\bar{x} \wedge f|x)$. Since $IP(f|\bar{x} \wedge f|x) \subseteq IP(f)$, this would mean that t is not a prime implicant of f , a contradiction. So $t \in IP(f|\bar{x} \wedge f|x)$.

We have established that

$$IP(f) \subseteq \{t \wedge \bar{x} \mid t \in IP(f|\bar{x}), t \not\models f|x\} \\ \cup \{t \wedge x \mid t \in IP(f|x), t \not\models f|\bar{x}\} \\ \cup IP(f|\bar{x} \wedge f|x)$$

thus finishing the proof. \square

Proposition 6. *Let f a Boolean function and let x be a variable, then $|IP(f)| \geq \max(|IP(f|\bar{x})|, |IP(f|x)|)$.*

Proof. Let $\ell \in \{\bar{x}, x\}$. It is shown in [Darwiche and Marquis, 2002] that $IP(f|\ell) = \max(\{t|\ell \mid t \in IP(f)\}, \models)$. So $|IP(f|\ell)| = |\max(\{t|\ell \mid t \in IP(f)\}, \models)| \leq |\{t|\ell \mid t \in IP(f)\}| = |IP(f)|$. \square

Proposition 7. *Enum-IP from dec-DNNF is in OutputP.*

Proof. Given a dec-DNNF circuit Σ , we construct $IP(\Sigma)$ by visiting every node v of Σ in a bottom-up order while computing $IP(\Sigma_v)$. We start from the leaves. If v is labelled by a literal ℓ then $IP(\Sigma_v) = \{\ell\}$, if it is labelled by 0 then $IP(\Sigma_v) = \emptyset$, and if it is labelled by 1 then $IP(\Sigma_v) = \{t_\emptyset\}$ where t_\emptyset is the term containing no literal.

Now let v be an internal node of Σ and let u and w be its children. Since we visit the nodes in depth-first order, $IP(\Sigma_u)$ and $IP(\Sigma_w)$ have already been computed. If v is a decomposable \wedge -node then using Proposition 3 we compute $IP(\Sigma_v) = \{t_u \wedge t_w \mid t_u \in IP(\Sigma_u), t_w \in IP(\Sigma_w)\}$ in time $O(|IP(\Sigma_u)| \times |IP(\Sigma_w)|) = O(|IP(\Sigma)|^2)$. Observe that $|IP(\Sigma_v)| \geq \max(|IP(\Sigma_u)|, |IP(\Sigma_w)|)$.

If v is a decision node for the variable x whose 0- and 1-children are u and w , respectively, then we compute $IP(\Sigma_v)$ from $IP(\Sigma_u)$ and $IP(\Sigma_w)$ using Proposition 5. Since dec-DNNFs support linear-time implicant check, $\{t \wedge \bar{x} \mid t \in IP(\Sigma_u), t \not\models \Sigma_w\}$ and $\{t \wedge x \mid t \in IP(\Sigma_w), t \not\models \Sigma_u\}$ are built in time polynomial in $|\Sigma| + |IP(\Sigma_u)| + |IP(\Sigma_w)|$. As for $IP(\Sigma_u \wedge \Sigma_w)$, we build it in time polynomial in $|IP(\Sigma_u)| + |IP(\Sigma_w)|$ using Proposition 3. Observe that, by Proposition 6, there is again $|IP(\Sigma_v)| \geq \max(|IP(\Sigma_u)|, |IP(\Sigma_w)|)$.

When we reach the root node r we compute $IP(\Sigma_r) = IP(\Sigma)$. Since for every node v with children u and w we have that $|IP(\Sigma_v)| \geq \max(|IP(\Sigma_u)|, |IP(\Sigma_w)|)$, we also have that $|IP(\Sigma_v)| \leq |IP(\Sigma)|$ for every v . We build $IP(\Sigma_v)$ only once and the time spent on each node v to build $IP(\Sigma_v)$ given $IP(\Sigma_u)$ and $IP(\Sigma_w)$ is polynomial in $|\Sigma| + |IP(\Sigma)|$. Summing over all nodes we get that the time needed to build $IP(\Sigma)$ is also polynomial in $|\Sigma| + |IP(\Sigma)|$. \square

Proposition 8. *Let Σ be a dec-DNNF circuit and let $S \subseteq IP(\Sigma)$. If the root of Σ is an \wedge -node, let u and w be its children and let $S_u := \{t_{var(\Sigma_u)} \mid t \in S\}$ and $S_w := \{t_{var(\Sigma_w)} \mid t \in S\}$. Then $S_u \subseteq IP(\Sigma_u)$ and $S_w \subseteq IP(\Sigma_w)$ hold, and*

$$S = IP(\Sigma) \text{ iff } S_u = IP(\Sigma_u) \text{ and } S_w = IP(\Sigma_w) \\ \text{and } S = \{t_u \wedge t_v \mid t_u \in S_u, t_v \in S_w\}.$$

Proof. If $S = IP(\Sigma)$ then by Proposition 3 $S = \{t_u \wedge t_v \mid t_u \in IP(\Sigma_u), t_v \in IP(\Sigma_w)\}$ so $IP(\Sigma_u) = \{t_{var(\Sigma_u)} \mid t \in S\} = S_u$ and $IP(\Sigma_w) = \{t_{var(\Sigma_w)} \mid t \in S\} = S_w$ and thus $S = \{t_u \wedge t_v \mid t_u \in S_u, t_v \in S_w\}$.

If $S \neq IP(\Sigma)$, let $t^* \in IP(\Sigma) \setminus S$ and let $t_u^* = t_{var(\Sigma_u)}^*$ and $t_v^* = t_{var(\Sigma_w)}^*$. By Proposition 3, t_u^* (resp. t_v^*) is in $IP(\Sigma_u)$ (resp. $IP(\Sigma_w)$), so either $t_u^* \notin S_u$ or $t_v^* \notin S_w$ and we are done, or $t_u^* \in S_u$ and $t_v^* \in S_w$ in which case $\{t_u^* \wedge t_v^* \mid t_u^* \in S_u, t_v^* \in S_w\} \neq S$ since $t_u^* \wedge t_v^*$ is in $\{t_u \wedge t_v \mid t_u \in S_u, t_v \in S_w\}$ but not in S . \square

Proposition 9. *Let Σ be a dec-DNNF circuit whose root is a decision node labelled by x and whose 0- and 1-child are u and w . Given $S \subseteq IP(\Sigma)$, let $S_u = \{t \mid t \wedge \bar{x} \in S\} \cup (S \cap IP(\Sigma_u))$, $S_w = \{t \mid t \wedge x \in S\} \cup (S \cap IP(\Sigma_w))$, $S' = \{t \mid t \in S, var(x) \notin var(t)\}$. Then $S_u \subseteq IP(\Sigma_u)$ and $S_w \subseteq IP(\Sigma_w)$ hold, and*

$$S = IP(\Sigma) \text{ iff } S_u = IP(\Sigma_u) \\ \text{and } S_w = IP(\Sigma_w) \\ \text{and } S' = \max(\{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}, \models).$$

Algorithm 5: GenerateIP(Σ)

Promise: Σ is satisfiable

- 1 Find a satisfying assignment a of Σ
 - 2 Let t be the corresponding term:
 $t = \bigwedge_{a(x)=1} x \wedge \bigwedge_{a(x)=0} \bar{x}$
 - 3 **while** there is $\ell \in t$ such that $t - \ell \models \Sigma$ **do**
 - 4 | Remove ℓ from t
 - 5 **end**
 - 6 **return** t
-

Proof. For convenience we denote $S^* = \max(\{t_u \wedge t_w \mid t_u \in S_u, t_w \in S_w\}, \models)$.

First we prove that $S_w \subseteq IP(\Sigma_w)$ (the proof that $S_u \subseteq IP(\Sigma_u)$ is analogous). Clearly $S \cap IP(\Sigma_w) \subseteq IP(\Sigma_w)$ so we just need to show that $\{t \mid t \wedge x \in S\} \subseteq IP(\Sigma_w)$. Let $t \wedge x$ be in S , then $t \wedge x \models \Sigma$. t is an implicant of Σ_w since $t \equiv (t \wedge x) \mid x \models \Sigma \mid x \equiv \Sigma_w$. Now if there exists $t' \neq t$ such that $t \models t' \models \Sigma_w$ then $t \wedge x \models t' \wedge x \models \Sigma$ holds, and therefore $t \wedge x$ is not a prime implicant of Σ , a contradiction. So $\{t \mid t \wedge x \in S\} \subseteq IP(\Sigma_w)$.

Second we prove that $S_w \neq IP(\Sigma_w)$ implies $S \neq IP(\Sigma)$ (the proof is similar for $S_u \neq IP(\Sigma_u)$). Assume there exists $t \in IP(\Sigma_w) \setminus S_w$. If $t \models \Sigma_u$ then t is in $IP(\Sigma)$ by Proposition 4. But t cannot be in S for otherwise it would be in $S \cap IP(\Sigma_w) \subseteq S_w$. This shows that $S \neq IP(\Sigma)$ in this case. If however $t \not\models \Sigma_u$ then $t \wedge x$ is in $IP(\Sigma)$ by Proposition 4. But $t \wedge x$ cannot be in S for otherwise t would be in $\{t \mid t \wedge x \in S\} \subseteq S_w$. So again $S \neq IP(\Sigma)$.

Now we prove that $(S' \neq S^*) \Rightarrow (S \neq IP(\Sigma))$. We may assume that $S_u = IP(\Sigma_u)$ and $S_w = IP(\Sigma_w)$, otherwise $S \neq IP(\Sigma)$ holds regardless of $S' = S^*$. Since $\Sigma_u \equiv \Sigma \mid \bar{x}$ and $\Sigma_w \equiv \Sigma \mid x$ we have that $S^* = \max(\{t_u \wedge t_w \mid t_u \in IP(\Sigma \mid \bar{x}), t_w \in IP(\Sigma \mid x)\}, \models) = IP(\Sigma \mid \bar{x} \wedge \Sigma \mid x)$ by Proposition 3. Now $S = S' \cup \{t \mid t \in S, \bar{x} \in t\} \cup \{t \mid t \in S, x \in t\}$ so, by Proposition 5, if $S = IP(\Sigma)$ then S' corresponds to the set $IP(\Sigma \mid \bar{x} \wedge \Sigma \mid x)$. So

$$(S' \neq S^*) \Rightarrow (S' \neq IP(\Sigma \mid \bar{x} \wedge \Sigma \mid x)) \Rightarrow (S \neq IP(\Sigma))$$

Now for the other direction, assume there exists $t \in IP(\Sigma) \setminus S$. First suppose that $t = t' \wedge x$. On the one hand t' is in $IP(\Sigma \mid x) = IP(\Sigma_w)$. On the other hand t' is clearly not in $\{t \mid t \wedge x \in S\}$, and since it is not an implicant of Σ , it is not in $S \cap IP(\Sigma_w)$ either. This means that $t' \in IP(\Sigma_w) \setminus S_w$ and therefore $S_w \neq IP(\Sigma_w)$. In the case where $t = t' \wedge \bar{x}$, a similar proof gives that $S_u \neq IP(\Sigma_u)$. It remains to consider the situation where neither x nor \bar{x} is in t . By Proposition 5, t is contained in $IP(\Sigma \mid \bar{x} \wedge \Sigma \mid x)$. As before, we can assume that $S_u = IP(\Sigma_u)$ and $S_w = IP(\Sigma_w)$. We have already explained that this assumption yields $S^* = IP(\Sigma \mid \bar{x} \wedge \Sigma \mid x)$. Since t is not in S and $\bar{x} \notin t$ and $x \notin t$, we have that $t \notin S'$. So $t \in S^* \setminus S'$, and therefore $S \neq S^*$. \square

Proposition 10. *Given a reduced dec-DNNF circuit Σ and $S \subseteq IP(\Sigma)$, MissingIP(Σ, S, \emptyset) runs in time $O(\text{poly}(|S| + |\Sigma|))$, and it returns false if and only if $S = IP(\Sigma)$.*

Proof. Soundness: We prove soundness by induction on the depth of Σ using Propositions 8 and 9.

If Σ has depth 1 then it is a single node v labelled by 0, 1 or a literal ℓ . The promise states that $S \subseteq IP(\Sigma)$. If v is labelled by 0, then S must be \emptyset and the algorithm returns *false* at line 4. If v is labelled by 1 then either $S = \{t_\emptyset\} = IP(1)$ and the algorithm returns *false* at line 24, or $S = \emptyset$ and the algorithm returns $(1, (v))$ at line 5. Finally if v is labelled by ℓ , either $S = \{\ell\} = IP(\ell)$ and the algorithm returns *false* at line 24, or $S = \emptyset$ and the algorithm returns $(\ell, (v))$ at line 5. In all cases the algorithm returns *false* if and only if $S = IP(\Sigma)$, and it sets $\lambda(v)$ to $|IP(\Sigma_v)|$ before returning *false*.

Now if Σ has depth more than 1, its root node v is either a decomposable \wedge -node or a decision node. Since Σ is reduced, it cannot be unsatisfiable, so if $S = \emptyset$ the algorithm returns $(t, (v))$ with $t \in IP(\Sigma)$ at line 5. From now on we suppose that $S \neq \emptyset$. If v is a decomposable \wedge -node with children u and w . By Proposition 8, since we are promised that $S \subseteq IP(\Sigma)$, we have that $IP(\Sigma) = S$ if and only if $IP(\Sigma_u) = S_u$ and $IP(\Sigma_w) = S_w$ and we can construct S from S_u and S_w as shown in Proposition 8 (S_u and S_w defined as in Proposition 8). By induction $IP(\Sigma_u) \neq S_u$ or $IP(\Sigma_w) \neq S_w$ if and only if the output of $\text{MissingIP}(\Sigma_u, S_u, *)$ or $\text{MissingIP}(\Sigma_w, S_w, *)$ is distinct from *false*. So if $IP(\Sigma_u) \neq S_u$ or $IP(\Sigma_w) \neq S_w$, a return statement occurs line 9 or 12. Otherwise, it possible that $IP(\Sigma_u) = S_u$ or $IP(\Sigma_w) = S_w$ but that S can not be constructed from S_u and S_w , then the return statement of line 14 is triggered. So if $S \neq IP(\Sigma)$, then lines 8-14 return something that is not *false*. And if $S = IP(\Sigma)$, then no return call is triggered lines 8-14 and the algorithm returns *false* at line 24 after setting $\lambda(v)$ to $|S| = |IP(\Sigma)| = |IP(\Sigma_v)|$.

If v is a decision node for variable x with 0-child u and 1-child w . By Proposition 9, since we are promised that $S \subseteq IP(\Sigma)$, we have that $IP(\Sigma) = S$ if and only if $IP(\Sigma_u) = S_u$ and $IP(\Sigma_w) = S_w$ and $S' = S^*$ with S_u, S_w and S' defined as in Proposition 9 and S^* defined line 21. By induction $IP(\Sigma_u) = S_u$ and $IP(\Sigma_w) = S_w$ if and only if the output of $\text{MissingIP}(\Sigma_u, S_u, *)$ or $\text{MissingIP}(\Sigma_w, S_w, *)$ is distinct from *false*. So if $S \neq IP(\Sigma)$, then lines 16-22 return something that is not *false*. And if $S = IP(\Sigma)$, then no return call is triggered lines 16-22 and the algorithm returns *false* at line 24 after setting $\lambda(v)$ to $|S| = |IP(\Sigma)| = |IP(\Sigma_v)|$.

Running time: Consider the time spent in $\text{MissingIP}(\Sigma, S, P)$ before a return statement or a recursive call is triggered. The procedure may end at line 2 or 4 in $O(1)$ time. It can also end line 5, in which case it has to compute a prime implicant of Σ using GenerateIP , which runs in time $O(\text{poly}(|\Sigma|))$. Now if the algorithm has not returned lines 2, 4 or 5, most of the running time is spent building sets of terms from S lines 8, 13, 16 and 21. Building S_u and S_w line 8 only requires projecting the terms in S onto $\text{var}(\Sigma_u)$ and $\text{var}(\Sigma_w)$, which takes time $O(|S|)$. Constructing the set S^* at line 13 takes $O(|S_u| \times |S_w|) = O(|S|^2)$ time. At line 16, S' can clearly be obtained in time $O(|S|)$ and S_u and S_w are obtained in time $O(\text{poly}(|S| + |\Sigma|))$ thanks to polynomial-time prime implicant check on dec-DNNF circuits. Finally the set S^* at line 21 is constructed in $O(|S_u| \times |S_w|) = O(|S|^2)$ and compared to S' in time $O(\text{poly}(|S|))$. So before a return statement or a recursive

call is triggered, the algorithm spends $O(\text{poly}(|S| + |\Sigma|))$ time. One can observe that $|S_u|, |S_w|$ are fewer than $|S|$, so for every node v in Σ , a call $\text{MissingIP}(\Sigma_v, S', *)$ takes $O(\text{poly}(|S| + |\Sigma|))$ time before triggering a return statement or a recursive call. Thanks to memoization – implemented via λ – the $O(\text{poly}(|S| + |\Sigma|))$ time procedure is done only once per node. So the total running time of the algorithm is also in $O(\text{poly}(|S| + |\Sigma|))$. \square

Proposition 11. *Let Σ be a reduced dec-DNNF circuit and let $S \subseteq IP(\Sigma)$. $\text{AnotherIP}(\Sigma, S)$ runs in time $O(\text{poly}(|S| + |\Sigma|))$. It returns *false* if $S = IP(\Sigma)$, otherwise it returns a prime implicant of Σ that does not belong to S .*

Proof. Soundness. First $\text{AnotherIP}(\Sigma, S)$ calls $\text{MissingIP}(\Sigma, S, \emptyset)$. Soundness of MissingIP has been established in Proposition 10 so if $S = IP(\Sigma)$ then $\text{MissingIP}(\Sigma, S, \emptyset)$ returns *false* and so does $\text{AnotherIP}(\Sigma, S)$.

Now let us assume that $\text{MissingIP}(\Sigma, S, \emptyset)$ has not returned *false* but the pair (t, P) with $P = (v_0, \dots, v_m)$ a path from v_0 (the root of Σ) to v_m and t a term. Use the notation $P_i = (v_0, \dots, v_{i-1})$ for all $1 \leq i \leq m$. Then calling $\text{MissingIP}(\Sigma, S, \emptyset)$ has triggered a sequence of recursive calls $\text{MissingIP}(\Sigma_{v_1}, S_1, P_1)$, $\text{MissingIP}(\Sigma_{v_2}, S_2, P_2), \dots, \text{MissingIP}(\Sigma_{v_m}, S_m, P_m)$. A contradiction has been found during the last step: $\text{MissingIP}(\Sigma_{v_m}, S_m, P_m)$ ended line 5 for a contradiction of type (c1), or line 20 for a contradiction of type (c2), and returned (t, P) with t some term that we claim is in $IP(\Sigma_{v_m}) \setminus S_m$.

Claim 1. $t \in IP(\Sigma_{v_m}) \setminus S_m$.

Proof. This is clear if $\text{MissingIP}(\Sigma_{v_m}, S_m, P_m)$ ends line 5. Now if it ends line 20, then v_m is a decision node for x with 0-child u and 1-child w . The sets S_u, S_w, S' and S^* have been generated and that it has been shown that $S_u = IP(\Sigma_u)$ and $S_w = IP(\Sigma_w)$ (otherwise a return statement line 16 or 18 would have been triggered). So $S^* = IP(\Sigma_u \wedge \Sigma_w) = IP(\Sigma_{v_m} | \bar{x} \wedge \Sigma_{v_m} | x)$ by Proposition 3. We have $t \in S^* \setminus S'$ so it is clear that $x \notin \text{var}(t)$. Furthermore S' contains all terms from S_m in which neither x nor \bar{x} appears, so $t \in S^* \setminus S'$ really means that $t \in S^* \setminus S_m = IP(\Sigma_{v_m} | \bar{x} \wedge \Sigma_{v_m} | x) \setminus S_m \subseteq IP(\Sigma_{v_m}) \setminus S_m$. \square

Now $\text{AnotherIP}(\Sigma, S)$ returns the result $\text{Propagate}(\Sigma, t, P)$. To prove that the output is a term in $IP(\Sigma) \setminus S$, it is sufficient to show that, for every $1 \leq i \leq m$, if $t_i \in IP(\Sigma_{v_i}) \setminus S_i$ then $\text{Propagate}(\Sigma, t_i, P_i)$ calls $\text{Propagate}(\Sigma, t_{i-1}, P_{i-1})$ with $t_{i-1} \in IP(\Sigma_{v_{i-1}}) \setminus S_{i-1}$. The rest is an easy induction (with $S_0 = S$ and $\Sigma_{v_0} = \Sigma$).

Claim 2. *Let $t_i \in IP(\Sigma_{v_i}) \setminus S_i$ with $i \geq 1$ then $\text{Propagate}(\Sigma, t_i, P_i)$ does a recursive call $\text{Propagate}(\Sigma, t_{i-1}, P_{i-1})$ with $t_{i-1} \in IP(\Sigma_{v_{i-1}}) \setminus S_{i-1}$.*

Proof. $\text{Propagate}(\Sigma, t_i, P_i)$ calls $\text{Propagate}(\Sigma, t_i \wedge t', P_{i-1})$. Let $t_{i-1} = t_i \wedge t'$. We need to show that it is in $IP(\Sigma_{v_{i-1}}) \setminus S_{i-1}$. First assume that v_{i-1} is a decomposable \wedge -node with children v_i and w , then t' is obtained line 4 and clearly $t' \in IP(\Sigma_w)$. By Proposition 3,

$t_i \wedge t' \in IP(\Sigma_{v_i} \wedge \Sigma_w) = IP(\Sigma_{v_{i-1}})$. By construction $S_i = \{t_{var(\Sigma_{v_i})} \mid t \in S_{i-1}\}$. If $t_i \wedge t'$ was in S_{i-1} then its restriction t_i to $var(\Sigma_{v_i})$ would be S_i , a contradiction. So $t_i \wedge t' \notin S_{i-1}$.

Now suppose v_{i-1} is a decision node for x with 0-child u and 1-child w . Let v_i be u (the case $v_i = w$ is analogous). By construction $S_i = S_u$. t' is obtained line 7 and, by Proposition 4, $t_i \wedge t' \in IP(\Sigma_{v_{i-1}})$. To prove that $t_i \wedge t' \notin S_{i-1}$, first assume that $t_i \models \Sigma_w$. Then t' is the empty term t_\emptyset . So $t_i \wedge t' = t_i$ and $t_i \in IP(\Sigma_{v_{i-1}})$. If t_i was in S_{i-1} then we would have $t_i \in S_{i-1} \cap IP(\Sigma_{v_i}) \subseteq S_i$, a contradiction. So when $t_i \models \Sigma_w$, we have $t_i \wedge t' \in IP(\Sigma_{v_{i-1}}) \setminus S_{i-1}$. Now if $t_i \not\models \Sigma_w$, then $t_i \wedge t' = t_i \wedge \bar{x}$ and $t_i \wedge \bar{x}$ is not in S_{i-1} for otherwise we would have $t_i \in \{\tau \mid \tau \wedge \bar{x} \in S_{i-1}\} \subseteq S_i$. So again we have $t_i \wedge t' \in IP(\Sigma_{v_{i-1}}) \setminus S_{i-1}$. \square

Running time. It has already been proved in Proposition 10 that $\text{Missing}(\Sigma, S, \emptyset)$ runs in time $O(\text{poly}(|S| + |\Sigma|))$. As for $\text{Propagate}(\Sigma, t, P)$, $|P|$ recursive calls are made and the cost between two consecutive recursive calls is either one call to GenerateIP line 3 or 4, or one implicant check line 7 or 9. An implicant test on a dec-DNNF takes linear time and GenerateIP makes at most $|var(\Sigma)|$ such tests, so it runs in time $O(\text{poly}(|\Sigma|))$. Thus $\text{Propagate}(\Sigma, t, P)$ runs in time $O(|P| \times \text{poly}(|\Sigma|)) = O(\text{poly}(|\Sigma|))$. \square

Proposition 12. *Enum-IP from dec-DNNF is in IncP.*

Proof. Using Proposition 11, k prime implicants of Σ can be generated in time $O(\text{poly}(k + |\Sigma|))$ by simply calling $\text{AnotherIP}(\Sigma, S)$ k times, each time adding to S the new prime implicant that has been computed. This shows that Enum-IP from dec-DNNF is in IncP. \square

Proposition 13. *Unless $P = NP$, there is no polynomial-time algorithm which, given an OBDD circuit or a decision tree computing a function f over X and a set $Y \subseteq X$, decides whether f has an implicant t with $var(t) \subseteq Y$.*

Proof. Let ϕ be a CNF formula with m clauses c_1, \dots, c_m . Create m fresh variables z_1, \dots, z_m . Let B_1, \dots, B_m be OBDD circuits respecting the same variable ordering and computing c_1, \dots, c_m , respectively. These OBDD circuits can be computed in polynomial time (and can even be chosen in DT). Define now the OBDD circuits $B^{(i)} = (\bar{z}_i \wedge B_i) \vee (z_i \wedge B^{(i+1)})$ for $1 \leq i \leq m$, with $B^{(m+1)} = 1$. $B^{(1)}$ is an OBDD circuit on $\{z_1, \dots, z_m\} \cup var(\phi)$ built in polynomial time from ϕ and whose size is in $O(|\phi|)$.

Claim 3. *An implicant t of $B^{(1)}$ such that $var(t) \subseteq var(\phi)$ exists if and only if ϕ is satisfiable.*

Proof. For the first direction assume the implicant exists. t is an implicant of $B^{(1)} = (\bar{z}_1 \wedge B_1) \vee (z_1 \wedge B^{(2)})$. Since $z_1 \notin var(t)$, we have $t \models B_1 \equiv c_1$ and $t \models B^{(2)}$. Following the same line of reasoning with $B^{(2)}$ instead of $B^{(1)}$ we also have that $t \models B_2 \equiv c_2$ and $t \models B^{(3)}$. And we repeat the argument until reaching, $t \models c_1, t \models c_2, \dots, t \models c_m, t \models B^{(m+1)} = 1$. So indeed $t \models \phi$ and then ϕ is satisfiable.

For the other direction assume ϕ is satisfiable. Then there exists an implicant t of ϕ with $var(t) \subseteq var(\phi)$. Let a be a truth assignment to $var(\phi) \cup \{z_1, \dots, z_m\}$ that satisfies t . If $a(z_i) = 1$ for all $i \in \{1, \dots, m\}$, then $B^{(1)}|a \equiv B^{(2)}|a \equiv \dots \equiv B^{(m+1)}|a \equiv 1$. Otherwise let j be the smallest integer such that $a(z_j) = 0$. Then $B^{(1)}|a \equiv B^{(2)}|a \equiv \dots \equiv B^{(j)}|a \equiv B_j|a \equiv c_j|a$. Since t is an implicant of ϕ , we have that $t \models c_j$, so $c_j|a \equiv 1$. Thus every assignment a that satisfies t also satisfies $B^{(1)}$, in other words t is an implicant of $B^{(1)}$. \square

So if the algorithm from the proposition statement exists, we can run it on inputs $B^{(1)}$ and $Y = var(\phi)$ to decide in polynomial time whether ϕ is satisfiable.

Finally note that if one had chosen to represent B_1, \dots, B_m as decision trees from DT (which is also feasible in polynomial time), then $B^{(1)}$ would be an element of DT. So the statement also holds for DT. \square

Proposition 14. *Let f and g be Boolean functions with $var(f) \cap var(g) = \emptyset$ and let a be a truth assignment to a superset of $var(f) \cup var(g)$, then $SR(f \wedge g, a) = \{t \wedge t' \mid t \in SR(f, a), t' \in SR(g, a)\}$.*

Proof. Comes from Proposition 3:

$$\begin{aligned} SR(f \wedge g, a) &= \{\tau \in IP(f \wedge g) \mid a \text{ satisfies } \tau\} \\ &= \{t \wedge t' \mid t \in IP(f), t' \in IP(g), a \text{ satisfies } t \wedge t'\} \\ &= \{t \wedge t' \mid t \in IP(f), t' \in IP(g), a \text{ satisfies both } t \text{ and } t'\} \\ &= \{t \wedge t' \mid t \in SR(f, a), t' \in SR(g, a)\} \end{aligned}$$

\square

Proposition 15. *Let f be a Boolean function, let a be a truth assignment to a superset of $var(f)$ and let $x \in var(f)$. If a satisfies the literal ℓ on variable x then*

$$\begin{aligned} SR(f, a) &= \{t \wedge \ell \mid t \in SR(f|\ell, a), t \not\models f|\bar{\ell}\} \\ &\quad \cup SR(f|\bar{x} \wedge f|x, a). \end{aligned}$$

Proof. Comes from Proposition 5:

$$\begin{aligned} SR(f, a) &= \{t \in IP(f) \mid a \text{ satisfies } t\} \\ &= \{t \wedge \bar{\ell} \mid t \in IP(f|\bar{\ell}), t \not\models f|\ell, a \text{ satisfies } t\} \\ &\quad \cup \{t \wedge \ell \mid t \in IP(f|\ell), t \not\models f|\bar{\ell}, a \text{ satisfies } t\} \\ &\quad \cup \{t \in IP(f|\bar{x} \wedge f|x) \mid a \text{ satisfies } t\} \\ &= \{t \wedge \ell \mid t \in SR(f|\ell, a), t \not\models f|\bar{\ell}\} \\ &\quad \cup SR(f|\bar{x} \wedge f|x, a). \end{aligned}$$

\square

Proposition 16. *If Enum-SR from OBDD is in OutputP or Enum-SR from DT is in OutputP, then enumerating the minimal transversals of a hypergraph is in OutputP.*

Proof. The proof leans on the proof of Theorem 2 in [Kavvadias et al., 1993]. Let \mathcal{H} be a hypergraph. Vertices are identified by integers $1, \dots, n$ and associated to variables x_1, \dots, x_n . Let $tr(\mathcal{H})$ be the set of transversals of \mathcal{H} and let

$tr_{\min}(\mathcal{H})$ be the set of minimal transversals of \mathcal{H} . For each $S \subseteq \{1, \dots, n\}$ of vertices let a_S be the assignment such that $a_S(x_i) = 0$ if and only if $i \in S$, and let $\gamma_S = \bigvee_{i \in S} \bar{x}_i$. Observe that a_S satisfies $\gamma_{S'}$ if and only if $S \cap S' \neq \emptyset$. Let f be the function whose satisfying assignments are exactly the a_H for $H \in \mathcal{H}$. Denote by $sat(f)$ the set of satisfying assignments of f .

Now we have the following:

$$\begin{aligned} f \models \gamma_S &\Leftrightarrow \forall H \in \mathcal{H}, a_H \text{ satisfies } \gamma_S \\ &\Leftrightarrow \forall H \in \mathcal{H}, H \cap S \neq \emptyset \\ &\Leftrightarrow S \text{ is a transversal of } \mathcal{H} \end{aligned}$$

This means that the set of implicates of f containing only negative literals is $\{\gamma_T \mid T \in tr(\mathcal{H})\}$, and that the set of *prime* implicates of f containing only negative literals is $\{\gamma_T \mid T \in tr_{\min}(\mathcal{H})\}$. Since the prime *implicants* of $\neg f$ are exactly the negation of the prime *implicates* of f , we get that the set of prime implicants of $\neg f$ containing only positive literals is $\{\bigwedge_{i \in T} x_i \mid T \in tr_{\min}(\mathcal{H})\}$. Observe that a_\emptyset is the assignment that set all x_i to 1 and that

$$SR(\neg f, a_\emptyset) = \left\{ \bigwedge_{i \in T} x_i \mid T \in tr_{\min}(\mathcal{H}) \right\}.$$

From \mathcal{H} we construct $sat(f)$ in polynomial time. Then from $sat(f)$ we construct in polynomial time an OBDD circuit B equivalent to f . Then we obtain an OBDD B' equivalent to $\neg f$ by switching the 0-sink and the 1-sink of B . Given the bijection between $SR(B', a_\emptyset)$ and $tr_{\min}(\mathcal{H})$, any algorithm for enumerating sufficient reasons from OBDD can be run with inputs B' and a_\emptyset to enumerate the minimal transversals of \mathcal{H} . So if Enum·SR from OBDD is in OutputP then enumerating the minimal transversals of a hypergraph is in OutputP.

Finally, note that from $sat(f)$ one can construct a decision tree representing f in polynomial time (instead of an OBDD circuit), and that negating such a decision tree boils down to turning 0-leaves into 1-leaves and vice-versa. So the statement also holds for Enum·SR from DT. \square