

Propagation through metamaterial temporal slabs: transmission, reflection and special cases

D. Ramaccia[†], A. Toscano, F. Bilotti

¹*“Roma Tre” University, Department of Engineering, Via Vito Volterra 62, 00146, Rome,*

Italy

(received **01 November 2019**)

Abstract

Time-varying metamaterials are artificial materials whose electromagnetic properties change over time. In earlier studies, the equivalent reflection and transmission coefficients at a temporal interface have been derived. Here, we extend the study to a temporal slab, *i.e.*, a uniform homogeneous medium that is present in the space for a limited time. We derive the transmission and reflection coefficients for a metamaterial temporal slab as a function of the refractive indices and application time. Similarly to the role played by the electrical thickness for spatial slabs, we show that the response of the temporal slab can be controlled through the application time. The preliminary results reported here may pave the way to several novel devices based on temporal discontinuities.

[†]To whom correspondence should be addressed: davide.ramaccia@uniroma3.it

I. INTRODUCTION

Propagation of an electromagnetic (EM) wave through a time-varying medium is an old research topic [1]. In 1958, Morgenthaler addressed the problem of the electromagnetic wave propagation through a dielectric media whose electromagnetic characteristics vary as a function of time. More recently, the advent of space-time and time-varying metamaterials [2] has stimulated the interest in the anomalous interaction between the waves and time-varying material, enabling the implementation of some novel interesting components, such as non-reciprocal Bragg-gratings [3] and antennas [4]–[8], optical isolators [9], and Doppler cloaks [10]. In particular, the salient features of temporal metamaterials have been recently investigated by Engheta [11], where the freezing and amplification of waves during propagation has been numerically demonstrated. However, a systematic study of the scattering response from a temporal slab has not been reported yet. The concept of temporal slab is illustrated in Fig. 1 in comparison with a conventional dielectric slab. We derive the conditions that allows to achieve some special responses, such as zero reflection and zero transmission.

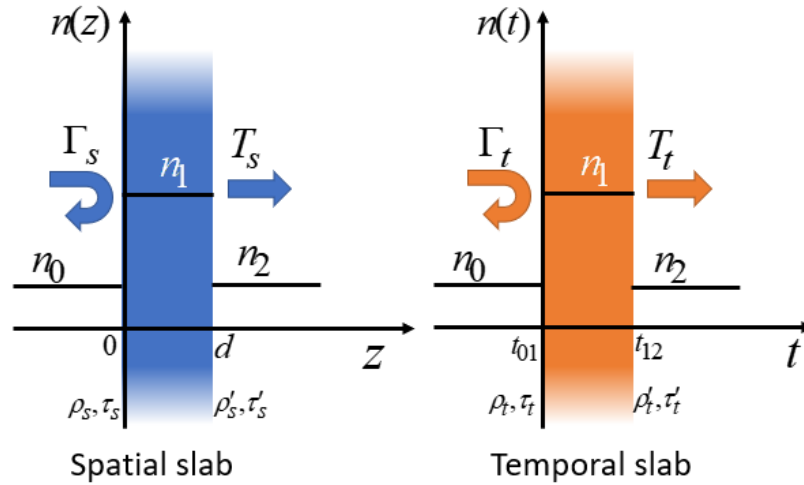


Fig. 1. Schematic illustration of a spatial (left) and temporal (right) material slab. The spatial slab consists of a layer of material with refractive index n_1 between two semi-infinite media with refractive indices n_0 and n_2 ; the temporal slab is a change of the material in all the space for a limited time interval Δt .

II. PROPAGATION THROUGH A TEMPORAL SLAB

Let us consider a non-magnetic temporal slab of refractive index $n_1 = \sqrt{\varepsilon_1}$ illuminated by a normally impinging plane wave as shown in Fig. 1. The harmonic time dependence $e^{i\omega t}$ will be assumed. The plane wave is propagating in an infinite non-magnetic medium of refractive index $n_0 = \sqrt{\varepsilon_0}$. At the instant of time $t=t_0$, the refractive index of the whole medium changes suddenly in n_1 , generating a couple of waves propagating in forward and backward directions. The scattering coefficients at this temporal discontinuity are [1], [2], [12]:

$$\begin{aligned} \rho_t &= \frac{1}{2} \frac{n_0}{n_1} \frac{Z_1 - Z_0}{Z_0} \\ \tau_t &= \frac{1}{2} \frac{n_0}{n_1} \frac{Z_1 + Z_0}{Z_0} \end{aligned} \quad (1)$$

where $Z_{0,1}$ are the intrinsic impedances of the media. At the time $t=t_{12}$, the refractive index of the medium suddenly changes again. The medium exhibits now the refractive index $n_2 = \sqrt{\varepsilon_2}$. The two waves previously generated by the first temporal discontinuity split again with the scattering coefficients ρ'_t, τ'_t in a forward and backward wave. A total of four scattering contributions are now propagating the medium n_2 , as envisioned in [3, Fig. 2]. The total scattering coefficients for a temporal slab however has not been evaluated yet in the open technical literature.

Defining $\Delta t = t_{12} - t_0$ as the application time of the refractive index n_1 , the total scattering coefficients have been evaluated:

$$\begin{aligned} \Gamma_t &= e^{i\xi\omega\Delta t} \left(\tau_t \rho'_t + \tau'_t \rho_t e^{-i2\xi\omega\Delta t} \right) \\ T_t &= e^{i\xi\omega\Delta t} \left(\tau_t \tau'_t + \rho'_t \rho_t e^{-i2\xi\omega\Delta t} \right) \end{aligned} \quad (2)$$

where $\xi = n_0/n_1$ is the *time-dilation factor* related to the change in the speed of the wave after the first temporal boundary. Eq. (2) resembles the reflection and transmission coefficients for a spatial slabs, where the electrical thickness d/λ is substituted by the temporal thickness $\Delta t/T$ of the temporal slab with $T = 2\pi/\omega$.

The total scattering coefficients in eq. (2) give us the possibility to design the temporal slabs for achieving special transmission and reflection cases. Here, we consider the special cases of reflection less ($\Gamma_t = 0$) and transmission less ($T_t = 0$) temporal slabs.

A. *Reflectionless temporal slabs*

The possibility to achieve reflection less temporal coating by using time-varying metamaterials has been recently envisioned in [13]. Here, using eq. (2), we derive the conditions for achieving such a specific reflection condition. To vanish the total reflection coefficient, the exponential term $e^{-i2\xi\omega\Delta t}$ must assume the following values:

$$\begin{aligned} e^{-i2\xi\omega\Delta t} = +1 &\Leftrightarrow \xi\Delta t = mT/2 & (m \geq 1) \\ e^{-i2\xi\omega\Delta t} = -1 &\Leftrightarrow \xi\Delta t = (2m+1)T/2 & (m \geq 0) \end{aligned} \quad (3)$$

Considering the shortest temporal slabs, eq (3) corresponds to an effective half-period and a quarter-period temporal slabs, respectively. As for the first case (half-period slab), the total reflection coefficient is vanished only if $n_0 = n_2$, regardless the value of n_1 . As for the second case, the total reflection coefficient is vanished only if $n_1^2 = n_0n_2$. These results represent the first temporal Fabry-Perot resonator and impedance transformer implemented through a time-varying metamaterial.

B. Transmissionless temporal slabs

Following a similar procedure for total transmission coefficient T_t of eq. (2), we have that the transmission never can be zero for an half-period temporal slab. On the contrary, for a quarter-period temporal slabs, the transmission can be zero if the permittivity of the temporal slab is negative $\varepsilon_1 = -\sqrt{\varepsilon_0\varepsilon_2}$.

III. NUMERICAL VERIFICATION

The numerical verification has been performed through a proper set of FDTD simulations. The scattering coefficients for a temporal slab that satisfies the reflectionless conditions have been evaluated. In Fig. 2 the comparison between numerical and analytical scattering parameters as a function of the effective temporal thickness of the slab are reported for the case of $n_1^2 = n_0n_2$, and $n_0 = n_2$, which exhibits a zero in reflection when the temporal thickness of the slab is a quarter- or half-period of the wave in the medium.

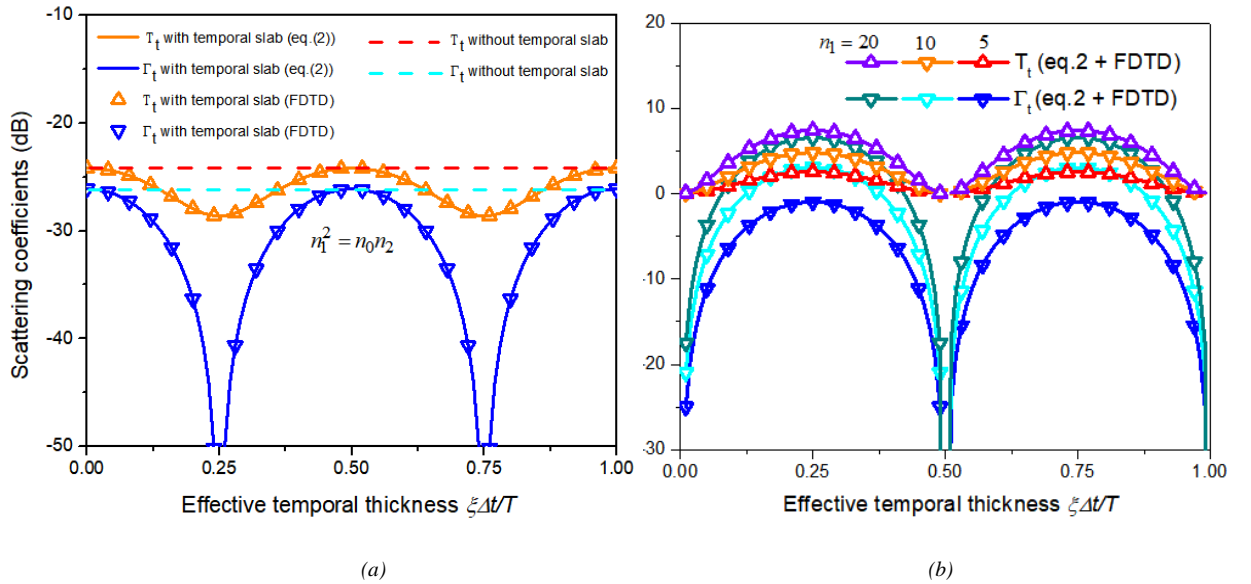


Fig. 2 Analytical and numerical scattering coefficients for (a) a slab with refractive index $n_1^2 = n_0 n_2$; and (b) a slab between two media with the same refractive index $n_0 = n_2$ and different values of n_1 .

REFERENCES

- [1] F. R. Morgenthaler, "Velocity Modulation of Electromagnetic Waves," *IEEE Trans. Microw. Theory Tech.*, vol. 6, no. 2, pp. 167–172, Apr. 1958.
- [2] C. Caloz and Z.-L. Deck-Leger, "Spacetime Metamaterials, Part II: Theory and Applications," *IEEE Trans. Antennas Propag.*, pp. 1–1, Oct. 2019.
- [3] N. Chamanara, S. Taravati, Z.-L. Deck-Léger, and C. Caloz, "Optical isolation based on space-time engineered asymmetric photonic band gaps," *Phys. Rev. B*, vol. 96, no. 15, p. 155409, Oct. 2017.
- [4] D. Ramaccia, D. L. Sounas, A. Alù, F. Bilotti, and A. Toscano, "Nonreciprocal Horn Antennas Using Angular Momentum-Biased Metamaterial Inclusions," *IEEE Trans. Antennas Propag.*, vol. 63, no. 12, 2015.
- [5] D. Ramaccia, D. L. D. L. Sounas, A. Alu, F. Bilotti, and A. Toscano, "Nonreciprocity in antenna radiation induced by space-time varying metamaterial cloaks," *IEEE Antennas Wirel. Propag. Lett.*, vol. 17, no. 11, pp. 1968–1972, Nov. 2018.
- [6] Y. Hadad, J. C. Soric, and A. Alu, "Breaking temporal symmetries for emission and absorption," *Proc. Natl. Acad. Sci.*, vol. 113, no. 13, pp. 3471–3475, Mar. 2016.
- [7] S. Taravati and C. Caloz, "Space-time modulated nonreciprocal mixing, amplifying and scanning leaky-wave antenna system," in *2015 IEEE International Symposium on Antennas and Propagation & USNC/URSI National Radio Science Meeting*, 2015, pp. 639–640.
- [8] D. Ramaccia, F. Bilotti, and A. Toscano, "Angular Momentum-biased metamaterials for filtering waveguide components and antennas with non-reciprocal behavior," in *2014 8th International Congress on Advanced Electromagnetic Materials in Microwaves and Optics*, 2014, pp. 250–252.
- [9] Z. Yu and S. Fan, "Complete optical isolation created by indirect interband photonic transitions," *Nat. Photonics*, vol. 3, no. 2, pp. 91–94, Jan. 2009.
- [10] D. Ramaccia, D. L. Sounas, A. Alù, A. Toscano, and F. Bilotti, "Doppler cloak restores invisibility to objects in relativistic motion," *Phys. Rev. B*, vol. 95, no. 7, p. 075113, Feb. 2017.
- [11] V. Pacheco-Pena, Y. Kiasat, B. Edwards, and N. Engheta, "Salient Features of Temporal and Spatio-Temporal Metamaterials," in *Proceedings of the 2018 20th International Conference on*

Electromagnetics in Advanced Applications, ICEAA 2018, 2018, pp. 524–526.

- [12] Y. Xiao, D. N. Maywar, and G. P. Agrawal, “Reflection and transmission of electromagnetic waves at a temporal boundary,” *Opt. Lett.*, vol. 39, no. 3, pp. 574–577, 2014.