

Optimization of Integer-Forcing Precoding for Multi-User MIMO Downlink

Ricardo Bohaczuk Venturelli and Danilo Silva, *Member, IEEE*

Abstract

Integer-forcing (IF) precoding is an alternative to linear precoding for multi-user (MU) multiple-input-multiple-output (MIMO) channels. IF precoding can be viewed as a generalization of lattice-reduction-aided (LRA) precoding where symbol-level detection is replaced by codeword-level decoding, allowing achievable rate expressions to be derived explicitly. A particular form of IF precoding that is asymptotically optimal for high SNR is the regularized diagonally-scaled IF (RDIF) scheme, which is specified by a diagonal scaling matrix \mathbf{D} and an integer-valued effective channel matrix \mathbf{A} . Optimal values for these parameters have been found (analytically) only for the case of $K = 2$ users. In this paper, a low-complexity method is proposed to find good parameters for the RDIF scheme for $K > 2$ users. The proposed method computes matrix \mathbf{D} by solving a relaxed optimization problem and then matrix \mathbf{A} by the application of the LLL algorithm—which, in this particular case, is shown to converge with a fixed number of iterations, resulting in an overall complexity of $\mathcal{O}(K^3)$. Simulation results show that the proposed method achieves a higher sum rate than choosing $\mathbf{D} = \mathbf{I}$ (as in LRA precoding) and significantly outperforms traditional linear precoding in all simulated scenarios.

Index Terms

Multi-user MIMO, downlink channel, linear precoding, integer-forcing.

I. INTRODUCTION

Multi-user (MU) multiple-input-multiple-output (MIMO) has been a vital technology for communication standards, such as IEEE 802.11 (WiFi), IEEE 802.16 (WiMAX) and LTE/LTE-A

Ricardo Bohaczuk Venturelli and Danilo Silva are with the Department of Electrical and Eletronic Engineering, Federal University of Santa Catarina, Florianópolis-SC, Brazil (e-mails: ricardo.bventurelli@gmail.com, danilo.silva@ufsc.br).

This work has been submitted to the IEEE for possible publication. Copyright may be transferred without notice, after which this version may no longer be accessible.

[1]. One of the reasons is that it combines the high throughput of conventional MIMO systems with the benefits of space-division multiple access [2]. In particular, in the downlink channel, where a base station with N antennas transmits to $K \leq N$ single-antenna users, the sum capacity grows linearly with K [3]–[6]. However, MU-MIMO may suffer from user interference, which can limit system performance [7]. Precoding techniques are often used in order to mitigate this user interference.

Linear methods are a low-complexity class of precoding techniques, where the signals are pre-multiplied by a well-chosen matrix before being transmitted [8]. This matrix is called *precoding* or *beamforming matrix*. Among traditional linear precoding methods, the two most known techniques are zero-forcing (ZF) and regularized ZF (RZF) precoding [9]–[11]. Although linear methods are, in general, simple to implement, their performance falls far below the sum capacity. Moreover, in order to improve the sum rate, linear methods require K much smaller than N [7]. On the other hand, non-linear techniques [11]–[13] can achieve higher sum rates in exchange for potentially much higher computational cost.

Lattice-reduction-aided (LRA) precoding is a low-complexity non-linear technique that, differently from linear methods, can achieve full diversity supported by the channel [14], [15]. The goal of LRA precoding is to choose a linear precoding matrix \mathbf{T} based on a more suitable basis for the channel matrix (according to some heuristic), which is obtained through lattice basis reduction [16]. With this approach, the effective channel matrix, as seen by the users, becomes a (unimodular) integer-valued matrix \mathbf{A} . In order to cancel this integer interference, prior to the application of the linear precoding matrix \mathbf{T} , the modulation symbols are pre-multiplied by the inverse of \mathbf{A} , followed by a modulo operator to limit the transmit power. Since channel coding can be applied on top of an LRA precoding scheme, the performance of the latter is typically measured based on uncoded symbol error probability [17].

An alternative to LRA precoding is integer-forcing (IF) precoding [18]–[23], whose main difference is that channel encoding is applied immediately before the multiplication by \mathbf{T} . In this case, in order for \mathbf{A} and \mathbf{A}^{-1} to properly cancel, so that each user receives the encoding of its desired message, the channel code must be a (nested) lattice code. This requirement does not restrict performance, since nested lattice codes are known to be capacity-achieving for the Gaussian channel [24]. An advantage of this approach is that it allows achievable rate expressions to be derived explicitly, rather than evaluated by numerical simulation as in LRA precoding. As a consequence, we can objectively choose \mathbf{T} (and \mathbf{A}) that maximize the achievable sum rate.

The IF framework first appeared in the MIMO uplink scenario [25]. In the downlink scenario, an IF approach was first suggested in [18], [19], where \mathbf{T} is chosen to enforce the effective channel to be exactly an integer matrix. Later, [20]–[22] proposed a more general form of downlink IF, using the uplink-downlink duality in the IF context. They proposed an iterative optimization algorithm also based on the uplink-downlink duality. However, this algorithm does not guarantee optimal parameters and requires a high computational cost, since a lattice reduction is made in each iteration.

In [23], two methods for IF precoding are proposed: the *diagonally-scaled exact IF* (DIF), which is shown to be an optimal IF structure in the high SNR regime; and its regularized version (RDIF), which improves its performance for general SNR. The main idea of DIF (RDIF) is to choose the precoding matrix \mathbf{T} such that the effective channel matrix becomes exactly (approximately) $\mathbf{D}\mathbf{A}$, where \mathbf{D} is a diagonal matrix. For both methods, for high SNR, [23] shows how to obtain optimal matrices \mathbf{A} and \mathbf{D} analytically in the special case of $K = 2$ users. However, finding optimal \mathbf{A} and \mathbf{D} for $K > 2$ with low complexity is still an open problem.

It is also shown in [23] that, if \mathbf{D} is known, finding an integer matrix \mathbf{A} corresponds to solving the shortest independent vector problem (SIVP) on a lattice, which can be (sub-optimally) done using the well-known Lenstra-Lenstra-Lovász (LLL) algorithm [26].

A. Contributions

In this work, we propose an algorithm to find a good choice of parameters \mathbf{A} and \mathbf{D} for RDIF precoding for $K > 2$. Our approach consists of first establishing a structure to matrix \mathbf{A} and then solving a relaxed optimization problem to find the diagonal matrix \mathbf{D} . Then, matrix \mathbf{A} can be found using the LLL algorithm which, in this particular case, is shown to converge with a fixed number of iterations, resulting in an overall complexity of $\mathcal{O}(K^3)$. Numerical simulations show that the proposed algorithm can achieve higher sum rates than both the naive choice $\mathbf{D} = \mathbf{I}$ and the use of linear precoding methods in all scenarios simulated. Moreover, for small values of N , the proposed method achieves a performance close to the sum capacity.

B. Organization

The remainder of the paper is organized as follows. In Section II, we describe the system model and we review some background needed to understand the IF precoding. Our proposed

algorithm is described in Section III. Finally, simulation results are shown in Section IV. Some conclusions are presented in Section V.

II. PRELIMINARIES

A. Notation

For any $x > 0$, let $\log^+(x) = \max(0, \log(x))$. Vectors are denoted by a bold lowercase letters and are treated as row vectors unless otherwise mentioned. For any vector \mathbf{a} , $\|\mathbf{a}\|$ denotes the Euclidean norm. Matrices are denoted by uppercase letters. For any matrix \mathbf{A} , let \mathbf{A}^T , \mathbf{A}^H and \mathbf{A}^{-1} denote the transpose, conjugate transpose and the inverse of \mathbf{A} , respectively. Also let $\text{Tr}(\mathbf{A})$ and $\det(\mathbf{A})$ be its trace and determinant, respectively. We denote the identity matrix by \mathbf{I} , whose dimension should be clear from the context. We say that \mathbf{A} is an upper unitriangular matrix if it is an upper triangular matrix with ones in the main diagonal.

Let \mathbb{Z} be the set of integers, and let $\mathbb{Z}[j] = \mathbb{Z} + j\mathbb{Z}$ be the ring of Gaussian integers. Also let \mathbb{Z}_p be the integer ring modulus p and $\mathbb{Z}_p[j] = \mathbb{Z}_p + j\mathbb{Z}_p$.

For any random variable \mathbf{x} , let $\mathbb{E}[\mathbf{x}]$ denotes its expected value. Whenever scalar functions are applied to vectors and matrices, it should be understood that the functions are applied element-wise.

B. Lattices

A (complex) lattice $\Lambda \subseteq \mathbb{C}^n$ is a discrete $\mathbb{Z}[j]$ -submodule of \mathbb{C}^n , in particular, any Gaussian integer linear combination of lattice points lies in the lattice [27].

A lattice quantizer is an operation that maps every element $\mathbf{x} \in \mathbb{C}^n$ into a lattice point. We consider the nearest neighbor quantizer, defined as $\mathcal{Q}_\Lambda(\mathbf{x}) = \arg \min_{\lambda \in \Lambda} \|\mathbf{x} - \lambda\|$. The Voronoi region (around the origin) is defined as $\mathcal{V}_\Lambda = \{\mathbf{x} \in \mathbb{C}^n : \mathcal{Q}_\Lambda(\mathbf{x}) = \mathbf{0}\}$. The modulo-lattice operator is defined as $\mathbf{x} \bmod \Lambda = \mathbf{x} - \mathcal{Q}_\Lambda(\mathbf{x}) \in \mathcal{V}_\Lambda$.

The second moment (per dimension) of a lattice is defined as $P_\Lambda \triangleq \frac{1}{n} \mathbb{E}[\|\mathbf{x}\|^2]$ where $\mathbf{x} \in \mathbb{C}^n$ is a random vector uniformly distributed over \mathcal{V}_Λ .

A pair of lattices Λ and Λ_s are called *nested* if $\Lambda_s \subseteq \Lambda$. A *nested lattice codebook* is defined as $\mathcal{C} \triangleq \Lambda \bmod \Lambda_s = \Lambda \cap \mathcal{V}_{\Lambda_s}$. In this case, the Voronoi region of Λ_s is called the *shaping region* and Λ_s is referred as *shaping lattice*.

C. Lattice Reduction

A lattice Λ can be defined by its *generator matrix* $\mathbf{B} \in \mathbb{C}^{n \times n}$ as $\Lambda \triangleq \{(\mathbf{B}\mathbf{u}^T)^T, \mathbf{u} \in \mathbb{Z}[j]^n\}$ where the columns¹ of \mathbf{B} are linearly independent vectors over \mathbb{C}^n . Note that the generator matrix is not unique for a given lattice. More specifically, \mathbf{B} and $\mathbf{B}' = \mathbf{B}\mathbf{A}$ generate the same lattice if and only if \mathbf{A} is unimodular, i.e., \mathbf{A} is an integer matrix with $|\det \mathbf{A}| = 1$.

An algorithm that, for a given \mathbf{B} , finds a “good” basis $\mathbf{B}' = \mathbf{B}\mathbf{A}$ is called a *lattice reduction algorithm* [27]. Generally, the idea of a “good” basis refers to using vectors that are as short as possible and nearly orthogonal. There are many lattice reduction techniques, each one having different criteria [28]: (a) the Minkowski reduction (b) the Korkine-Zolotareff (KZ) reduction and (c) the Lenstra-Lenstra-Lovsz (LLL) reduction [26] (see also [29] for an overview of the LLL algorithm in the complex field). Minkowski and KZ reduction produce better results (i.e., shorter bases) [30], however they require a high computational cost, since they need to solve the shortest vector problem (SVP), which is NP-Hard. Meanwhile, the LLL algorithm, which is one of the most used, can find a suboptimal basis in polynomial time.

1) *LLL Reduction*: Let $\mathbf{B} = [\mathbf{B}(1) \ \dots \ \mathbf{B}(K)]$ be a basis of lattice Λ , where $\mathbf{B}(i) \in \mathbb{C}^K$ is the i th column of \mathbf{B} , $i = 1, \dots, K$. Let $\mathbf{B}' = [\mathbf{B}'(1) \ \dots \ \mathbf{B}'(K)]$ be the Gram-Schmidt orthogonalization of \mathbf{B} , i.e.,

$$\mathbf{B}'(i) = \mathbf{B}(i) - \sum_{j=1}^{i-1} \mu_{ij} \mathbf{B}'(j) \quad (1)$$

where

$$\mu_{ij} = \frac{\mathbf{B}(i)^H \mathbf{B}'(j)}{\|\mathbf{B}'(j)\|^2}. \quad (2)$$

We say that \mathbf{B}' is a LLL-reduced basis if it satisfied both the *size-reduction condition*, i.e.,

$$|\Re\{\mu_{ij}\}| \leq \frac{1}{2} \quad \text{and} \quad |\Im\{\mu_{ij}\}| \leq \frac{1}{2} \quad (3)$$

for $1 \leq j < i \leq K$, where $\Re\{\cdot\}$ and $\Im\{\cdot\}$ represent the real and imaginary part, respectively, and the *Lovász condition*, i.e.,

$$\|\mathbf{B}'(i) + \mu_{i,i-1} \mathbf{B}'(i-1)\|^2 \geq \delta \|\mathbf{B}'(i-1)\|^2 \quad (4)$$

for $i = 2, \dots, K$, where $\delta \in (\frac{1}{4}, 1]$ (typically $\delta = \frac{3}{4}$ is chosen) [26], [29]. The LLL algorithm consists in, for a given \mathbf{B} , find a LLL-reduced basis $\mathbf{B}' = \mathbf{B}\mathbf{A}$. Starting with $i = 2$, it computes

¹Throughout this paper, we use column-notation for the lattice generator matrix in order to be consistent with the literature.

(1) and verifies if (3) and (4) are satisfied. Whenever (3) is not satisfied then $\mathbf{B}(i)$ is updated to $\mathbf{B}(i) - \lfloor \mu_{ij} \rfloor \mathbf{B}(j)$, where $\lfloor \cdot \rfloor$ is the rounding to the nearest (Gaussian) integer operator, and μ_{ij} and $\mathbf{B}'(i)$ are recomputed. Then, if (4) is not satisfied, $\mathbf{B}(i)$ and $\mathbf{B}(i-1)$ are swapped and the iteration index i is replaced by $i-1$ (provided that is still greater than 2). The complete procedure of (complex) LLL algorithm can be found in [29].

The complexity of LLL algorithm is hard to precisely estimate since it mostly depends on the number of times that the Lovász condition is not satisfied [26], [30]. It is estimated that, on average, the LLL algorithm requires $\mathcal{O}(K^2 \log K)$ iterations [29]. Each iteration has a complexity of $\mathcal{O}(K^2)$, which results in a total complexity of $\mathcal{O}(K^4 \log K)$.

Note that, if \mathbf{B} is an upper unitriangular matrix and \mathbf{B}' and μ_{ij} are defined as (1) and (2), respectively, then the Lovász condition (4) is automatically satisfied [31]. In this case, the LLL algorithm has a fixed number K of iterations, and therefore, a total complexity of $\mathcal{O}(K^3)$.

D. System Model

Consider a downlink MIMO channel with an N -antenna transmitter and $K \leq N$ single-antenna users. Let $\mathbf{w}_i \in \mathcal{W}_i$ be the message destined to the i th user, $i = 1, \dots, K$. Let $\mathbf{x}'_j \in \mathbb{C}^n$ be the vector sent by the j th transmitter's antenna, $j = 1, \dots, N$, and let $\mathbf{X}' = \begin{bmatrix} \mathbf{x}'_1{}^T & \dots & \mathbf{x}'_N{}^T \end{bmatrix}^T$. For $i = 1, \dots, K$, let $\mathbf{y}_i \in \mathbb{C}^n$ be the signal received by the i th user and let $\mathbf{Y} = \begin{bmatrix} \mathbf{y}_1{}^T & \dots & \mathbf{y}_K{}^T \end{bmatrix}^T \in \mathbb{C}^{K \times n}$. Then, we can express as

$$\mathbf{Y} = \mathbf{H}\mathbf{X}' + \mathbf{Z} \quad (5)$$

where $\mathbf{H} = \begin{bmatrix} \mathbf{h}_1{}^T & \dots & \mathbf{h}_K{}^T \end{bmatrix}^T \in \mathbb{C}^{K \times N}$, $\mathbf{h}_i \in \mathbb{C}^n$ is the channel coefficients to the i th user and $\mathbf{Z} = \begin{bmatrix} \mathbf{z}_1{}^T & \dots & \mathbf{z}_K{}^T \end{bmatrix}^T \in \mathbb{C}^{K \times n}$ is Gaussian noise, such that $\mathbf{z}_i \sim \mathcal{CN}(\mathbf{0}, \mathbf{I})$.

The transmitted signals must satisfy an average total power constraint, namely

$$\frac{1}{n} \mathbb{E}[\text{Tr}(\mathbf{X}'\mathbf{X}'^H)] \leq \text{SNR} \quad (6)$$

where $\text{SNR} > 0$.

The i th user will try to infer a message $\hat{\mathbf{w}}_i \in \mathcal{W}_i$ from \mathbf{y}_i . An error occurs if $\hat{\mathbf{w}}_i \neq \mathbf{w}_i$ for any i . The sum rate is given by $R_{\text{sum}} = R_1 + \dots + R_K$, where $R_i = \frac{1}{n} \log_2 |\mathcal{W}_i|$. A sum rate R is said to be achievable if, for any $\epsilon > 0$ and a sufficiently large n , there exists a coding scheme with sum rate at least R and error probability less than ϵ .

The *sum capacity* of the channel is the supremum of all achievable sum rates and is given by [4]–[6]

$$C_{\text{sum}} = \sup_{\mathbf{Q}: \text{Tr}(\mathbf{Q}) \leq 1} \log_2 \det (\mathbf{I} + \text{SNR} \mathbf{H}^H \mathbf{Q} \mathbf{H}) \quad (7)$$

where $\mathbf{Q} \in \mathbb{R}^{K \times K}$ is a diagonal matrix with nonnegative entries.

E. Linear Precoding

In linear precoding, the messages, $\mathbf{w}_1, \dots, \mathbf{w}_K$ are encoded and then modulated in vectors $\mathbf{x}_1, \dots, \mathbf{x}_K$, respectively, where $\mathbf{x}_i \in \mathbb{C}^n$ and $\mathbb{E}[\|\mathbf{x}_i\|^2] \leq n \text{SNR}$. Let $\mathbf{X} = \begin{bmatrix} \mathbf{x}_1^T & \dots & \mathbf{x}_K^T \end{bmatrix}^T \in \mathbb{C}^{K \times n}$. After the encoding/modulation, matrix \mathbf{X} is pre-multiplied by a *precoding matrix* $\mathbf{T} \in \mathbb{C}^{N \times K}$, generating the transmitted signals $\mathbf{X}' = \mathbf{T} \mathbf{X}$. Note that, due to (6), we have that

$$\text{Tr}(\mathbf{T}^H \mathbf{T}) \leq 1 \quad (8)$$

which is a constraint to the precoding matrix.

The two best known linear precoding are the zero-forcing (ZF) precoding [9], [10], with $\mathbf{T} = \mathbf{H}^H (\mathbf{H} \mathbf{H}^H)^{-1} \text{diag}(\sqrt{\mathbf{p}})$, where $\mathbf{p} \in \mathbb{R}^K$ is the power allocation vector (which can be obtained using the water-filling algorithm), and the regularized-ZF (RZF) precoding [9], [11], with $\mathbf{T} = \mathbf{H}^H (K/\text{SNR} \mathbf{I} + \mathbf{H} \mathbf{H}^H)^{-1} \text{diag}(\sqrt{\mathbf{p}})$. Note that, as $\text{SNR} \rightarrow \infty$, RZF reduced to ZF.

F. Integer-Forcing (IF) Precoding

Let $\Lambda \subseteq \mathbb{C}^n$ be a lattice and $\Lambda_s = p\Lambda$ be the shaping lattice, where $p \in \mathbb{Z}$ is a prime satisfying $p \bmod 4 \equiv 3$ so that $\mathbb{Z}_p[j]$ is a finite field [32]. We assume that the second moment (per dimension) of Λ_s is $P_{\Lambda_s} = \text{SNR}$. Let $\mathcal{C} = \Lambda \cap \mathcal{V}_{\Lambda_s}$ be a nested lattice codebook, which is used by the transmitter.

The transmitter selects a message $\mathbf{w}_i \in \mathcal{W}_i$ to be sent to the i th user, where $\mathcal{W}_i \subseteq \mathcal{W}$ is the *message space* of the i th user and $\mathcal{W} = \mathbb{Z}_p[j]^n$ is the *ambient space*. Let $\varphi: \Lambda \rightarrow \mathcal{W}$ be a $\mathbb{Z}[j]$ -linear mapping with kernel Λ_s and let $\tilde{\varphi}: \mathcal{W} \rightarrow \mathcal{C}$ be a bijective encoding function, such that $\varphi(\tilde{\varphi}(\mathbf{w})) = \mathbf{w}$ for all $\mathbf{w} \in \mathcal{W}$. Finally, we define the lattice code $\mathcal{C}_i \subseteq \mathcal{C}$ such that $\mathcal{C}_i = \varphi(\mathcal{W}_i)$, which is used as a decoder for the i th user.

Let $\mathbf{A} = \begin{bmatrix} \mathbf{a}_1^T & \dots & \mathbf{a}_K^T \end{bmatrix}^T \in \mathbb{Z}[j]^{K \times K}$ be a matrix such that $\det(\mathbf{A}) \neq 0 \bmod p$, i.e., \mathbf{A} is invertible modulo p , and let $\mathbf{A}' \in \mathbb{Z}[j]^{K \times K}$ be a matrix such that $\mathbf{A} \mathbf{A}' = \mathbf{I} \bmod p$. Let

$\mathbf{W} = \begin{bmatrix} \mathbf{w}_1^T & \dots & \mathbf{w}_K^T \end{bmatrix}^T \in \mathcal{W}^K$ be a matrix whose i th row is given by $\mathbf{w}_i \in \mathcal{W}_i$. The transmitter computes the *precoded messages* $\mathbf{w}'_1, \dots, \mathbf{w}'_K \in \mathcal{W}$ as

$$\mathbf{W}' = \mathbf{A}'\mathbf{W} \bmod p \quad (9)$$

where $\mathbf{W}' = \begin{bmatrix} \mathbf{w}'_1{}^T & \dots & \mathbf{w}'_K{}^T \end{bmatrix}^T$ is a matrix whose i th row is \mathbf{w}'_i .

Then, for each \mathbf{w}'_i , the lattice-code \mathcal{C} is applied generating the codeword $\mathbf{c}'_i = \tilde{\varphi}(\mathbf{w}'_i) \in \mathcal{C}_i$. Let $\mathbf{C}' = \begin{bmatrix} \mathbf{c}'_1{}^T & \dots & \mathbf{c}'_K{}^T \end{bmatrix}^T \in \mathbb{C}^{K \times n}$ and let $\mathbf{S} = \begin{bmatrix} \mathbf{s}_1^T & \dots & \mathbf{c}_K^T \end{bmatrix}^T \in \mathbb{C}^{K \times n}$, where $\mathbf{s}_i \in \mathbb{C}^n$ is the dither vector, which is chosen by a uniform distribution over \mathcal{V}_{Λ_s} [27]. The transmitter shifts the codewords \mathbf{C}' by \mathbf{S} and the reduces it modulus Λ_s , generating

$$\mathbf{X} = \mathbf{C}' + \mathbf{S} \bmod \Lambda_s. \quad (10)$$

The dither vector together with the modulo-lattice operator ensure that $\mathbb{E}[\|\mathbf{x}_i\|^2] \leq n\text{SNR}$.

Finally, similar to the linear schemes, a precoding matrix $\mathbf{T} \in \mathbb{C}^{N \times K}$ is applied, generating the transmitted signals \mathbf{X}' .

At the i th receiver, a scalar $\alpha_i \in \mathbb{C}$ is applied and the dither is subtracted to generate the signal [23]

$$\mathbf{y}_{\text{eff},i} = \alpha_i \mathbf{y}_i - \mathbf{a}_i \mathbf{S} \bmod \Lambda_s \quad (11)$$

$$= \mathbf{c}_i + \mathbf{z}_{\text{eff},i} \bmod \Lambda_s \quad (12)$$

where $\mathbf{c}_i = \mathbf{a}_i \mathbf{C}' \bmod \Lambda_s \in \mathcal{C}_i$ and

$$\mathbf{z}_{\text{eff},i} = (\alpha_i \mathbf{h}_i \mathbf{T} - \mathbf{a}_i) \mathbf{X} + \alpha_i \mathbf{z}_i \quad (13)$$

is the effective noise.

As shown in [23], if the receiver can correctly infer \mathbf{c}_i , then it can recover its desired signal by applying the mapping φ , i.e.,

$$\varphi(\mathbf{c}_i) = \mathbf{a}_i \varphi(\mathbf{C}') = \mathbf{a}_i \mathbf{W}' = \mathbf{a}_i \mathbf{A}' \mathbf{W} = \mathbf{w}_i \quad (14)$$

since φ is $\mathbb{Z}[j]$ -linear.

For p and n sufficiently large, there is an IF precoding scheme with achievable sum rate [22], [23]

$$R_{\text{IF}}(\mathbf{H}, \mathbf{A}, \mathbf{T}) = \sum_{i=1}^K R_{\text{comp}}(\mathbf{h}'_i, \mathbf{a}_i) \quad (15)$$

where $\mathbf{h}'_i \triangleq \mathbf{h}_i \mathbf{T}$ and

$$R_{\text{comp}}(\mathbf{h}'_i, \mathbf{a}_i) = \log_2^+ \left(\frac{1}{\|\mathbf{a}_i\|^2 - \frac{1}{\|\mathbf{h}'_i\|^2 + \text{SNR}^{-1}} |\mathbf{a}_i \mathbf{h}'_i{}^{\text{H}}|^2} \right). \quad (16)$$

is the individual rate for each user (also called *computational rate* in the compute-and-forward framework).

Even though, for practical implementations, it is necessary that \mathbf{A} be invertible modulo p , for achievable rates, \mathbf{A} only needs to be full rank (equivalently, invertible over \mathbb{C}^n) since p can be arbitrarily large. Therefore, the IF precoding tries to find a matrix $\mathbf{A} \in \mathbb{Z}[j]^{K \times K}$ with $\text{rank}(\mathbf{A}) = K$ and a matrix $\mathbf{T} \in \mathbb{C}^{N \times K}$ with $\text{Tr}(\mathbf{T}^{\text{H}} \mathbf{T}) = 1$ that maximizes (15).

Note that, if $\mathbf{A} = \mathbf{I}$, then finding an optimal \mathbf{T} corresponds to solving the optimal linear beamforming problem [9]. Moreover, if we choose $\mathbf{A} = \mathbf{I}$ and $\mathbf{T} = \mathbf{H}^{\text{H}} (\mathbf{H} \mathbf{H}^{\text{H}})^{-1} \text{diag}(\sqrt{\mathbf{p}})$, where $\mathbf{p} \in \mathbb{R}^K$ is the power allocation vector, we have traditional ZF precoding, while choosing $\mathbf{A} = \mathbf{I}$ and $\mathbf{T} = \mathbf{H}^{\text{H}} (K \text{SNR}^{-1} \mathbf{I} + \mathbf{H} \mathbf{H}^{\text{H}})^{-1} \text{diag}(\sqrt{\mathbf{p}})$ we recover RZF precoding. As we can see, IF precoding is a generalization of linear precoding [23], [25].

As the authors of [23] showed, if we let the choice of \mathbf{T} be more flexible, the problem can be more structured and potentially easier to solve. They also showed two approaches to choosing \mathbf{T} for IF precoding, called DIF and RDIF, which will be more detailed in the next section.

1) *DIF Scheme*: The first approach proposed in [23] chooses a precoding matrix \mathbf{T} such that the channel matrix $\mathbf{H} \mathbf{T}$ seen by the users is an integer matrix, up to scaling for each user. More precisely, for a any full rank integer matrix \mathbf{A} , the precoding matrix \mathbf{T} is given

$$\mathbf{T} = c \mathbf{H}^{\text{H}} (\mathbf{H} \mathbf{H}^{\text{H}})^{-1} \mathbf{D} \mathbf{A} \quad (17)$$

where $\mathbf{D} \in \mathbb{C}^{K \times K}$ is a diagonal matrix with nonzero entries such that $|\det \mathbf{D}| = 1$ and $c > 0$ is chosen to satisfy (8).

This method is called *diagonally-scaled exact integer-forcing* (DIF) precoding. It is clear that DIF is a generalization of ZF schemes, which corresponds to $\mathbf{A} = \mathbf{I}$ and $c \mathbf{D} = \text{diag}(\sqrt{\mathbf{p}})$. The DIF precoding is optimal in the high SNR regime [23], where it can achieve a sum rate given by

$$R_{\text{DIF}}^{\text{HI}}(\mathbf{H}, \mathbf{A}, \mathbf{D}) \triangleq K \log_2 \left(\frac{\text{SNR}}{\text{Tr}(\mathbf{A}^{\text{H}} \mathbf{D}^{\text{H}} (\mathbf{H} \mathbf{H}^{\text{H}})^{-1} \mathbf{D} \mathbf{A})} \right) \quad (18)$$

which is also shown to be a lower bound on the achievable rate for any SNR.

2) *RDIF Scheme*: The second approach proposed in [23], which is called *regularized DIF* (RDIF), attempts to improve the performance of DIF for finite SNR by regularizing the matrix inversion in (17). Specifically, (17) is modified as

$$\mathbf{T} = c\mathbf{H}^H \left(\frac{K}{\text{SNR}}\mathbf{I} + \mathbf{H}\mathbf{H}^H \right)^{-1} \mathbf{D}\mathbf{A}. \quad (19)$$

Just as DIF generalizes ZF, RDIF is a generalization of RZF scheme, which is obtained by making $\mathbf{A} = \mathbf{I}$ and $c\mathbf{D} = \text{diag}(\sqrt{\mathbf{p}})$. In particular, RDIF reduces to DIF when $\text{SNR} \rightarrow \infty$.

G. Problem Statement

In general, finding \mathbf{A} and diagonal \mathbf{D} that maximize the sum rate for RDIF is a hard problem, due not only to the integer constraints on \mathbf{A} but also to the complicated objective function (15). The latter difficulty is overcome in [23] by solving a simpler optimization problem, which can be interpreted as the minimization of a regularized version of the denominator in (18), namely,

$$\begin{aligned} & \underset{\mathbf{A}, \mathbf{D}}{\text{minimize}} && \text{Tr}(\mathbf{A}^H \mathbf{D}^H \mathbf{M} \mathbf{D} \mathbf{A}) \\ & \text{s.t.} && |\det \mathbf{D}| = 1 \\ & && \text{rank}(\mathbf{A}) = K \end{aligned} \quad (20)$$

where $\mathbf{A} \in \mathbb{Z}[j]^{K \times K}$, $\mathbf{D} \in \mathbb{C}^{K \times K}$ is diagonal, and

$$\mathbf{M} = \left(\frac{K}{\text{SNR}}\mathbf{I} + \mathbf{H}\mathbf{H}^H \right)^{-1}. \quad (21)$$

While generally a suboptimal heuristic, solving the above problem indeed maximizes the sum rate for the special case of asymptotically high SNR (where RDIF reduces to DIF).

The above problem was solved analytically in [23] for the special case $K = 2$. For $K > 2$, the problem is still open.

Note that, if \mathbf{D} is fixed, then finding \mathbf{A} that minimizes (20) corresponds to the *shortest independent vector problem* (SIVP) [23]. Let $\mathbf{B}^H \mathbf{B} = \mathbf{D}^H \mathbf{M} \mathbf{D}$ (i.e., \mathbf{B} is any square root of $\mathbf{D}^H \mathbf{M} \mathbf{D}$). As shown by [23, Section IV-C], we want to find K shortest linearly independent vectors of the lattice with generator matrix \mathbf{B} (written in column notation). Those vectors will correspond to the columns of \mathbf{A} . The SIVP can be sub-optimally solved using lattice basis reduction algorithms, for example the LLL algorithm [26], [29].

Note that, if we do not diagonally scale the integer combinations, i.e., $\mathbf{D} = \mathbf{I}$, then RDIF combined with lattice reduction becomes the regularized version of the method proposed by

[18] (see also [23, Section III-A]). This special case is also equivalent to a channel-coded generalization of LRA precoding, as further elaborated in the Appendix.

III. PROPOSED ALGORITHM

In this chapter we propose a method to find an approximate solution (\mathbf{A}, \mathbf{D}) to problem (20) for any K . Two key ingredients of our approach are a convenient choice for the structure of \mathbf{A} and a relaxation of the problem eliminating the integer constraints. This relaxed optimization problem can be analytically solved with complexity $\mathcal{O}(K^3)$. Moreover, with this approach, we show that the LLL algorithm can be used with a fixed number of iterations, making its complexity be $\mathcal{O}(K^3)$. The summary of the algorithm is described in Section III-E.

A. Structure of \mathbf{A}

Consider the objective function in (20) and note that

$$\begin{aligned} f(\mathbf{A}, \mathbf{D}) &\triangleq \text{Tr}(\mathbf{A}^H \mathbf{D}^H \mathbf{M} \mathbf{D} \mathbf{A}) \\ &= \sum_{i=1}^K \underbrace{M_{ii} \|\mathbf{a}_i\|^2 |d_i|^2}_{\geq 0} + \sum_{i=1}^K \sum_{j=i+1}^K 2M_{ji} \mathbf{a}_i \mathbf{a}_j^H d_i d_j^* \end{aligned} \quad (22)$$

where \mathbf{a}_i is the i -th row of \mathbf{A} , d_i is the i -th element in the main diagonal of \mathbf{D} and M_{ij} is the element of row i and column j of \mathbf{M} .

The first summation in (22) contains only nonnegative values, while the second summation can have positive or negative values. In the best scenario, where all those values are negative, we want to choose \mathbf{A} such that the Euclidean norms of each row ($\|\mathbf{a}_i\|$) are minimized and the absolute values of the inner product between rows ($|\mathbf{a}_i \mathbf{a}_j^H|$) are maximized.

If we focus exclusively on minimizing $\|\mathbf{a}_i\|$, $i = 1, \dots, K$, then it is easy to see that the optimal choice is $\mathbf{A} = \mathbf{I}$. However, we wish some degree of freedom to be able to maximize the absolute values of the inner products. To satisfy these conflicting requirements, we propose that \mathbf{A} be *upper unitriangular*, i.e.

$$\mathbf{A} = \begin{bmatrix} 1 & a_{12} & \cdots & a_{1K} \\ 0 & 1 & \cdots & a_{2K} \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & 1 \end{bmatrix} \quad (23)$$

up to permutation of rows. An advantage of this structure is that the restriction of full rank \mathbf{A} is automatically satisfied.

For $K = 2$, the proposed structure is similar to the optimal one found in [23]. However, for $K > 2$, differently from the case $K = 2$, a row permutation of \mathbf{A} may change the achievable rate, thus multiple permutations must be considered.

We first consider the identity permutation on the rows of \mathbf{A} , which gives \mathbf{A} exactly of the form (23). The generalization for other permutations is discussed in III-D.

B. Relaxed Problem

Even with the proposed structure for \mathbf{A} , we still have an integer optimization problem, which is generally hard to solve. In order to circumvent this difficulty, we consider in this section a relaxation of the problem where the indeterminate entries of \mathbf{A} can be any complex number.

Theorem 1. *Under the constraint that $\mathbf{A} \in \mathbb{C}^{K \times K}$ be upper unitriangular, problem (20) has a solution given by*

$$\tilde{\mathbf{A}} = \mathbf{D}^{-1} \mathbf{U}^{-1} \mathbf{D} = \mathbf{\Lambda}^{\frac{1}{2}} \mathbf{U}^{-1} \mathbf{\Lambda}^{-\frac{1}{2}} \quad (24)$$

$$\tilde{\mathbf{D}} = (\det \mathbf{\Lambda})^{\frac{1}{2K}} \mathbf{\Lambda}^{-\frac{1}{2}} \quad (25)$$

where $\mathbf{U} \in \mathbb{C}^{K \times K}$ is upper unitriangular and $\mathbf{\Lambda} \in \mathbb{R}^{K \times K}$ is diagonal such that $\mathbf{M} = \mathbf{U}^H \mathbf{\Lambda} \mathbf{U}$. The solution for \mathbf{A} as a function of \mathbf{D} is unique and the optimal solution for \mathbf{D} (with the corresponding optimal \mathbf{A}) is unique up to a phase shift for each of the diagonal entries. The optimal value of the problem is $K(\det \mathbf{M})^{1/K}$.

Proof: We solve this problem by first finding $\tilde{\mathbf{A}}$ as a function of \mathbf{D} and then finding $\tilde{\mathbf{D}}$.

Let $\nabla_{\mathbf{A}} f$ be a matrix whose (i, j) th element is the partial derivative of (20) with respect to a_{ij} if $i < j$ and zero otherwise. Note that $(\nabla_{\mathbf{A}} f)_{ij} = (2\mathbf{D}^H \mathbf{M} \mathbf{D} \mathbf{A})_{ij}$ if $i < j$. The critical points of f with respect to \mathbf{A} are those which satisfy, for all j and all $i < j$,

$$0 = (\nabla_{\mathbf{A}} f)_{ij} = (2\mathbf{D}^H \mathbf{M} \mathbf{D} \mathbf{A})_{ij}. \quad (26)$$

Multiplying by $(d_i^*)^{-1}$ and d_j^{-1} in both sides, this is equivalent to requiring that, for all j and all $i < j$,

$$\begin{aligned} 0 &= (d_i^*)^{-1}(\mathbf{D}^H \mathbf{M} \mathbf{D} \mathbf{A})_{ij} d_j^{-1} \\ &= (\mathbf{M} \mathbf{D} \mathbf{A} \mathbf{D}^{-1})_{ij} \\ &= (\mathbf{M} \mathbf{A}')_{ij} \end{aligned} \quad (27)$$

where $\mathbf{A}' = \mathbf{D} \mathbf{A} \mathbf{D}^{-1} \in \mathbb{C}^{K \times K}$ is also upper unitriangular. Note that (27) implies that a critical point is any matrix $\mathbf{A} = \mathbf{D}^{-1} \mathbf{A}' \mathbf{D}$ such that $\mathbf{M} \mathbf{A}' = \mathbf{L}$ is a lower triangular matrix. Thus, any solution, if it exists, can be found by computing an LU decomposition of $\mathbf{M} = \mathbf{L} \mathbf{A}'^{-1}$. Moreover, since we require that the diagonal of \mathbf{A}' consists of ones, such a decomposition is unique whenever it exists.

Since \mathbf{M} is a symmetric positive definite matrix, such an LU decomposition always exists. Specifically, it admits an LDL decomposition $\mathbf{M} = \mathbf{U}^H \mathbf{\Lambda} \mathbf{U}$, where \mathbf{U} is an upper unitriangular matrix and $\mathbf{\Lambda}$ is a diagonal matrix with real and positive diagonal entries. Thus, $\mathbf{A}' = \mathbf{U}^{-1}$ is the unique solution to (27), which gives

$$\tilde{\mathbf{A}} = \mathbf{D}^{-1} \mathbf{U}^{-1} \mathbf{D}. \quad (28)$$

Now, substituting $\tilde{\mathbf{A}}$ in (20), we have that

$$f(\tilde{\mathbf{A}}, \mathbf{D}) = \text{Tr}(\mathbf{D}^H \mathbf{\Lambda} \mathbf{D}) = \sum_{i=1}^K |d_i|^2 \lambda_i \quad (29)$$

where $\lambda_i > 0$ and d_i are the i th diagonal element of $\mathbf{\Lambda}$ and \mathbf{D} , respectively. Due to the inequality of arithmetic and geometric means, we have that

$$\frac{1}{K} f(\tilde{\mathbf{A}}, \mathbf{D}) = \frac{1}{K} \sum_{i=1}^K |d_i|^2 \lambda_i \geq \left(\prod_{i=1}^K |d_i|^2 \lambda_i \right)^{\frac{1}{K}} \quad (30)$$

with equality if and only if $|d_1|^2 \lambda_1 = \dots = |d_K|^2 \lambda_K$.

Applying the constraint $|\det \mathbf{D}| = 1$, we have

$$\left(\prod_{i=1}^K |d_i|^2 \lambda_i \right)^{\frac{1}{K}} = \left(\prod_{i=1}^K \lambda_i \right)^{\frac{1}{K}} = (\det \mathbf{\Lambda})^{\frac{1}{K}}. \quad (31)$$

Thus, the bound in (30) is achievable by setting each term $|d_i|^2 \lambda_i$ equal to the right hand side of (31), i.e.,

$$\mathbf{D}^H \mathbf{D} = (\det \mathbf{\Lambda})^{\frac{1}{K}} \mathbf{\Lambda}^{-1}. \quad (32)$$

By choosing \mathbf{D} to be real and positive, one solution is given by

$$\tilde{\mathbf{D}} = (\det \mathbf{\Lambda})^{\frac{1}{2K}} \mathbf{\Lambda}^{-\frac{1}{2}} \quad (33)$$

which applied in (28) gives (24).

Finally, since $\det \mathbf{\Lambda} = (\det \mathbf{M})$, we have $f(\tilde{\mathbf{A}}, \tilde{\mathbf{D}}) = K (\det \mathbf{\Lambda})^{\frac{1}{K}} = K (\det \mathbf{M})^{\frac{1}{K}}$, completing the proof. \blacksquare

Remark 1. *If we let $\text{SNR} \rightarrow \infty$ and replace the optimal value of the relaxed problem in (18), we obtain an upper bound on the rate achievable by DIF in this regime. This bound happens to coincide with the high SNR expression for the sum capacity,*

$$C_{\text{sum}}^{\text{HI}} = K \log_2 \left(\frac{\text{SNR}}{K} \right) + \log_2(\det \mathbf{H}\mathbf{H}^{\text{H}}). \quad (34)$$

Of course, this bound is rarely achievable, since \mathbf{A} is constrained to be an integer matrix. More precisely, the bound is achievable if and only if each row of \mathbf{H} is a multiple of an integer vector.

C. Optimization of \mathbf{A}

We now show how to find an approximate solution (\mathbf{A}, \mathbf{D}) to problem (20) satisfying $\mathbf{A} \in \mathbb{Z}[j]^{K \times K}$, starting from a solution $(\tilde{\mathbf{A}}, \tilde{\mathbf{D}})$ to the relaxed problem. First take $\mathbf{D} = \tilde{\mathbf{D}}$, and note that

$$f(\mathbf{A}, \mathbf{D}) = (\det \mathbf{\Lambda})^{\frac{1}{K}} \text{Tr}(\mathbf{A}^{\text{H}} \mathbf{\Lambda}^{-\frac{1}{2}} \mathbf{M} \mathbf{\Lambda}^{-\frac{1}{2}} \mathbf{A}) \quad (35)$$

$$= (\det \mathbf{\Lambda})^{\frac{1}{K}} \text{Tr}(\mathbf{A}^{\text{H}} \mathbf{\Lambda}^{-\frac{1}{2}} \mathbf{U}^{\text{H}} \mathbf{\Lambda} \mathbf{U} \mathbf{\Lambda}^{-\frac{1}{2}} \mathbf{A}) \quad (36)$$

$$= (\det \mathbf{\Lambda})^{-\frac{1}{K}} \text{Tr}(\mathbf{A}^{\text{H}} \tilde{\mathbf{A}}^{-\text{H}} \tilde{\mathbf{A}}^{-1} \mathbf{A}) \quad (37)$$

$$= (\det \mathbf{\Lambda})^{-\frac{1}{K}} \sum_{i=1}^K \|\mathbf{B}\mathbf{A}(i)\|^2 \quad (38)$$

where $\mathbf{B} \triangleq \tilde{\mathbf{A}}^{-1} = \mathbf{\Lambda}^{\frac{1}{2}} \mathbf{U} \mathbf{\Lambda}^{-\frac{1}{2}}$ and $\mathbf{A}(i)$ is the i th column of \mathbf{A} .

Note that, finding a Gaussian integer matrix \mathbf{A} that minimizes (38) is the same problem described in Section II-G (see also [23]) with \mathbf{D} fixed. That means that the LLL algorithm can be used to find K shortest linearly independent vectors from the lattice generated by the columns of \mathbf{B} .

Moreover, since, in this case, \mathbf{B} is an upper unitriangular matrix, the LLL algorithm has a fixed number K of iterations as mentioned in Section II-C1.

D. Permutations

Let $\bar{\mathbf{A}}$ be a Gaussian integer matrix with a structure given by (23) and suppose we want to solve (20) under the constraint that $\mathbf{A} = \mathbf{P}\bar{\mathbf{A}}$ where \mathbf{P} is a permutation matrix.

First, note that

$$\begin{aligned}\text{Tr}(\mathbf{A}^H \mathbf{D}^H \mathbf{M} \mathbf{D} \mathbf{A}) &= \text{Tr}(\bar{\mathbf{A}}^H \mathbf{P}^T \mathbf{D}^H \mathbf{M} \mathbf{D} \mathbf{P} \bar{\mathbf{A}}) \\ &= \text{Tr}(\bar{\mathbf{A}}^H \bar{\mathbf{D}}^H \mathbf{P}^T \mathbf{M} \mathbf{P} \bar{\mathbf{D}} \bar{\mathbf{A}})\end{aligned}$$

where $\bar{\mathbf{D}} = \mathbf{P}^T \mathbf{D} \mathbf{P}$. Thus, we can use the solution of Theorem 1 with \mathbf{M} replaced by $\mathbf{P}^T \mathbf{M} \mathbf{P}$ or, equivalently, \mathbf{M}^{-1} replaced by $\mathbf{P}^T \mathbf{M}^{-1} \mathbf{P}$ to obtain

$$\mathbf{D} = \mathbf{P} \tilde{\mathbf{D}} \mathbf{P}^T \tag{39}$$

$$\mathbf{A} = \mathbf{P} \bar{\mathbf{A}} \tag{40}$$

where $\bar{\mathbf{A}}$ is the output of LLL algorithm.

E. Summary of the Algorithm

The steps described above allow us to find a good choice of \mathbf{A} and \mathbf{D} (and thus \mathbf{T}) for any given permutation \mathbf{P} specifying the structure of \mathbf{A} . In general, to improve performance, one may wish to try multiple permutations. We propose to use a fixed number N_p of permutations. Those permutations can be chosen randomly or based on heuristics. A summary of the proposed algorithm is given in Algorithm 1. Note that, while our approach is based on the simplified metric (20), when comparing multiple solutions we can actually compute the exact metric, which is the corresponding achievable rate (15). We have found that this results in a slight but non-negligible improvement in performance for finite SNR.

1) *Complexity Analysis:* The complexity of the algorithm is dominated by a few steps, namely, lines 4, 7, 9 and 12, all of which can be done with complexity $\mathcal{O}(K^3)$. The remaining lines involve only (upper) triangular and diagonal matrices, which require $\mathcal{O}(K^2)$ and $\mathcal{O}(K)$ operations, respectively.

Note that, since lines 2 to 16 need to be computed for any choice of permutation, the total complexity of Algorithm 1 is $\mathcal{O}(N_p K^3)$.

Algorithm 1 Proposed RDIF Design

Require: \mathbf{H} and N_p

- 1: Compute $\mathbf{M} = (K/\text{SNRI} + \mathbf{H}\mathbf{H}^H)^{-1}$
 - 2: **for** $i = 1, \dots, N_p$ **do**
 - 3: Generate a permutation matrix \mathbf{P}
 - 4: Compute the LDL decomposition $\mathbf{P}^T \mathbf{M} \mathbf{P} = \mathbf{U}^H \mathbf{\Lambda} \mathbf{U}$
 - 5: Compute $\tilde{\mathbf{D}} = (\det \mathbf{\Lambda})^{\frac{1}{2K}} \mathbf{\Lambda}^{-\frac{1}{2}}$
 - 6: Compute $\mathbf{B} = \mathbf{\Lambda}^{\frac{1}{2}} \mathbf{U} \mathbf{\Lambda}^{-\frac{1}{2}}$
 - 7: Use the LLL algorithm using \mathbf{B} as input to find $\bar{\mathbf{A}}$
 - 8: Set $\mathbf{D} = \mathbf{P} \tilde{\mathbf{D}} \mathbf{P}^T$ and $\mathbf{A} = \mathbf{P} \bar{\mathbf{A}}$
 - 9: Compute $\mathbf{T}_0 \triangleq \mathbf{H}^H \mathbf{M} \mathbf{D} \mathbf{A}$
 - 10: Compute $c = \text{Tr}(\mathbf{T}_0^H \mathbf{T}_0)^{-\frac{1}{2}}$
 - 11: Compute $\mathbf{T} = c \mathbf{T}_0$
 - 12: Compute $R = R_{\text{IF}}(\mathbf{H}, \mathbf{A}, \mathbf{T})$ as (15)
 - 13: **if** $R > R_{\text{best}}$ **then**
 - 14: $\mathbf{A}^* = \mathbf{A}$ and $\mathbf{T}^* = \mathbf{T}$
 - 15: **end if**
 - 16: **end for**
 - 17: **return** $\mathbf{A} = \mathbf{A}^*$ and $\mathbf{T} = \mathbf{T}^*$
-

IV. SIMULATION RESULTS

In this section we show the average sum-rate performance of the proposed method. In our simulations, the sum rates were obtained through 10000 channel realizations. In each realization, the channel coefficients were randomly obtained considering a circularly symmetric complex Gaussian distribution with zero mean and unit variance. In each simulation we compare our proposed RDIF design to the traditional linear precoding methods, namely, ZF and RZF. We also compare to the RDIF approach mentioned in Section II-G, where we fix $\mathbf{D} = \mathbf{I}$ and apply the LLL algorithm to find \mathbf{A} . This method will be denoted by “ $\mathbf{D} = \mathbf{I}$ ”.

For our proposed method, we compare two heuristics. Specifically, we compare the heuristic where $N_p = 1$ or 2 random permutations are chosen, which is denoted by “Random- N_p ”, with a heuristic inspired by [33], where the permutation sorts the diagonal elements of \mathbf{M} in

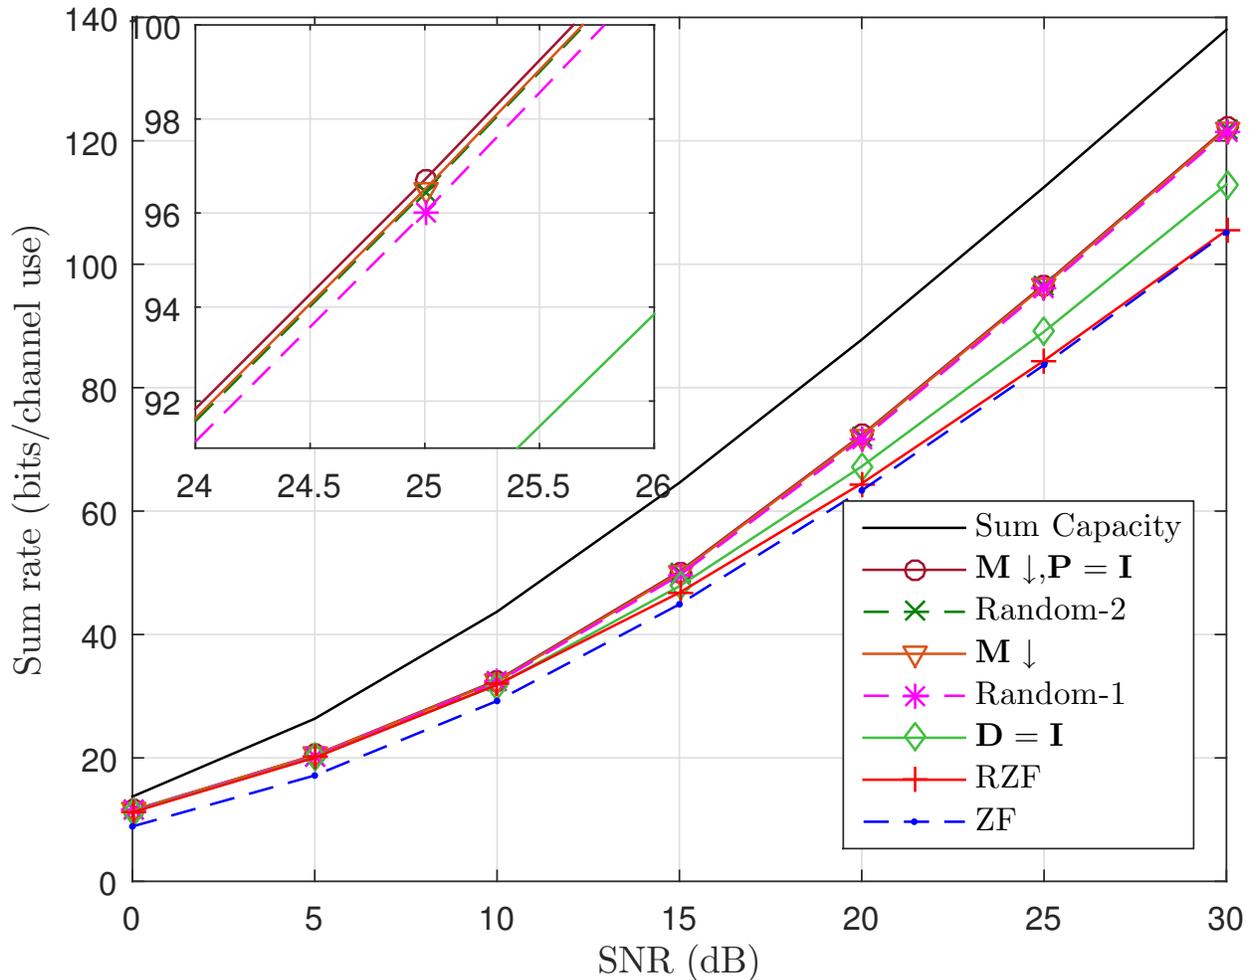


Fig. 1: Average sum rate for $N = 16$ transmit antennas. For each value of SNR, the number of users $K \leq N$ was chosen to maximize the sum rate. On the box, a close up on SNR range of 24 to 26 dB.

descending order, which is denoted by “ $M \downarrow$ ”. Finally, we combine this approach with simply choosing $\mathbf{P} = \mathbf{I}$ (taking the best of both), which is denoted by “ $M \downarrow, \mathbf{P} = \mathbf{I}$ ”. Note that taking $\mathbf{P} = \mathbf{I}$ is statistically equivalent to using a single random permutation.

In Fig. 1 we show the performance for $N = 16$ transmit antennas. For each value of SNR, we choose, through exhaustive search, the value of $K \leq N$ that achieves the highest sum rate. As expected, the IF precoding outperforms linear techniques for all values of SNR. Moreover, as seen in the close up, the proposed method outperforms the traditional RDIF approach ($\mathbf{D} = \mathbf{I}$) by more than 1 dB for a sum rate of 96 bits/channel use. Also note that, increasing the number of permutations can slightly increase the performance of the proposed method.

To illustrate how the choice of K is performed, we show in Fig. 2 the sum rate for $N = 16$

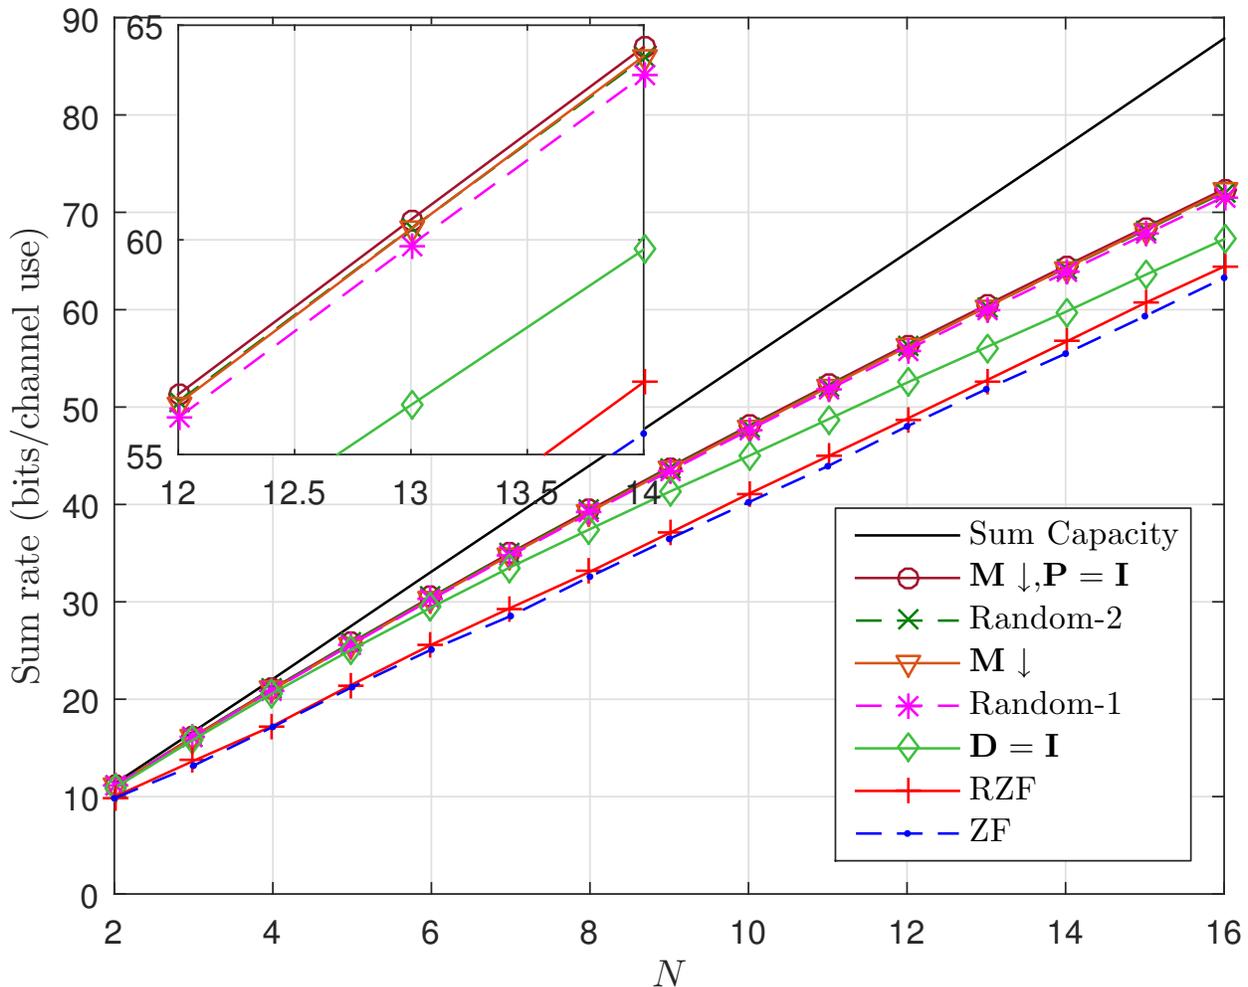


Fig. 2: Average sum rate for $N = 16$ transmit antennas and $\text{SNR} = 20$ dB.

transmit antennas and $\text{SNR} = 20$ dB, varying the number of users K . Note that the optimal value may change depending on the method used. For example, the optimal point for the ZF method is $K = 12$ users, while for RZF is $K = 13$ users. Also note that, for this specific choice of SNR, the performance of the proposed method increases with K , making its optimal value $K = N$. However, it is important to emphasize that the optimal K may change for other values of SNR (even if N is fixed).

Finally, in Fig. 3 we show the average sum rate for a fixed $\text{SNR} = 20$ dB while varying the number of transmit antennas N (and choosing the optimal K for each N). Note that, although the gap to capacity increases with K , the difference between our proposed approach and traditional linear methods also increases. Moreover, for small values of N , the performance of the proposed method is close to the sum capacity.

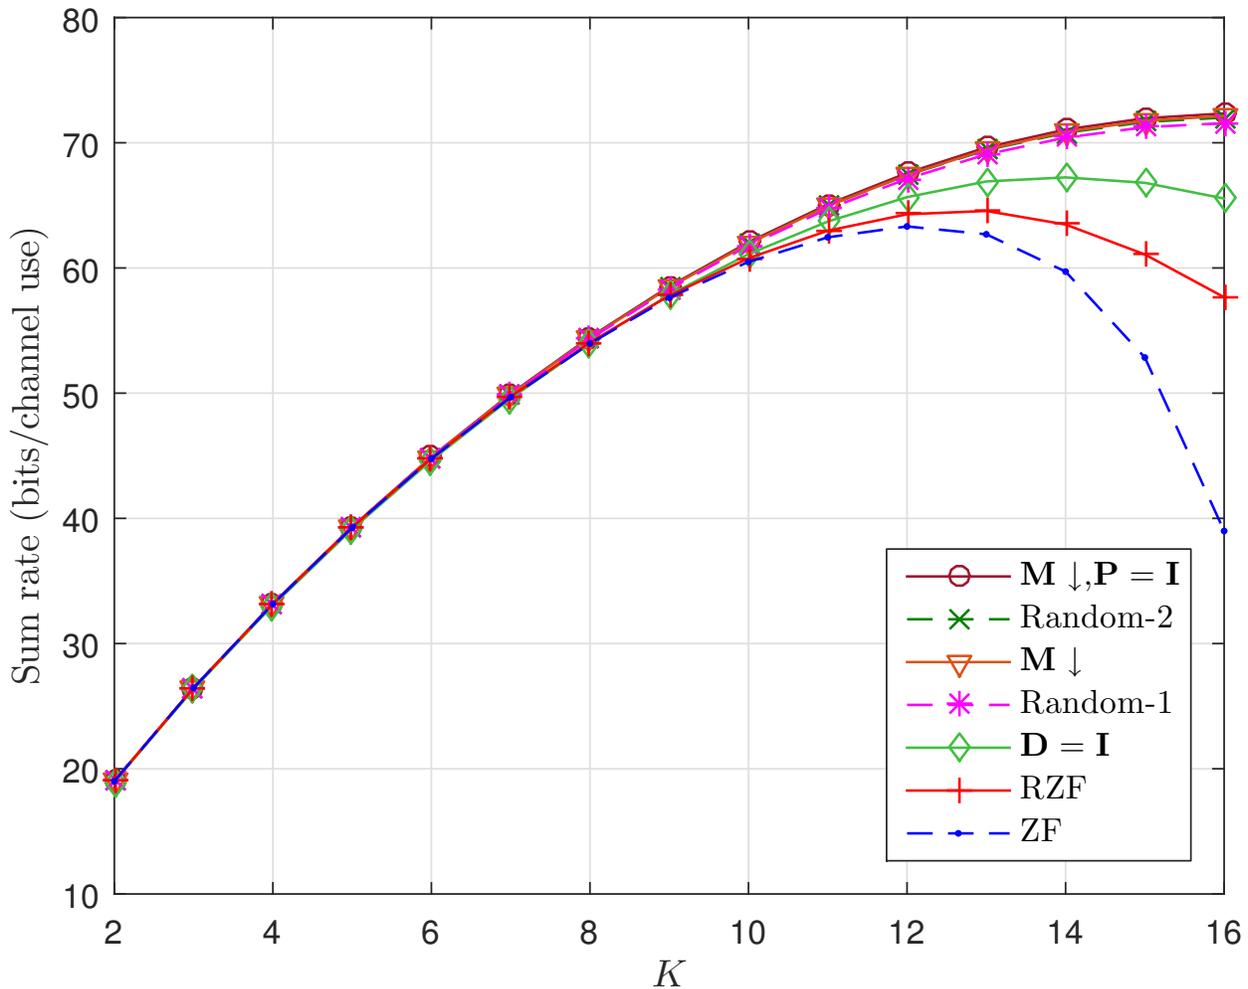


Fig. 3: Average sum rate for SNR = 20 dB. For each value of N , K was chosen to maximize the sum rate. On the box, a close up on SNR range of 20 to 21 dB.

V. CONCLUSION

In this paper, we propose an algorithm to find the parameters of the RDIF scheme for $K > 2$. This new algorithm involves specifying a convenient structure for \mathbf{A} and solving a relaxed optimization problem to find \mathbf{D} . With this specific choice, we show that the traditional LLL algorithm can be used with a fixed number of iterations, making its complexity $\mathcal{O}(K^3)$.

With the same asymptotic complexity, the RDIF method can achieve much higher rates than traditional linear precoding methods. Moreover, the proposed method outperforms RDIF method with $\mathbf{D} = \mathbf{I}$ (equivalent to LRA precoding) in all scenarios simulated. For small values of N , the RDIF method achieves a performance close to the sum capacity.

APPENDIX

RELATIONSHIP WITH LATTICE-REDUCTION-AIDED PRECODING

When $\mathbf{D} = \mathbf{I}$, the RDIF scheme becomes equivalent to the LRA precoding proposed in [16], except for the fact that LRA precoding assumes symbol-level detection, while IF precoding employs codeword-level decoding, as discussed in Section II-F (see also [22], [23]). More precisely, the precoding matrix in LRA precoding has the same form as \mathbf{T} in (19) (with $\mathbf{D} = \mathbf{I}$), while the integer matrix \mathbf{A} is obtained in both schemes by solving the same lattice reduction problem. In order to make this relationship clear, consider the factorization of the *inverse augmented channel matrix*² [16, eq. (3)]

$$\mathcal{H}^H (\mathcal{H}\mathcal{H}^H)^{-1} = \mathcal{T} \mathbf{A}^{-1} \quad (41)$$

where $\mathcal{H} \triangleq \begin{bmatrix} \mathbf{H} & \sqrt{\frac{K}{\text{SNR}}} \mathbf{I} \end{bmatrix}$ and $\mathcal{T} \in \mathbb{C}^{(N+K) \times K}$ is a reduced basis.³ According to [16], the precoding matrix for LRA (up to scaling) is obtained from the first N rows of

$$\mathcal{T} = \mathcal{H}^H (\mathcal{H}\mathcal{H}^H)^{-1} \mathbf{A} \quad (42)$$

$$= \begin{bmatrix} \mathbf{H}^H \\ \sqrt{\frac{K}{\text{SNR}}} \mathbf{I} \end{bmatrix} \left(\mathbf{H}\mathbf{H}^H + \frac{K}{\text{SNR}} \mathbf{I} \right)^{-1} \mathbf{A} \quad (43)$$

which is precisely a scaled version of \mathbf{T} in (19). Moreover, the integer matrix \mathbf{A} found in (41) is the same solution obtained for RDIF by applying lattice reduction on the columns of a matrix \mathbf{B} such that $\mathbf{B}^H \mathbf{B} = \mathbf{M}$, as discussed in Section II-G. This is because $(\mathcal{H}\mathcal{H}^H)^{-1} = \mathbf{M}$, thus one possible square root of \mathbf{M} is precisely the left-hand side of (41), i.e., $\mathbf{B} = \mathcal{H}^H (\mathcal{H}\mathcal{H}^H)^{-1}$.

This implies that RDIF can be seen as a generalization of LRA precoding, where we replace the left-hand side of (41) by $\mathcal{H}^H (\mathcal{H}\mathcal{H}^H)^{-1} \mathbf{D}$, where \mathbf{D} is a diagonal matrix, before performing the factorization. To the best of our knowledge, this generalization has not been previously proposed.

REFERENCES

- [1] L. Lu, G. Y. Li, A. L. Swindlehurst, A. Ashikhmin, and R. Zhang, "An overview of massive MIMO: Benefits and challenges," *IEEE J. Sel. Top. Signal Process.*, vol. 8, no. 5, pp. 742–758, Oct. 2014.
- [2] Q. Spencer, C. Peel, A. Swindlehurst, and M. Haardt, "An introduction to the multi-user MIMO downlink," *IEEE Commun. Mag.*, vol. 42, no. 10, pp. 60–67, Oct. 2004.

²We dropped the Hermitian in [16, eq. (3)] for consistency with our notation.

³In the notation of [16], $\mathbf{T} = \mathbf{F}$, $\mathcal{T} = \mathcal{F}$ and $\mathbf{A} = \mathbf{Z}$.

- [3] G. Caire and S. Shamai, "On the achievable throughput of a multiantenna Gaussian broadcast channel," *IEEE Trans. Inf. Theory*, vol. 49, no. 7, pp. 1691–1706, Jul. 2003.
- [4] S. Vishwanath, N. Jindal, and A. Goldsmith, "Duality, achievable rates, and sum-rate capacity of Gaussian MIMO broadcast channels," *IEEE Trans. Inf. Theory*, vol. 49, no. 10, pp. 2658–2668, Oct. 2003.
- [5] P. Viswanath and D. N. C. Tse, "Sum capacity of the vector Gaussian broadcast channel and uplink-downlink duality," *IEEE Trans. Inf. Theory*, vol. 49, no. 8, pp. 1912–1921, Aug. 2003.
- [6] W. Yu and J. M. Cioffi, "Sum capacity of Gaussian vector broadcast channels," *IEEE Trans. Inf. Theory*, vol. 50, no. 9, pp. 1875–1892, Sep. 2004.
- [7] N. Fatema, G. Hua, Y. Xiang, D. Peng, and I. Natgunanathan, "Massive MIMO linear precoding: A survey," *IEEE Syst. J.*, vol. 12, no. 4, pp. 3920–3931, Dec. 2018.
- [8] E. Bjornson and E. Jorswieck, *Optimal Resource Allocation in Coordinated Multi-Cell Systems*. Boston, Mass.: Now Publishers Inc, Jan. 2013.
- [9] E. Björnson, M. Bengtsson, and B. Ottersten, "Optimal multiuser transmit beamforming: A difficult problem with a simple solution structure," *IEEE Signal Process. Mag.*, vol. 31, no. 4, pp. 142–148, Jul. 2014.
- [10] A. Wiesel, Y. C. Eldar, and S. Shamai, "Zero-forcing precoding and generalized inverses," *IEEE Trans. Signal Process.*, vol. 56, no. 9, pp. 4409–4418, Sep. 2008.
- [11] C. Peel, B. Hochwald, and A. Swindlehurst, "A vector-perturbation technique for near-capacity multiantenna multiuser communication-part I: Channel inversion and regularization," *IEEE Trans. Commun.*, vol. 53, no. 1, pp. 195–202, Jan. 2005.
- [12] M. Costa, "Writing on dirty paper (Corresp.)," *IEEE Trans. Inf. Theory*, vol. 29, no. 3, pp. 439–441, May 1983.
- [13] B. Hochwald, C. Peel, and A. Swindlehurst, "A vector-perturbation technique for near-capacity multiantenna multiuser communication-part II: Perturbation," *IEEE Trans. Commun.*, vol. 53, no. 3, pp. 537–544, Mar. 2005.
- [14] C. Windpassinger, R. F. H. Fischer, and J. B. Huber, "Lattice-reduction-aided broadcast precoding," *IEEE Trans. Commun.*, vol. 52, no. 12, pp. 2057–2060, Dec. 2004.
- [15] C. Stierstorfer and R. F. H. Fischer, "Lattice-reduction-aided Tomlinson–Harashima precoding for point-to-multipoint transmission," *AEUE - Int. J. Electron. Commun.*, vol. 4, no. 60, pp. 328–330, 2006.
- [16] S. Stern and R. F. H. Fischer, "Advanced factorization strategies for lattice-reduction-aided preequalization," in *2016 IEEE International Symposium on Information Theory (ISIT)*, Jul. 2016, pp. 1471–1475.
- [17] Y. Avner, B. M. Zaidel, and S. S. Shitz, "On vector perturbation precoding for the MIMO Gaussian broadcast channel," *IEEE Trans. Inf. Theory*, vol. 61, no. 11, pp. 5999–6027, Nov. 2015.
- [18] S.-N. Hong and G. Caire, "Reverse compute and forward: A low-complexity architecture for downlink distributed antenna systems," in *2012 IEEE International Symposium on Information Theory Proceedings*, Jul. 2012, pp. 1147–1151.
- [19] —, "Compute-and-forward strategies for cooperative distributed antenna systems," *IEEE Trans. Inf. Theory*, vol. 59, no. 9, pp. 5227–5243, Sep. 2013.
- [20] W. He, B. Nazer, and S. Shamai (Shitz), "Uplink-downlink duality for integer-forcing: Effective SINRs and iterative optimization," in *2014 IEEE 15th International Workshop on Signal Processing Advances in Wireless Communications (SPAWC)*, Jun. 2014, pp. 474–478.
- [21] —, "Uplink-downlink duality for integer-forcing," in *2014 IEEE International Symposium on Information Theory*, Jun. 2014, pp. 2544–2548.
- [22] —, "Uplink-Downlink Duality for Integer-Forcing," *IEEE Trans. Inf. Theory*, vol. 64, no. 3, pp. 1992–2011, Mar. 2018.
- [23] D. Silva, G. Pivaro, G. Fraidenraich, and B. Aazhang, "On integer-forcing precoding for the Gaussian MIMO broadcast channel," *IEEE Trans. Wirel. Commun.*, vol. 16, no. 7, pp. 4476–4488, Jul. 2017.

- [24] U. Erez and R. Zamir, "Achieving $1/2 \log(1+\text{SNR})$ on the AWGN channel with lattice encoding and decoding," *IEEE Trans. Inf. Theory*, vol. 50, no. 10, pp. 2293–2314, Oct. 2004.
- [25] J. Zhan, B. Nazer, U. Erez, and M. Gastpar, "Integer-Forcing Linear Receivers," *IEEE Trans. Inf. Theory*, vol. 60, no. 12, pp. 7661–7685, Dec. 2014.
- [26] A. K. Lenstra, H. W. Lenstra, and L. Lovasz, "Factoring polynomials with rational coefficients," *Math. Ann.*, vol. 261, no. 4, pp. 515–534, Dec. 1982.
- [27] R. Zamir, *Lattice Coding for Signals and Networks*. Cambridge: Cambridge University Press, 2014.
- [28] E. Agrell, T. Eriksson, A. Vardy, and K. Zeger, "Closest point search in lattices," *IEEE Trans. Inf. Theory*, vol. 48, no. 8, pp. 2201–2214, Aug. 2002.
- [29] Y. H. Gan, C. Ling, and W. H. Mow, "Complex lattice Reduction Algorithm for Low-Complexity Full-Diversity MIMO detection," *IEEE Trans. Signal Process.*, vol. 57, no. 7, pp. 2701–2710, Jul. 2009.
- [30] D. Wubben, D. Seethaler, J. Jalden, and G. Matz, "Lattice Reduction," *IEEE Signal Process. Mag.*, vol. 28, no. 3, pp. 70–91, May 2011.
- [31] F. T. Luk and D. M. Tracy, "An improved LLL algorithm," *Linear Algebra and its Applications*, vol. 428, no. 2-3, pp. 441–452, Jan. 2008.
- [32] D. S. Dummit and R. M. Foote, *Abstract Algebra, 3rd Edition*, 3rd ed., Hoboken, NJ, Jul. 2003.
- [33] P. Xu, "Parallel Cholesky-based reduction for the weighted integer least squares problem," *J Geod*, vol. 86, no. 1, pp. 35–52, Jan. 2012.