

---

# PREDICTIVE ANALYSIS FOR DETECTION OF HUMAN NECK POSTURES USING A ROBUST INTEGRATION OF KINETICS AND KINEMATICS

---

**Korupalli V Rajesh Kumar**

Research Scholar  
School of Electronics Engineering  
Vellore Institute of Technology Chennai Campus  
Chennai, India 600127  
v.rajeshkumar2016@vitstudent.ac.in

**Susan Elias**

Associate Professor  
School of Electronics Engineering  
Vellore Institute of Technology Chennai Campus  
Chennai, India 600127  
susan.elias@vit.ac.in

January 4, 2022

## ABSTRACT

Human neck postures and movements need to be monitored, measured, quantified and analyzed, as a preventive measure in healthcare applications. Improper neck postures are an increasing source of neck musculoskeletal disorders, requiring therapy and rehabilitation. The motivation for the research presented in this paper was the need to develop a notification mechanism for improper neck usage. Kinematic data captured by sensors have limitations in accurately classifying the neck postures. Hence, we propose an integrated use of kinematic and kinetic data to efficiently classify neck postures. Using machine learning algorithms we obtained 100% accuracy in the predictive analysis of this data. The research analysis and discussions show that the kinetic data of the Hyoid muscles can accurately detect the neck posture given the corresponding kinematic data captured by the neck-band. The proposed robust platform for the integration of kinematic and kinetic data has enabled the design of a smart neck-band for the prevention of neck musculoskeletal disorders.

## Keywords

Human Neck Postures, Inertial Measurement Unit, OpenSim, Kinetics, Kinematics and Predictive Analysis.

## 1 Introduction and Related Work

Enabling technology to monitor, measure and manage human movements has been an active area of research with a wide spectrum of applications ranging from medical diagnostics, rehabilitation, sports, fitness, behaviour analysis and gait based bio-metrics. The historic landscape of research publications in the field, has presented the use of technology that are vision based (video cameras), sensor based (Inertial Measurement Units IMUs), Infra-red and RADAR based innovations to study human movement [1, 2, 3, 4]. Quantitative analysis have traditionally been carried out using either kinetic or kinematic data for various applications. Kinematic data is obtained using IMUs and has been used in the study of Musculoskeletal Disorders (MSD) [5, 6] and in gait recognition. On the other hand, kinetic data provides details of the force of the component in motion and helps to analyse the activation of muscles associated with the joint in motion. Kinetic data are computed from the signals obtained from Kinesiographical Electro Myography (KEMG) device and these are quantitatively analysed for understanding muscle force and fatigue [7, 8, 9, 10, 11]. The motivation for the research presented in this paper, was to identify a robust methodology to integrate the kinetic and kinematic features for predictive analysis of human postures and movements. IMU-based technology is the most popular for kinematic data capture as the IMU is a versatile Micro-Electro-Mechanical System (MEMs) based device [12]. IMU data have been integrated earlier with several proprietary and open source based simulation platforms for analysis and visualization of movement data [13, 14, 15, 16, 17, 18, 19]. Here the integration of IMU with OpenSim is presented and it is currently a

focus area in top research laboratories as well. OpenSim is an free open source simulation and modelling tool developed at Stanford University (<https://opensim.stanford.edu/>). The in-built features, modeling capabilities and the contributions by the OpenSim community makes it a scalable and reliable tool for analysing human movement. Besides presenting the step-wise procedure to integrate IMU data with OpenSim, this paper presents a novel methodology of combining kinetic and kinematic data for generating insightful analysis of human movements. OpenSim provides details of muscle activation and supports joint modelling of kinetic and kinematic parameters. In the following subsections the detailed methodology is presented. The results and discussions that follow will highlight the significance and applications of the proposed robust integration platform for movement analysis.

## 2 Motivation and Proposed work

The goal of the proposed research is to present a methodology to measure and accurately identify the postures of the human neck, for prevention and rehabilitation of musculoskeletal disorders of the cervical region. Improper neck posture due to sedentary lifestyle is a major cause of Cervical spine dysfunction in all age groups ranging from children to the elderly. The neck region can also be affected due to improper neck postures that are inherent in certain kinds of occupations. Other lifestyle related activities, including sleeping in the sitting position during travel can trigger musculoskeletal problems around the neck. The motivation for the research was to propose a novel methodology to prevent disorders of the neck through timely detection and notifications. A sensor based smart neck-band that can precisely detect neck postures was designed to monitor improper use of the neck region and to generate alert messages as a preventive measure [20]. This neck-band can also be used to take measurements of the range of motion of the neck regions during therapy and rehabilitation [21]. Research works related to the use of sensors to track movements by obtaining kinematic data have been presented extensively in literature under the field called Actigraphy. These approaches have also been widely used for tracking movement through commercially available wrist worn fitness monitors. But in order to identify the postures of the neck, there are several challenges and limitation in using only kinematic data obtained using sensors. Hence we explored the possibility of integrating kinetic and kinematic data for better accuracy in detection of neck postures. In this paper we present a robust integrated platform for predictive analysis of human neck postures using kinetic and kinematic data.

## 3 Materials and Methods

In this research, an IMU based device is used for acquiring the kinematic data of the neck, and the OpenSim simulation modeling tool is used to generate the kinetic data of the corresponding neck movements. Predictive Analysis to detect neck postures from the kinetic and kinematic data, is done using Machine Learning methods. In the following sections, the methods and materials used in this research are presented.

### 3.1 Kinematic data acquisition using Smart Neck-Band

#### 3.1.1 IMU Based Neck-Band:

Inertial Measurement Unit (IMU) embedded in an elastic neck-band captures the kinematic data required for the analysis. IMU devices are available in miniature-sizes, and can be used to design wearable products. For this research, Metawear CPRO, IMU device developed at MBIENTLAB has been used. It has on-chip memory, processing unit, accelerometer, gyroscope sensor, magnetometer sensor, pressure sensor and temperature sensor. In addition to these sensors, this device has inbuilt Bluetooth support, to establish communication with the associated mobile application or any Bluetooth device to transmit the device data. This IMU device can stream data for 6 hours continuously using a 3.3 V coin sized battery and is attached to a wearable band with an adjustable strap to fit it firmly around the neck. This neck-band when integrated with the proposed predictive analysis can be referred to as a smart neck-band, for its context-aware functionalities.

#### 3.1.2 Mobile Application- MetaBase:

The commercially available IMU device used in this research comes with an associated mobile application called MetaBase, developed by MBIENTLAB. It is used to retrieve the recorded sensor data from the IMU device. MetaBase establishes a Bluetooth communication channel with the IMU hardware and receives the sensor data from the device. Once data transmission from the sensor to the mobile application is completed, the data can be shared to a cloud storage or to any local machine. Figure 1 summarises the data acquisition process of the neck kinematics.

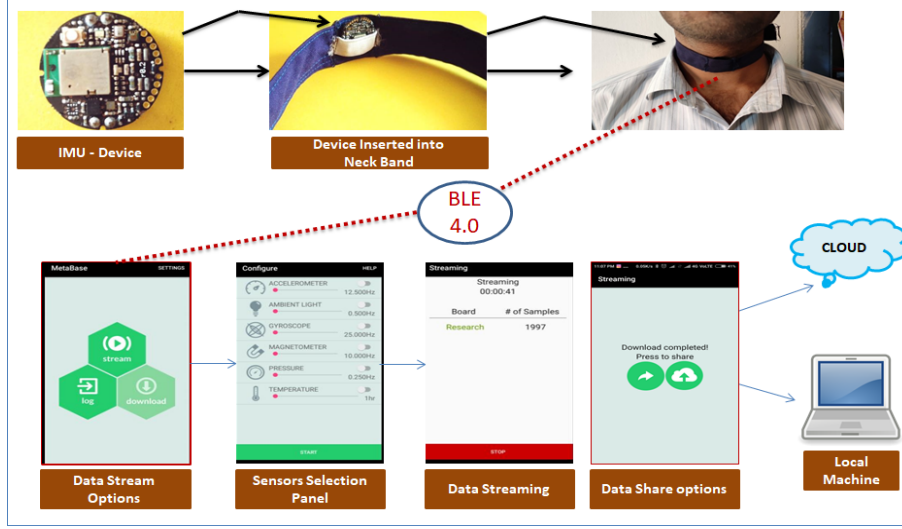


Figure 1: Kinematic Data Acquisition Process

### 3.1.3 Sensor Data Format:

The IMU device, has in-built Accelerometer, Gyroscope and Magnetometer sensors to record various kinematic aspects of the movements. The format of the data captured by these sensors are given below:

- Accelerometer sensor : epoch(ms), time, elapsed(s), x(g), y(g), z(g)
- Gyroscope sensor : epoch(ms), time, elapsed(s), x(deg/s), y(deg/s), z(deg/s)
- Magnetometer : epoch(ms), time, elapsed(s), x(T), y(T), z(T) etc.

For the kinematic analysis of neck postures, dealt with in this research, the accelerometer sensor data was sufficient. The accelerometer sensor was operated at 100Hz frequency with 8+/-g.

## 3.2 Kinetic data generation using Neck Musculoskeletal Model

Electro Myography (EMG) and Surface EMG (SEMG) are the standard methods for muscle related data acquisition for movement analysis. The kinetic data obtained from EMG based methods are accurate, but are limited to laboratory based study. In order to carry out movement analysis using both kinematic and kinetic data, a novel methodology has been proposed in this paper. Here we focus on the detection of postures of the neck using an innovative approach. Instead of capturing kinetic data related to muscle activation using any of the EMG based methods, in the proposed approach kinetic data of the corresponding neck postures is generated using a Neck Musculoskeletal Simulation Model. The smart neck-band captures the real-world kinematic data of the neck postures and this data is used to generate the corresponding kinetic data relating to the muscles around the neck region using the OpenSim simulation tool.

### 3.2.1 OpenSim - Simulation Modeling Tool:

OpenSim is the most popular open-source tool, used to create and study human musculoskeletal models and provides extensive data on kinematics and kinetics of human movement. In-built functionalities such as Scale, Inverse Kinematics (IK), Inverse Dynamics (ID), Residual Reduction (RR), Static Optimization (STO), Computed Muscle Control (CMC) and Analyze, provide support to extract all information related to the muscles, tendons, joints kinetics and kinematics. An overview of the functionalities of OpenSim and the inbuilt tools is shown in Figure 2 and detailed information is made available by the OpenSim contributors [22, 23, 24, 25].

### 3.2.2 Neck Musculoskeletal Model:

In this research, the neck musculoskeletal model presented in [26] (Figure 3) was used. This is a fully flexible model for head and neck movements, and versatile compared to other models [27]. The neck region consists of Cervical

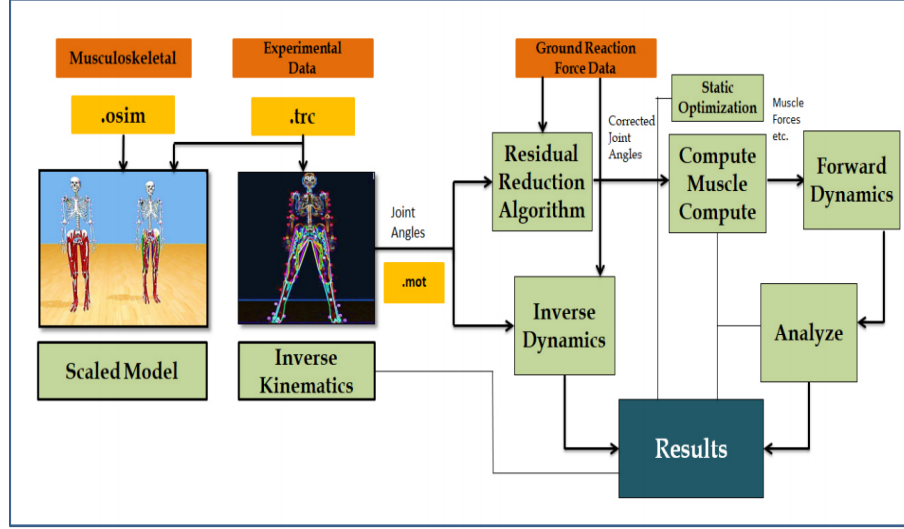


Figure 2: Overview of OpenSim Functionalities

joints (C1-C7), sixty four muscles and various associated tendons and ligaments. The Hyoid muscles plays a vital role in supporting the neck movements and hence has a key role in the proposed predictive analysis. The Neck Musculoskeletal Model used in this research has integrated the Hyoid muscles and this was a big advantage for our experimental analysis. The kinetic data provided by OpenSim includes forces, length, power and activation levels of joints, muscles and tendons. With the neck musculoskeletal model and research insights provided in [26, 28] used in simulation modeling. We used the kinetic data of the Hyoid muscles, extracted from the CMC tool during simulation for our research analysis. The Hyoid muscles are highlighted in green colour and shown in Figure 3.

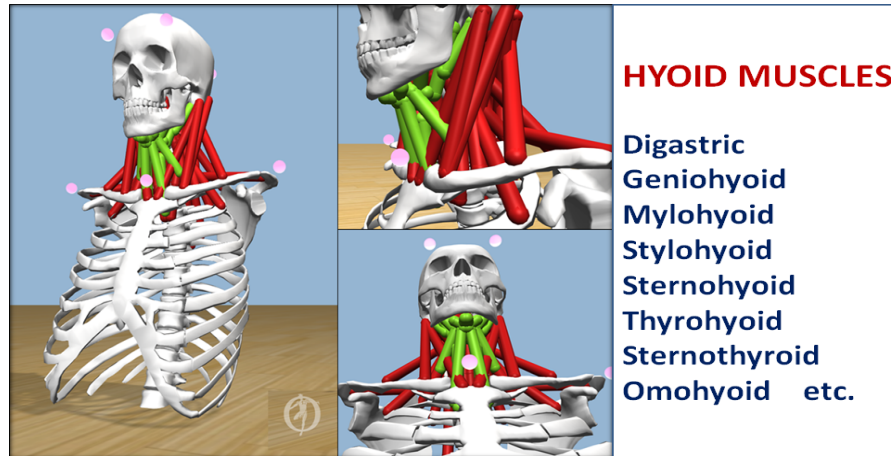


Figure 3: Hyoid Muscles (in green colour)

## 4 Experiments and Research Analysis

In general the human neck has three-degrees of freedom, horizontal plane, vertical plane, and rolling of the head. All other asymmetric movements of the neck are variations and combinations of these three fundamental movements. At any point of time the neck will be in one of the following nine static positions called neck postures or it can move in any random order between these nine postures. The nine static positions or neck postures are:

- Neck at Extreme Up (NU)
- Neck at Extreme Down (ND)

- Neck at Extreme Right (NR)
- Neck at Extreme Left (NL)
- Neck at Right Up (NRU)
- Neck at Right Down (NRD)
- Neck at Left Up (NLU)
- Neck at Left Down( NLD)
- Neck at Middle (NM).

The goal of the research presented in this paper is to design a methodology to detect neck postures by training the Machine Learning algorithms using the kinematic and kinetic data. In this research we used Random Forest, an ensemble learning method for the prediction and classification. The smart neck-band captures the real world data and integrates it with the OpenSim simulation platform. In order to effectively capture the neck kinematics, an experimental study was first carried out to determine the ideal location for the IMU device. The IMU device was fixed onto the elastic band, and the neck-band could be worn in a manner that located the IMU device either in Front or at the Back of the neck region.

#### 4.1 Experimental study for Location of IMU

In this research, eight volunteers participated and details of their physical attributes are given in Table 1.

Gender	No.of Persons	Height	Weight
Male	5	~5.3 cms	+/- 75.6 kgs
Female	3	~5.1 cms	+/- 69.3 kgs

Table 1: Participants - Physical Attributes

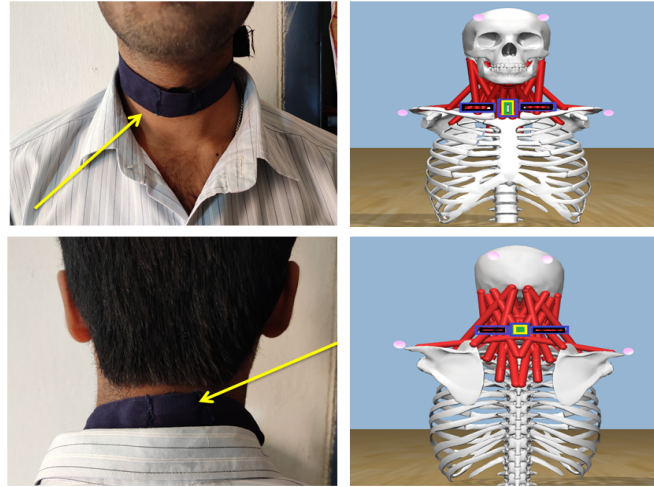


Figure 4: IMU located FRONT & BACK and corresponding Musculoskeletal Model

The subjects wore the neck-band and participated in the research study. The participants were asked to keep their neck in the nine static positions for a duration ranging from 1 minute to 2 minutes based on their comfort level. IMU data was recorded for all participants for each of the nine neck postures with the sensor located at FRONT side of the neck region and similarly for BACK side of neck. Figure 4, shows the kinematic and kinetic data extraction methods using IMU device and OpenSim simulation model for both Front and Back neck locations. Details of the dataset are presented in Table 2.

Datasets were pre-processed and modularised based on the time stamp provided by the sensor and labelled manually. The observations in the dataset were also validated using the video footage of the corresponding experimental study. As part of the pro-processing task, NaN's(Not a Number) and NA's (Not Available) were interpreted, outliers were removed and data was normalised.

IMU - Device Placement	Total Time Duration	Dataset Size (After Pre-processing)
Sensor Placed at Front Side	1080 sec (Nine Static positions)	1080 * 6 Rows * Columns
Sensor Placed at Back Side	1080 sec (Nine Static positions)	1080 * 6 Rows * Columns

Table 2: Dataset Quantitative Parameters

## 4.2 Predictive Analysis using Random Forest Algorithm

The data collected by keeping IMU device at the FRONT side of the neck was divided into training and testing data in the ratio of 75 : 25, and given as input to the Random Forest algorithm, to classify the nine static neck positions and to find the accuracy of the classification. Similarly the data collected by keeping the IMU device at the BACK side of the neck was similarly processed.

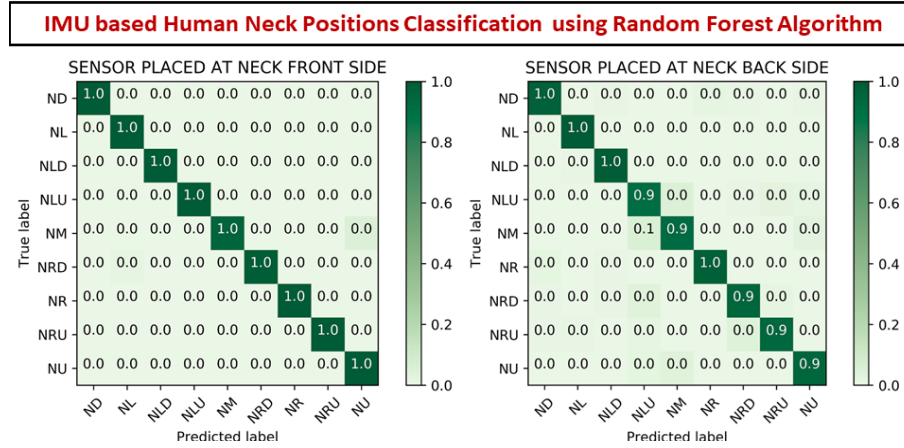


Figure 5: Confusion Matrix - Classification of Neck Positions

The confusion matrix and performance metrics for the Front and Back location and are shown in Figure 5 and 6. 100% accuracy was achieved for Front location based classification and 99% for the Back location based classification. From this research study we can infer that the ideal location for the IMU device during data capture is the Front side of the neck. This inference correlates with our decision to use the Hyoid muscles located in Front of the neck for accurate classification of neck postures. In this research paper, we proposed the idea of generating kinetic data related to the Hyoid muscles and to use this data along with the associated kinematic data to detect neck posture accurately using classification techniques. This is presented in the following section.

## 5 Robust Integration of Kinematic and Kinetic Data

In this section we first present the procedure to integrate kinematic and kinetic data for the experiment research analysis. Integrating the IMU based kinematic data to the OpenSim simulation modeling platform is a challenging and interesting task.

### 5.1 IMU data integration with OpenSim

- The IMU based accelerometer sensor data format provides three dimensional kinematic data (X,Y,Z).
- To export IMU kinematic data into OpenSim simulation tool, mathematical and functional analysis is required. In OpenSim, a file with the extension .trc (Track Row Column) is used as an input file for the Inverse Kinematics (IK) tool, and using this information this tool provides joint movement data as a motion file with the extension .mot.

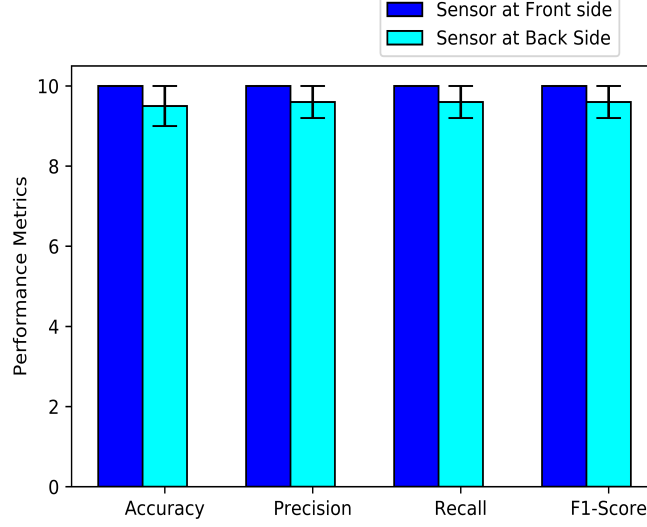


Figure 6: Performance Metrics

- The neck skeletal model has seven sets of markers around the skull and cervical region (four on the skull, one at Sternum Jugular Notch and two at acromioclavicular right and left joints ). In the front side of the neck, there is a marker called Sternum Jugular Notch (SJN). The IMU based kinematics data is mapped onto the data of SJN - X,Y,Z coordinates. The other markers are calibrated according to the functional movements. The .trc file contains the details of these markers and it is the input file for the Inverse Kinematics (IK) and the motion file (.mot) is obtained as the output.
- The information in this .mot file is fed as input to Computed Muscle Control (CMC) tool, which produces the data related to Neck kinematics, kinetics, joints, muscles, forces etc.
- The functional integration of IMU data and OpenSim is shown in Figure 7.

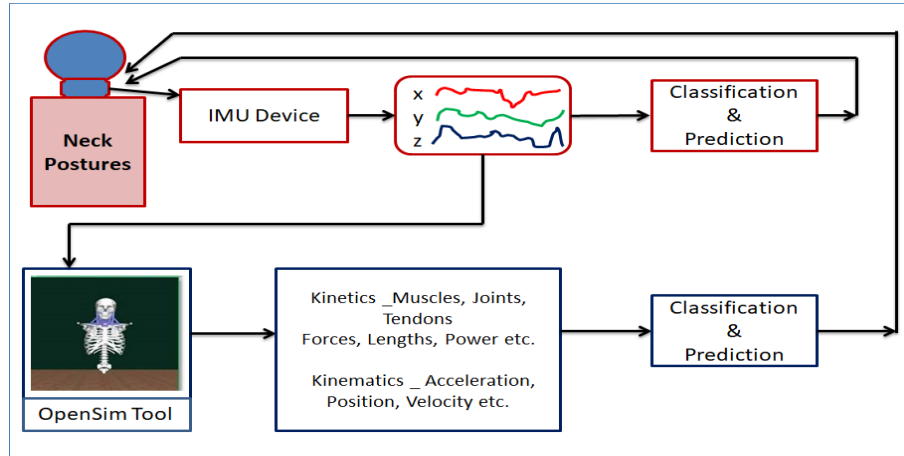


Figure 7: IMU to OpenSim - Data Flow

## 5.2 Simulation using Neck musculoskeletal model

The Spine and Cervical joints C1, C2, C3, C4, C5, C6 and C7 play a pivotal role for any kind of neck movements. The Spine and Cervical variations in the OpenSim for the various neck postures presented in Figure 8.

In this research we recorded and analyzed kinematic data for all the subjects. In this section we present the simulation results and analysis for Subject ID: 04. The data collected from all the other subjects were used in training and

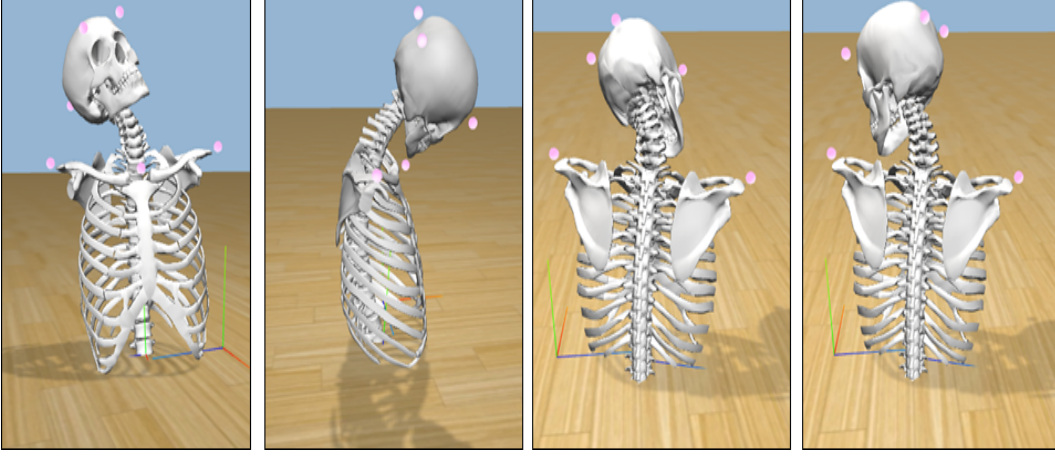


Figure 8: Head and Neck Musculoskeletal Model

testing of the classification model. Figure 9, shows the neck postures for research Subject ID: 4 and the corresponding musculoskeletal model. The images were captured during the simulation of the Musculoskeletal neck model and this helped to correlate the dataset with the image of the neck posture.

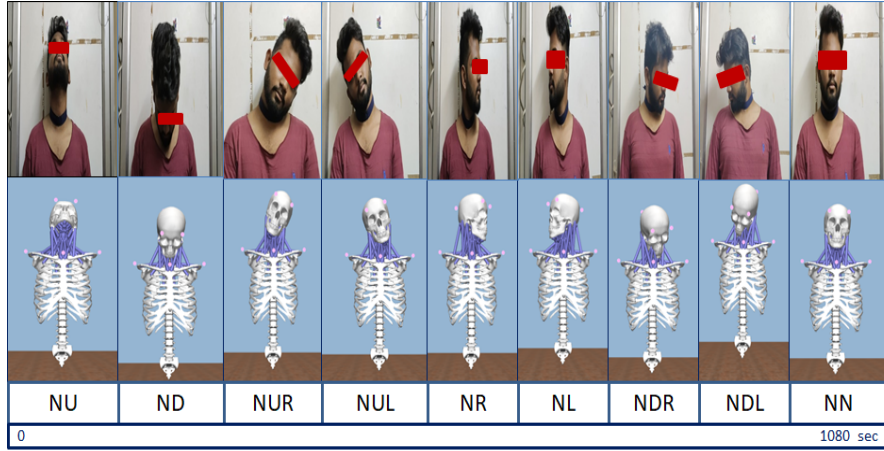


Figure 9: Subject Specific Neck Postures with OpenSim Musculoskeletal Model

### 5.3 Neck Musculoskeletal Model based Kinematic and Kinetic Data Analysis

OpenSim generates the Neck kinematics information based on the input data: Acceleration, Position and Velocity. We used the Acceleration and Position data to classify and predict the human neck posture. From the Figures 10 and 11, we can observe the response of the cervical joints and other associated joints during the experimentation task. The subjects changed the neck posture from one position to another after a time gap of about 120 sec, and with a total of nine positions in the study, 1080 secs of data was captured. Figure 10 shows the variations in the Neck Acceleration with respective to joint kinematics and similarly Figure 11 shows the variations in the Position of the neck.

There are eight important sets of Hyoid muscles (shown in Figure 3) and many other associated hyoid muscles are attached with hyoid bone in neck region. These muscles help in providing free movement generation and flexibility to the neck [26]. The OpenSim based CMC tool provides kinetic information like forces, activation, lengths etc. Using the CMC tool, kinetic data is extracted for the corresponding kinematic data that was captured and integrated in OpenSim. Here, the response of the tendon forces of the Neck Hyoid muscles were analysed as shown in Figure 12.

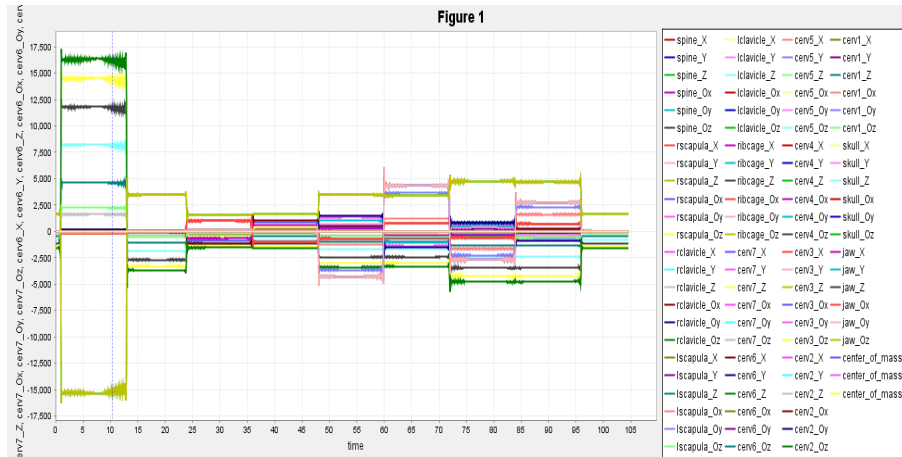


Figure 10: Kinematics-Neck Acceleration

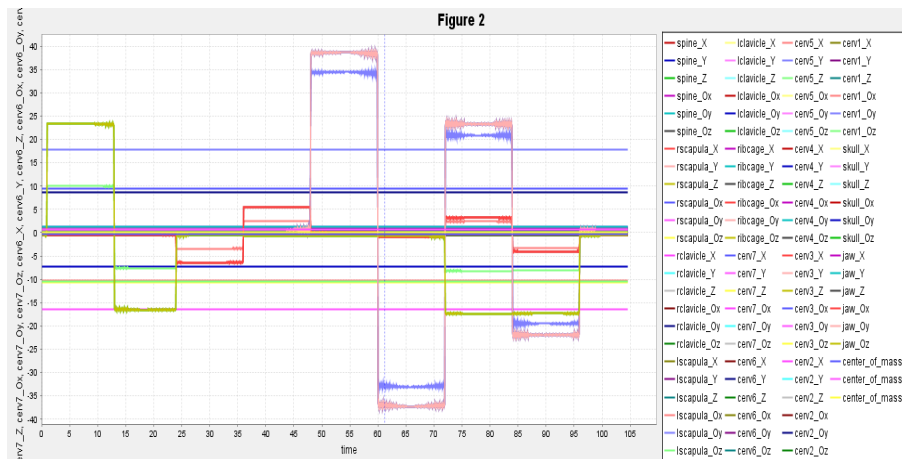


Figure 11: Kinematics-Neck Position

## 5.4 Predictive Analysis - Kinematics and Kinetics

The Random Forest Algorithm was used to classify and to predict the neck posture based on the kinematics and kinetics data generated by OpenSim. The Random Forest method achieved 100% accuracy in the classification and prediction of neck postures using Neck acceleration and position data. These results are presented in Figures 13 and 14.

Similarly, Random Forest classifier predicted nine neck postures using the response of the tendon force data of Hyoid muscles and achieved 100% accuracy in the prediction. The results of the kinetic tendon force classification is shown in Figure 15.

## 6 Conclusion

This paper presents a novel methodology to identify neck postures using kinetic and kinematic data. Improper neck postures can lead to neck cervical pain and musculoskeletal disorders. This research includes the design of a smart neck-band that captures kinematic data of the neck postures and movements. The OpenSim simulation tool and a neck musculoskeletal model, were used to simulate the related kinetic data for classification of the neck postures. The Machine Learning algorithms achieved 100% accuracy in prediction of the neck postures and this innovative methodology can support notification based applications for prevention of neck musculoskeletal disorders.

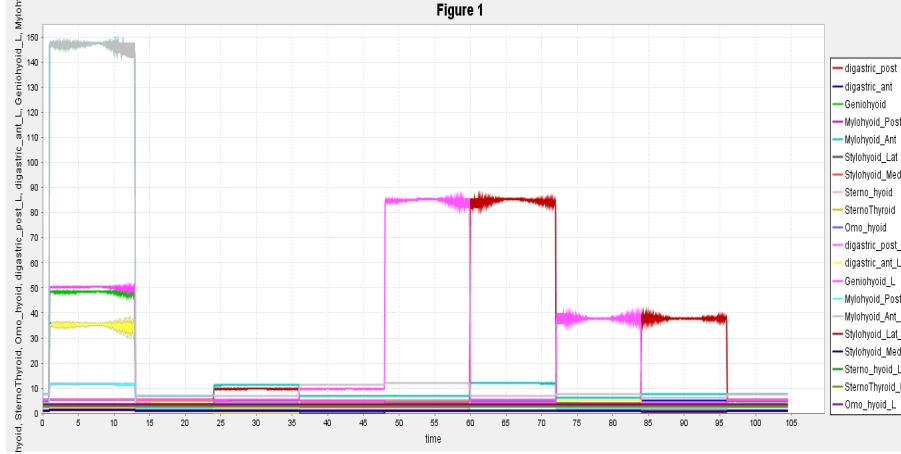


Figure 12: Kinetics - Tendon Force

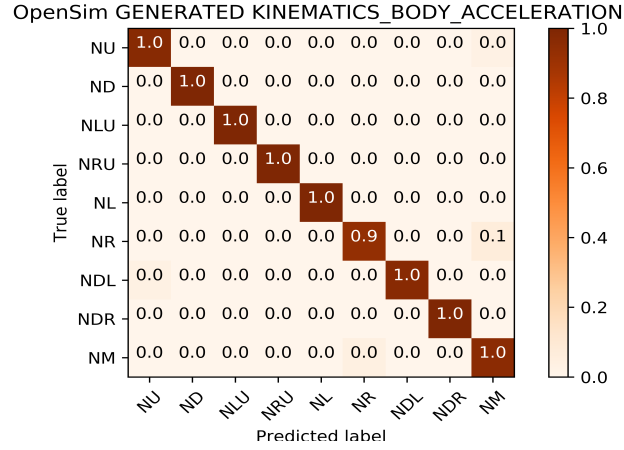


Figure 13: Kinematics-Neck Acceleration

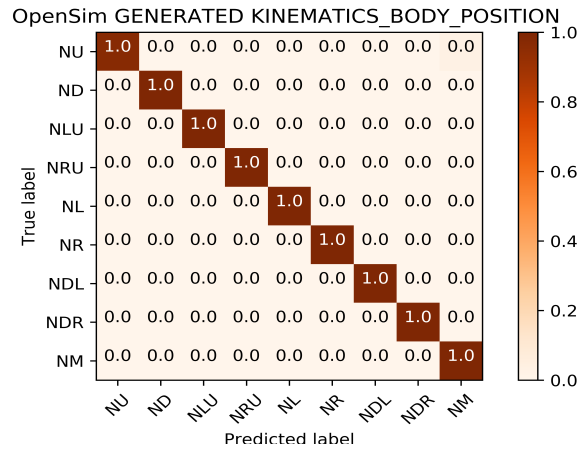


Figure 14: Kinematics-Neck Position

## References

- [1] P. C. Ribeiro, J. Santos-Victor, and P. Lisboa, "Human activity recognition from video: modeling, feature selection and classification architecture," in *The Proceedings of International Workshop on Human Activity Recognition*

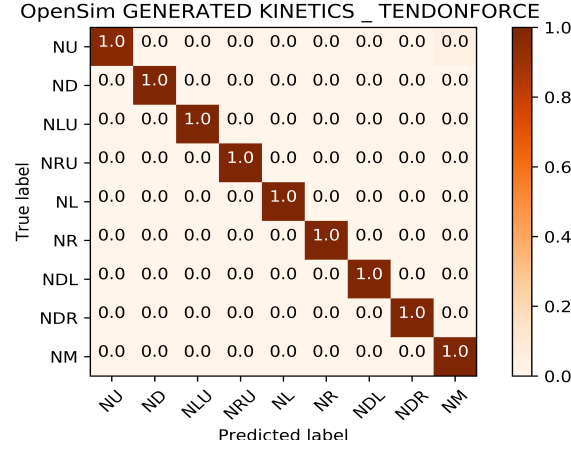


Figure 15: Kinetics-Tendon Force

and Modelling, (HAREM) Oxford, United Kingdom, 2005.

- [2] V. Kellokumpu, G. Zhao, and M. Pietikäinen, “Human activity recognition using a dynamic texture based method,” in *The Proceedings of British Machine Vision Conference 2008, Leeds, United Kingdom*, 2008.
- [3] K. K. Biswas and S. K. Basu, “Gesture recognition using microsoft kinect,” in *The Proceedings of The 5th IEEE international conference on automation, robotics and applications*, Wellington, New Zealand, 2011.
- [4] A. Nandy, R. Chakraborty, and P. Chakraborty, “Cloth invariant gait recognition using pooled segmented statistical features,” *Neurocomputing*, vol. 191, pp. 117–140, 2016.
- [5] R. Balakrishnan, E. Chinnavan, and T. Feii, “An extensive usage of hand held devices will lead to musculoskeletal disorder of upper extremity among student in amu: a survey method,” *International Journal of Physical Education, Sports and Health*, vol. 3, no. 2, pp. 368–372, 2016.
- [6] B. Thanathornwong, S. Suebnukarn, Y. Songpaisan, and K. Ouivirach, “A system for predicting and preventing work-related musculoskeletal disorders among dentists,” *Computer methods in biomechanics and biomedical engineering*, vol. 17, no. 2, pp. 177–185, 2014.
- [7] M. Kadaba, H. Ramakrishnan, M. Wootten, J. Gainey, G. Gorton, and G. Cochran, “Repeatability of kinematic, kinetic, and electromyographic data in normal adult gait,” *Journal of Orthopaedic Research*, vol. 7, no. 6, pp. 849–860, 1989.
- [8] S. Pizzolato, L. Tagliapietra, M. Cognolato, M. Reggiani, H. Müller, and M. Atzori, “Comparison of six electromyography acquisition setups on hand movement classification tasks,” *PloS one*, vol. 12, no. 10, 2017.
- [9] N. U. Ahamed, Z. Taha, M. Alqahtani, O. Altwijri, M. Rahman, and A. Deboucha, “Age related differences in the surface emg signals on adolescent’s muscle during contraction,” in *The Proceedings of IOP Conference Series: Materials Science and Engineering. Malaysia & Indonesia*, 2016.
- [10] S. Deslandes, J. Mariot, B. Beaune, S. Durand, and S. Serveto, “Isokinetics for neck muscular fatigue assessment,” *Computer Methods in Biomechanics and Biomedical Engineering*, vol. 11, no. S1, pp. 87–88, 2008.
- [11] H. Saraç, S. Laporte, and B. Sandoz, “Evaluation of a passive model to mimic dynamic head/neck movements,” *Computer Methods in Biomechanics and Biomedical Engineering*, vol. 20, no. sup1, pp. S191–S192, 2017.
- [12] T. Seel, J. Raisch, and T. Schauer, “Imu-based joint angle measurement for gait analysis,” *Sensors*, vol. 14, no. 4, pp. 6891–6909, 2014.
- [13] E. J. Shiroma, M. Schepps, J. Harezlak, K. Chen, C. Matthews, A. Koster, P. Caserotti, N. Glynn, and T. Harris, “Daily physical activity patterns from hip-and wrist-worn accelerometers,” *Physiological measurement*, vol. 37, no. 10, pp. 1852–1861, 2016.
- [14] A. Moncada-Torres, K. Leuenberger, R. Gonzenbach, A. Luft, and R. Gassert, “Activity classification based on inertial and barometric pressure sensors at different anatomical locations,” *Physiological measurement*, vol. 35, no. 7, pp. 1245–1263, 2014.
- [15] N. D. Nguyen, P. H. Truong, and G.-M. Jeong, “Daily wrist activity classification using a smart band,” *Physiological measurement*, vol. 38, no. 9, pp. L10–L16, 2017.

- [16] N. L. Mifsud, N. H. Kristensen, M. Villumsen, J. Hansen, and U. G. Kersting, "Portable inertial motion unit for continuous assessment of in-shoe foot movement," *Procedia Engineering*, vol. 72, pp. 208–213, 2014.
- [17] C. Crema, A. Depari, A. Flammini, E. Sisinni, T. Haslwanter, and S. Salzmann, "Imu-based solution for automatic detection and classification of exercises in the fitness scenario," in *The Proceedings of IEEE Sensors Applications Symposium (SAS)*, Glassboro, New Jersey, 2017.
- [18] M. Georgi, C. Amma, and T. Schultz, "Recognizing hand and finger gestures with imu based motion and emg based muscle activity sensing.," in *The Proceedings of the International Conference on Bio-inspired Systems and Signal Processing (BIOSIGNALS)*, Lisbon, Portugal, 2015.
- [19] R. Chavarriaga, H. Sagha, A. Calatroni, S. T. Digumarti, G. Tröster, J. d. R. Millán, and D. Roggen, "The opportunity challenge: A benchmark database for on-body sensor-based activity recognition," *Pattern Recognition Letters*, vol. 34, no. 15, pp. 2033–2042, 2013.
- [20] K. V. RajeshKumar and E. Susan, "Smart neckband for rehabilitation of musculoskeletal disorders," 2019. INDIAN PATENTS Reference: 201941042978.
- [21] K. V. R. Kumar and S. Elias, "Smart neck-band for rehabilitation of musculoskeletal disorders," in *The proceedings of IEEE 2020 International Conference on COMMunication Systems & NETWORKS (COMSNETS)*, Bengaluru, India, 2020.
- [22] S. L. Delp, F. C. Anderson, A. S. Arnold, P. Loan, A. Habib, C. T. John, E. Guendelman, and D. G. Thelen, "Opensim: open-source software to create and analyze dynamic simulations of movement," *IEEE transactions on biomedical engineering*, vol. 54, no. 11, pp. 1940–1950, 2007.
- [23] A. Seth, M. Sherman, J. A. Reinbolt, and S. L. Delp, "Opensim: a musculoskeletal modeling and simulation framework for in silico investigations and exchange," *Procedia Iutam*, vol. 2, pp. 212–232, 2011.
- [24] D. G. Thelen and F. C. Anderson, "Using computed muscle control to generate forward dynamic simulations of human walking from experimental data," *Journal of biomechanics*, vol. 39, no. 6, pp. 1107–1115, 2006.
- [25] A. Seth, J. L. Hicks, T. K. Uchida, A. Habib, C. L. Dembia, J. J. Dunne, C. F. Ong, M. S. DeMers, A. Rajagopal, M. Millard, *et al.*, "Opensim: Simulating musculoskeletal dynamics and neuromuscular control to study human and animal movement," *PLoS computational biology*, vol. 14, no. 7, 2018.
- [26] J. D. Mortensen, A. N. Vasavada, and A. S. Merryweather, "The inclusion of hyoid muscles improve moment generating capacity and dynamic simulations in musculoskeletal models of the head and neck," *PloS one*, vol. 13, no. 6, 2018.
- [27] D. Cazzola, T. P. Holsgrove, E. Preatoni, H. S. Gill, and G. Trewartha, "Cervical spine injuries: A whole-body musculoskeletal model for the analysis of spinal loading," *PloS one*, vol. 12, no. 1, 2017.
- [28] J. Mortensen, M. Trkov, and A. Merryweather, "Improved ergonomic risk factor assessment using opensim and inertial measurement units," in *The Proceedings of IEEE/ACM International Conference on Connected Health: Applications, Systems and Engineering Technologies (CHASE)* Washington, D.C, 2018.