

Generalized golden mean and the efficiency of thermal machines

Ramandeep S. Johal*

Department of Physical Sciences,

Indian Institute of Science Education and Research Mohali,

Sector 81, S.A.S. Nagar,

Manauli PO 140306, Punjab, India

Abstract

We investigate generic heat engines and refrigerators operating between two heat reservoirs, for the condition when their efficiencies are equal to each other. It is shown that the corresponding value of efficiency is given as the inverse of the generalized golden mean, ϕ_p , where the parameter p depends on the degrees of irreversibility of both engine and refrigerator. The reversible case ($p = 1$) yields the efficiency in terms of the standard golden mean. We also extend the analysis to a three-heat-reservoir setup.

I. INTRODUCTION

Although the golden mean (golden ratio) has engaged artists, mathematicians and philosophers since antiquity¹⁻⁴, it has been appreciated more recently that it is not a unique number as far as many of its algebraic and geometric properties are concerned^{5,6}. In fact, one of the simplest generalizations of the golden mean may be defined by the positive solution, ϕ_p , of the following quadratic equation:

$$x^2 - px - 1 = 0, \quad (1)$$

where p is a given positive number. The number ϕ_p is given by:

$$\phi_p = \frac{\sqrt{p^2 + 4} + p}{2}, \quad (2)$$

also referred as the p th order extreme mean (POEM)⁵. More specifically, when p is a positive integer n , it is addressed as the n th order extreme mean (NOEM)⁶ or a member of the family of metallic means. For example, $p = 1$ gives the golden mean $\phi_1 = (\sqrt{5} + 1)/2$; $p = 2$ yields the silver mean, $\phi_2 = \sqrt{2} + 1$, and so on. Amongst other mathematical constructions, the ratio of successive terms in the generalized Fibonacci sequence $F_n = pF_{n-1} + F_{n-2}$, tend to this number:

$$\lim_{n \rightarrow \infty} \frac{F_{n+1}}{F_n} = \phi_p. \quad (3)$$

It also relates the lengths of diagonals of a regular odd n -gon ($n \geq 5$). For other properties and identities related to ϕ_p , see Ref.⁶.

The generalized golden mean (ϕ_p) appears as the optimal solution determining the shape of Newton's frustum that faces the least resistance while moving through a rare medium⁷. The metallic means family has been related to quasiperiodic dynamics⁸. Another simple physical example is a semi-infinite resistor network^{9,10} as shown in Fig. 1a, whose equivalent resistance (r') between points A and B satisfies the quadratic equation: $(r')^2 - rr' - 1 = 0$, and therefore, $r' = \phi_r$. In this article, we describe an occurrence of the generalized golden mean in the context of thermodynamics by relating this number to the instance of equal efficiencies of a heat engine and refrigerator.

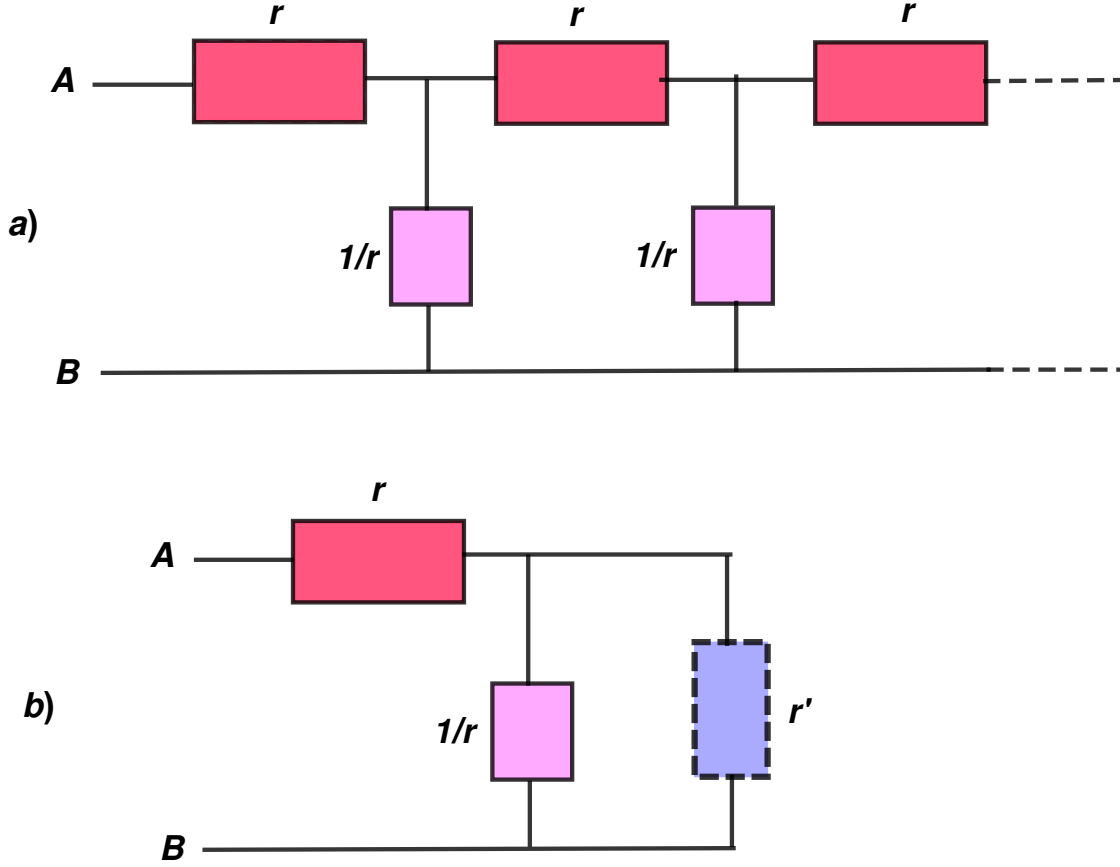


FIG. 1. a) An semi-infinite resistor network where each resistance in series is r while a resistance in parallel is $1/r$. b) The effective resistance between points A and B is $r' = \phi_r$.

II. TWO-HEAT-RESERVOIR SETUP

A heat engine and a refrigerator constitute basic mechanisms of a thermal machine operating between two heat reservoirs at unequal temperatures, say, T_h and T_c ($T_c < T_h$)¹¹. An irreversible machine always leads to a net entropy increase of the universe. On the other hand, the ideal limit of a reversible operation implies no net entropy change of the universe. Further, irreversibility leads to a decrease in performance of the machine, and so the efficiency of a thermal machine is limited by its maximal value, known as the Carnot efficiency, obtained in the reversible case.

Heat engine: We first consider an irreversible heat engine working in a cycle, and suppose that W amount of work is extracted per cycle when Q_h amount of heat is absorbed from the hot reservoir. The total entropy generated per cycle is:

$$\Delta_{\text{tot}}S = -\frac{Q_h}{T_h} + \frac{Q_c}{T_c} > 0. \quad (4)$$

where $Q_c = Q_h - W$, is the heat rejected to the cold reservoir. All quantities defined above are positive. From Eq. (4), we can express the work output of an irreversible cycle as:

$$W = (1 - \theta)Q_h - T_c\Delta_{\text{tot}}S, \quad (5)$$

where $\theta = T_c/T_h$. Let $\Delta_{\text{rev}}S = Q_h/T_h$ be the entropy transferred from the hot reservoir to the working medium, in the reversible case. Then, the efficiency, $E = W/Q_h$, can be written as

$$E = 1 - \left(1 + \frac{\Delta_{\text{tot}}S}{\Delta_{\text{rev}}S}\right) \theta. \quad (6)$$

Here, we define the “irreversibility” parameter, $z = 1 + \Delta_{\text{tot}}S/\Delta_{\text{rev}}S > 1$, so that the efficiency of the engine can be expressed as $E = 1 - z\theta$. The reversible case corresponds to $\Delta_{\text{tot}}S = 0$, or $z = 1$, yielding Carnot efficiency equal to $1 - \theta$. In other words, $0 \leq E \leq 1 - \theta$ implies $1 \leq z \leq 1/\theta$.

Refrigerator: Now, let us consider the machine in the refrigerator mode. Suppose, an input work $\mathcal{W}$ is required to transport $\mathcal{Q}_c$ amount of heat against the temperature gradient. Let $\mathcal{Q}_h = \mathcal{Q}_c + \mathcal{W}$, be the amount of heat deposited in the hot reservoir. The efficiency of a refrigerator is defined as $R = \mathcal{Q}_c/\mathcal{W}$. The total entropy generated per cycle¹¹ is:

$$\Delta_{\text{tot}}\mathcal{S} = \frac{\mathcal{Q}_h}{T_h} - \frac{\mathcal{Q}_c}{T_c} > 0. \quad (7)$$

Let $\Delta_{\text{rev}}\mathcal{S}$ be the amount of heat transferred reversibly, from the *cold* reservoir to the working medium. Then we have $\mathcal{Q}_c = T_c\Delta_{\text{rev}}\mathcal{S}$, and so, we can write

$$\mathcal{W} = \frac{1 - \theta}{\theta} \mathcal{Q}_c + T_h\Delta_{\text{tot}}\mathcal{S}. \quad (8)$$

The efficiency is then given by:

$$R = \theta \left(1 + \frac{\Delta_{\text{tot}}\mathcal{S}}{\Delta_{\text{rev}}\mathcal{S}} - \theta\right)^{-1}. \quad (9)$$

Analogous to the case of engine, we define the parameter $z' = 1 + \Delta_{\text{tot}}\mathcal{S}/\Delta_{\text{rev}}\mathcal{S} > 1$, and express the efficiency of the refrigerator as : $R = \theta(z' - \theta)^{-1}$. In the reversible case, $z' = 1$, and so $R = \theta(1 - \theta)^{-1}$. Note that, unlike the parameter z , z' is not bounded from above.

In the above, we have identified the expressions for efficiencies as functions of the ratio of temperatures as well as the irreversibility parameter z or z' . These expressions refer to *any* irreversible thermal cycle between the two reservoirs, with given values of θ, z and z' . We may now ask, for what ratio of temperatures, a heat engine and a refrigerator with the given values of their respective irreversibility parameters, have the *same* efficiency, and what is its value?

Thereby, setting $E = R$, and solving for $0 < \theta < 1$, we obtain:

$$\theta = \frac{zz' + 2 - \sqrt{(zz')^2 + 4}}{2z}. \quad (10)$$

Then, the efficiency, $E = 1 - z\theta$, at the above condition is given by:

$$E = R = \frac{\sqrt{(zz')^2 + 4} - zz'}{2}. \quad (11)$$

Interestingly, the above expression for the efficiency depends only on the *product* of the irreversibility parameters. Thus, we may define $zz' \equiv p$, and rewrite Eq. (11) as follows

$$E = \frac{\sqrt{p^2 + 4} - p}{2} = \frac{1}{\phi_p}, \quad (12)$$

where E is expressed in terms of ϕ_p from Eq. (2). Note that, in the above $p \geq 1$, where $p = 1$ implies the reversible case, with $z = z' = 1$, yielding $E = R = (\sqrt{5} - 1)/2 = 1/\phi_1$, which was earlier noted in Ref.¹². Correspondingly, the ratio of temperatures in the reversible case is required to be: $\theta = (3 - \sqrt{5})/2 = 2 - \phi_1$.

III. THREE-HEAT-RESERVOIR SETUP

Next, we show the occurrence of the generalized golden mean in a slightly different setting. Let us consider three heat reservoirs with temperatures ordered as $T_l < T_c < T_h$. Assume that we can operate an engine between the reservoirs at T_h and T_l , and a refrigerator between the reservoirs at T_c and T_l (see Fig. 2). Further, let these be ideal or reversible machines, so that the respective thermal efficiencies are given as:

$$E_{hl} = \frac{T_h - T_l}{T_h}, \quad R_{cl} = \frac{T_l}{T_c - T_l}. \quad (13)$$

Now, for given values of T_h and T_c , we look for the temperature T_l such that these two

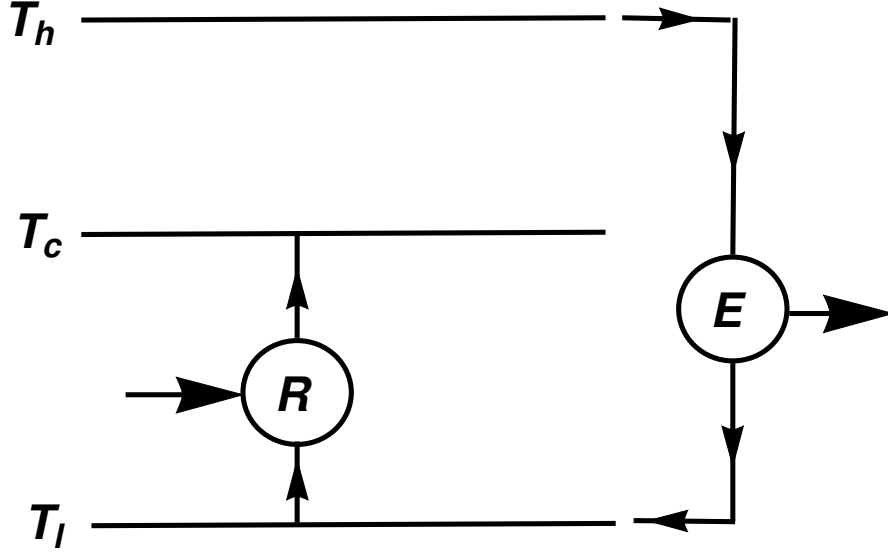


FIG. 2. A three heat-reservoir setup, in which a heat engine runs between the hottest (T_h) and the coldest (T_l) reservoirs, while a refrigerator runs between the coldest and an intermediate reservoir (T_c). For given values of T_h and T_c , we look for T_l at which efficiencies of the engine and the refrigerator are equal.

efficiencies become equal. Setting $E_{hl} = R_{cl}$, we obtain a quadratic equation for T_l :

$$T_l^2 - (2T_h + T_c)T_l + T_h T_l = 0, \quad (14)$$

whose solutions are:

$$T_l = \frac{T_h}{2} \left[\theta + 2 \pm \sqrt{\theta^2 + 4} \right], \quad (15)$$

where $\theta = T_c/T_h$. Only the negative root above yields an allowed value of the efficiency, given by:

$$E_{hl} = R_{cl} = \frac{\sqrt{\theta^2 + 4} - \theta}{2} = \frac{1}{\phi_\theta}. \quad (16)$$

Note that the generalized golden mean appears above within a reversible setup. Secondly, due to $0 < \theta < 1$, it covers a range of parameters complementary to the expression (12), where $p \geq 1$.

Finally, we extend our exploration on the three-heat-reservoir case also into the irreversible regime. Consider an irreversible engine between T_h and T_l , specified by the irreversibility parameter z . Likewise, let the corresponding parameter for the refrigerator operating between T_c and T_l be z' . Then, following Section II, the efficiencies of these machines can be written as:

$$\bar{E}_{hl} = 1 - z \frac{T_l}{T_h}; \quad \bar{R}_{cl} = \frac{T_l/T_c}{z' - T_l/T_c}. \quad (17)$$

Now setting the condition $\bar{E}_{hl} = \bar{R}_{cl}$, we can solve for T_l :

$$T_l = \frac{T_h}{2z} \left[p\theta + 2 \pm \sqrt{(p\theta)^2 + 4} \right], \quad (18)$$

where $p = zz'$. Consequently, the allowed solution for efficiency is given by:

$$\bar{E}_{hl} = \frac{\sqrt{(p\theta)^2 + 4} - p\theta}{2} = \frac{1}{\phi_{p\theta}}. \quad (19)$$

For $p = 1$, we obtain the reversible case discussed above (Eq. (16)). Moreover, letting $\theta \rightarrow 1$, which may be realized by taking $T_c \rightarrow T_h$, we revert to the case of two reservoirs (at T_h and T_l), as discussed in Section II.

IV. CONCLUSIONS

In the above, we have observed that the generalized golden mean determines the efficiencies of a heat engine and a refrigerator when the latter are set equal to each other. When both the machines are reversible, the efficiency is related to the standard golden mean. To extend to irreversible domain, we have first recast the efficiency of a generic heat engine and a refrigerator in terms of an irreversibility parameter and the ratio of the reservoir temperatures. Then, the efficiency depends only on the product of the two irreversibility parameters.

The importance of this step can be appreciated by noting that *only* for the reversible case, we have $R = Q_c/W_h$ along with $E = W/Q_h$, where $Q_c = Q_h - W$, i.e. the same amounts of heat and work appear for a *reversible* heat engine as well as for a refrigerator. So, in this case, we can express the condition $E = R$, as follows:

$$\frac{W}{Q_h} = \frac{Q_c}{W}. \quad (20)$$

From this, we obtain the equation: $E = E^{-1} - 1$, whose solution is $E = R = 1/\phi_1^{12}$. However, the efficiencies in the irreversible case are $E = W/Q_h$ and $R = \mathcal{Q}_c/\mathcal{W}_h$, which don't seem useful for applying the $E = R$ condition. Thereby, the forms (6) and (9) have been employed. Further, we have also extended this condition to three-reservoir scenario which also includes the limiting case of two-reservoir setup. It will be interesting to identify physical situations leading to the equality of the efficiencies of engine and refrigerator under the given conditions. Here, we have discussed one possible setup using three heat reservoirs. The interested reader can identify other engine-refrigerator pairs in the three-reservoir setup which lead to equal efficiencies, expressed in terms of suitable generalized golden means.

* rsjohal@iisermohali.ac.in

¹ H. S. M. Coxeter, *Introduction to Geometry*, 2nd ed. (Wiley, New York, 1969).

² C. S. Ogilvy, *Excursions in Geometry* (Dover, New York, 1990) pp. 122-125.

³ G. Markowsky, The College Mathematics Journal **23**, 2 (1992), <https://doi.org/10.1080/07468342.1992.11973428>.

⁴ M. Livio, *The Golden Ratio: The Story of Phi, The World's Most Astonishing Number* (Broadway Books, New York, 2002).

⁵ C. Falbo, The College Mathematics Journal **36**, 123 (2005), <https://doi.org/10.1080/07468342.2005.11922119>.

⁶ D. H. Fowler, Fibonacci Quarterly **20**, 146 (1982).

⁷ J. Cruz-Sampedro and M. Tetlalmatzi-Montiel, The College Mathematics Journal **41**, 145 (2010), <https://doi.org/10.4169/074683410X480258>.

⁸ V. W. D. Spinadel, Chaos, Solitons & Fractals **8**, 1631 (1997).

⁹ T. P. Srinivasan, American Journal of Physics **60**, 461 (1992), <https://doi.org/10.1119/1.16849>.

¹⁰ M. Kasperski and W. Kłobus, European Journal of Physics **35**, 015008 (2013).

- ¹¹ M. Zemansky and R. Dittman, *Heat and Thermodynamics: An Intermediate Textbook*, International Series in Pure and Applied Physics (McGraw-Hill, 1997).
- ¹² V. V. Popkov and E. V. Shipitsyn, *Physics-Uspekhi* **43**, 1155 (2000).