

The joint survival signature of coherent systems with shared components

Tahani Coolen-Maturi^{1,a}, Frank P.A. Coolen¹, Narayanaswamy Balakrishnan²

¹*Department of Mathematical Sciences, Durham University, Durham, UK.*

²*Department of Mathematics and Statistics, McMaster University, Ontario, Canada.*

Abstract

The concept of joint bivariate signature, introduced by Navarro et al. [7], is a useful tool for studying the dependence between two systems with shared components. As with the univariate signature, introduced by Samaniego [9], its applications are limited to systems with only one type of components which restricts its practical use. Coolen and Coolen-Maturi [1] introduced the survival signature, which is capable of dealing with multiple types of components. In this paper we present a survival signature for systems with shared components, including one or multiple types of components.

Keywords: Coherent systems, exchangeable components, signature, survival signature, system reliability.

1. Introduction

In recent decades, the signature has become a popular tool for quantifying reliability of coherent systems consisting of components with exchangeable random failure times [9], where in the literature the assumption of exchangeability [2] is often replaced by the stronger assumption of independent and identically distributed (*iid*) component failure times. The signature can be used to quantify aspects of reliability of a system such as its failure time distribution. A detailed introduction and overview of system signatures is presented by Samaniego [9].

The essential property of the system signature is that it enables information of the system structure to be fully taken into account through the signature, and this is separated from information about the random failure times of the components. The main disadvantage of system signatures, however, is that it becomes extremely complicated, and is indeed effectively impossible, to keep this separation when generalizing the concept

^aCorresponding author: tahani.maturi@durham.ac.uk

to systems with multiple types of components, which is crucial for a practically applicable theory as most real-world systems consist of more than a single type of components [1, 6]. As an alternative to the signature, Coolen and Coolen-Maturi [1] introduced the survival signature. For systems with just one type of components, the survival signature is closely related to the signature, but the survival signature can be defined for, and easily applied to, systems with multiple types of components. Many interesting problems have been investigated using the concept of survival signature, see, e.g. [3, 4, 8].

There are many scenarios where two or more systems share multiple components, which can be of different types. Consider for example the case of two computers linked to a server, where the performance of any computer will depend on the performance of the shared components, in the server, and the performance of its own components. While we do not focus explicitly on it, it is important to note that the theory in this paper can also be applied for the case of one system which performs two or more functions, with some but not all components involved in multiple functions.

Navarro et al. [5] and Zarezadeh et al. [10] introduced the signature for systems with shared components, however the joint signature representation has no probability interpretation, that is they can take negative values. Navarro et al. [7] presented the so-called joint bivariate signature, in which the joint signature had a probabilistic interpretation, they also showed how the joint bivariate signature can be used to perform stochastic comparisons. But again their method is limited to one type of component, which is less useful in real world applications. In this paper, we introduce the joint survival signature of coherent systems with shared components, which can be of different types. This paper is organised as follows. Section 2 provides a brief overview of the survival signature introduced by Coolen and Coolen-Maturi [1]. Section 3 introduces the joint survival signature of two coherent systems with shared components, followed by generalisation for more than two coherent systems in Section 4. Examples are provided throughout to illustrate the proposed methods.

2. Survival signature

For a system with n components, we define the state vector $\underline{x} \in \{0, 1\}^n$ with entry $x_i = 1$ if the i th component functions and $x_i = 0$ if not. The labelling of the components is arbitrary but must be fixed to define \underline{x} . The structure function $\phi : \{0, 1\}^n \rightarrow \{0, 1\}$, defined for all possible \underline{x} , takes the value 1 if the system functions and 0 if the system does not function for state vector \underline{x} . In this paper, we restrict attention to coherent systems, which means that $\phi(\underline{x})$ is not decreasing in any of the components of \underline{x} , so system

functioning cannot be improved by worse performance of one or more of its components. We further assume that $\phi(\underline{0}) = 0$ and $\phi(\underline{1}) = 1$, so the system fails if all its components fail and it functions if all its components function. These assumptions could be relaxed but are reasonable for most practical systems, and they simplify the presentation in this paper.

Consider a system with $K \geq 2$ types of components, with n_k components of type $k \in \{1, 2, \dots, K\}$ and $\sum_{k=1}^K n_k = n$. Assume that the random failure times of components of the same type are exchangeable [2], while full independence is assumed for the random failure times of components of different types. Due to the arbitrary ordering of the components in the state vector, components of the same type can be grouped together, leading to a state vector that can be written as $\underline{x} = (\underline{x}^1, \underline{x}^2, \dots, \underline{x}^K)$, with $\underline{x}^k = (x_1^k, x_2^k, \dots, x_{n_k}^k)$ the sub-vector representing the states of the components of type k .

Coolen and Coolen-Maturi [1] introduced the *survival signature* for such a system, denoted by $\Phi(l_1, l_2, \dots, l_K)$, with $l_k = 0, 1, \dots, n_k$ for $k = 1, \dots, K$, which is defined to be the probability that the system functions given that *precisely* l_k of its n_k components of type k function, for each $k \in \{1, 2, \dots, K\}$.

There are $\binom{n_k}{l_k}$ state vectors \underline{x}^k with $\sum_{i=1}^{n_k} x_i^k = l_k$; let S_l^k denote the set of these state vectors for components of type k and let S_{l_1, \dots, l_K} denote the set of all state vectors for the whole system for which $\sum_{i=1}^{n_k} x_i^k = l_k$, $k = 1, 2, \dots, K$. Due to the exchangeability assumption for the failure times of the n_k components of type k , all the state vectors $\underline{x}^k \in S_l^k$ are equally likely to occur, hence

$$\Phi(l_1, \dots, l_K) = \left[\prod_{k=1}^K \binom{n_k}{l_k}^{-1} \right] \times \sum_{\underline{x} \in S_{l_1, \dots, l_K}} \phi(\underline{x}) \quad (1)$$

Let $C_k(t) \in \{0, 1, \dots, n_k\}$ denote the number of components of type k in the system which function at time $t > 0$. The probability that the system functions at time $t > 0$ is

$$P(T_S > t) = \sum_{l_1=0}^{n_1} \cdots \sum_{l_K=0}^{n_K} \Phi(l_1, \dots, l_K) P\left(\bigcap_{k=1}^K \{C_k(t) = l_k\}\right) \quad (2)$$

Assumed independence of the failure times of components of different types leads to, for $l_k \in \{0, 1, \dots, n_k\}$ for each $k \in \{1, \dots, K\}$,

$$P\left(\bigcap_{k=1}^K \{C_k(t) = l_k\}\right) = \prod_{k=1}^K P(C_k(t) = l_k)$$

The additional assumption of *iid* failures times of components of the same type with known CDF $F_k(t)$ for type k leads to

$$P\left(\bigcap_{k=1}^K \{C_k(t) = l_k\}\right) = \prod_{k=1}^K \binom{n_k}{l_k} [F_k(t)]^{n_k - l_k} [1 - F_k(t)]^{l_k}$$

3. Joint survival signature of two coherent systems with shared components

Let T_1 and T_2 be the failure times of two coherent systems, S_1 and S_2 , based on components with *iid* failure time X_1, \dots, X_n having a common continuous distribution function F . A coherent system fails at the failure of one of its components. The two systems can share one or more components, and each of the systems is allowed to be of order less than n . Let us assume that the first system is based on n_1^* components and the second system is based on n_2^* components, and they are having n_{12} components in common (shared components), that is $n = n_1^* + n_2^* - n_{12}$. Obviously $n_{12} > 0$, otherwise the two systems are independent (by the *iid* assumption above). Let $n_1^* = n_1 + n_{12}$ and $n_2^* = n_2 + n_{12}$ so $n = n_1 + n_2 + n_{12}$. In [7], only one type of components is considered, we will discuss how our method can be extended for multiple types of components. In addition to the above assumptions, we also assume that there are no repairs, so once a component fails it remains failed.

In this section we consider system failures at different times, including inferences about the joint survival function of two systems at two different times, which we can use to derive the marginal survival function of a system with shared components, and the conditional reliability of the two systems. First we will consider systems that shared the same type of components then we extend that for components of different types.

3.1. One-type of shared components

The survival signature $\Phi(l_1, l_2, l_{[1]2}, l_{[1]2})$ can be defined as the probability that systems S_1 and S_2 function given that precisely l_1 out of n_1 , $l_{[1]2}$ out of n_{12} , l_2 out of n_2 , and $l_{[1]2}$ out of n_{12} components function, where $l_{[1]2}$ is the number of components out of n_{12} that function when S_1 is considered, and $l_{[1]2}$ is the number of components out of n_{12} that function when S_2 is considered. We can write this as

$$\Phi(l_1, l_2, l_{[1]2}, l_{[1]2}) = P(SF_1, SF_2 | l_1, l_2, l_{[1]2}, l_{[1]2}) \quad (3)$$

where SF_i denotes the event that system i functions.

It is important to mention here that, as we may want to consider S_1 and S_2 at different times, say respectively at t_1 and t_2 , thus $l_{12} = (l_{[1]2}, l_{[1]2})$ is needed. It is also important

to emphasize, given the above setting, that we have the same $\min(l_{1[2]}, l_{[1]2})$ components functioning at both times t_1 and t_2 , and the same $n_1 - \max(l_{1[2]}, l_{[1]2})$ components not functioning at both times. The remaining components (if $l_{1[2]} \neq l_{[1]2}$ are different) fail between the two different times. That is $\Phi(l_1, l_2, l_{[1]2}, l_{1[2]}) = 0$ if $t_1 < t_2$ and $l_{1[2]} \geq l_{[1]2}$ or if $t_1 > t_2$ and $l_{1[2]} \leq l_{[1]2}$.

Let $C_{t_1}^1 \in \{0, 1, \dots, n_1\}$ and $C_{t_1}^{[1]2} \in \{0, 1, \dots, n_{12}\}$ denote the numbers of components in system S_1 that function at time $t_1 > 0$. And let $C_{t_2}^2 \in \{0, 1, \dots, n_2\}$ and $C_{t_2}^{1[2]} \in \{0, 1, \dots, n_{12}\}$ denote the numbers of components in system S_2 that function at time $t_2 > 0$. If the probability distribution of the component failure time has CDF $F(t)$, then for $t_1 < t_2$, thus $l_{1[2]} \leq l_{[1]2}$, we can write

$$P(T_1 > t_1, T_2 > t_2) = \sum_{l_1=0}^{n_1} \sum_{l_2=0}^{n_2} \sum_{l_{[1]2}=0}^{n_{12}} \sum_{l_{1[2]}=0}^{n_{12}} \Phi(l_1, l_2, l_{[1]2}, l_{1[2]}) P_{C_{t_1} < t_2}(l_1, l_2, l_{[1]2}, l_{1[2]})$$

where

$$\begin{aligned} P_{C_{t_1} < t_2}(l_1, l_2, l_{[1]2}, l_{1[2]}) &= P(C_{t_1}^1 = l_1, C_{t_2}^2 = l_2, C_{t_1}^{[1]2} = l_{[1]2}, C_{t_2}^{1[2]} = l_{1[2]}) \\ &= \frac{n_1!}{(n_1 - l_1)! l_1!} [1 - F(t_1)]^{l_1} [F(t_1)]^{n_1 - l_1} \frac{n_2!}{(n_2 - l_2)! l_2!} [1 - F(t_2)]^{l_2} [F(t_2)]^{n_2 - l_2} \\ &\times \frac{n_{12}!}{(n_{12} - l_{[1]2})! (l_{[1]2} - l_{1[2]})! l_{1[2]}!} [F(t_1)]^{n_{12} - l_{[1]2}} [F(t_2) - F(t_1)]^{l_{[1]2} - l_{1[2]}} [1 - F(t_2)]^{l_{1[2]}} \end{aligned}$$

And for $t_1 > t_2$, thus $l_{1[2]} \geq l_{[1]2}$, we have

$$\begin{aligned} P_{C_{t_1} > t_2}(l_1, l_2, l_{[1]2}, l_{1[2]}) &= \\ &\frac{n_1!}{(n_1 - l_1)! l_1!} [1 - F(t_1)]^{l_1} [F(t_1)]^{n_1 - l_1} \frac{n_2!}{(n_2 - l_2)! l_2!} [1 - F(t_2)]^{l_2} [F(t_2)]^{n_2 - l_2} \\ &\times \frac{n_{12}!}{(n_{12} - l_{1[2]})! (l_{1[2]} - l_{[1]2})! l_{[1]2}!} [F(t_2)]^{n_{12} - l_{1[2]}} [F(t_1) - F(t_2)]^{l_{1[2]} - l_{[1]2}} [1 - F(t_1)]^{l_{[1]2}} \end{aligned}$$

If $t_1 = t_2 = t$, then $P_{C_{t_1} < t_2}(l_1, l_2, l_{[1]2}, l_{1[2]}) := 0$ for $l_{[1]2} \neq l_{1[2]}$, and if $l_{[1]2} = l_{1[2]} = l_{12}$ then

$$\begin{aligned} P_{C_{t_1} < t_2}(l_1, l_2, l_{[1]2}, l_{1[2]}) &= \\ &\frac{n_1!}{(n_1 - l_1)! l_1!} [1 - F(t_1)]^{l_1} [F(t_1)]^{n_1 - l_1} \frac{n_2!}{(n_2 - l_2)! l_2!} [1 - F(t_2)]^{l_2} [F(t_2)]^{n_2 - l_2} \\ &\times \frac{n_{12}!}{(n_{12} - l_{12})! l_{12}!} [F(t_1)]^{n_{12} - l_{12}} [1 - F(t_2)]^{l_{12}} \end{aligned}$$

Note that $P(C) = 0$ for $t_1 < t_2$ if $l_{[1]2} < l_{1[2]}$ and for $t_1 > t_2$ if $l_{[1]2} > l_{1[2]}$.

3.2. Marginal survival signature of two coherent systems with shared components

For $t_1 = 0$ and $t_2 > 0$, so in this case we assume that $P(l_{[1]2} = n_{12}) = 1$ and $P(l_1 = n_1) = 1$, thus

$$\begin{aligned} P(T_2 > t_2) &= P(T_1 > 0, T_2 > t_2) = \sum_{l_1=n_1}^{n_1} \sum_{l_2=0}^{n_2} \sum_{l_{[1]2}=n_{12}}^{n_{12}} \sum_{l_{1[2]}=0}^{n_{12}} \Phi(l_1, l_2, l_{[1]2}, l_{1[2]}) P_C(l_1, l_2, l_{[1]2}, l_{1[2]}) \\ &= \sum_{l_2=0}^{n_2} \sum_{l_{1[2]}=0}^{n_{12}} \Phi(n_1, l_2, n_{12}, l_{1[2]}) P_C(n_1, l_2, n_{12}, l_{1[2]}) \end{aligned}$$

where $\Phi(n_1, l_2, n_{12}, l_{1[2]}) = P(S_1, S_2 | n_1, l_2, n_{12}, l_{1[2]}) = P(S_2 | l_2, l_{1[2]}) = \Phi(l_2, l_{1[2]})$, and since $F(t_1 = 0) = 0$ then

$$P_C(n_1, l_2, n_{12}, l_{1[2]}) = \binom{n_2}{l_2} [1 - F(t_2)]^{l_2} [F(t_2)]^{n_2 - l_2} \binom{n_{12}}{l_{1[2]}} [F(t_2)]^{n_{12} - l_{1[2]}} [1 - F(t_2)]^{l_{1[2]}}$$

3.3. Conditional reliability of two coherent systems with shared components

In this section we consider the conditional reliability of two coherent systems with shared components. Suppose, one inspects system 2 at time t_2 , given system 2 functions, the probability that system 1 functions at $t_2 > t_1$.

$$P(T_1 > t_1 | T_2 > t_2) = \frac{P(T_1 > t_1, T_2 > t_2)}{P(T_2 > t_2)}$$

and for $t_1 \geq t_2$,

$$P(T_1 > t_1 | T_2 \leq t_2) = \frac{P(T_1 > t_1, T_2 \leq t_2)}{P(T_2 \leq t_2)}$$

Now let us consider the case when system 2 is known to be function at t_2 , and we would like to find the probability that both systems function at t_1 ($t_1 > t_2$), then

$$P(T_1 > t_1, T_2 > t_1 | T_2 > t_2) = P(\min\{T_1, T_2\} > t_1 | T_2 > t_2) = \frac{P(T_1 > t_1, T_2 > t_1)}{P(T_2 > t_2)}$$

All these conditional probabilities are easily derived using the results presented in Sections 3.1 and 3.2.

3.4. Some relationships

Let us define $\Phi(l_1^*)$ as the probability that system S_1 functions given that precisely $l_1^* = l_1 + l_{[1]2}$ out of $n_1^* = n_1 + n_{12}$ components function. We can define similarly $\Phi(l_2^*)$ for system S_2 . That is

$$\begin{aligned}\Phi(l_1^*) &= P(SF_1|l_1^*) \\ &= P(SF_1|l_1^*, l_1, l_{[1]2})P(l_1, l_{[1]2}|l_1^*) \\ &= P(SF_1|l_1, l_{[1]2})P(l_1, l_{[1]2}|l_1^*) \\ &= \Phi(l_1, l_{[1]2})P(l_1, l_{[1]2}|l_1^*)\end{aligned}$$

which means that $\Phi(l_1^*) \leq \Phi(l_1, l_{[1]2})$.

The survival signature $\Phi(l_1^*, l_2^*)$ can be defined as the probability that both systems S_1 and S_2 function given that precisely l_1^* out of n_1^* and l_2^* out of n_2^* components function, respectively. Let $C_{t_1}^1 \in \{0, 1, \dots, n_1^*\}$ and $C_{t_2}^2 \in \{0, 1, \dots, n_2^*\}$ denote the number of components in system S_1 and system S_2 that function at time $t_1 > 0$ and $t_2 > 0$, respectively. There is an explicit relationship between the above and the survival signature defined in Section 3.1.

$$\begin{aligned}\Phi(l_1^*, l_2^*) &= P(SF_1, SF_2|l_1^*, l_2^*) \\ &= P(SF_1, SF_2|l_1^*, l_2^*, l_1, l_{[1]2}, l_2, l_{1[2]})P(l_1, l_{[1]2}, l_2, l_{1[2]}|l_1^*, l_2^*) \\ &= P(SF_1, SF_2|l_1, l_{[1]2}, l_2, l_{1[2]})P(l_1, l_{[1]2}, l_2, l_{1[2]}|l_1^*, l_2^*) \\ &= \Phi(l_1, l_{[1]2}, l_2, l_{1[2]})P(l_1, l_{[1]2}, l_2, l_{1[2]}|l_1^*, l_2^*)\end{aligned}$$

where for $t_1 < t_2$,

$$\begin{aligned}P(l_1, l_{[1]2}, l_2, l_{1[2]}|l_1^*, l_2^*) &= P(l_2, l_{1[2]}|l_1^*, l_2^*)P(l_1, l_{[1]2}|l_1^*, l_2^*, l_2, l_{1[2]}) \\ &= P(l_2, l_{1[2]}|l_2^*)P(l_1, l_{[1]2}|l_1^*, l_{1[2]})\end{aligned}$$

depends on $l_{[1]2} \leq l_{1[2]}$. Thus $\Phi(l_1^*, l_2^*) \leq \Phi(l_1, l_{[1]2}, l_2, l_{1[2]})$.

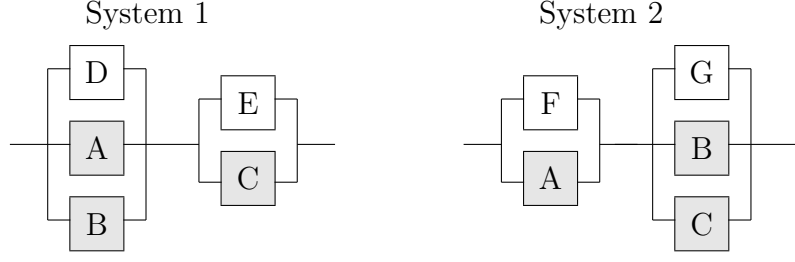


Figure 1: Two systems with one type of components, Example 1

Example 1. Consider the two systems in Figure 1. For system 1 we have $n_1^* = 5$, $n_1 = 2$, $n_{12} = 3$ and for system 2 we have $n_2^* = 5$, $n_2 = 2$, $n_{12} = 3$. That is both systems share components A, B and C. For a given $(l_1 = 1, l_2 = 1, l_{[1]2} = 2, l_{1[2]} = 1)$, Table 1 shows all possible scenarios each with probability $1/24$ due to the exchangeability assumption. In this case, the survival function is equal to $\Phi(1, 1, 2, 1) = \frac{10}{24}$.

System functions	$l_1 = 1$	$l_2 = 1$	$l_{[1]2} = 2$	$l_{1[2]} = 1$
0	D	F	AB	A
0	D	F	AB	B
0	D	G	AB	A
0	D	G	AB	B
0	D	F	AC	A
1	D	F	AC	C
1	D	G	AC	A
0	D	G	AC	C
1	D	F	BC	B
1	D	F	BC	C
0	D	G	BC	B
0	D	G	BC	C
0	E	F	AB	A
1	E	F	AB	B
1	E	G	AB	A
0	E	G	AB	B
0	E	F	AC	A
1	E	F	AC	C
1	E	G	AC	A
0	E	G	AC	C
1	E	F	BC	B
1	E	F	BC	C
0	E	G	BC	B
0	E	G	BC	C

Table 1: Two systems with one type of components, Example 1

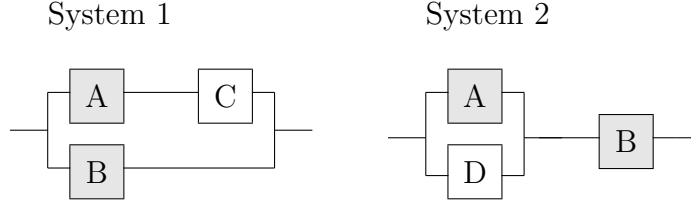


Figure 2: Two systems with one type of components, Example 2

Example 2. Consider the two systems in Figure 2. For system 1 we have $n_1^* = 3$, $n_1 = 1$ (C), $n_{12} = 2$ (A and B) and for system 2 we have $n_2^* = 3$, $n_2 = 1$ (D), $n_{12} = 2$ (A and B). That is both systems share components A and B. The survival signature is zero, $\Phi(l_1, l_2, l_{[1]2}, l_{[2]}) = 0$, for the trivial cases: $l_1 + l_2 < 2$, $l_{[1]2} = 0$ and $l_{[2]} = 0$. The survival signatures for remaining cases are given in Table 2. For example, the first row in this table represents the case for which both systems function if the same B component functions. If the probability distribution of the component failure time is exponential with rate 1, that is $F(t) = 1 - e^{-t}$, then the joint survival function is depicted in Figure 3.

C	D	A,B		$\Phi(l_1, l_2, l_{[1]2}, l_{[2]})$
$l_1 \in \{0, 1\}$	$l_2 \in \{0, 1\}$	$l_{[1]2} \in \{0, 1, 2\}$	$l_{[2]} \in \{0, 1, 2\}$	
0	1	1	1	$\frac{1}{2}$
1	0	1	1	0
1	1	1	1	$\frac{1}{2}$
0	0	1	1	0
0	0	2	1	0
0	1	2	1	$\frac{1}{2}$
1	0	2	1	0
1	1	2	1	$\frac{1}{2}$
0	0	1	2	$\frac{1}{2}$
0	1	1	2	$\frac{1}{2}$
1	0	1	2	1
1	1	1	2	1
1	1	2	2	1

Table 2: Two systems with one type of components, Example 2

3.5. Multiple-types of shared components

We extend the results of previous sections to multiple types of components. We denote the type of component $k \in \{1, 2, \dots, K\}$ as superscript. Let $C_{t_1}^{k,1} \in \{0, 1, \dots, n_1^k\}$, $C_{t_2}^{k,2} \in \{0, 1, \dots, n_2^k\}$, $C_{t_1}^{k,[1]2} \in \{0, 1, \dots, n_{12}^k\}$ and $C_{t_2}^{k,1[2]} \in \{0, 1, \dots, n_{12}^k\}$ denote the number of components of type k , $k \in \{1, 2, \dots, K\}$, in system S_1 and system S_2 that

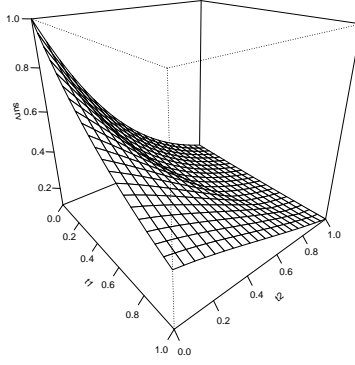


Figure 3: Two systems with one type of components, Example 2

function at time $t_1 > 0$ and $t_2 > 0$, respectively. For ease of notation, let $\underline{l}^k = (l_1^1, l_2^1, l_{[1]2}^1, l_{1[2]}^1, \dots, l_1^K, l_2^K, l_{[1]2}^K, l_{1[2]}^K)$, and we denote the summation over all their possible values by $\sum_{\underline{l}^k}$. If the probability distribution of the component failure time of type k is known and has CDF $F_k(\cdot)$, then

$$P(T_1 > t_1, T_2 > t_2) = \sum_{\underline{l}^k} \Phi(\underline{l}^k) P(C_{\underline{t}, \underline{l}^k})$$

since the components from different types are assumed to have independent failure times. Then for $t_1 < t_2$, we have

$$\begin{aligned} P(C_{\underline{t}, \underline{l}^k}) &= \prod_{k=1}^K P(C_{t_1}^{k,1} = l_1^k, C_{t_2}^{k,2} = l_2^k, C_{t_1}^{k,[1]2} = l_{[1]2}^k, C_{t_2}^{k,1[2]} = l_{1[2]}^k) \\ &= \prod_{k=1}^K \frac{n_1^k!}{(n_1^k - l_1^k)! l_1^k!} [1 - F_k(t_1)]^{l_1^k} [F_k(t_1)]^{n_1^k - l_1^k} \frac{n_2^k!}{(n_2^k - l_2^k)! l_2^k!} [1 - F_k(t_2)]^{l_2^k} [F_k(t_2)]^{n_2^k - l_2^k} \\ &\quad \times \frac{n_{12}^k!}{(n_{12}^k - l_{[1]2}^k)! (l_{[1]2}^k - l_{1[2]}^k)! l_{1[2]}^k!} [F_k(t_1)]^{n_{12}^k - l_{[1]2}^k} [F_k(t_2) - F_k(t_1)]^{l_{[1]2}^k - l_{1[2]}^k} [1 - F_k(t_2)]^{l_{1[2]}^k} \end{aligned}$$

4. Joint survival signature of three coherent systems with shared components

There will be situations where more than two systems may share some components, e.g. in network systems. Therefore it will be of interest to consider such a setting, so we consider the case of three systems that may share some components, and then we discuss how this can be generalised for more than three systems. Suppose we have 3 coherent

systems, S_1, S_2 and S_3 , the setting for this scenario with one-type of components shared is as follows. Let the number of shared components between systems 1 and 2 be denoted by n_{12} , and the number of shared components between system 1 and 3 by n_{13} , and the number of shared components between system 2 and 3 is denoted by n_{23} , and finally the number of shared components over all three systems by n_{123} . Of course, there may be some components that belong to one system only. We can write the number of components per system as

$$n_1^* = n_1 + n_{12} + n_{13} + n_{123}$$

$$n_2^* = n_2 + n_{12} + n_{23} + n_{123}$$

$$n_3^* = n_3 + n_{13} + n_{23} + n_{123}$$

thus $n = n_1 + n_2 + n_3 + n_{12} + n_{13} + n_{23} + n_{123}$.

Let T_1, T_2 and T_3 be the failure times of the three coherent systems S_1, S_2 and S_3 , based on components with *iid* failure times X_1, X_2, \dots, X_n having a common continuous distribution function of the same type F . Let $l_{[1]2}$ and $l_{1[2]}$ be the number of components out of n_{12} that function when, respectively, S_1 and S_2 is considered. Similarly let $l_{[1]3}$ ($l_{1[3]}$) be the number of components out of n_{13} that function when S_1 (S_3) is considered, let $l_{[2]3}$ ($l_{2[3]}$) be the number of components out of n_{23} that function when S_2 (S_3) is considered, and finally let $l_{[1]23}$, $l_{1[2]3}$ and $l_{12[3]}$ be the number of components out of n_{123} that function when S_1, S_2 and S_3 are considered, respectively. For ease of notation let $\underline{l} = (l_1, l_2, l_3, l_{[1]2}, l_{1[2]}, l_{[1]3}, l_{1[3]}, l_{[2]3}, l_{2[3]}, l_{[1]23}, l_{1[2]3}, l_{12[3]})$, and we denote the summation over all their possible values as $\sum_{\underline{l}}$. The survival signature $\Phi(\underline{l})$ can be defined as

$$\Phi(\underline{l}) = P(SF_1, SF_2, SF_3 | \underline{l})$$

For $t_1 < t_2 < t_3$, and for $l_{[1]2} > l_{1[2]}$, $l_{[1]3} > l_{1[3]}$, $l_{[2]3} > l_{2[3]}$ and $l_{[1]23} > l_{1[2]3} > l_{12[3]}$, we can write

$$P(T_1 > t_1, T_2 > t_2, T_3 > t_3) = \sum_{\underline{l}} \Phi(\underline{l}) P(C_{t,\underline{l}})$$

where

$$\begin{aligned}
P(C_{\underline{t}, \underline{l}}) &= P(C_{t_1}^1 = l_1, C_{t_2}^2 = l_2, C_{t_3}^3 = l_3, C_{t_1}^{[1]2} = l_{[1]2}, C_{t_2}^{[1]2} = l_{1[2]}, C_{t_1}^{[1]3} = l_{[1]3}, C_{t_3}^{[1]3} = l_{1[3]}, \\
&\quad C_{t_2}^{[2]3} = l_{[2]3}, C_{t_3}^{[2]3} = l_{2[3]}, C_{t_1}^{[1]23} = l_{[1]23}, C_{t_2}^{[1]23} = l_{1[2]3}, C_{t_3}^{[1]23} = l_{12[3]}) \\
&= \frac{n_1!}{(n_1 - l_1)!l_1!} [1 - F(t_1)]^{l_1} [F(t_1)]^{n_1 - l_1} \\
&\times \frac{n_2!}{(n_2 - l_2)!l_2!} [1 - F(t_2)]^{l_2} [F(t_2)]^{n_2 - l_2} \\
&\times \frac{n_3!}{(n_3 - l_3)!l_3!} [1 - F(t_3)]^{l_3} [F(t_3)]^{n_3 - l_3} \\
&\times \frac{n_{12}!}{(n_{12} - l_{[1]2})!(l_{[1]2} - l_{1[2]})!l_{1[2]}!} [F(t_1)]^{n_{12} - l_{[1]2}} [F(t_2) - F(t_1)]^{l_{[1]2} - l_{1[2]}} [1 - F(t_2)]^{l_{1[2]}} \\
&\times \frac{n_{13}!}{(n_{13} - l_{[1]3})!(l_{[1]3} - l_{1[3]})!l_{1[3]}!} [F(t_1)]^{n_{13} - l_{[1]3}} [F(t_3) - F(t_1)]^{l_{[1]3} - l_{1[3]}} [1 - F(t_3)]^{l_{1[3]}} \\
&\times \frac{n_{23}!}{(n_{23} - l_{[2]3})!(l_{[2]3} - l_{2[3]})!l_{2[3]}!} [F(t_2)]^{n_{23} - l_{[2]3}} [F(t_3) - F(t_2)]^{l_{[2]3} - l_{2[3]}} [1 - F(t_3)]^{l_{2[3]}} \\
&\times \frac{n_{123}!}{(n_{123} - l_{[1]23})!(l_{[1]23} - l_{1[2]3} - l_{12[3]})!l_{12[3]}!} [F(t_1)]^{n_{123} - l_{[1]23}} [F(t_2) - F(t_1)]^{l_{[1]23} - l_{1[2]3} - l_{12[3]}} [F(t_3) - F(t_2)]^{l_{12[3]}} [1 - F(t_3)]^{l_{12[3]}}
\end{aligned}$$

Similarly one can define $P(C_{\underline{t}, \underline{l}})$ for other orderings of (t_1, t_2, t_3) . Finally, we can extend this similarly for multiple types of components, by denoting the type of component $k \in \{1, 2, \dots, K\}$ as superscript in the formulas above, and following the method of Section 3.5. However, to make this operational for non-trivial systems is computationally challenging. This is briefly illustrated in the following example.

Example 3. In addition to the two systems in Example 2, we consider a third system as in Figure 3. To illustrate the complexity of the approach in this paper for more than two systems, we show the effort required to compute the survival signature restricted to considering all systems at the same moment of time. Both systems 1 and 2 have 3 components while system 3 has 4 components, and we have $n_1 = n_2 = 0$, $n_3 = 1$ (E), $n_{12} = 1$ (B), $n_{13} = 1$ (C), $n_{23} = 1$ (D), $n_{123} = 1$ (A). As in this example we have at most one shared component among the systems, thus $l_1 = l_2 = 0$, $l_3 \in \{0, 1\}$, $l_{12}^* = l_{[1]2} = l_{1[2]} \in \{0, 1\}$, $l_{13}^* = l_{[1]3} = l_{1[3]} \in \{0, 1\}$, $l_{23}^* = l_{[2]3} = l_{2[3]} \in \{0, 1\}$, $l_{123}^* = l_{[1]23} = l_{1[2]3} = l_{12[3]} \in \{0, 1\}$. As $l_1 = l_2 = 0$ there are 2^{10} possibilities we need to consider, the first column in Table 3 shows the corresponding number of these possibilities out of 2^{10} . For example, the first three rows suggest that at least one of these systems fails when either component B or D fails, and this counts for 768 out of 1024 of possibilities ($3 \times 2^8 / 2^{10}$). Clearly, this already requires many combinations to be considered, and the combinatorics

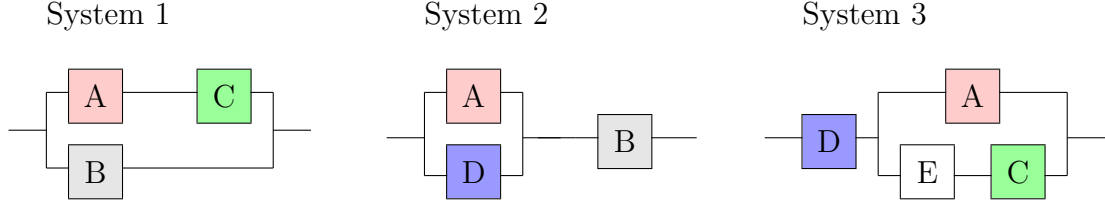


Figure 4: Three systems with one type of components, Example 3

increase enormously when also considering the systems at different moments in time. Further computational methods or approximations need to be investigated.

#	B $l_{12}^* \in \{0, 1\}$	D $l_{23}^* \in \{0, 1\}$	A $l_{123}^* \in \{0, 1\}$	C $l_{13}^* \in \{0, 1\}$	E $l_3 \in \{0, 1\}$	All systems function
2^8	0	0	0/1	0/1	0/1	No
2^8	0	1	0/1	0/1	0/1	No
2^8	1	0	0/1	0/1	0/1	No
2^7	1	1	1	0/1	0/1	Yes
2^6	1	1	0	0	0/1	No
2^5	1	1	0	1	1	Yes
2^5	1	1	0	1	0	No

Table 3: Three systems with one type of components, Example 3

5. Concluding Remarks

In this paper we have introduced the concept of joint survival signature for two systems with shared components, first we considered the case when we have only one type of component, then we extended that for multiple types of components. Then we showed how this can be generalised for more than two systems with one or multiple types of shared components. We have also derived the conditional reliability of two coherent systems with shared components and we have investigated some useful relationships.

Acknowledgements

The results presented in this paper were mostly achieved during Prof. Balakrishnan's visit to Durham University in November 2018, funded by a Durham University Global Engagement Travel Grant, which is gratefully acknowledged. The work has been presented by the first author at the UK Reliability Meeting, Durham, 1-3 April 2019 (<http://www.maths.dur.ac.uk/stats/uk-reliability>).

References

- [1] Coolen, F.P.A., Coolen-Maturi, T., 2012. Generalizing the signature to systems with multiple types of components, in: Zamojski, W., Mazurkiewicz, J., Sugier, J., Walkowiak, T., Kacprzyk, J. (Eds.), *Complex Systems and Dependability*, Springer Berlin Heidelberg, Berlin, Heidelberg. pp. 115–130.
- [2] De Finetti, B., 1974. *Theory of Probability: A Critical Introductory Treatment*. Wiley, London.
- [3] Eryilmaz, S., Coolen, F.P.A., Coolen-Maturi, T., 2018. Marginal and joint reliability importance based on survival signature. *Reliability Engineering & System Safety* 172, 118 – 128.
- [4] Huang, X., Coolen, F.P.A., Coolen-Maturi, T., 2019. A heuristic survival signature based approach for reliability-redundancy allocation. *Reliability Engineering & System Safety* 185, 511 – 517.
- [5] Navarro, J., Samaniego, F.J., Balakrishnan, N., 2010. The joint signature of coherent systems with shared components. *Journal of Applied Probability* 47, 235–253.
- [6] Navarro, J., Samaniego, F.J., Balakrishnan, N., 2011. Signature-based representations for the reliability of systems with heterogeneous components. *Journal of Applied Probability* 48, 856–867.
- [7] Navarro, J., Samaniego, F.J., Balakrishnan, N., 2013. Mixture representations for the joint distribution of lifetimes of two coherent systems with shared components. *Advances in Applied Probability* 45, 1011–1027.
- [8] Patelli, E., Feng, G., Coolen, F.P.A., Coolen-Maturi, T., 2017. Simulation methods for system reliability using the survival signature. *Reliability Engineering & System Safety* 167, 327 – 337.
- [9] Samaniego, F.J., 2007. *System Signatures and their Applications in Engineering Reliability*. Springer, New York, N.Y.
- [10] Zarezadeh, S., Mohammadi, L., Balakrishnan, N., 2018. On the joint signature of several coherent systems with some shared components. *European Journal of Operational Research* 264, 1092 – 1100.