



Technical Report

A Choreographed Outline Instrumentation Approach for Asynchronous Components

Luca Aceto, Duncan Paul Attard, Adrian Francalanza, and Anna Ingólfssdóttir

April, 2021

TÖLVUNARFRÆÐIDEILD
DEPARTMENT OF COMPUTER SCIENCE

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

LUCA ACETO, Reykjavík University, Iceland and Gran Sasso Science Institute, Italy

DUNCAN PAUL ATTARD, University of Malta, Malta and Reykjavík University, Iceland

ADRIAN FRANCALANZA, University of Malta, Malta

ANNA INGÓLFSDÓTTIR, Reykjavík University, Iceland

The runtime analysis of decentralised software requires instrumentation methods that are scalable, but also minimally invasive. This paper presents a new algorithm that instruments choreographed outline monitors. Our instrumentation algorithm scales and reorganises monitors dynamically as the system executes. We demonstrate the implementability of choreographed outline instrumentation and compare it to inline instrumentation, subject to rigorous and comprehensive benchmarking. Our results debunk the general notion that outline monitoring is necessarily infeasible, and show that our implementation induces runtime overhead comparable to that of its inline counterpart for many practical cases.

Additional Key Words and Phrases: Choreographed outline instrumentation, Asynchronous components, Decentralised runtime verification, Dynamic reconfiguration

1 INTRODUCTION

Software is increasingly decentralised and dynamic, in both structure and scale. Constituent system components execute concurrently: they are dynamically created and destroyed, forging interconnections that are determined at runtime. These characteristics make the expected software behaviour, in terms of both correctness and performance, harder to establish. Runtime monitoring is a widespread technique that is used for analysing the behaviour of decentralised and distributed software *after* it has been deployed [43, 44]. The technique uses *monitors*—computational entities consisting of logically-distinct *instrumentation* and *analysis* units—to observe the execution of the System under Scrutiny (SuS). *Instrumentation* lies at the heart of runtime monitoring [11, 43, 56]. It refers to the extraction of information from executing software, following one of two approaches. In the *grey-box* approach, developers implement instrumentation by *weaving* tracing instructions into the SuS. Alternatively, instrumentation can leverage *tracing infrastructures* (e.g. DTrace [20], LTTng [34], OpenJ9 Trace [35]) to collect trace events externally, thereby treating the SuS as a *black-box*.

Runtime Verification (RV) [11] is the verification complement to monitoring. Monitors are used to process the trace events extracted from the executing SuS in order to determine whether a *correctness specification* is satisfied or violated [11, 43]. A wide variety of RV tools instrument the SuS by weaving the monitor logic to maintain low runtime overhead [38, 39]. This grey-box approach, known as *monitor inlining* [40], brings with it other benefits such as timely detections [11]. However, inlining is not necessarily the best approach for the RV of large-scale decentralised open systems [44]. For cases where the SuS sources or binaries are unavailable, e.g. closed-source components, licensing agreements, third-party services, *etc.*, inlining *cannot* be used. In most cases, inlining is programming-language dependent, making it difficult to apply to heterogeneous components. Additionally, inlining is hard to undo once the instrumented SuS is in place.

Outline monitoring [40] is an alternative approach to inlining where the SuS and monitor components are organised as *concurrent* logical entities. This *minimal coupling* between the SuS and monitors begets a number of advantages that are more attuned to the characteristics of decentralised systems. In particular, monitors can be enabled or disabled at runtime *without* system redeployments or restarts. This is invaluable when conducting live debugging to track subtle concurrency issues that only emerge for certain execution paths. Outlining does not necessitate access to the SuS sources and tends to be more language-agnostic. Moreover, the independent SuS and monitor components permit a degree of *partial failure*: a faulty monitor does not compromise the running system, and reciprocally, a crashed SuS component can still be detected by the external monitor.

Despite these merits, inlining is still the predominant method employed by tools targeting decentralised RV (e.g. Basin et al. [12], Bonakdarpour et al. [18], Cassar and Francalanza [21], Colombo et al. [32], El-Hokayem and Falcone [36, 37], Fraigniaud et al. [42], Jin et al. [51], Kim et al. [54], Sen et al. [77, 78]). One probable reason for this is *legacy tooling*. A number of decentralised RV tools are extensions of older efforts that were originally conceived for monolithic, single-threaded RV, where inlining has traditionally performed well. It is therefore advantageous to extend a tried-and-tested approach to a new domain such as decentralised systems, rather than abandoning this technological investment in favour of a completely new approach.

The second reason is that concurrent systems have more stringent requirements, making decentralised outline instrumentation *harder* to build. Decentralised software is often designed to *scale* in response to fluctuating demands, and this naturally requires a RV set-up that grows and shrinks accordingly. With inlining, scalability comes about as a byproduct of the monitor logic that is weaved into components of the SuS. By contrast, scaling must be *explicitly* engineered in the case of outline monitoring, since the instrumentation needs to *dynamically* reconfigure the decentralised RV set-up while the runtime analysis is being effected. The decoupling forces instrumentation to contend with the *race conditions* (e.g. message reordering) that arise from the asynchronous execution of the SuS and monitors. In particular, decentralised outline instrumentation should ensure that the trace events collected from the SuS reach the intended monitors in the *correct order*. To our knowledge, no outline instrumentation that is decentralised and scalable currently exists.

The third reason why outline instrumentation is seldom considered for decentralised RV is that outlining is *perceived* to induce infeasibly higher runtime overhead when compared to inlining. This perception partly stems from the fact that inlining identifies the designated monitor instrumentation points in the SuS prior to deployment, whereas outlining defers this decision *post-deployment*. Moreover, overhead for decentralised RV is still measured in terms of criteria applicable to monolithic, single-threaded systems such as total execution time (e.g. see Bodden et al. [16], Chen and Rosu [25, 26], Lange and Yoshida [55], Neykova and Yoshida [64, 65], Reger et al. [70]). In distributed settings with high latencies, there are other facets of runtime overhead that are as important (if not more), such as the mean response time of a service invocation.

Contributions. Monitor decentralisation and outlining necessitate a *choreographed instrumentation* approach—here called ‘choreographed outline instrumentation’, and referred to simply as ‘outline instrumentation’ in the sequel. Our contributions target the last two reasons inhibiting the adoption of outline monitoring outlined above, *i.e.*, the difficulty of building outline decentralised instrumentation and the perception of unfeasibly high overheads:

- (i) We devise the first general algorithm for instrumenting choreographed outline monitors that scales with the SuS. We discuss the technical challenges of outlining, elaborating on the issues that arise due to the dynamic reconfiguration of choreographed monitors in an asynchronous setting, Sec. 2;

- (ii) We demonstrate the implementability of our proposed choreographed outline monitoring algorithm by building a tool using an industry-strength programming concurrent language. We validate the correctness of our implementation by subjecting it to rigorous invariance testing, Sec. 3.
- (iii) We compare implementations of inline and choreographed outline instrumentation via a comprehensive empirical study and show that, for respectable loads, both approaches induce comparable overhead. We judge this performance on multiple facets of runtime overhead, subjecting the SuS to loads that are typically observed in practice [3]. Our estimated overhead per SuS component reveals that outline instrumentation exacts negligible penalties, Sec. 4.

2 CHOREOGRAPHED OUTLINE INSTRUMENTATION

Studies on monolithic RV conflate the instrumentation of monitors *and* the analysis of trace events. Generally, extracting trace events via instrumentation induces the larger part of the overhead, when compared to the analysis [46, 63]. APM tools often resort to *sampling* as means of managing the overhead induced by the instrumentation [47, 80]. This solution is, however, inapplicable to RV, since many verification applications require that *every* event is considered in strict orderly fashion. In our study of decentralised RV, we delineate between the instrumentation and analysis to: (i) isolate and address the complications of instrumenting decentralised outline monitors, and, (ii) understand the impact of separating the instrumentation and analysis w.r.t. overhead. The outline instrumentation algorithm makes the following minimal assumptions on our operational model for concurrent components:

- A₁ *Local clocks*. Components do not share a common global clock.
- A₂ *Dynamic system*. The number of components fluctuates.
- A₃ *Point-to-point communication*. A sender component can interact with one receiver at any point in time.
- A₄ *Reliable communication*. Messages sent are not tampered with, are guaranteed to be delivered, and are never duplicated.
- A₅ *Message reordering*. The order the messages are sent is not necessarily the order received in. This does not apply to point-to-point communication, *i.e.*, successive messages exchanged between component pairs are delivered in the same sequence issued.
- A₆ *Reliable components*. Components are not subject to either fail-stops or Byzantine failures.

Our outline instrumentation requires monitors to be:

- R₁ *Passive*. Monitors only react to SuS events, and do not interfere with its execution.
- R₂ *Decentralised*. No central entity coordinates monitors.
- R₃ *Reliable*. Trace events are not lost, nor analysed out-of-order.

We use sequence recognisers [57, 74] as RV monitors that reach irrevocable verdicts after analysing a *finite stream* of trace events [2]; they satisfy requirement R₁. Our monitors are instrumented to run asynchronously with the SuS, in line with assumption A₁; this turns out to be the general case for distributed set-ups. We remark that distribution can be obtained by weakening assumptions A₄ and A₆. Assumption A₂ and requirement R₂ call for monitoring to scale dynamically by continually reconfiguring the choreography in response to specific events exhibited by the SuS. Requirement R₃ guards against issues arising from assumption A₅—this is vital for analyses that are sensitive to the temporal ordering of trace events (*e.g.* RV, live debugging).

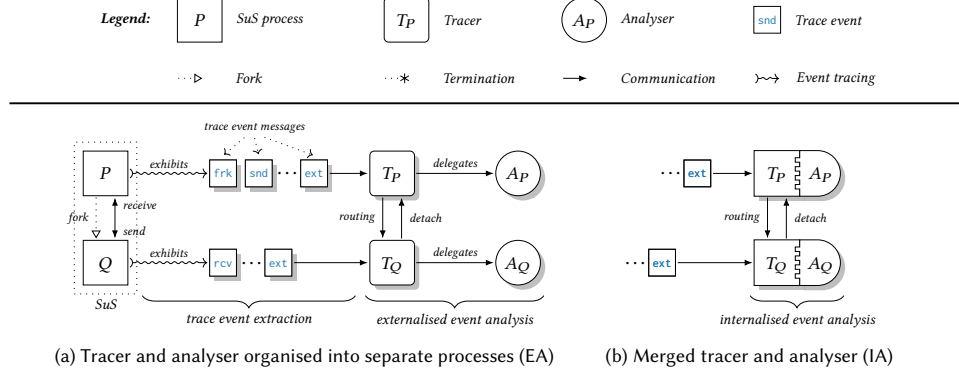


Fig. 1. Outline verdict monitoring set-up consisting of tracer and analyser roles

2.1 Overview

Fig. 1 shows the variants of outline instrumentation we consider. The externalised analysis (EA) arrangement in fig. 1a consists of independently-executing *tracer* and *analyser* processes, teasing apart the tasks of trace event handling and monitor reorganisation, performed by tracers, from the task of trace event examination, effected by analysers. Separating these roles follows the single responsibility principle advocated in component-based design [4, 58] at the expense of introducing an additional analyser component. By contrast, the internalised analysis (IA) variant merges the tracing and analysis aspects to forgo this extra component, as in fig. 1b. Our algorithm works for both grey-box and black-box tracing, so long as it is provided with streams of trace event *messages* for the monitored SuS components. Tracers may start or stop these event streams at runtime. In fig. 1, the trace event messages from processes P and Q are directed to the respective tracers T_P and T_Q , where they are analysed by A_P and A_Q . Our model assumes that:

- A_7 *Tracers cannot share system processes.* A system process can be traced by one tracer at any point in time.
- A_8 *System processes may share tracers.* A tracer may trace multiple system processes concurrently.
- A_9 *System processes inherit tracers.* A forked system process is automatically assigned the tracer of its parent process.

Assumption A_7 means that for a tracer to start tracing some system process being traced, it must first *stop* the active tracer before it can take over and *continue* tracing said process itself.

2.2 The System Model

Processes. In concurrency, processes are created *hierarchically*, starting from the top-level process that *forks* other processes, and so forth, e.g. `CreateThread()` in Windows [61], `pthread_create()` for POSIX threads [19], `ActorContext.spawn()` in Akka [71], `spawn()` in Erlang [24]. We borrow standard terminology (root, child, ancestor, *etc.*) to describe the relationships between processes in the tree. Our model assumes a denumerable set of process identifiers (PIDs) to refer to processes. We distinguish between system, tracer and analyser process forms, denoting them respectively by the sets PID_s , PID_t and PID_a , where $p_s \in \text{PID}_s$, $p_t \in \text{PID}_t$, $p_a \in \text{PID}_a$. New processes are created via the function `fork(g)` that takes the signature of the code to be run by the forked process, $g \in \text{SIG}$, returning its *fresh* PID. We refer to the process invoking `fork` as the *parent*, and to the forked process as the *child*. To create analyser processes, the function `fork` is overloaded to accept *verdict-flagging* code, $v \in \text{MON}$, and return the corresponding PID p_a ; tracer processes are forked analogously.

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

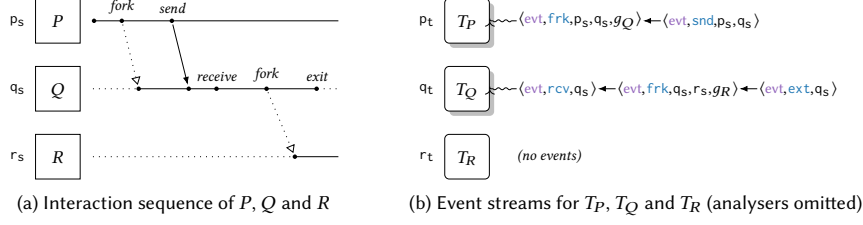


Fig. 2. SuS with processes P , Q , and R instrumented with three independent monitors

Processes communicate through asynchronous messages. Each process owns a *message queue*, K , from where it can read messages *out-of-order* and in a *non-blocking* fashion. We use the terms *tracer* and *monitor* synonymously wherever the distinction is unimportant; the term *component* refers to a grouping of one or more processes.

Messages. We represent messages, $m \in \text{Msg}$, as tuples $\langle q, d_0, d_1, \dots, d_n \rangle$, where $q \in \{\text{evt}, \text{dtc}, \text{rtd}\}$ is the *qualifier* indicating the message type, and $d_i \in \mathbb{Z}^{0+}$, are the data elements comprising the payload. The qualifier designates messages for *one* of these purposes:

- $q = \text{evt}$: analysable system *trace events* obtained via tracing,
- $q = \text{dtc}$: *detach commands* that tracers exchange to reorganise the monitoring choreography, or,
- $q = \text{rtd}$: *embedded evt* or *dtc* messages that are *routed* between tracers.

The meta-variables e , c , and r are reserved for messages of types *evt*, *dtc* and *rtd* respectively; m , refers to generic messages otherwise. We use the dot notation (\cdot) to access specific message data elements through indexable *field names*, e.g. the message qualifier q is read through $m.\text{type}$. Trace events are encoded as messages, $\langle q = \text{evt}, d_0 = a, d_1, \dots, d_n \rangle$, where $a \in \text{Act}$ identifies the kind of action exhibited by the SuS and d_1, \dots, d_n designate the data particular to the event. The event action is accessed using $e.\text{act}$. Let $\text{Act} = \{\text{frk}, \text{ext}, \text{snd}, \text{rcv}\}$ denote the process actions fork (*frk*), exit (*ext*), send (*snd*) and receive (*rcv*). We abuse the notation and use the action name a in lieu of the full trace event message payload (*i.e.*, omitting q and d_1, \dots, d_n) when this simplifies our explanation. The events and corresponding data carried are catalogued in tbl. 1.

Event	Action ($e.\text{act}$)	Field names	Description
fork	<i>frk</i>	src	PID p_s of the (parent) process invoking fork(g)
		tgt	PID p_g of the forked (child) process
		sig	Code signature g run by the forked process
exit	<i>ext</i>	src	PID p_s of the terminated process
send	<i>snd</i>	src	PID p_s of the sender process
		tgt	PID p_g of the recipient process
receive	<i>rcv</i>	src	PID p_s of the recipient process

Tbl. 1. Trace event messages data field names

2.3 The Running Example

Our SuS consists of three processes where P forks Q and communicates with it; afterwards Q forks R and terminates. P , Q , and R are assigned PIDs, p_s , q_s , and r_s respectively. This interaction, captured in fig. 2a, is essentially sequential due to the synchronous dependency between processes; for instance, Q comes into existence after P forks it, and R is forked by Q only when P sends a message which Q receives. We set our SuS with independent monitors, one for each of P , Q , and R , denoting them by T_P , T_Q and T_R . Fig. 2b shows these monitors, corresponding PIDs, and the *correct* sequence of events each tracer is meant to observe.

Despite its modest size and sequential operation, our SuS and outline monitoring set-up may still be subject to multiple interleaved executions. These result from the asynchronous organisation of the SuS and monitor components, whose execution is at the mercy of external factors such as process scheduling, network latency, *etc.* Outline monitoring must handle all possible component interleaving to *guarantee* that every trace event is reported in the *correct order* reflecting the true behaviour of the SuS, regardless of potential race conditions that arise as a product of non-determinism. Monitor inlining is spared these complications, since static weaving necessarily fixes the precise order in which instrumented code instructions execute. Our algorithm given next details how choreographed outline instrumentation is able to ensure the correct order of trace events, and how scalable monitoring is achieved via dynamic instrumentation and monitor garbage collection.

2.4 The Choreographed Instrumentation Approach

The algorithm covers the two variants of fig. 1. Lsts. 1–3 describe the core logic found in each tracer; auxiliary logic is elided due to space limitations. In the pseudocode, we **highlight** whether the tracer dispatches trace events to the analyser (EA), or analyses these internally (IA)—regardless, tracing is *agnostic* of the analyser logic. Each tracer maintains an internal state σ that consists of three maps: (i) the *routing map*, Π , governing how events are routed to other tracers, (ii) the *instrumentation map*, Φ , dictating whether new tracers need to be launched, and, (iii) the *traced-processes map*, Γ , recording the system processes that the tracer currently tracks.

Tracing. The operations TRACE, CLEAR and PREEMPT provide access to our tracing infrastructure. TRACE enables a tracer with PID p_t to register its interest in receiving trace event messages of a system process with PID p_s . This operation can be undone using CLEAR, which *blocks* the calling tracer p_t and returns once all the event messages for p_s that are in transit to p_t have been delivered. PREEMPT combines CLEAR and TRACE, enabling a different tracer p'_t to take over the tracing of process p_s from the current tracer, p_t . Following assumption A₉, tracing is *inherited* by every child process that a traced system process forks; CLEAR or PREEMPT can be used to alter this arrangement (see lst. 6 in app. A).

Decentralised trace processing. Tracers are programmed to react to **frk** and **ext** events in the trace. Fig. 3 illustrates how the process creation sequence of the SuS is exploited to instrument tracers. A tracer instruments other tracers whenever it encounters **frk** events. In fig. 3a, the root tracer T_P analyses the top-level process P , step ①. It instruments a new tracer, T_Q , for process Q when it observes the fork event $\langle \text{evt}, \text{frk}, p_s, q_s, g_Q \rangle$ exhibited by P in step ③. The field *e.tgt* carried by **frk** designates the SuS process to be instrumented with the new tracer, q_s in this case. At this point, T_Q *takes over* the tracing of process Q from T_P by invoking PREEMPT to trace Q *independently* of T_P , steps ④ and ⑤ in fig. 3b. T_P resumes its analysis, receiving the send event $\langle \text{evt}, \text{snd}, p_s, q_s \rangle$ in step ⑩ after P messages Q in step ⑥ of fig. 3c. Subsequent **frk** events observed by T_P and T_Q are handled as described earlier. Figs. 3c and 3d show how the final tracer, T_R , is instrumented as Q forks its child R . Following assumption A₉, we recall that prior to instrumenting

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

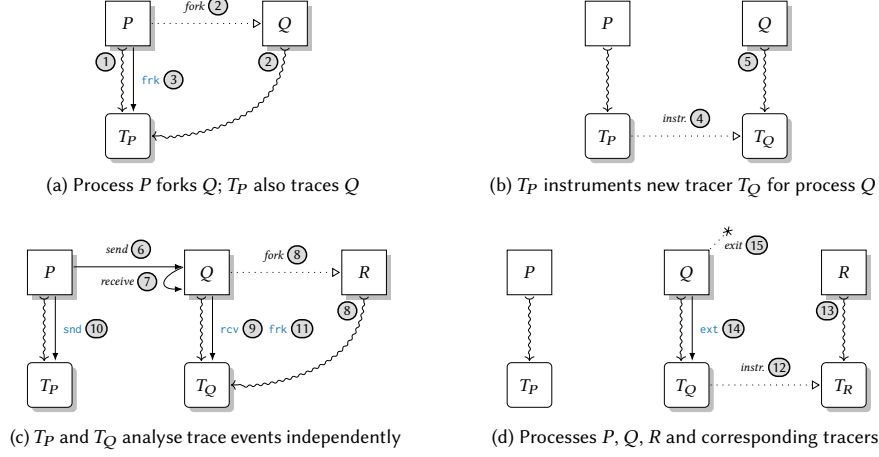


Fig. 3. Outline tracer instrumentation for processes P , Q and Q (analysers omitted)

T_Q in step ④, process Q automatically inherits tracer T_P of its parent P in step ②. T_Q is analogously assigned to process R in step ⑧ before T_Q instruments the new tracer T_R for R in step ⑫.

Trace event routing. The asynchrony between the SuS and tracer components may give rise to different interleaved executions. Fig. 4 shows one interleaving *alternative* to that of figs. 3b–3d. In fig. 4a, T_P is slow to handle the fork event of Q (received in step ③ in fig. 3a), and fails to instrument T_Q promptly. As a result, the events `rcv` and `frk` exhibited by Q are received by T_P in steps ⑦ and ⑨. Fig. 4a shows the case where $\langle \text{evt}, \text{rcv}, q_s \rangle$ is processed by T_P , step ⑩, rather

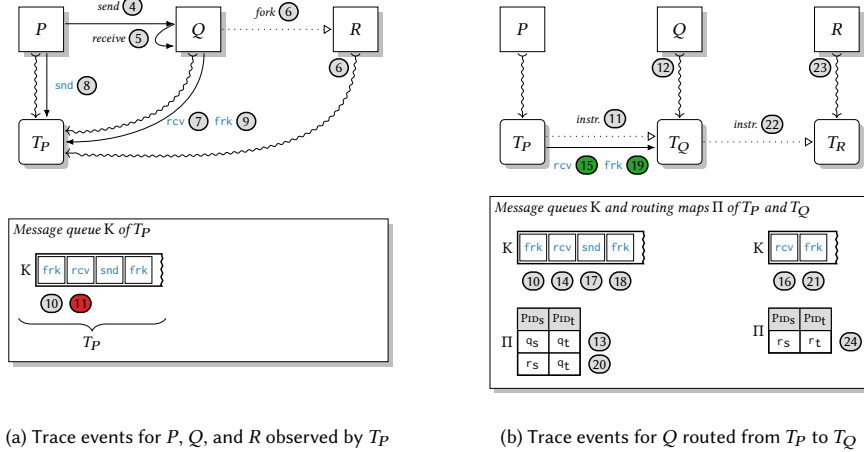


Fig. 4. Hop-by-hop trace event routing using tracer routing maps Π (analysers omitted)

than by the *correct* tracer T_Q that would be eventually instrumented by T_P . This non-determinism corrupts the runtime analysis, as the events that are to be processed by one tracer reach unwanted tracers.

To address such issues, tracers *keep* the events they should analyse and *route* the rest to other tracers. This scheme is outlined in fig. 4b, where T_P instruments T_Q with Q in step ⑩. It then processes events $\langle \text{evt}, \text{rcv}, q_s \rangle$ and $\langle \text{evt}, \text{frk}, q_s, r_s, g_R \rangle$, steps ⑭ and ⑮, and *forwards* them to T_Q in steps ⑯ and ⑰. The event $\langle \text{evt}, \text{snd}, p_s, q_s \rangle$ is processed by T_P , step ⑱. Concurrently, T_Q acts on the forwarded events in steps ⑲ and ⑳, and T_R is instrumented with R as a result.

Tracers determine which events to keep or forward by means of the *routing map*, $\Pi: \text{PID}_s \rightarrow \text{PID}_t$, relating system and tracer PIDs. Each tracer queries its routing map for every event e it processes using the source PID, $e.\text{src}$. An event is forwarded to a tracer with PID p_t when $\Pi(e.\text{src}) = p_t$, otherwise it is handled by the tracer itself since a route for $e.\text{src}$ does not exist, *i.e.*, $\Pi(e.\text{src}) = \perp$. `HANDLEFORK`, `HANDLEEXIT` and `HANDLECOMM` in lst. 2 implement this forwarding logic on lines 24, 34 and 44.

A tracer populates its routing map Π whenever it processes a fork event $\langle \text{evt}, \text{frk}, p_s, p'_s, g \rangle$. It considers *one* of two cases for p_s :

- C_1 $\Pi(p_s) = \perp$. This means that the tracer must adapt the choreography to account for the newly-forked process p'_s . It forks a child tracer $T_{p'}$ with PID p'_t to be instrumented with p'_s . The mapping $p'_s \mapsto p'_t$ is added to Π , or,
- C_2 $\Pi(p_s) = p'_t$. A route to the tracer with PID p'_t exists for trace events originating from p_s . The tracer forwards the fork event for process p_s to p'_t , and adds the mapping $p'_s \mapsto p'_t$ to Π .

In cases C_1 and C_2 , the addition of $p'_s \mapsto p'_t$ ensures that future events originating from p'_s can be forwarded onwards. Fig. 4b shows the routing maps of T_P and T_Q . T_P adds $q_s \mapsto q_t$, step ⑬, after processing $\langle \text{evt}, \text{frk}, p_s, q_s, g_Q \rangle$ from the message queue in step ⑩ and instrumenting tracer T_Q with Q in step ⑪; an instance of case C_1 . The function `INSTRUMENT` in lst. 1 details this on line 5, where the mapping $e.\text{tgt} \mapsto p'_t$ (with $e.\text{tgt} = p'_s$) is added to Π , following the creation of tracer p'_t . Step ⑳ of fig. 4b constitutes an instance of case C_2 : T_P adds $r_s \mapsto q_t$ after processing $\langle \text{evt}, \text{frk}, q_s, r_s, g_R \rangle$ for R in step ⑮. Crucially, T_P *does not* instrument a new tracer, but delegates this task to T_Q by forwarding the fork event in question. Lines 26 and 81 in lst. 2 (and later line 26 in lst. 3) are manifestations of this, where the mapping $e.\text{tgt} \mapsto p'_t$ is added after the fork event e is routed to the next tracer p'_t .

Note that in fig. 4b, the mappings inside T_P point to tracer T_Q , and the mapping in T_Q points to T_R . This arises as a result of cases C_1 and C_2 , where any tracer in the monitoring choreography can *only* forward events to *adjacent* tracers. For instance, events that R might exhibit and that are collected by T_P must be forwarded twice to reach the intended tracer T_R : from tracer T_P to T_Q , and from T_Q to T_R . This *hop-by-hop routing* [9] between tracers forms a connected DAG,

Expect: $e.\text{act} = \text{frk}$ 1 def <code>INSTRUMENT_○</code> (σ, e, p_t) 2 $p_s \leftarrow e.\text{tgt}$ 3 if ($v \leftarrow \sigma.\Phi(e.\text{sig}) \neq \perp$) then 4 $p'_t \leftarrow \text{fork}(\text{TRACER}(\sigma, v, p_s, p_t))$ 5 $\sigma.\Pi \leftarrow \sigma.\Pi \cup \{ \langle p_s, p'_t \rangle \}$ 6 else 7 # In \circ mode, there is no process p_s to detach from 7 # a router tracer; add p_s to Γ in \circ mode 7 $\sigma.\Gamma \leftarrow \sigma.\Gamma \cup \{ \langle p_s, \circ \rangle \}$ 8 end if 9 return σ 10 end def	Expect: $e.\text{act} = \text{frk}$ 11 def <code>INSTRUMENT_•</code> (σ, e, p_t) 12 $p_s \leftarrow e.\text{tgt}$ 13 if ($v \leftarrow \sigma.\Phi(e.\text{sig}) \neq \perp$) then 14 $p'_t \leftarrow \text{fork}(\text{TRACER}(\sigma, v, p_s, p_t))$ 15 $\sigma.\Pi \leftarrow \sigma.\Pi \cup \{ \langle p_s, p'_t \rangle \}$ 16 else 17 # Detach process p_s from router tracer p_t 17 <code>DETACH</code> (p_s, p_t) 18 $\sigma.\Gamma \leftarrow \sigma.\Gamma \cup \{ \langle p_s, \bullet \rangle \}$ # Add p_s to Γ in \bullet mode 19 end if 20 return σ 21 end def
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Lst. 1. Instrumentation operations for direct and priority tracer modes

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

and ensures that every event message is eventually delivered. We implement hop-by-hop routing using the operations ROUTE and FORWD (see app. A). ROUTE creates a new *wrapper* message, r , with type rtd and *embeds* the message to be routed. Tracers then process routed messages by (i) either extracting the embedded message via the field $r.emb$, e.g. line 68 in FORWDDTC, or, (ii) forwarding it to the next tracer using FORWD, e.g. line 70 in FORWDDTC.

Temporal coherence of events. Hop-by-hop routing does not guarantee that tracers receive events in an order that reflects the correct SuS execution. This can arise when a tracer collects trace events of a SuS component *and simultaneously* receives routed events concerning this component from other tracers. Fig. 5a gives a different interleaving to the execution of fig. 4b to showcase the deleterious effect this race condition has on the runtime analysis when events are reordered for T_Q . In step ⑫, T_Q takes the place of T_P and continues tracing process Q , collecting the event ext in step ⑮; this happens *before* T_Q receives the routed event rcv concerning Q in step ⑰. When T_Q analyses trace events from its message queue in the order it receives them, as in step ⑲, it violates the logical event ordering established in fig. 2b

```

1  def LOOPo( $\sigma, p_a$ )
2    forever do
3      # Process routed messages AND direct trace events
4       $m \leftarrow$  next message from queue K
5      if  $m.type = evt$  then
6         $\sigma \leftarrow$  HANDLEEVENTo( $\sigma, m, p_a$ )
7      else if  $m.type = dtc$  then
8        # dtc command received from issuer tracer. Route
9        # dtc back to issuer through the tracer choreography
10        $\sigma \leftarrow$  ROUTEDTC( $\sigma, m, p_a$ )
11      else if  $m.type = rtd$  then
12         $\sigma \leftarrow$  FORWDRTDo( $\sigma, m, p_a$ )
13      end if
14    end forever
15  end def

16 def HANDLEEVENTo( $\sigma, e, p_a$ )
17   if  $e.act = frk$  then
18      $\sigma \leftarrow$  HANDLEFORKo( $\sigma, e, p_a$ )
19   else if  $e.act = ext$  then
20      $\sigma \leftarrow$  HANDLEEXITo( $\sigma, e, p_a$ )
21   else if  $e.act \in \{snd, rcv\}$  then
22     HANDLECOMMo( $\sigma, e, p_a$ )
23   end if
24   return  $\sigma$ 
25 end def

26 def HANDLEFORKo( $\sigma, e, p_a$ )
27   if ( $p_t \leftarrow \sigma.\Pi(e.src)$ )  $\neq \perp$  then
28     ROUTE( $e, p_t$ )
29     # Route for  $e.tgt$  goes via the same tracer  $p_t$  of  $e.src$ 
30      $\sigma.\Pi \leftarrow \sigma.\Pi \cup \{ \langle e.tgt, p_t \rangle \}$ 
31   else
32     Delegate  $e$  to analyser  $p_a$  OR analyse  $e$  internally
33      $\sigma \leftarrow$  INSTRUMENTo( $\sigma, e, self()$ )
34   end if
35   return  $\sigma$ 
36 end def

37 def HANDLEEXITo( $\sigma, e, p_a$ )
38   if ( $p_t \leftarrow \sigma.\Pi(e.src)$ )  $\neq \perp$  then
39     ROUTE( $e, p_t$ )
40   else
41     Delegate  $e$  to analyser  $p_a$  OR analyse  $e$  internally
42      $\sigma.\Gamma \leftarrow \sigma.\Gamma \setminus \{ \langle e.src, o \rangle \}$  # Remove terminated  $e.src$ 
43     TRYGC( $\sigma, p_a$ )
44   end if
45   return  $\sigma$ 
46 end def

47 def HANDLECOMMo( $\sigma, e, p_a$ )
48   if ( $p_t \leftarrow \sigma.\Pi(e.src)$ )  $\neq \perp$  then
49     ROUTE( $e, p_t$ )
50   else
51     Delegate  $e$  to analyser  $p_a$  OR analyse  $e$  internally
52   end if
53 end def

54 def ROUTEDTC( $\sigma, c, p_a$ )
55   if ( $p_t \leftarrow \sigma.\Pi(c.tgt)$ )  $\neq \perp$  then
56     ROUTE( $c, p_t$ )
57      $\sigma.\Pi \leftarrow \sigma.\Pi \setminus \{ \langle c.tgt, p_t \rangle \}$  # Clear route for  $c.tgt$ 
58   TRYGC( $\sigma, p_a$ )
59   end if
60   return  $\sigma$ 
61 end def

62 def FORWDRTDo( $\sigma, r, p_a$ )
63    $m \leftarrow r.emb$ 
64   if  $m.type = dtc$  then
65      $\sigma \leftarrow$  FORWDDTC( $\sigma, r, p_a$ )
66   else if  $m.type = evt$  then
67      $\sigma \leftarrow$  FORWDEVT( $\sigma, r$ )
68   end if
69   return  $\sigma$ 
70 end def

71 def FORWDDTC( $\sigma, r, p_a$ )
72    $c \leftarrow r.emb$ 
73   if ( $p_t \leftarrow \sigma.\Pi(c.tgt)$ )  $\neq \perp$  then
74     FORWD( $r, p_t$ )
75      $\sigma.\Pi \leftarrow \sigma.\Pi \setminus \{ \langle c.tgt, p_t \rangle \}$  # Clear route for  $c.tgt$ 
76   TRYGC( $\sigma, p_a$ )
77   end if
78   return  $\sigma$ 
79 end def

80 def FORWDEVT( $\sigma, r$ )
81    $e \leftarrow r.emb$ 
82   if ( $p_t \leftarrow \sigma.\Pi(e.src)$ )  $\neq \perp$  then
83     FORWD( $r, p_a$ )
84     # Route for  $e.tgt$  goes via the same tracer  $p_t$  of  $e.src$ 
85     if  $e.act = frk$  then
86        $\sigma.\Pi \leftarrow \sigma.\Pi \cup \{ \langle e.tgt, p_t \rangle \}$ 
87     end if
88   end if
89   return  $\sigma$ 
90 end def

```

Lst. 2. Tracer loop that handles direct (o) trace events, message routing and forwarding

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

<pre> 1 def LOOP_•(σ, p_a) 2 forever do 3 r ← next <i>rtid</i> message from queue K 4 m ← r.emb 5 if m.type = <i>evt</i> then 6 σ ← HANDLEEVENT_•(σ, r, p_a) 7 else if m.type = <i>dtc</i> then 8 # <i>dtc</i> command routed back from router tracer 9 σ ← HANDLEDTC(σ, r, p_a) 10 end if 11 end forever 12 end def 12 def HANDLEEVENT_•(σ, r, p_a) 13 e ← r.emb 14 if e.act = <i>frk</i> then 15 σ ← HANDLEFORK_•(σ, r, p_a) 16 else if e.act = <i>ext</i> then 17 σ ← HANDLEEXIT_•(σ, r, p_a) 18 else if e.act ∈ {<i>snd</i>, <i>rcv</i>} then 19 HANDLECOMM_•(σ, r, p_a) 20 end if 21 end def 22 def HANDLEFORK_•(σ, r, p_a) 23 e ← r.emb 24 if (p_t ← σ.Π(e.src)) ≠ ⊥ then 25 FORWD(r, p_t) 26 σ.Π ← σ.Π ∪ {⟨e.tgt, p_t⟩} 27 else 28 Delegate e to analyser p_a OR analyse e internally 29 p_t ← r.rtr 30 σ ← INSTRUMENT_•(σ, e, p_t) 31 end if 32 return σ 33 end def </pre>	<pre> 34 def HANDLEEXIT_•(σ, r, p_a) 35 e ← r.emb 36 if (p_t ← σ.Π(e.src)) ≠ ⊥ then 37 FORWD(r, p_t) 38 else 39 Delegate e to analyser p_a OR analyse e internally 40 σ.Γ ← σ.Γ \ {⟨e.src, •⟩} # Remove terminated e.src 41 TRYGC(σ, p_a) 42 end if 43 return σ 44 end def 45 def HANDLECOMM_•(σ, r, p_a) 46 e ← r.emb 47 if (p_t ← σ.Π(e.src)) ≠ ⊥ then 48 FORWD(r, p_t) 49 else 50 Delegate e to analyser p_a OR analyse e internally 51 end if 52 end def Expect: r.emb.iss = self() ∨ σ.Π(r.emb.tgt) ≠ ⊥ 53 def HANDLEDTC(σ, r, p_a) 54 c ← r.emb 55 if (p_t ← σ.Π(c.tgt)) ≠ ⊥ then 56 FORWD(r, p_t) 57 else 58 σ.Γ ← σ.Γ ∪ {⟨c.tgt, •⟩} 59 σ.Γ ← σ.Γ ∪ {⟨c.tgt, ○⟩} 60 γ = {⟨p_s, d⟩ ⟨p_s, d⟩ ∈ σ.Γ, d = •} 61 if γ = ∅ then # Check all processes in Γ are detached 62 LOOP_○(σ, p_a) # Switch tracer to ○ mode 63 end if 64 end if 65 return σ 66 end def </pre>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Lst. 3. Tracer loop that handles priority (•) trace events and message forwarding

A tracer in priority mode coordinates with its router tracer to determine when all of the events for a system process it traces have been routed to it. Each tracer keeps a record of the processes it traces in the *traced-processes map*, $\Gamma: \text{PID}_s \rightarrow \{\circ, \bullet\}$. Entries to Γ are added when the tracer starts collecting events for a process (lines 7 and 18 in lst. 1) and removed when processes terminate (lines 38 and 40 in lst. 2 and lst. 3). The coordination procedure with the router is effected by the tracer in priority mode, once for *every* process in Γ , before it can safely transition to direct mode and start operating on the events it collects directly. The tracer issues a special detach command message, *c*, with type *dtc*, to notify the router tracer that it is now responsible for tracing a particular system process. The detach command contains the PIDs of the issuer tracer and system process, read via the respective fields *c.iss* and *c.tgt*. Tracers mark a process as detached by updating its mapping $c.tgt \mapsto \bullet$ in Γ to $c.tgt \mapsto \circ$.

Fig. 5b shows T_Q in priority mode sending command $\langle \text{dtc}, q_t, q_s \rangle$ for Q , step ③, after it starts tracing this process in step ⑩. This transaction is implemented by DETACH on line 17 in lst. 1 (see app. A). The *dtc* command issued by T_Q is deposited in the message queue of (router tracer) T_p after the events *rcv* and *frk*. T_p processes the contents of its message queue sequentially in steps ⑩, ⑪, ⑫, ⑬ and ⑭, and forwards *rcv* and *frk*, steps ⑮ and ⑯. It also routes the *dtc* command back to the issuer tracer T_Q , step ⑰, where once handled, marks Q as detached from T_p . This update on Γ of T_Q is performed by HANDLEDTC in lst. 3 on lines 58 and 59.

A tracer transitions to direct mode once *all* the processes in Γ become detached; see lines 60 and 61 in lst. 3. While in priority mode, T_Q in fig. 5b handles the events forwarded by T_p in the correct order, as per fig. 2b (steps ② and ③).

This is followed by handling `dtc` in step ③. The transition from priority to direct mode for T_Q in fig. 5b takes place in step ③. Finally, the event `ext` is handled in the correct order in step ③ (as opposed to step ③ in fig. 5a).

A detach command $\langle \text{dtc}, p_t, p_s \rangle$ that is routed to a tracer p_t by the router, may be directed via multiple *intermediate tracers* before it reaches p_t . Every tracer *en route* to p_t purges the mapping for p_s from its routing map Π once it forwards `dtc` to the next tracer. This cleanup logic is performed by `ROUTEDTC` and `FORWDDTC` in lst. 2. Fig. 5b does not illustrate this flow. We however note that T_p would remove from Π the mapping $q_s \mapsto q_t$, calling `ROUTEDTC` to route back the detach command $\langle \text{dtc}, q_t, q_s \rangle$ it receives from T_Q . Eventually, T_p also removes $r_s \mapsto q_t$ for R once it handles $\langle \text{dtc}, r_t, r_s \rangle$ from T_R . When T_Q receives the *rerouted* detach command $\langle \text{rtd}, p_t, \langle \text{dtc}, r_t, r_s \rangle \rangle$ from T_p , it removes $r_s \mapsto r_t$ from Π and forwards it, in turn, to T_R .

Selective instrumentation. To monitor processes as one component—rather than having a dedicated monitor for each as in our example—the algorithm uses the *instrumentation map*, $\Phi : \text{SIG} \rightarrow \text{MON}$, from code signatures, g , to analysis code, v . Φ is consulted to selectively instrument processes. The signature g , carried as part of the fork trace event e , can be retrieved using the field $e.\text{sig}$; see tbl. 1. The instrumentation operations in lst. 1 apply Φ to $e.\text{sig}$ on lines 3 and 13. When $\Phi(e.\text{sig}) = \perp$, no instrumentation is effected, and the tracer becomes automatically shared by the new process $e.\text{tgt}$, as per assumptions A_8 and A_9 .

Garbage collection. Our outline instrumentation can shrink the tracer choreography by discarding unneeded tracers. A tracer is designed to terminate when both its routing Π and traced-processes Γ maps become empty. It purges process references from Γ when handling exit trace events via `HANDLEEXITo` and `HANDLEEXIT•` (lsts. 2 and 3). When $\Gamma = \emptyset$, and a tracer has no processes to analyse, it could still be required to forward events to neighbouring tracers, *i.e.*, $\Pi \neq \emptyset$. Therefore, the garbage collection check, `TRYGC`, is performed each time mappings from Π or Γ are removed; see lines 39, 54 and 72 in lst. 2, and line 41 in lst. 3.

3 CORRECTNESS VALIDATION

Our choreographed instrumentation from sec. 2 is assessed in two stages. First, we confirm its *implementability* by instantiating the core logic of lsts. 1–3 to a multipurpose language that is tailored to the demands of distributed applications. Our development follows a test-driven approach [13, 85], to ensure that the tracer logic is implemented correctly. Second, we verify the correctness of our implementation by augmenting the logic given in lsts. 1–3 with runtime checks that guarantee a number of invariants [8, 75] w.r.t. message routing between tracers.

Implementability. We map our algorithm of sec. 2.4 to the actor model of computation [4, 49]. *Actors*—the basic unit of decomposition in this model—are abstractions of concurrent entities that do not share mutable memory with other actors (assumption A_1). Instead, actors interact through *asynchronous messaging*, and alter their internal state based on messages they consume (assumption A_5). Each actor is equipped with an incoming message buffer called the *mailbox*, from where messages deposited by other actors may be *selectively* read (assumption A_4). Besides sending and receiving messages, actors can fork other actors (assumption A_2). Actors are uniquely identifiable via their PID that they use to directly address one another (assumption A_3).

The actor model is concretised by a number of languages and frameworks, including Erlang, Akka for the Java Virtual Machine (JVM), Thespian [69] for Python [59], and Pony [84]. We adopt Erlang for our implementation, since the Erlang Virtual Machine (EVM) is *specifically engineered* for high-concurrency settings Armstrong [6], Cesarini and Thompson [24]: it implements actors as lightweight processes, permitting us to scale our experiment set-ups

to loads that go *beyond* the state of the art. The EVM also features *per-process* garbage collection that—unlike JVM implementations—does not subject the entire virtual machine to non-deterministic pauses [52, 67]; this minimises the interference with running benchmarks and is fundamental to stabilising the *variance* in our measurements. All these aspect increases the confidence in our empirical measurements and the general conclusion drawn from them.

Our implementation of choreographed outline monitoring maps the tracer processes of sec. 2 to Erlang actors. Every tracer collects events from components of the SuS by leveraging the *native tracing infrastructure* of the EVM [24], which complies with assumptions A_7 – A_9 . It deposits trace event messages inside the tracer mailboxes, which in our implementation, coincide with the message queues K of sec. 2.2. Our outline set-up covers both the externalised (EA) and internalised (IA) analysis variants of fig. 1¹.

Invariant and unit testing. One salient aspect our algorithm addresses is that of reporting SuS trace events to the analysis component in a *reliable* manner; this is captured by requirement R_3 . The invariants listed below ensure the correct handling of events by tracers. Together with the core logic of lts. 1–3, these enable us to reason about properties the tracer choreography should observe. For instance, our algorithm guarantees that ‘every trace event that is routed between tracers eventually reaches the intended tracer’, that ‘the choreography grows dynamically’, and that ‘unneeded tracers are always garbage collected’. We implement these invariant checks in the form of assertions as part of our implementation.

Choreography invariants

- I_1 The root tracer has *no* router tracers.
- I_2 A tracer p_t has exactly *one* router tracer p'_t ; this does not apply for the root tracer, invariant I_1 . The router tracer of p_t is either its parent *or* the tracer that forked the ancestors of p_t .
- I_3 A tracer never terminates unless its routing map, Π , *and* traced-processes map, Γ , are empty.
- I_4 A tracer that analyses a *frk* event adds a process to its traced-process map Γ . Depends on invariant I_{25} .
- I_5 A tracer that analyses an *ext* event removes a process from its traced-processes map Γ . Depends on invariant I_{26} .
- I_6 A tracer that analyses a *frk* event adds a route to its routing map Π . Depends on invariant I_{23} .
- I_7 A tracer that routes a *frk* event adds a route to its routing map Π . Depends on invariant I_{23} .
- I_8 A tracer that forwards a *frk* event adds a route to its routing map Π . Depends on invariant I_{23} .
- I_9 A tracer that routes a *dtc* command removes a route from its routing map Π . Depends on invariant I_{24} .
- I_{10} A tracer that forwards a *dtc* command removes a route from its routing map Π . Depends on invariant I_{24} .

Message routing invariants

- I_{11} A tracer in \bullet mode prioritises routed messages until it switches to \circ mode.
- I_{12} A tracer handles a *dtc* command only in \bullet mode.
- I_{13} A tracer in \bullet mode either analyses a routed trace event *or* forwards it. Depends on invariants I_{21} and I_{22} . A tracer can only route direct events, *i.e.*, when $m.type = rtd$, in \circ mode. Routing in \bullet mode means that the tracer dequeued a direct event, violating invariant I_{11} .
- I_{14} A tracer in \bullet mode either handles a routed *dtc* command *or* forwards it. Depends on invariants I_{10} and I_{22} . A tracer can only route direct commands, *i.e.*, when $m.type = rtd$, in \circ mode. Routing in \bullet mode means that the tracer dequeued a direct command, violating invariant I_{11} .
- I_{15} A tracer in \circ mode either analyses a direct trace event *or* routes it. Depends on invariants I_{21} and I_{22} .

¹The full source code can be found on the GitHub repository: <https://github.com/duncanatt/detector>.

- l_{16} A tracer in \circ mode only forwards a routed trace event, *i.e.*, when $m.type = rtd$. Depends on invariant l_{22} . Analysing a routed trace event in \circ mode means that the tracer dequeued a priority event, violating invariant l_{11} .
- l_{17} A tracer in \circ mode only forwards a routed dtc command, *i.e.*, when $m.type = rtd$. Depends on invariants l_{10} and l_{22} . Handling a routed command in \circ mode means that the tracer dequeued a priority event, violating invariants l_{11} and l_{12} .
- l_{18} A router tracer that receives a dtc command must route it. Depends on invariants l_9 and l_{22} . If routing is not possible, the command was sent by mistake.
- l_{19} A tracer in \bullet mode transitions to \circ mode only when all of the processes in its traced-processes map Γ are marked as \circ or Γ is empty. Depends on invariant l_{12} .
- l_{20} The total amount of dtc commands a tracer issues is equal to the sum of the number of processes in its traced-process map Γ and the number of terminated processes for the tracer. Depends on invariants l_4 and l_5 .
- l_{21} A tracer has a corresponding analyser.
- l_{22} A tracer never routes or forwards a message unless a route exists in its routing map Π . Depends on invariants l_6 – l_8 .
- l_{23} A tracer never adds a route that already exists in its routing map Π .
- l_{24} A tracer never removes a non-existing route from its routing map Π .
- l_{25} A tracer never adds a process that already exists in its traced-processes map Γ .
- l_{26} A tracer never removes a non-existing process from its traced-processes map Γ .

We also implement a number of unit tests that operate on these invariants. The tests focus on race conditions that arise and how these are handled by the tracer choreography while it simultaneously analyses trace events. Our tests also validate the scaling aspect of our algorithm in terms of the dynamic instrumentation of tracers and corresponding garbage collection. To this end, we built a testing harness that can be *controlled* to yield particular interleaved executions. The harness adheres to assumptions A_7 – A_9 , and emulates the native EVM tracing infrastructure. It enables us to inject our choreographed outline instrumentation with different *trace permutations* to test and obtain *full* branch coverage of the core logic in lsts. 1–3. Note that our tests use only valid trace permutations, following assumption A_4 . While tracer and analyser components are not permitted to fail (assumption A_6), we introduce random faults to verify that *partial-failure* is possible for independently-executing tracers. We also simulate SuS components crashes to confirm that abnormal termination *ext* events are captured and correctly analysed by tracers.

4 EMPIRICAL EVALUATION

The litmus test assessing the utility of our choreographed outline instrumentation should show that it induces feasible runtime overhead. Concretely, we employ a benchmarking tool that evaluates the scalability of our implementation from sec. 3 over a master-worker SuS that is subject to a variety of loads covering most real-world scenarios.

4.1 Methodology

Benchmarking set-up. We adopt a concurrent benchmarking framework [3] written for the analysis of highly-scalable Erlang systems. The framework generates system models based on the master-worker architecture through configurable parameters. These models have been shown to be *realistic* [72] and satisfy assumptions A_1 – A_6 from sec. 2. The benchmarking framework permits us to emulate different load profiles that are observed in practice, in contrast to established benchmarking tools, *e.g.* SPECjvm2008 [83], DaCapo [15], ScalaBench [79] and Savina [50], and industry-strength load testers, *e.g.* Tsung [66] or JMeter [5]. *Steady* loads reproduce executions where a system operates under

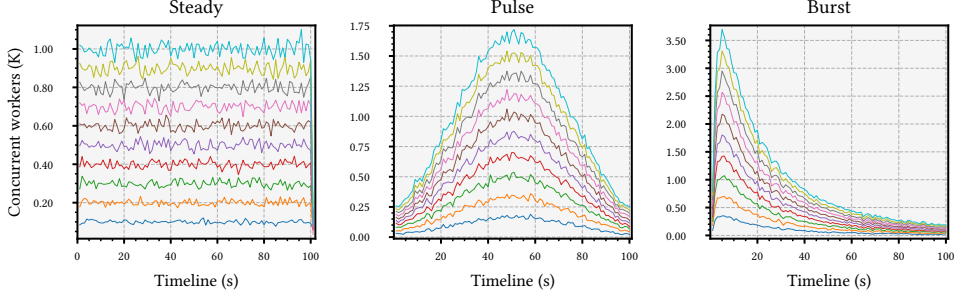


Fig. 6. Steady, Pulse and Burst load distributions with 100 k workers for the duration of 100 s

stable conditions. *Pulse* loads emulate scenarios where a system undergoes gradually-increasing load peaks. *Burst* loads capture scenarios where a system is stressed due to instant load spikes. The benchmarking framework also captures four performance metrics, namely the: (i) mean execution duration, measured in seconds (s), (ii) mean scheduler utilisation, as a percentage of the total available capacity, (iii) mean memory consumption, measured in GB, and, (iv) mean response time (RT), measured in milliseconds (ms). These provide a *multi-faceted* view of runtime overhead that is conducive to a comprehensive assessment of decentralised monitoring.

Experiment set-up. We carry out two case studies, instrumenting the master-worker SuS with either inline or outline monitors to compare them with the uninstrumented SuS as a baseline. The first case study configures the SuS with 10k for *moderate* loads, whereas the second case study uses 100k workers for *high* loads. In each case, the master issues 100 requests to each worker; these requests are distributed to workers based on the Steady, Pulse and Burst load profiles (see fig. 6). The loading time is set to 100s. For each experiment, we run 10 benchmarks using a specific monitoring set-up (e.g. outline instrumentation), incrementally applying load in steps. We perform 10 repetitions of the same experiment and aggregate the results for the four performance metrics recorded by the benchmarking framework. Our experiments are conducted on an Intel Core i7 M620 64-bit machine with 8GB of memory, running Ubuntu 18.04 LTS and Erlang/OTP 22.2.1.

Inline monitoring. We are unaware of inline monitoring tools that target programs written for the Erlang platform. As a result, our study required us to develop a bespoke inline monitoring tool that models Parametric Trace Slicing [10, 26]. It instruments monitoring instructions into the target program via code injection by manipulating its abstract syntax tree. The modified syntax tree is afterwards compiled, and the weaved instructions effect the runtime analysis in a *synchronous* manner. Further detail on the tool may be found in app. B.

4.2 Precautions

Recall that RV monitoring is made up of two parts: instrumentation and analysis, e.g. fig. 1. We objectively compare inline and outline instrumentation by fixing the runtime overhead introduced by the analysis. To this end, our synthesis is designed to generate *identical* analysis components for both the inline and outline implementations. The analysis components process trace event streams and reach verdicts in connection with correctness properties [11, 43]. Our synthesis generates *automata-based* analysers from syntactic descriptions of properties, following the approach of established RV tools such as Aceto et al. [1], Cassar et al. [22], Havelund and Rosu [48], Meredith et al. [60], Mostafa

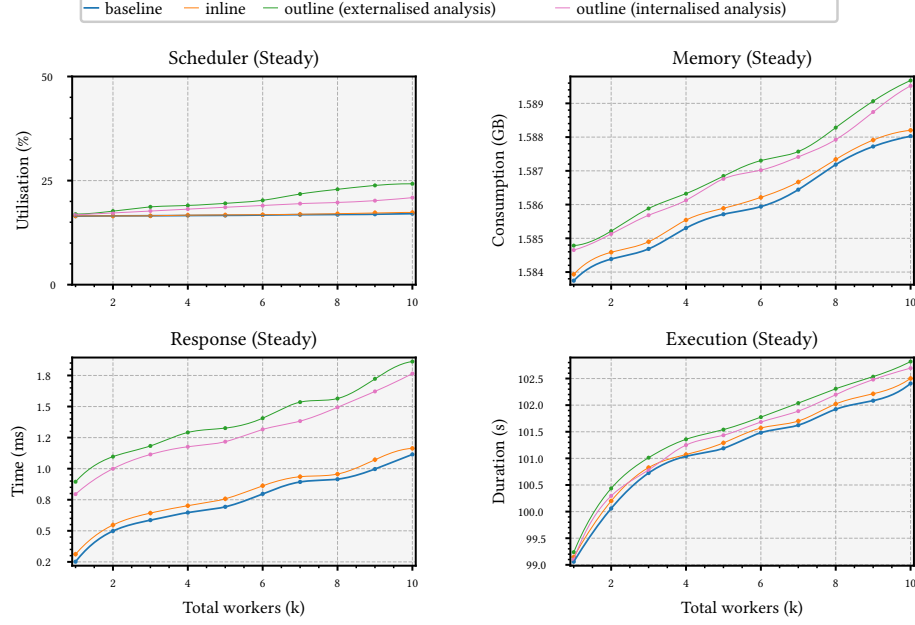


Fig. 7. Mean runtime overhead for benchmark configured with moderate load (10k workers)

and Bonakdarpour [62], Reger et al. [70]. Unfortunately, this is not enough to guarantee a constant analysis overhead across inline and outline instrumentations. Since inline and outline monitors behave differently (e.g. inline monitors can query the internal state of the SuS, whereas outline monitors must replicate this externally), this disparity introduces runtime biases that obstruct the collection and isolation of instrumentation overheads, complicating our interpretation of results. To minimise these effects, our case studies employ properties that are *parametric* w.r.t. SuS components, where the synthesised analysers are able to reach verdicts *without* mutually interacting e.g. Attard and Francalanza [7], Chen and Rosu [26], Jin et al. [51], Neykova and Yoshida [64], Reger et al. [70].

4.3 Results and Discussion

We perform two sets of experiments, for *moderate* and *high* loads. Our results are reported in tbls. 2 and 3 and figs. 7–10. Charts plot each performance metric (*y*-axis) against the number of worker processes (*x*-axis) for the inline and the two outline instrumentation variants of fig. 1, EA and IA. The *unmonitored* system is inserted as a baseline reference.

Moderate loads. This first batch of results replicates loads that are slightly higher than those used by the state of the art in decentralised (and distributed) RV e.g. Attard and Francalanza [7], Berkovich et al. [14], Cassar and Francalanza [21], Colombo and Falcone [29], El-Hokayem and Falcone [36], Francalanza and Seychell [45], Mostafa and Bonakdarpour [62], Neykova and Yoshida [64, 65], Scheffel and Schmitz [73]. The set-up with 10k workers and 100 work requests generates $\approx 10k \times 100 \times (\text{work requests and responses}) = 2M$ message exchanges, producing $2M \times (\text{snd and rcv trace events}) = 4M$ analysable events. Tbl. 2 reports the percentage overhead at 10k workers. It shows that inline and the two variants of outline monitoring, EA and IA, induce negligible execution slowdown for *all* three load profiles. For instance, the

maximum slowdown for EA is 1.09%; the memory consumption behaves similarly. At the Steady load illustrated in fig. 7, the memory consumption and RT grow *linearly* in the number of worker processes. For the three load profiles in tbl. 2, inline monitoring induces minimal scheduler overhead; this is markedly higher for EA and IA, and is mostly caused by the dynamic reconfiguration of the monitoring choreography. Tbl. 2 indicates that the RT is *sensitive* to the type of load applied, where it increases under the Steady, Pulse and Burst load profiles respectively. Bursts, in fact, induce a *sharp growth* in the RT for outline monitoring at 9k ~ 10k workers, as fig. 8 shows.

We stress that—notwithstanding the clear percentage-wise discrepancies in the scheduler utilisation and RT between inline and outline monitoring in tbl. 2—this overhead is *comparable value-wise* for moderate loads that are typically used in other bodies of work. Concretely, fig. 8 shows that the worst discrepancy for the RT at a Burst load of 10k is a mere 11ms. Merging the tracing and analysis (IA) does yield improvements, but the effect is minor at this load size. Figs. 7 and 8 also show that the memory consumption, RT and execution duration plots exhibit *analogous growth* for inline and outline monitoring under the Steady and Pulse load profiles, differing slightly in the *y*-intercept value. This is a good indicator that for moderate loads *both* forms of instrumentation scale well for these profiles.

We remark that the RT Burst plots for EA and IA in fig. 8 prevent us from extrapolating our findings. In fact, these attest to the utility of benchmarks using different forms of load that, typically, do not feature in other studies; see Aceto et al. [3] for details. Coupled with a multi-faceted view of overhead, load profiles may reveal *nuanced behaviour* that could be overlooked, were one to consider a *single* performance metric (*e.g.* execution slowdown). For our moderate loads, the RT Burst plots raise the question of whether the observed trend for EA and IA remains consistent when the load goes beyond 10k workers.

High loads. We assesses inline and outline monitoring under high concurrency. The maximum number of workers is set to 100k to produce 20M messages and 40M trace events. Fig. 6 shows that the benchmark with a Steady load of 100k generates an average of 1k workers/s; this load spikes to just over 3.5k workers for Burst.

Tbl. 3 confirms that inline monitoring does induce lower overhead. However, dissecting these results uncovers important subtleties. For instance the difference in memory consumption between inline and EA is 13.3% under a

	Steady			Pulse			Burst		
	Inline	EA	IA	Inline	EA	IA	Inline	EA	IA
Scheduler utilisation	1.68	42.13	22.60	1.54	35.17	18.12	2.08	38.92	26.03
Memory consumption	0.01	0.10	0.09	0.01	0.08	0.04	0.03	0.10	0.06
RT	4.37	67.05	58.36	7.72	82.85	60.79	20.17	859.91	666.46
Execution duration	0.09	0.40	0.28	0.10	0.32	0.22	0.12	1.09	0.77

Tbl. 2. Percentage runtime overhead w.r.t. to baseline at the *maximum* load of 10k workers

	Steady			Pulse			Burst		
	Inline	EA	IA	Inline	EA	IA	Inline	EA	IA
Scheduler utilisation	1.8	86.8	58.1	2.9	85.5	55.6	3.1	84.4	57.9
Memory consumption	1.9	15.2	8.7	2.9	18.1	11.8	3.1	24.6	15.4
RT	68.9	326.9	267.9	72.7	257.8	238.7	28.4	120.6	114.3
Execution duration	23.5	108.6	93.8	24.5	101.8	93.5	15.7	82.0	77.5

Tbl. 3. Percentage runtime overhead w.r.t. to baseline at the *maximum* load of 100k workers

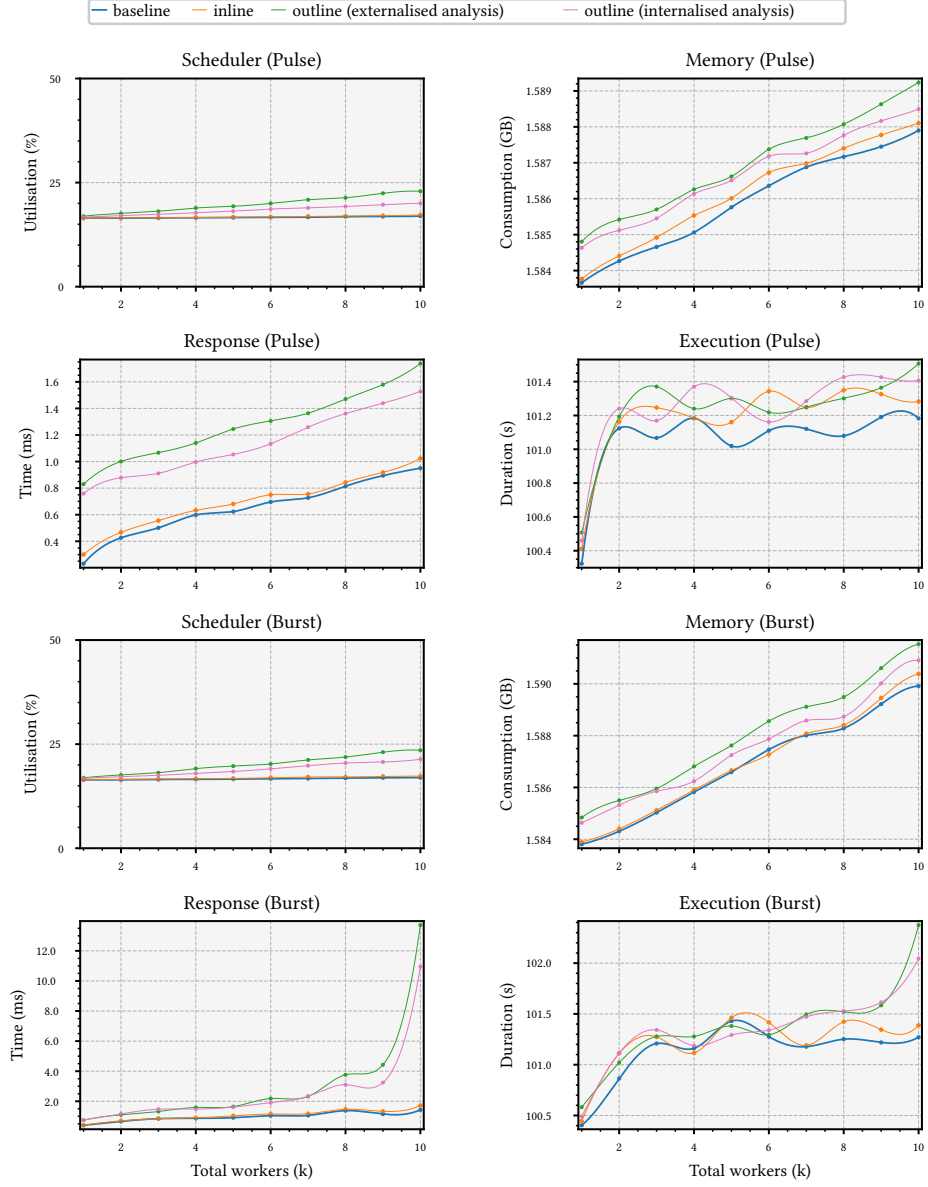


Fig. 8. Mean runtime overhead for benchmark configured with moderate load (10k workers, cont.)

Steady load; localising the analysis (IA) reduces this gap to 6.8 %. This overhead is arguably tolerable for a number of applications, and *debunks* the general notion that outline monitoring necessarily leads to infeasible overhead. Fig. 9 also shows that under a Steady load, the memory consumption, RT, and execution duration overhead induced by outline

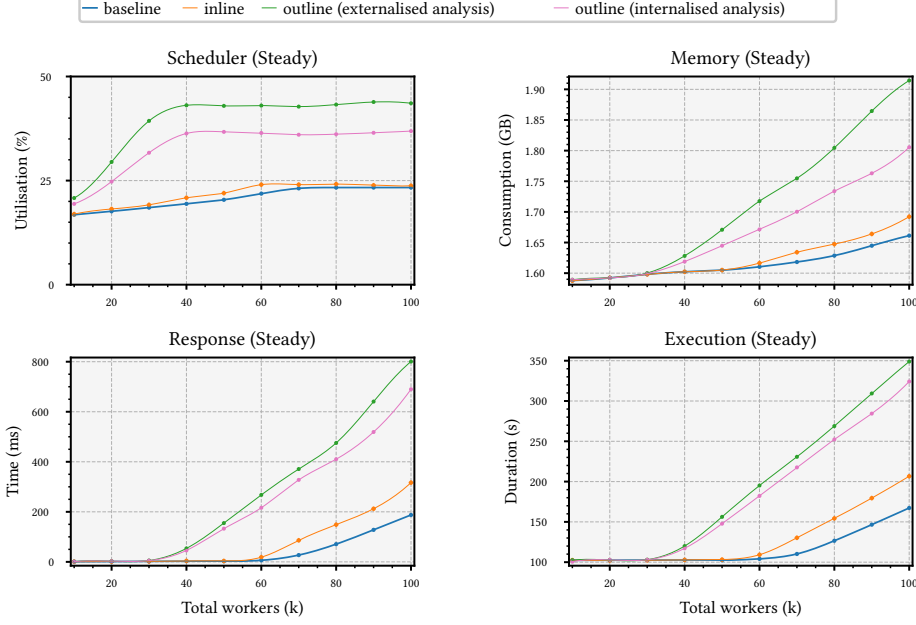


Fig. 9. Mean runtime overhead for benchmark configured with high load (100k workers)

monitoring is similar to those of inline monitoring up to the respectable load of ≈ 40 k workers, *i.e.*, 8M messages and 16M events. We point out the benefit that IA yields when compared to EA, discernible in the form of *consistently* lower overhead for *all* four performance metrics, irrespective of the load profile.

The memory consumption, RT, and execution duration plots in figs. 9 and 10 exhibit a *linear* growth beyond specific *x*-axis thresholds. This contrasts with the plots in figs. 7 and 8 for 10k workers, where varying trends may be observed. Specifically, the execution duration under the Steady load profile appears to grow (negative) quadratically, but follows a cubic shape in the case of Pulse and Burst loads; a similar effect is obtained in the RT under the Burst load profile.

Estimated overhead on workers. We refine the results in tbl. 3 and estimate the overhead at each worker for *outline monitoring*. Qualifying this overhead is crucial when the processing capability of components is spread on nodes with differing resource requirements. For example, in a set-up where workers carry out computationally-intensive tasks (*e.g.* render farms [87]), gauging the RT between components may be more relevant than measuring the scheduler utilisation; in an IoT scenario with low-powered devices (*e.g.* sensor data acquisition [27]), calculating the resource usage is useful to predict battery consumption. Estimating the overhead per worker also gives a *truer depiction* of its distribution, in contrast to a global view. In a master-worker architecture, where the master is susceptible to bottlenecks, a large portion of overhead is incurred by the master [72], yet this is not clearly perceivable in the presented plots. Our chosen benchmarking tool does not enable us to measure the overhead at each worker. We approximate this by subtracting the total overhead induced by outline monitors from the overhead at the master, dividing the difference by the number of workers, *i.e.*, 100k. The result obtained for the four performance metrics is negligible—at $< 0.01\%$ —for

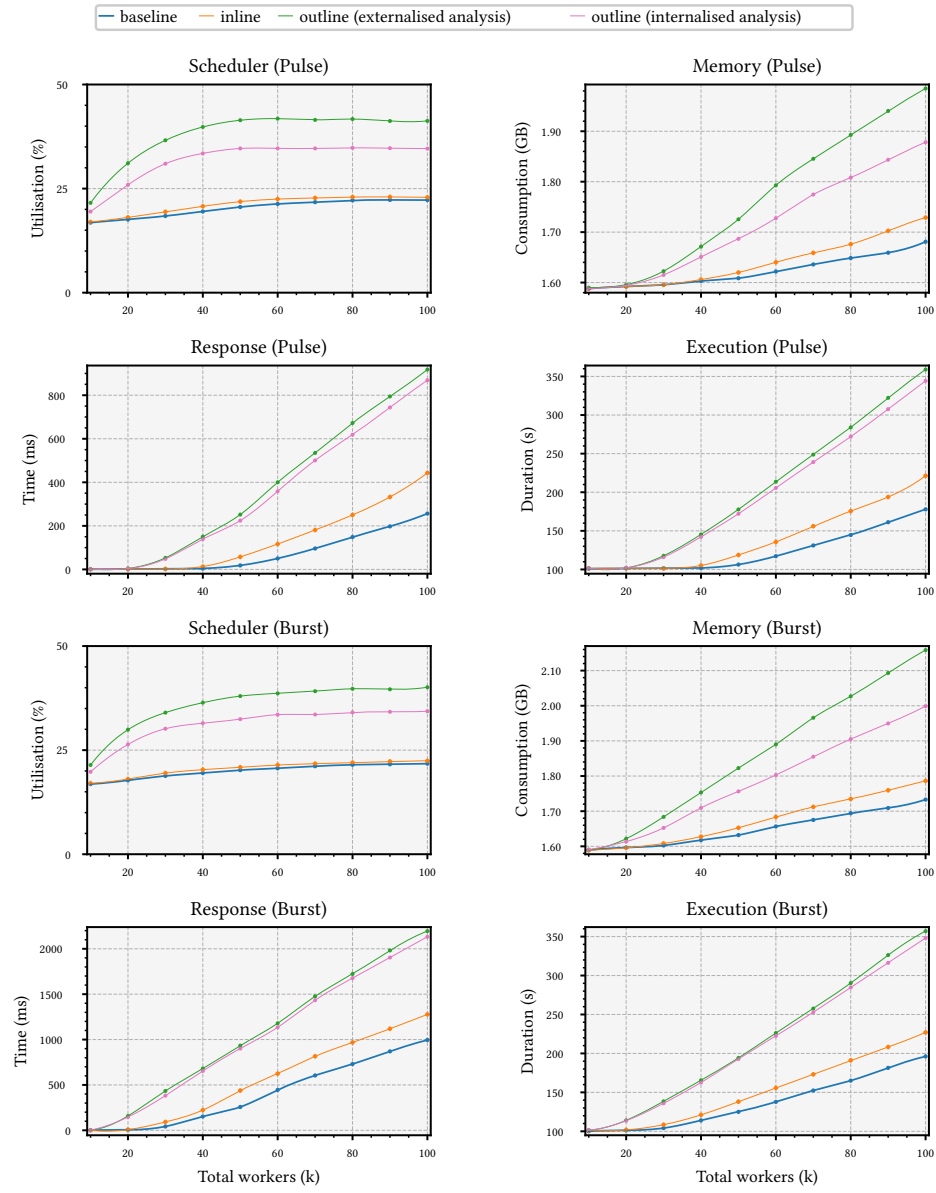


Fig. 10. Mean runtime overhead for benchmark configured with high load (100k workers, cont.)

Steady, Burst and Pulse loads, demonstrating that inline and outline monitoring induce much the same overhead (see tbl. 4 in app. C).

5 CONCLUSION AND RELATED WORK

This paper proposes a new instrumentation approach—*choreographed outline instrumentation*—targeted towards the monitoring of decentralised, open systems. Sec. 2 details a concrete algorithm that describes how the instrumentation of a concurrent SuS is attainable in a decentralised, scalable fashion by relying exclusively on events exhibited by the running system; contribution (i). Our approach sets itself apart from the state of the art in three core aspects: (i) it *asynchronously* instruments the SuS with monitors *without* modifying it, (ii) *dynamically reorganises* the monitoring choreography while the runtime analysis is in progress, and, (iii) does *not* assume a fixed number of SuS components, but *scales* as required. The exposition in sec. 2 identifies the intricacies that our algorithm addresses in order to guarantee that trace events of the SuS are reported *and* analysed correctly, lts. 1–3. We express our algorithm in terms of general software engineering concepts (e.g. encapsulated component states, separation of the routing and analysis concerns) to facilitate its adoption to a variety of settings and technologies. The algorithm we present is evaluated in two respects. Sec. 3 confirms the *implementability* of choreographed outline instrumentation; contribution (ii). It describes how our general algorithm of lts. 1–3 can be naturally mapped to a tool implementation in a mainstream concurrent language. We augment this with an account of the principled approach employed to ensure the *correct* translation of our algorithm to code. Sec. 4 assesses the *feasibility* of choreographed outline instrumentation in terms of runtime overhead; contribution (iii). We subject our implementation of sec. 3 to rigorous empirical analyses to show that the overhead it induces is *comparable* to that of inline instrumentation for many practical cases.

Impact. We debunk the commonly-held view that outline monitoring necessarily induces infeasible overhead. Our study shows that, in the case of decentralised systems, outline monitoring can be a viable alternative, even when conducted in decentralised fashion. To conclude its feasibility, our study considers other facets of overhead apart from the execution slowdown, and shows that outline monitoring induces comparable overhead to inlining in the case of master-worker systems. We conjecture that, in other architectures where the distribution of load is more even (e.g. peer-to-peer), this discrepancy is even less. Moreover, our experiments subject the monitoring set-up to different load profiles that are typically observed in practice, fig. 6, increasing our confidence in the applicability of our results; this is generally not done by other studies, e.g. Attard and Francalanza [7], Berkovich et al. [14], Bodden et al. [16], Cassar and Francalanza [21], Cassar et al. [23], Chen and Rosu [25, 26], Colombo et al. [30, 31, 32], El-Hokayem and Falcone [36, 37], Francalanza and Seychell [45], Lange and Yoshida [55], Meredith et al. [60], Mostafa and Bonakdarpour [62], Neykova and Yoshida [64, 65], Reger et al. [70]. Although the empirical measurements presented in sec. 4 are necessarily dependent on the chosen implementation framework, our conclusions should be transferrable to other set-ups that adhere to assumptions A_1 – A_9 .

Our solution adopts a principle similar to the black-box-style of monitoring employed by Application Performance Management (APM) tools that are geared towards maintaining large-scale decentralised software. APM tools operate externally to the SuS, similar to our tool. They are used extensively to identify and diagnose performance problems such as bottlenecks and hotspots; they presently have an edge on static analysis tools for critical path analysis [86] and unearthing performance anti-patterns [81, 82]. The proposed methods in sec. 2 are general enough to be applied, at least in part, to APM tools in order to make them more decentralised. In turn, we can also benefit from judiciously introducing advanced APM techniques such as sampling to further lower overhead. Although our algorithm is implement in Erlang [6], it is still sufficiently general to be instantiated to other language frameworks (e.g. Elixir [53], Akka [71] for Scala [68], Thespian [69] for Python [59]) that follow assumptions A_1 – A_9 . It can then, be used by RV tools that target other platforms, such as the JVM.

Hyper-logics [28] have recently emerged as a expressive formalism for expressing complex properties about decentralised systems (e.g. non-interference). Broadly, these logics can specify conditions across distinct traces, where quantifications range over potentially infinite trace domains. One branch in this line of study is the verification of such properties at runtime [17, 41]. Although we are unaware of any attempts at runtime verifying such properties using outline instrumentation, the inherent dynamicity required to analyse an unbounded number of traces would certainly make our instrumentation methods applicable. Our tool from sec. 3 already disentangles the instrumentation from the analysis, thus providing a platform for plugging new analyses that implement monitoring for hyper-properties (instead of the existing one).

Related work. There are other bodies of work that address decentralised monitoring besides the ones already discussed. A considerable portion of these instrument monitors via inlining. For instance, Sen et al. [78] study decentralised monitors that are attached to different threads to extract and analyse trace events internally; see fig. 1b. In their earlier work [77], the authors conduct investigate the use of decentralised monitors on distributed SuS components. While both works focus on the efficiency of communication between monitors, these do not study, nor quantify the overhead induced by runtime monitoring. Minimising overhead is also the focus of Mostafa and Bonakdarpour [62]. In their setting, the SuS consists of distributed asynchronous processes that interact via message-passing over reliable channels. Similar to ours, their monitoring algorithm does not rely on a global notion of timing (assumption A_1), nor does it tackle aspects of failure (assumptions A_4 and A_6). The work by Basin et al. [12] is one of the few that considers distributed system monitoring where components and network links may fail. While their algorithm does not employ a global clock, it is based on the timed asynchronous model for distributed systems [33] that assumes *highly-synchronised* physical clocks across nodes. In a different spirit, Bonakdarpour et al. [18], Fraigniaud et al. [42] address the problem of crashing monitors; this is something that we presently do not address, although our decentralised set-up enables us to *fail partially* (see sec. 3).

Other tooling efforts for decentralised monitoring such as El-Hokayem and Falcone [36], Jin et al. [51], Kim et al. [54], Sen et al. [76], weave the SuS with code instructions that extract trace events and delegate their analysis to independent processes—this mirrors our externalised event analysis variant of fig. 1b. Although these approaches may be classified under outline instrumentation [40], they *do not* treat the SuS as a black-box, which makes them prone to shortcomings of inlining. Crucially, the aforementioned works assume a *static* system arrangement, sparing them from dealing with the dynamic reconfiguration of outline tracers and reordering of tracer events.

Tools such as Attard and Francalanza [7], Neykova and Yoshida [64] target the Erlang ecosystem. [64] propose a method that statically analyses the program communication flow that is specified in terms of a multiparty protocol. Monitors attached to system processes then check that the messages received coincide with the projected local type (similar to the analysis conducted by our monitors) in the case of failure, the associated processes are restarted. The authors show that their recovery algorithm induces less communication overhead, and improves upon the static process structure recovery mechanisms offered by the Erlang/OTP platform. Similarly, [7] focus on decentralised outline monitoring in a concurrent setting. By contrast to [64], they leverage the native tracing infrastructure offered by the EVM.

We remark that the tools discussed in this section rely on bespoke evaluation platforms, making it hard to reproduce and objectively compare to ours. Their empirical measurements focus exclusively on the execution slowdown. By comparison, our measurements of sec. 4 show that this metric alone can be misleading since it does not portray the other facets of overhead, e.g. mean response time, that are relevant to decentralised component settings [3]; see discussion in

sec. 4.3. Moreover, their experiments either use a Steady load profile (*i.e.*, a Poisson process), or fail to specify the load type altogether. Our empirical study shows that different load profiles are essential to holistically assess overhead in decentralised settings.

REFERENCES

- [1] Luca Aceto, Antonis Achilleos, Adrian Francalanza, Anna Ingólfssdóttir, and Karoliina Lehtinen. 2019. Adventures in monitorability: from branching to linear time and back again. *Proc. ACM Program. Lang.* 3, POPL (2019), 52:1–52:29. <https://doi.org/10.1145/3290365>
- [2] Luca Aceto, Antonis Achilleos, Adrian Francalanza, Anna Ingólfssdóttir, and Karoliina Lehtinen. 2019. An Operational Guide to Monitorability. In *SEFM (LNCS)*, Vol. 11724. 433–453.
- [3] Luca Aceto, Duncan Paul Attard, Adrian Francalanza, and Anna Ingólfssdóttir. 2021. On Benchmarking for Concurrent Runtime Verification. In *FASE (LNCS)*, Vol. 12649. Springer, 3–23.
- [4] Gul Agha, Ian A. Mason, Scott F. Smith, and Carolyn L. Talcott. 1997. A Foundation for Actor Computation. *JFP* 7, 1 (1997), 1–72.
- [5] Apache Software Foundation. 2020. JMeter. <https://jmeter.apache.org>
- [6] Joe Armstrong. 2007. *Programming Erlang: Software for a Concurrent World* (first ed.). Pragmatic Bookshelf.
- [7] Duncan Paul Attard and Adrian Francalanza. 2017. Trace Partitioning and Local Monitoring for Asynchronous Components. In *SEFM (LNCS)*, Vol. 10469. 219–235.
- [8] Ralph-Johan Back. 2009. Invariant Based Programming: Basic Approach and Teaching Experiences. *Formal Aspects Comput.* 21, 3 (2009), 227–244.
- [9] Fred Baker. 1995. Requirements for IPv4 Routers. <https://www.ietf.org/rfc/rfc1812.txt>
- [10] Howard Barringer, Yliès Falcone, Klaus Havelund, Giles Reger, and David E. Rydeheard. 2012. Quantified Event Automata: Towards Expressive and Efficient Runtime Monitors. In *FM (LNCS)*, Vol. 7436. 68–84.
- [11] Ezio Bartocci, Yliès Falcone, Adrian Francalanza, and Giles Reger. 2018. Introduction to Runtime Verification. In *Lectures on Runtime Verification*. LNCS, Vol. 10457. Springer, 1–33.
- [12] David A. Basin, Felix Klaedtke, and Eugen Zalinescu. 2015. Failure-Aware Runtime Verification of Distributed Systems. In *FSTTCS (LIPIcs)*, Vol. 45. 590–603.
- [13] Kent Beck. 2002. *Test Driven Development by Example*. Addison-Wesley.
- [14] Shay Berkovich, Borzoo Bonakdarpour, and Sebastian Fischmeister. 2015. Runtime Verification with Minimal Intrusion through Parallelism. *FMSD* 46, 3 (2015), 317–348.
- [15] Stephen M. Blackburn, Robin Garner, Chris Hoffmann, Asjad M. Khan, Kathryn S. McKinley, Rotem Bentzur, Amer Diwan, Daniel Feinberg, Daniel Frampton, Samuel Z. Guyer, Martin Hirzel, Antony L. Hosking, Maria Jump, Han Bok Lee, J. Eliot B. Moss, Aashish Phansalkar, Darko Stefanovic, Thomas VanDrunen, Daniel von Dincklage, and Ben Wiedermann. 2006. The DaCapo Benchmarks: Java Benchmarking Development and Analysis. In *OOPSLA*. 169–190.
- [16] Eric Bodden, Laurie J. Hendren, Patrick Lam, Ondrej Lhoták, and Nomair A. Naeem. 2010. Collaborative Runtime Verification with Tracematches. *J. Log. Comput.* 20, 3 (2010), 707–723.
- [17] Borzoo Bonakdarpour and Bernd Finkbeiner. 2018. The Complexity of Monitoring Hyperproperties. In *31st IEEE Computer Security Foundations Symposium, CSF 2018, Oxford, United Kingdom, July 9-12, 2018*. IEEE Computer Society, 162–174. <https://doi.org/10.1109/CSF.2018.00019>
- [18] Borzoo Bonakdarpour, Pierre Fraigniaud, Sergio Rajsbaum, David A. Rosenblueth, and Corentin Travers. 2016. Decentralized Asynchronous Crash-Resilient Runtime Verification. In *CONCUR (LIPIcs)*, Vol. 59. 16:1–16:15.
- [19] David R. Butenhof. 1997. *Programming with POSIX threads* (first ed.). Addison-Wesley.
- [20] Bryan Cantrill. 2006. Hidden in Plain Sight. *ACM Queue* 4, 1 (2006), 26–36.
- [21] Ian Cassar and Adrian Francalanza. 2016. On Implementing a Monitor-Oriented Programming Framework for Actor Systems. In *IFM (LNCS)*, Vol. 9681. 176–192.
- [22] Ian Cassar, Adrian Francalanza, Duncan Paul Attard, Luca Aceto, and Anna Ingólfssdóttir. 2017. A Suite of Monitoring Tools for Erlang. In *RV-CuBES (Kalpa Publications in Computing)*, Vol. 3. 41–47.
- [23] Ian Cassar, Adrian Francalanza, and Simon Said. 2015. Improving Runtime Overheads for detectEr. In *FESCA (EPTCS)*, Vol. 178. 1–8.
- [24] Francesco Cesarini and Simon Thompson. 2009. *Erlang Programming: A Concurrent Approach to Software Development* (first ed.). O'Reilly Media.
- [25] Feng Chen and Grigore Rosu. 2007. MOP: An Efficient and Generic Runtime Verification Framework. In *OOPSLA*. 569–588.
- [26] Feng Chen and Grigore Rosu. 2009. Parametric Trace Slicing and Monitoring. In *TACAS (LNCS)*, Vol. 5505. 246–261.
- [27] Simone Cirani, Gianluigi Ferrari, Marco Picone, and Luca Veltri. 2018. *Internet of Things: Architectures, Protocols and Standards* (first ed.). Wiley.
- [28] Norine Coenen, Bernd Finkbeiner, Christopher Hahn, and Jana Hofmann. 2019. The Hierarchy of Hyperlogics. In *34th Annual ACM/IEEE Symposium on Logic in Computer Science, LICS 2019, Vancouver, BC, Canada, June 24-27, 2019*. IEEE, 1–13. <https://doi.org/10.1109/LICS.2019.8785713>
- [29] Christian Colombo and Yliès Falcone. 2016. Organising LTL Monitors over Distributed Systems with a Global Clock. *FMSD* 49, 1-2 (2016), 109–158.
- [30] Christian Colombo, Adrian Francalanza, and Rudolph Gatt. 2011. Elarva: A Monitoring Tool for Erlang. In *RV (Lecture Notes in Computer Science)*, Vol. 7186. 370–374.

- [31] Christian Colombo, Adrian Francalanza, Ruth Mizzi, and Gordon J. Pace. 2012. polyLarva: Runtime Verification with Configurable Resource-Aware Monitoring Boundaries. In *SEFM (LNCS)*, Vol. 7504. 218–232.
- [32] Christian Colombo, Gordon J. Pace, and Gerardo Schneider. 2009. LARVA—Safer Monitoring of Real-Time Java Programs (Tool Paper). In *SEFM*. 33–37.
- [33] Flaviu Cristian and Christof Fetzer. 1999. The Timed Asynchronous Distributed System Model. *IEEE Trans. Parallel Distrib. Syst.* 10, 6 (1999), 642–657.
- [34] Mathieu Desnoyers and Michel R. Dagenais. 2006. *The LTTng tracer : A low impact performance and behavior monitor for GNU / Linux*. Technical Report.
- [35] Eclipse/IBM. 2021. OpenJ9. <https://www.eclipse.org/openj9>
- [36] Antoine El-Hokayem and Yliès Falcone. 2017. Monitoring Decentralized Specifications. In *ISSTA*. 125–135.
- [37] Antoine El-Hokayem and Yliès Falcone. 2020. On the Monitoring of Decentralized Specifications: Semantics, Properties, Analysis, and Simulation. *ACM Trans. Softw. Eng. Methodol.* 29, 1, Article 1 (Jan. 2020), 57 pages. <https://doi.org/10.1145/3355181>
- [38] Úlfar Erlingsson. 2004. *The Inlined Reference Monitor Approach to Security Policy Enforcement*. Ph.D. Dissertation. Cornell University.
- [39] Úlfar Erlingsson and Fred B. Schneider. 1999. SASI Enforcement of Security Policies: A Retrospective. In *NSPW*. ACM, 87–95.
- [40] Yliès Falcone, Srđan Krstić, Giles Reger, and Dmitriy Traytel. 2018. A Taxonomy for Classifying Runtime Verification Tools. In *RV (LNCS)*, Vol. 11237. 241–262.
- [41] Bernd Finkbeiner, Christopher Hahn, Marvin Stenger, and Leander Tentrup. 2019. Monitoring hyperproperties. *Formal Methods Syst. Des.* 54, 3 (2019), 336–363. <https://doi.org/10.1007/s10703-019-00334-z>
- [42] Pierre Fraigniaud, Sergio Rajsbaum, and Corentin Travers. 2014. On the Number of Opinions Needed for Fault-Tolerant Run-Time Monitoring in Distributed Systems. In *RV (LNCS)*, Vol. 8734. 92–107.
- [43] Adrian Francalanza, Luca Aceto, Antonis Achilleos, Duncan Paul Attard, Ian Cassar, Dario Della Monica, and Anna Ingólfssdóttir. 2017. A Foundation for Runtime Monitoring. In *RV (LNCS)*, Vol. 10548. 8–29.
- [44] Adrian Francalanza, Jorge A. Pérez, and César Sánchez. 2018. Runtime Verification for Decentralised and Distributed Systems. In *Lectures on Runtime Verification*. LNCS, Vol. 10457. Springer, 176–210.
- [45] Adrian Francalanza and Aldrin Seychell. 2015. Synthesising Correct Concurrent Runtime Monitors. *FMSD* 46, 3 (2015), 226–261.
- [46] Xiaofeng Gao. 2006. *Reducing Time and Space Costs of Memory Tracing*. Ph.D. Dissertation. University of California, San Diego, USA.
- [47] Mark Harman and Peter W. O’Hearn. 2018. From Start-ups to Scale-ups: Opportunities and Open Problems for Static and Dynamic Program Analysis. In *SCAM*. 1–23.
- [48] Klaus Havelund and Grigore Rosu. 2004. An Overview of the Runtime Verification Tool Java PathExplorer. *Formal Methods Syst. Des.* 24, 2 (2004), 189–215.
- [49] Carl Hewitt, Peter Boehler Bishop, and Richard Steiger. 1973. A Universal Modular ACTOR Formalism for Artificial Intelligence. In *IJCAI* William Kaufmann, 235–245.
- [50] Shams Mahmood Imam and Vivek Sarkar. 2014. Savina - An Actor Benchmark Suite: Enabling Empirical Evaluation of Actor Libraries. In *AGERE!@SPASH*. 67–80.
- [51] Dongyun Jin, Patrick O’Neil Meredith, Choonghwan Lee, and Grigore Rosu. 2012. JavaMOP: Efficient Parametric Runtime Monitoring Framework. In *ICSE*. 1427–1430.
- [52] Richard Jones, Antony Hosking, and Eliot Moss. 2020. *The Garbage Collection Handbook: The Art of Automatic Memory Management*. CRC.
- [53] Saša Jurić. 2019. *Elixir in Action*. Manning.
- [54] Moonjoo Kim, Sampath Kannan, Insup Lee, Oleg Sokolsky, and Mahesh Viswanathan. 2001. Java-MaC: a Run-time Assurance Tool for Java Programs. *Electr. Notes Theor. Comput. Sci.* 55, 2 (2001), 218–235.
- [55] Julien Lange and Nobuko Yoshida. 2019. Verifying Asynchronous Interactions via Communicating Session Automata. In *CAV (LNCS)*, Vol. 11561. 97–117.
- [56] Martin Leucker and Christian Schallhart. 2009. A brief account of runtime verification. *JLAP* 78, 5 (2009), 293–303.
- [57] Jay Ligatti, Lujo Bauer, and David Walker. 2005. Edit automata: enforcement mechanisms for run-time security policies. *International Journal of Information Security (IJIS)* 4, 1-2 (2005), 2–16. <https://doi.org/10.1007/s10207-004-0046-8>
- [58] Robert Martin. 2013. *Agile Software Development, Principles, Patterns, and Practices* (first ed.). Pearson.
- [59] Eric Matthes. 2019. *Python Crash Course: A Hands-On, Project-Based Introduction to Programming*. No Starch Press.
- [60] Patrick O’Neil Meredith, Dongyun Jin, Dennis Griffith, Feng Chen, and Grigore Rosu. 2012. An Overview of the MOP Runtime Verification Framework. *STTT* 14, 3 (2012), 249–289.
- [61] Microsoft. 2021. MSDN. <https://msdn.microsoft.com>
- [62] Menna Mostafa and Borzoo Bonakdarpour. 2015. Decentralized Runtime Verification of LTL Specifications in Distributed Systems. In *IPDPS*. 494–503.
- [63] Jan Müßler, Daniel Lorenz, and Felix Wolf. 2011. Reducing the Overhead of Direct Application Instrumentation Using Prior Static Analysis. In *Euro-Par (LNCS)*, Vol. 6852. 65–76.
- [64] Rumyana Neykova and Nobuko Yoshida. 2017. Let It Recover: Multiparty Protocol-Induced Recovery. In *CC*. 98–108.
- [65] Rumyana Neykova and Nobuko Yoshida. 2017. Multiparty Session Actors. *Log. Methods Comput. Sci.* 13, 1 (2017).

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

- [66] Nicolas Niclausse. 2017. Tsung. <http://tsung.erlang-projects.org>
- [67] Scott Oaks. 2020. *Java Performance: In-Depth Advice for Tuning and Programming Java 8, 11, and Beyond*. CRC.
- [68] Martin Odersky, Lex Spoon, and Bill Venners. 2020. *Programming in Scala*. Artima Inc.
- [69] Kevin Quick. 2021. Thespian. <http://thespianpy.com>
- [70] Giles Reger, Helena Cuenca Cruz, and David E. Rydeheard. 2015. MarQ: Monitoring at Runtime with QEA. In *TACAS (LNCS)*, Vol. 9035. 596–610.
- [71] Raymond Roostenburg, Rob Bakker, and Rob Williams. 2015. *Akka in Action*. Manning.
- [72] Sartaj Sahni and George L. Vairaktarakis. 1996. The Master-Slave Paradigm in Parallel Computer and Industrial Settings. *J. Glob. Optim.* 9, 3-4 (1996), 357–377.
- [73] Torben Scheffel and Malte Schmitz. 2014. Three-Valued Asynchronous Distributed Runtime Verification. In *MEMOCODE*. 52–61.
- [74] Fred B. Schneider. 2000. Enforceable Security Policies. *Transactions on Information and System Security (TISSEC)* 3, 1 (2000), 30–50. <https://doi.org/10.1145/353323.353382>
- [75] Peter Seibel. 2009. *Coders at Work: Reflections on the Craft of Programming*. A Press.
- [76] Koushik Sen, Grigore Rosu, and Gul Agha. 2003. Runtime safety analysis of multithreaded programs. In *ESEC / SIGSOFT FSE*. 337–346.
- [77] Koushik Sen, Abhay Vardhan, Gul Agha, and Grigore Rosu. 2004. Efficient Decentralized Monitoring of Safety in Distributed Systems. In *ICSE*. 418–427.
- [78] Koushik Sen, Abhay Vardhan, Gul Agha, and Grigore Rosu. 2006. Decentralized Runtime Analysis of Multithreaded Applications. In *IPDPS*.
- [79] Andreas Sewe, Mira Mezini, Aibek Sarimbekov, and Walter Binder. 2011. DaCapo con Scala: design and analysis of a Scala benchmark suite for the JVM. In *OOPSLA*. 657–676.
- [80] Benjamin H. Sigelman, Luiz André Barroso, Mike Burrows, Pat Stephenson, Manoj Plakal, Donald Beaver, Saul Jaspan, and Chandan Shanbhag. 2010. *Dapper, a Large-Scale Distributed Systems Tracing Infrastructure*. Technical Report. Google, Inc.
- [81] Connie U. Smith and Lloyd G. Williams. 2001. Software Performance AntiPatterns; Common Performance Problems and their Solutions. In *CMG*. Computer Measurement Group, 797–806.
- [82] Connie U. Smith and Lloyd G. Williams. 2002. New Software Performance AntiPatterns: More Ways to Shoot Yourself in the Foot. In *CMG*. Computer Measurement Group, 667–674.
- [83] SPEC. 2008. SPECjvm2008. <https://www.spec.org/jvm2008>
- [84] The Pony Team. 2021. Ponylang. <https://tutorial.ponylang.io>
- [85] David Thomas and Andrew Hunt. 2019. *The Pragmatic Programmer: Your Journey to Mastery*. Addison-Wesley.
- [86] Cui-Qing Yang and Barton P. Miller. 1988. Critical Path Analysis for the Execution of Parallel and Distributed Programs. In *ICDCS*. 366–373.
- [87] Jiali Yao, Zhigeng Pan, and Hongxin Zhang. 2009. A Distributed Render Farm System for Animation Production. In *ICEC (LNCS)*, Vol. 5709. 264–269.

Expect: $m.type = evt \vee m.type = dtc$ <pre> 1 def ROUTE(m, p_t) 2 $p_t ! \langle rtd, self() \rangle, m$ 3 end def 4 def TRACER(σ, v, p_s, p_t) 5 # New (child) tracer state σ' is initialised with an 6 # empty routing map Π; instrumentation map $\sigma.\Phi$ is 7 # copied to σ', and the tracer-processes map Γ is 8 # initialised with the (first) process being traced, p_s 9 $\sigma' \leftarrow (\Pi \leftarrow \emptyset, \sigma.\Phi, \Gamma \leftarrow \{\langle p_s, \bullet \rangle\})$ 10 DETACH(p_s, p_t) 11 $p_a \leftarrow \text{fork}(v)$ executable monitor 12 # Tracer started in \bullet mode to process routed trace 13 # events first 14 LOOP$_{\bullet}$(σ', p_a) 15 end def </pre>	Expect: $m.type = rtd$ <pre> 10 def FORWD(m, p_t) 11 $p_t ! m$ 12 end def 13 def DETACH(p_s, p_t) 14 $p'_t \leftarrow self()$ 15 PREEMPT(p_s, p'_t) 16 $p_t ! \langle dtc, p'_t, p_s \rangle$ 17 end def 18 def TRYGC(σ, p_a) 19 if $\sigma.\Gamma = \emptyset \wedge \sigma.\Pi = \emptyset$ then 20 Signal analyser p_a to terminate 21 Terminate tracer 22 end if 23 end def </pre>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Lst. 4. Operations used by the (◦) and priority (•) tracer loops

A FURTHER OUTLINE INSTRUMENTATION DETAILS

Our message routing and forwarding operations described in sec. 2 enable tracers to implement hop-by-hop routing; these are given in lst. 4. The function `self()` on line 2 returns the PID of the calling process. Lst. 4 includes the `TRACER` function that is forked in lst. 1 to execute the core tracer logic of lsts. 2 and 3. `DETACH` is used to signal to the router tracer p_t that the system process p_s is being traced by a new tracer, p'_t . Prior to issuing the message, detach invokes `PREEMPT` so that p'_t takes over the tracing of system process p_s . `TRYGC` determines whether a tracer can be safely terminated. For the case of EA of fig. 1a, `TRYGC` also signals the analyser to terminate. The analyser terminates asynchronously so that it can process potential trace events it might still have in its message queue.

Starting the system. `START` in lst. 5 launches the SuS and monitoring system in tandem. The operation accepts the code signature g , as the entry point of the SuS, together with the instrumentation map, Φ . As a safeguard that prevents the initial loss of trace events, the SuS is launched in a paused state (line 2) to permit the root tracer to start tracing the top-level system process. `ROOT` resumes the system (8), and begins its trace inspection in *direct* mode, as shown on line 10.

Tracing. The tracing mechanism is defined by the operations `TRACE`, `CLEAR` and `PREEMPT` listed in lst. 6.

B INLINE INSTRUMENTATION

Our RV tool instruments monitors into the target system via *code injection* by manipulating the program abstract syntax tree (AST). Fig. 11 outlines how this process is carried out. In step ①, the Erlang source code of the system is parsed into the corresponding AST, step ②. The Erlang compilation process contains a *parse transform phase* [24], step ③, that provides a hook to enable the AST to be post-processed. The custom-built weaver leverages this mechanism in step

<pre> 1 def START(g, Φ) 2 # Pausing allows root tracer to be set 3 # up; no initial message loss 4 $p_s \leftarrow \text{fork}(g)$ in paused mode 5 $p_t \leftarrow \text{fork}(\text{ROOT}(p_s, \Phi))$ 6 return $\langle p_s, p_t \rangle$ 7 end def </pre>	<pre> 6 def ROOT(p_s, Φ) 7 TRACE($p_s, self()$) 8 Resume system p_s 9 $\sigma \leftarrow (\Pi \leftarrow \emptyset, \Phi, \Gamma \leftarrow \{\langle p_s, \circ \rangle\})$ 10 # Root tracer has no monitor 11 LOOP$_{\circ}$(σ, \perp) 12 end def </pre>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Lst. 5. System starting operation and root tracer

```

1 def TRACE( $p_s, p_t$ )
2   if  $p_s$  is not traced then
3     Set the tracer for  $p_s$  to  $p_t$ ;  $p_t$  will trace new
      descendant processes  $p_{s_1}, p_{s_2}, \dots$  forked
      by  $p_s$  automatically (assumption A9)
4   while  $p_s$ 's tracer is set do
5      $s \leftarrow$  read next event for  $p_s$  from
      trace event source
6      $e \leftarrow$  encode  $s$  as a message
7      $p_t ! e$ 
8   end while
9 end if
10 end def

11 def CLEAR( $p_s, p_t$ )
12   if  $p_s$  is traced then
13     Clear the tracer  $p_t$  for  $p_s$ ;  $p_t$  still traces
      the descendant processes  $p_{s_1}, p_{s_2}, \dots$  of  $p_s$ 
14     Block until the trace events for  $p_s$  that are in
      transit are delivered to  $p_t$ 
15   end if
16 end def

```

Expect: p_s 's tracer is set

```

17 def PREEMPT( $p_s, p_t$ )
18    $p'_t \leftarrow p_s$ 's tracer
19   CLEAR( $p_s, p'_t$ )
20   TRACE( $p_s, p_t$ )
21 end def

```

Lst. 6. Tracing operations offered by the tracing mechanism

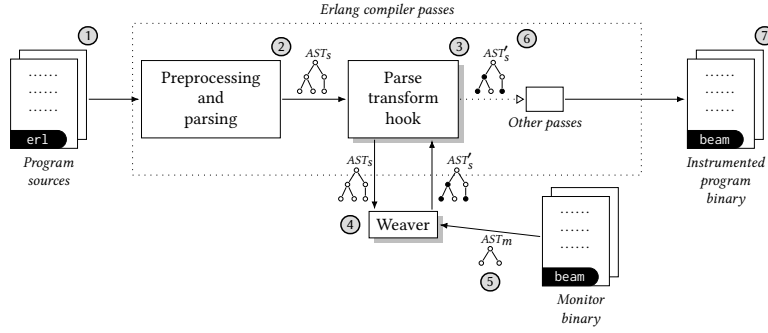


Fig. 11. Instrumentation pipeline for inline monitors

④, to embed into the program AST the AST of the synthesised monitor, step ⑤. The weaver performs two types of transformations:

- (i) *Monitor bootstrapping*. The function encoding the monitor is stored in the process dictionary (a process-local key-value store) of the monitored process.
- (ii) *Instrumentation points*. The program AST is instrumented with calls at the points of interest: these calls constitute the extraction and analysis of system trace events by the monitor code.

The instrumented calls in transformation (ii) retrieve the monitor function stored in the process dictionary in transformation (i), and apply it to the system trace event. This function application returns the monitor continuation function that is used to replace the current monitor in the process dictionary. The two-step weaving procedure produces the instrumented program AST in step ⑥, that can be subsequently compiled by the Erlang compiler into the system binary, step ⑦.

C ADDITIONAL EXPERIMENT RESULTS

Total memory consumed. Fig. 12 shows the total memory consumed (left) and sampled memory (right) during the experiment runs conducted under Steady, Pulse and Burst loads for the case study with $n = 100k$ workers. Note that unlike in figs. 9 and 10, the y-axis is labelled in GB. The total memory consumed (left) in fig. 12 corresponds to the *area*

	Steady				Pulse				Burst			
	Master		Per worker		Master		Per worker		Master		Per worker	
	EA	IA	EA	IA	EA	IA	EA	IA	EA	IA	EA	IA
Scheduler utilisation	20.4	10.1	0.001	0.001	21.4	14.4	0.001	0.000	23.2	15.4	0.001	0.000
Memory consumption	1.4	0.7	0.000	0.000	2.0	1.5	0.000	0.000	1.4	0.9	0.000	0.000
RT	194.6	134.4	0.001	0.001	200.5	185.4	0.001	0.001	87.2	72.7	0.000	0.000
Execution duration	74.9	61.1	0.000	0.000	79.2	73.7	0.000	0.000	60.7	50.3	0.000	0.000

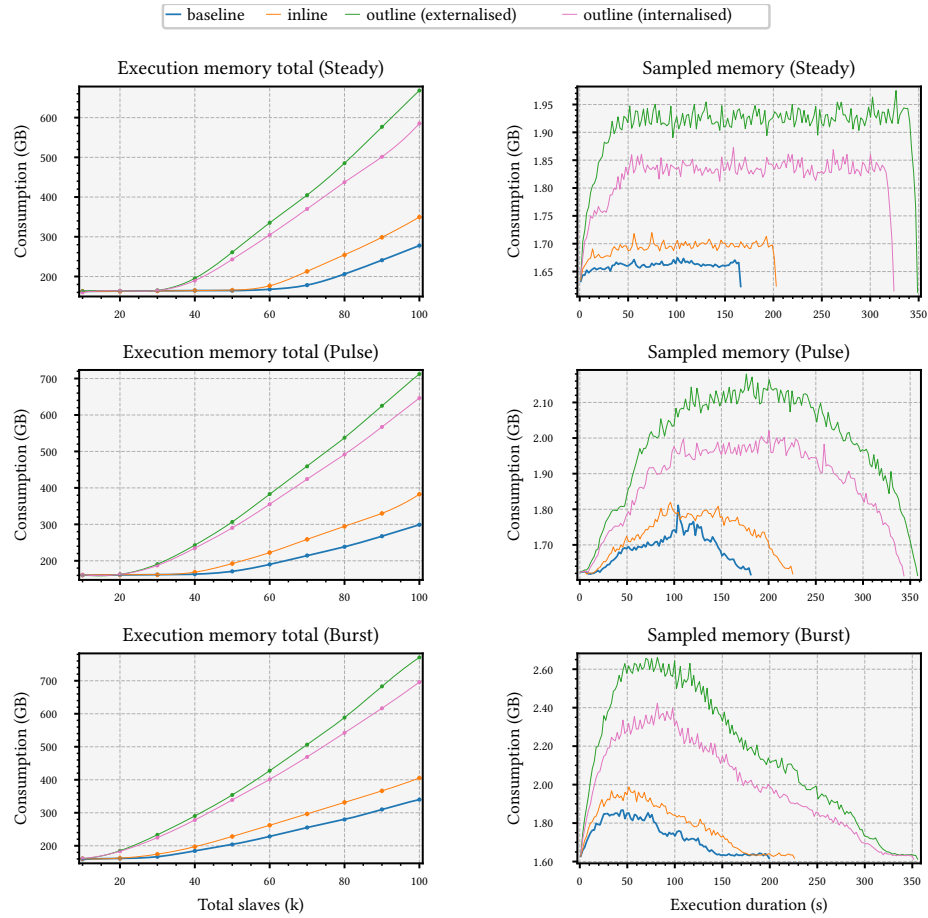
Tbl. 4. Percentage *estimated* runtime overhead per worker at the *maximum* load of 100k workers

Fig. 12. Total and sampled memory consumption for benchmark configured with high load of 100k workers

under the sampled memory plots (right). Our sampled memory plots reflect the shapes of the loads applied, although these extend for a longer duration that goes beyond the original loading time of $t = 100$ s (see fig. 6).

Overhead on master process only. Figs. 15 and 16 show the mean runtime overhead on the master process for the benchmark set up with 100 k workers. The combined overhead for the set-up for the master and worker processes is plotted for reference.

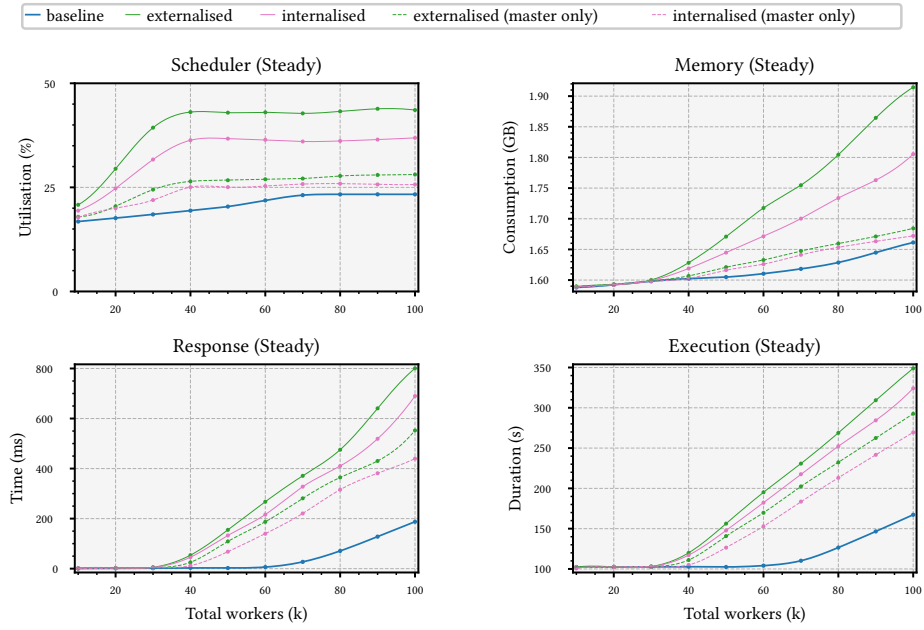


Fig. 13. Mean runtime overhead on master *only* for benchmark configured with high load (100 k workers)

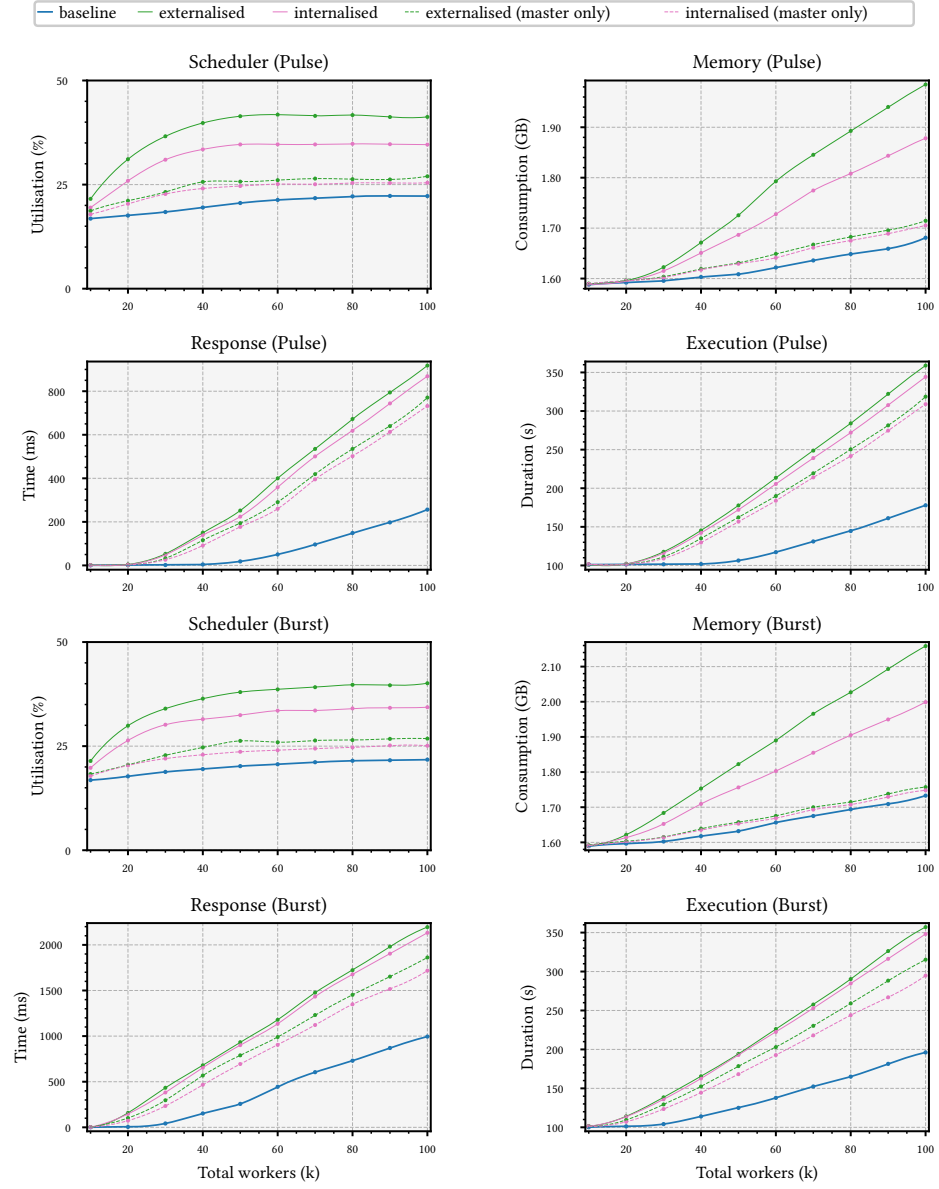


Fig. 14. Mean runtime overhead on master *only* for benchmark configured with high load (100 k workers, cont.)

Estimated overhead per worker. Figs. 15 and 16 show the estimated overhead per worker for the benchmark set up with 100 k workers.

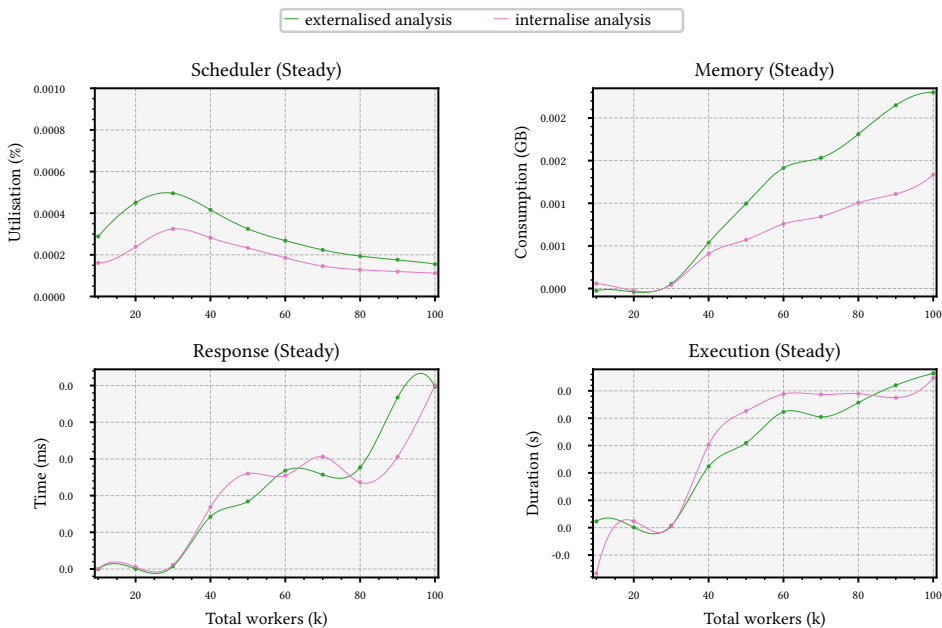


Fig. 15. Mean estimated runtime overhead per worker for benchmark configured with high load (100 k workers)

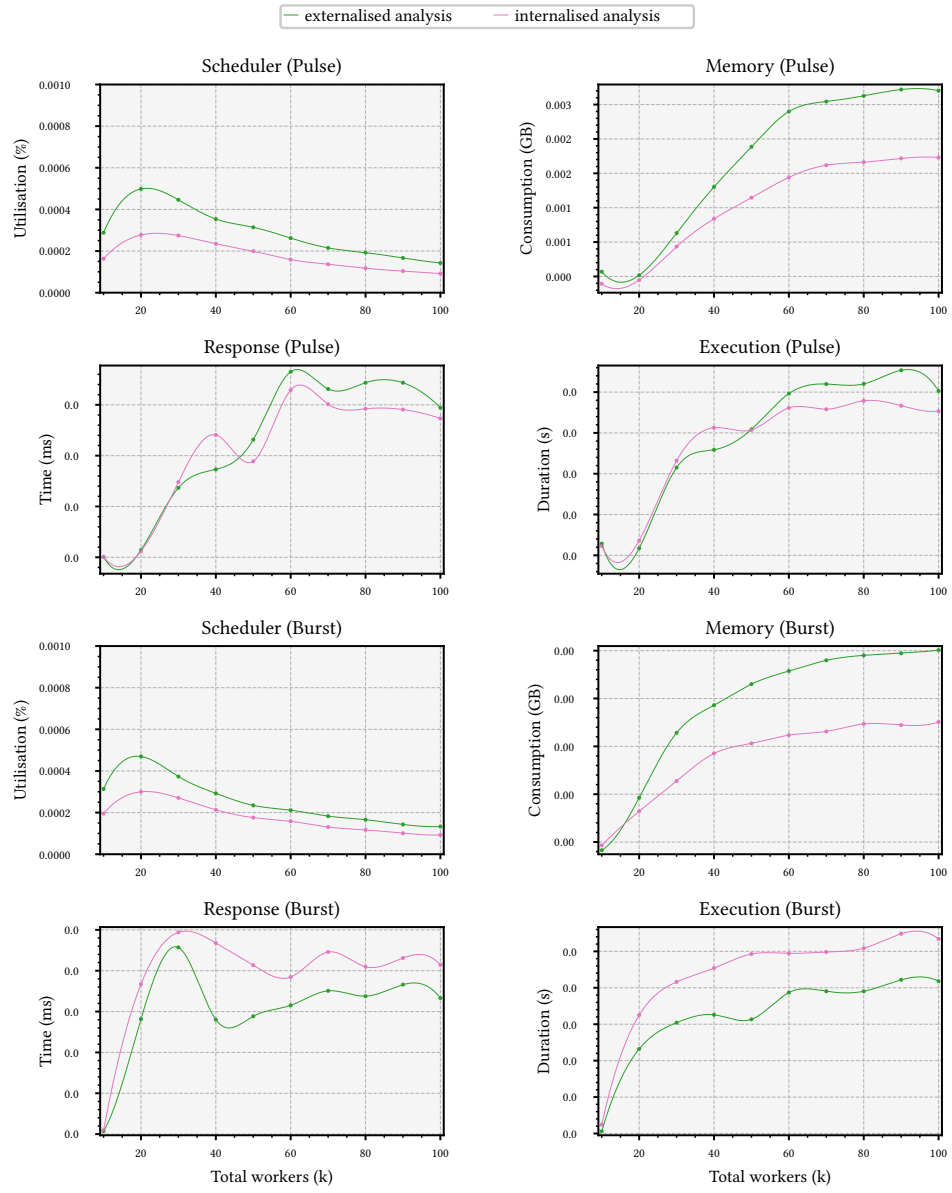


Fig. 16. Mean estimated runtime overhead per worker for benchmark configured with high load (100 k workers, cont.)

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

Fitted data plots. Figs. 17 and 18, and figs. 19 and 20 show the mean runtime overhead for the benchmark set up with 10 k and 100 k workers respectively. These plots, which correspond to figs. 7–10, have been fitted with linear, quadratic and cubic polynomials where the R^2 is above 0.96.

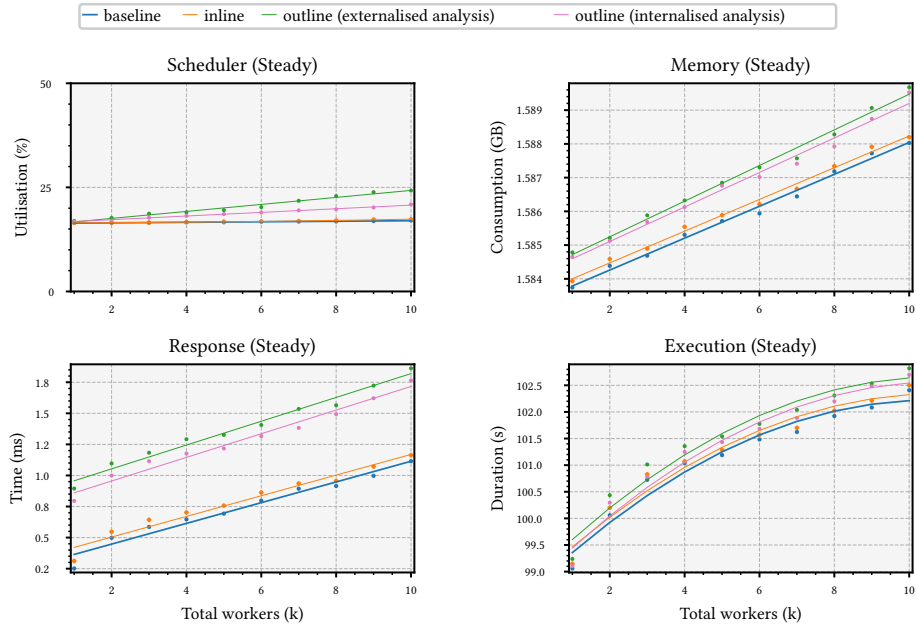


Fig. 17. Mean runtime overhead for benchmark configured with moderate load (10 k workers)

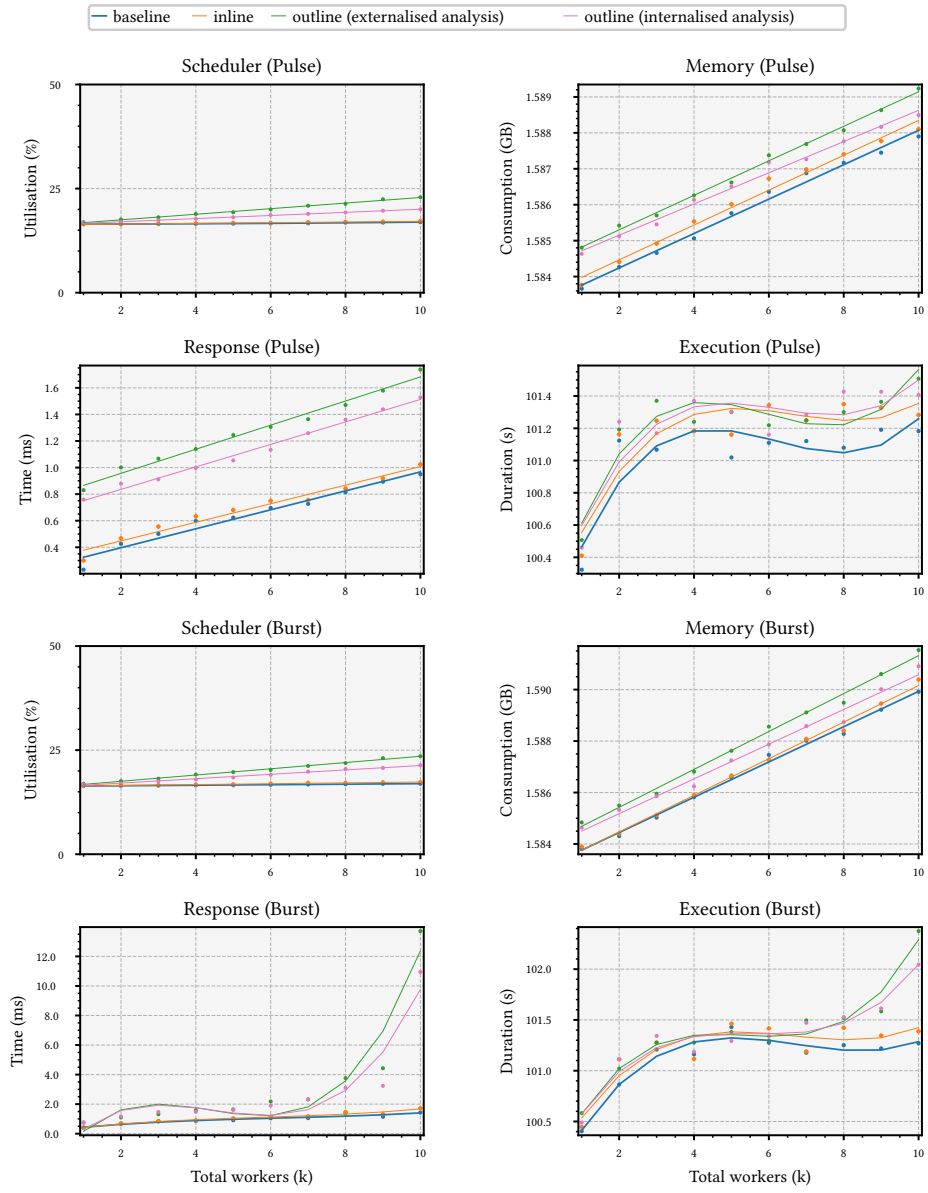


Fig. 18. Mean runtime overhead for benchmark configured with moderate load (10 k workers, cont.)

A Choreographed Outline Instrumentation Algorithm for Asynchronous Components

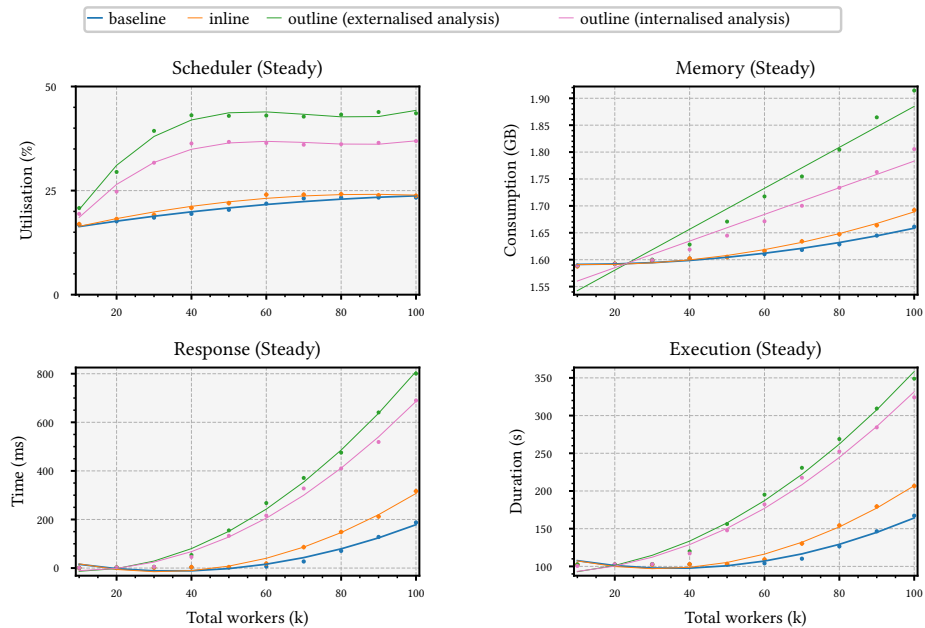


Fig. 19. Mean runtime overhead for benchmark configured with high load (100k workers)

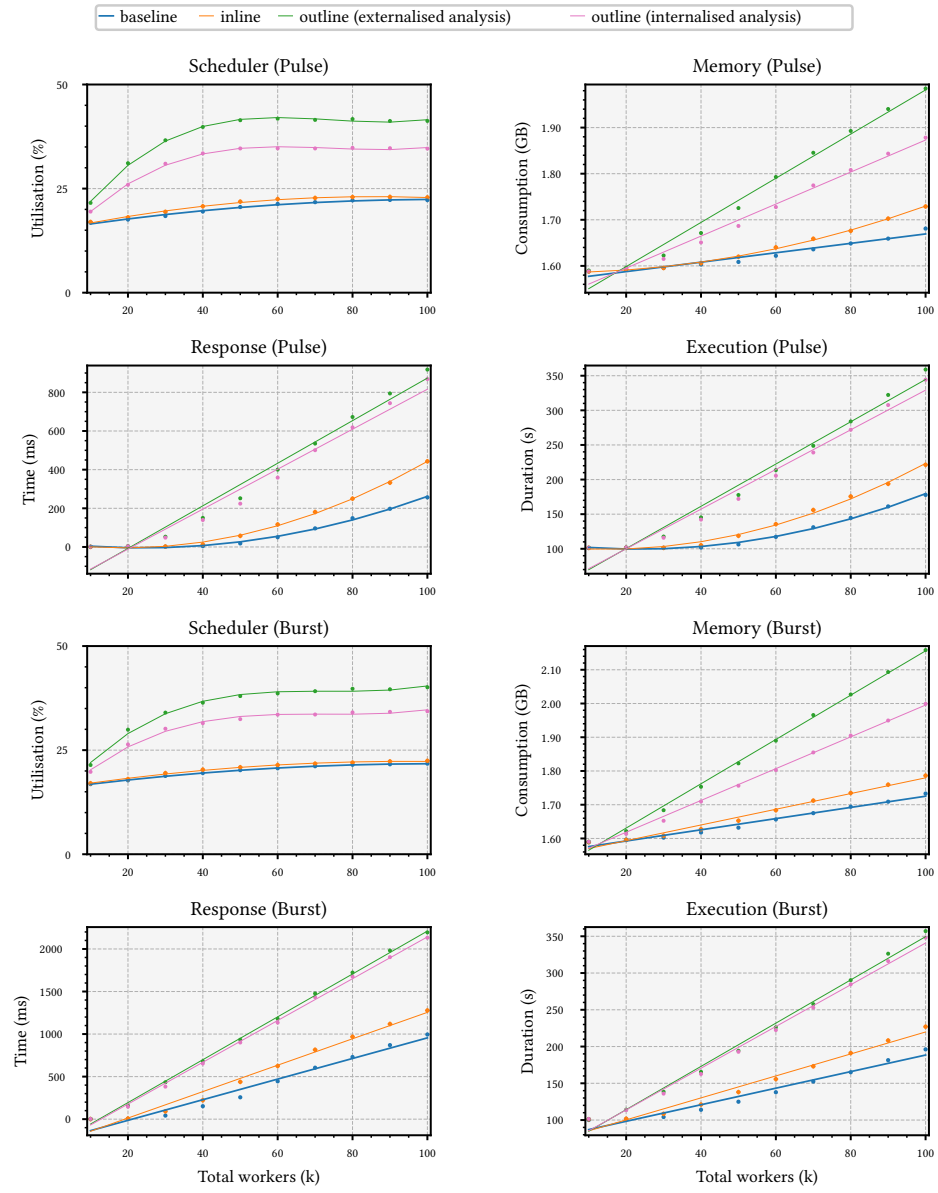


Fig. 20. Mean runtime overhead for benchmark configured with high load (100 k workers, cont.)