

# Procedural Generation of 3D Maps with Snappable Meshes

Rafael C. e Silva, Nuno Fachada, Diogo de Andrade, and Nélío Códices

**Abstract**—In this paper we present a technique for procedurally generating 3D maps using a set of premade meshes which snap together based on designer-specified visual constraints. The proposed approach avoids size and layout limitations, offering the designer control over the look and feel of the generated maps, as well as immediate feedback on a given map’s navigability. A prototype implementation of the method, developed in the Unity game engine, is discussed, and a number of case studies are analyzed. These include a multiplayer game where the method was used, together with a number of illustrative examples which highlight various parameterizations and generation methods. We argue that the technique is designer-friendly and can be used as a map composition method and/or as a prototyping system in 3D level design, opening the door for quality map and level creation in a fraction of the time of a fully human-based approach.

**Index Terms**—Procedural content generation (PCG), 3D maps, designer-centric methods, constraint-based PCG.

## I. INTRODUCTION

IN this paper we describe a method for procedurally generating 3D maps using visual constraints. The approach, termed *snappable meshes*, consists of a system of connectors with pins and colors—similar in concept to a jigsaw puzzle—which constrains how any two map pieces (i.e., meshes) can snap together. Through the visual design and specification of these connection constraints, and an easy-to-follow and fully explainable [1] generation procedure, the method is accessible to game designers and/or other non-experts in procedural content generation (PCG), artificial intelligence (AI) or programming.

While the maps are procedurally generated, the technique grants the game designer considerable influence over the final result. More specifically, the designer has complete control on the modeling of individual meshes—including the placement and configuration of associated connectors—and can achieve substantial customization on the generated maps through a small number of intuitive parameters. At the same time, the technique avoids size and layout limitations, common in grid-based approaches. Maps are generated almost immediately and can be quickly validated for navigability. With a focus on fast iteration and respect for existing development workflows [2], the snappable meshes PCG technique can be used in practical industry settings, while following academic best practices such as transparency and reproducibility [3]. Further, the technique can be easily tweaked and extended by programmers, since one of its core components—the *generation method*, discussed in

detail in Section III—is fully swappable, and implementing new ones is relatively simple. Four of these *generation methods* are described in this paper and included in the provided prototype implementation.

The snappable meshes PCG technique was initially developed for a multiplayer combat game, created as a semester project at Lusófona University’s Bachelor in Videogames—an industry-focused, interdisciplinary game development degree [4]. The decision of using PCG in this particular game project was made to promote its replayability, requiring players to adapt to a new map on every match, keeping the experience from turning stale once the combat loop is mastered. Given the technique’s capability of creating general 3D maps (i.e., non-action game-specific maps), its core ideas were previously presented in a conference [5]. The present paper extends that publication in several ways, making the following contributions:

- The technique is presented in a carefully formalized, fully reproducible and implementation-independent fashion. Furthermore, it is comprehensively classified and contextualized within the PCG state of the art, highlighting the advantages it brings with respect to explainability [1] and potential integration with industry workflows [2].
- A new optional connection constraint is introduced in the form of a color compatibility layer, specified through a color matrix. Additionally, two navigability-focused map validation metrics are proposed and analyzed.
- A reference and standalone implementation of the technique, developed in the Unity game engine [6], is presented and examined. This implementation is made available as free and open-source software, and the source code is thoroughly annotated. Further, it includes concrete solutions for issues considered separate from the technique itself, such as mesh overlap detection (i.e., collision avoidance) and specific obstacles to validating map navigability.
- Using the prototype implementation, an in-depth analysis of the technique’s generation and validation capabilities is undertaken, namely on how the various parameters and *generation methods* influence the created maps, as well as the generation and validation times.
- A thorough discussion on several aspects of the proposed technique, related to its designer-centric approach, applicability (i.e., in which scenarios could the method be more useful), limitations, as well as alternative uses and possible improvements.

The paper is organized as follows. In Section II, we review

All authors are with the School of Communication, Arts and Information Technology at Lusófona University, Lisboa, Portugal e-mail: nuno.fachada@ulusofona.pt

N. Fachada and D. de Andrade are with COPELABS, Lusófona University  
N. Códices is with Instituto Superior Técnico, Lisboa, Portugal

related work concerning the use of PCG for map design in computer games. In Section III, we describe the snappable meshes PCG technique, namely the components that make up the system, and classify the method according to a well-known PCG taxonomy. A reference implementation of the method, developed in the Unity game engine, is presented in Section IV. Several case studies are examined in Section V, including one where the method was used for generating arenas for the aforementioned multiplayer combat game. A discussion of the method, possible uses, limitations and potential improvements follows in Section VI. Section VII closes the paper, offering some conclusions.

## II. BACKGROUND

The use of PCG for creating maps and levels in computer games began in the late 1970's with games such as *Beneath Apple Manor* and *Rogue* [7], and is unarguably the most common use case of PCG in games [8]. Academic interest in this area has been growing, with a number of important developments occurring in the last 15 years [9], [10].

PCG techniques are often fully autonomous, in the sense that the user simply performs some initial configuration, such as defining parameters and/or output constraints, before content is generated. Recently, mixed-initiative content creation (MICC) techniques, in which a combination of human input and computer-assisted PCG are used, have gained traction in game development in general and map design in particular [8], [11]. However, the line that separates autonomous PCG and MICC-PCG is ill-defined. For example, Yannakakis & Togelius [8] claim that “the PCG process is autonomous when the initiative of the designer is limited to algorithmic parameterizations before the generation starts”. Then, how to classify a PCG technique that works according to this statement, but produces results which mainly depend on designer-provided building blocks, such as the one presented in this paper? Although we do not provide a definitive answer, this question guides the type of related works discussed in this section. More specifically, we will focus on PCG methods and tools for creating maps and levels in which the human designer has considerable influence on the look and feel of the generated output, irrespective of whether the PCG algorithm tends to be more autonomous (i.e., the designer specifies the parameters and possibly provides the building blocks) or works in a more MICC fashion, where human and computer iteratively collaborate on the design process.

Tanagra is one such MICC tool for 2D platformers [12], allowing human designers to partially specify a level's geometry and pacing, leaving up to the computer to fill in the gaps. Using constraint programming, Tanagra guarantees that the generated levels are playable when human-defined constraints are valid.

Occupancy-regulated extension (ORE) [13] is a 2D geometry assembly algorithm that, similar to the algorithm presented in this paper, (i) creates maps from premade pieces (or chunks), and, (ii) delegates context and chunk selection to separate subroutines. However, contrary to the snappable meshes technique, ORE utilizes the potential positions a player

might occupy in a chunk during play to determine which other chunks are adequate for combination, thus requiring pieces of geometry annotated with gameplay information.

PCG can be used together with pre-established level design patterns to generate desirable levels. Two proposals have employed a MICC approach, where the contribution from the level designers is used in the optimization process of the generators' evolutionary algorithm [14], [15]. This way, their accumulated knowledge of level design is fed into the generators, refining not only level layouts but also agent and item placement on each iteration. This is accomplished by identifying and then reinforcing the level design patterns in the heuristics, leading to both playable and enjoyable experiences.

Sentient Sketchbook [16] is a MICC level design tool for strategy games, where designers sketch maps while being presented with similar, more detailed alternatives. These recommendations are presented in real time using evolutionary search and employing gameplay metrics—such as balance, exploration, resources or navigability—as fitness dimensions.

A number of 3D map and level generation approaches have also been proposed. SuSketch [17], aimed at generating first-person shooter levels, is one such case. Like Sentient Sketchbook, the user provides the initial designs and the tool offers alternative layouts and feedback on a number of gameplay metrics in a full MICC fashion. Additionally, SuSketch also provides gameplay predictions which take into account different character classes.

FPSEvolver is a 3D MICC generation proposal in which the human contribution for level design comes from the players themselves. It consists of a multiplayer shooter featuring a novel grid-based interactive evolution approach for generating maps according to the players' preferences [18]. Players vote on a selection of evolving scenarios, with the goal of generating levels in accordance with what they consider to be a good map.

Oblige is a 3D level generator for the DOOM family of games [19]. It allows the level designer to set a number of parameters, such as level size and approximate quantities of each type of monster, power-up and level section (e.g. outdoors, caves, hallways, etc). Levels are created using shape grammars on a grid-based layout, and are limited to a single floor—an inherent limitation of the DOOM family of games.

Butler et al. [20] explored MICC-based PCG in the context of macro level design, where the focus is the entire player experience and not just single levels. Their solution relies on a set of authoring tools where level designers can define progression constraints that lead to the generation of a progression plan. The solution then generates and/or validates the individual level designs against the progression plan.

Regarding recent commercial applications, map and/or level PCG has been employed for level creation in a number of games, namely 2D roguelikes such as *Spelunky Classic* [21], *The Binding of Isaac: Rebirth* [22] and *Enter the Gungeon* [23]. *Spelunky* uses premade room templates to fill out a grid. Rooms with specific characteristics such as top entrances and bottom pits are considered when generating levels in order to create a valid path for the player to traverse to the end [24], [25]. In *The Binding of Isaac: Rebirth*, maps are created by

connecting several rooms together [26], [27]. These rooms are fit into a grid. However, each room may take more than one grid space, and each grid space it occupies can be connected to other rooms on adjacent grid spaces. This allows for large rooms to connect to small rooms and vice-versa. *Enter the Gungeon* does not connect its rooms directly to one another, employing a more complex algorithm to obtain the desired layout. It uses nodes and connectors, placing different premade rooms as those nodes and afterwards creating corridors to join the rooms for the final map layout [28].

Generate Worlds [29] is a commercial tool for creating 3D maps from user-provided voxel tiles or blocks. It uses a very simple premise: two blocks are only adjacently placed if they have the same color in all the places where they touch. If the user carefully designs these blocks, the method is able to generate varied and interesting content, from dungeons to landscapes. Generate Worlds is based on a previously proposed open-source tool [30], and essentially solves the constraint satisfaction problem of correctly tiling blocks according to their colors.

The map generation technique proposed in this paper uses some of the ideas present in the works discussed thus far, but follows its own distinct approach. For example, contrary to the work of Butler et al. [20], the proposed method does not deal with gameplay or inter-level balance, focusing instead on the layout of individual maps. Furthermore, unlike evolutionary-based designer feedback approaches [14], [15], [16], [17], the presented PCG technique relies on the designer to carefully model individual map pieces, since one of the goals is to generate multiple quality maps, rather than refining one design. Like Sentient Sketchbook [16] and SuSketch [17], the snappable meshes technique uses path finding for map evaluation; contrary to these tools, however, the technique is less bound to specific game genres (at the cost of less detailed maps) and offers a fully explainable generation process. Snappable meshes follows a constraint-based approach, similar to Generate Worlds [29], but is considerably more flexible, since it does not require pixel-perfect colored block interfaces and does not impose any limits to a block's geometry. Further, unlike many of the works discussed here, the proposed technique is not a specific tool designed for certain use cases, but a generic and easy-to-understand procedure which can be integrated in various designer tools and workflows.

### III. THE SNAPPABLE MESHES PCG TECHNIQUE

The snappable meshes PCG technique is presented in this section in a game engine-independent fashion. The technique, summarized in Fig. 1, requires a set of premade *map pieces* to generate maps. These pieces can be manually created by the game designer and should contain one or more connectors. Connectors, which have a *color* and one or more *pins*, are placed on the mesh in locations where pieces can snap together. Map pieces, connectors and pins/colors are detailed in Subsection III-A. The set of human-designed map pieces, together with a number of generation parameters—also defined by the game designer—are fed to the *generation algorithm*. The algorithm is then able to create a playable

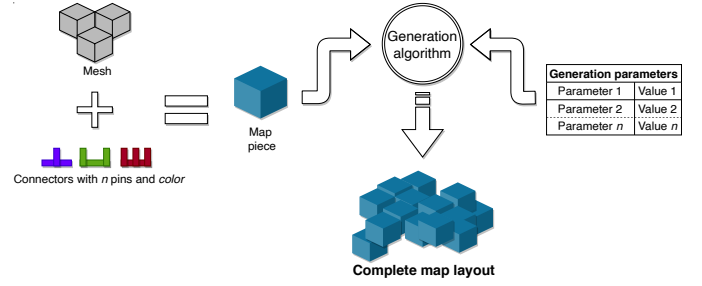


Fig. 1. Summary of the snappable meshes map generation process.

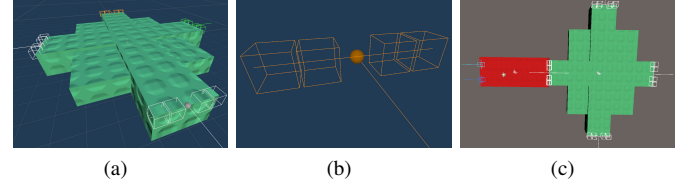


Fig. 2. Map pieces and connectors. (a) An example of a map piece with visible connectors; (b) an isolated 4-pin connector with the straight line representing its heading; (c) two map pieces snapped together at their compatible connectors.

TABLE I  
CONTENT PARAMETERS FOR THE GENERATION ALGORITHM

Parameter	Description
<code>piecesList</code>	Map pieces to be used by the algorithm to create the map.
<code>useStarter</code>	Boolean. If true, the starting piece will be drawn from the <code>starterList</code> instead of the <code>piecesList</code> .
<code>starterList</code>	Map pieces to be used as the starting piece if <code>useStarter</code> is true.

map, as described in Subsection III-B. Certain aspects of the algorithm depend on the chosen *generation method*. A number of generation methods, and their influence on the generation algorithm, are presented in Subsection III-C. Two metrics for validating the generated maps are discussed in Subsection III-D. Finally, in Subsection III-E, the snappable meshes PCG technique is classified according to the PCG taxonomy proposed by Togelius et al. [10].

#### A. Map Pieces and Connectors

Map pieces are sets of geometry that include one or more connectors. An example of a map piece with visible connectors is shown in Fig. 2a. For a map piece to be usable by the generation algorithm it needs to have at least one associated connector, since these determine where two pieces will be joined, i.e., snapped together. Map pieces are in effect content parameters for the generation algorithm. As shown in Table I, the generation algorithm accepts a list of pieces for generating the map and an optional list of pieces which can be used as the *starting piece*, i.e., the first piece to be placed on the map.

Compatibility between connectors from different pieces is defined by two parameters set by the designer: *pin count* and *color*. Connectors have a heading, represented in Fig. 2b by a straight line. Pieces with matching connectors can be snapped together, as shown in Fig. 2c. When two connectors

TABLE II  
CONNECTION PARAMETERS FOR THE MAP PIECES

Parameter	Description
<code>matchingRules</code>	Selection. Selects whether to use <i>none</i> , <i>pins</i> , <i>colors</i> or <i>both</i> as connector matching rules.
<code>pinTolerance</code>	Integer. The maximum allowed difference between pin counts in two connectors to allow them to be paired up.
<code>colorMatrix</code>	Boolean matrix. Valid color combinations, one-way or both ways (i.e., symmetric).

are matched, a copy of the *tentative piece*—the piece being evaluated for placement in the map—is positioned so its connector and the connector of the *guide piece*—a piece previously added to the map—are facing each other. Matching rules between connectors are defined as follows:

- 1) Connectors may be compatible if their pin count is equal, or if their difference is within a tolerance level defined in the generation parameters.
- 2) Connectors may be compatible if their colors have a match according to a color matrix given as a generation parameter. The use of a non-symmetric color matrix allows the designer to specify one- or two-way compatibility between the connectors of the guide piece and of the tentative piece.

These matching rules are optional. The designer can activate both rules, only one of them, or even none. If both rules are active, connector compatibility is established only if both rules are verified. If none of the rules is set, all connectors in different pieces are compatible and pieces can snap together on their connectors without restriction. Table II summarizes how the matching rules are given as generation parameters.

### B. Generation Algorithm

The pseudo-code of the generation algorithm is presented in Algorithm 1, and the general algorithm parameters are described in Table III. The algorithm begins by selecting the starting piece (line 1) and placing it on the map (line 2). The exact process of selecting the starting piece depends on the chosen generation method, and is detailed in the next subsection. By default, the generation method should choose the starting piece from the `pieceList`, i.e., from the list of pieces used during the generation process. However, if the `useStarter` option is enabled, the generation method will instead select the starting piece from a separate `starterList`. Refer to Table I for a description of the `piecesList`, `useStarter` and `starterList` content parameters. In any case, when a piece is selected for placement, it is not used directly. Instead, a copy is made and it is the copy that is placed on the map. Thus, pieces in these lists act as blueprints for the pieces actually deployed during the generation process.

Before entering the main loop of the algorithm, the starting piece is selected as the guide piece (line 3), since it is the only piece currently placed on the map. When the main loop of the algorithm begins (line 4), the `failCount` and `connection` variables are initialized to zero and *none*, respectively (lines 5–6). The former counts how many failed connection attempts have occurred between the current guide piece and tentative

Algorithm 1: Map generation.

```

1 startingPiece ← genMethod.SelectStartingPiece(useStarter ? starterList
  : piecesList)
2 map.InitializeWith(startingPiece)
3 guidePiece ← startingPiece
4 do
5   failCount ← 0
6   connection ← none
7   do
8     tentativePiece ← piecesList.GetRandomItem()
9     connList ← guidePiece.GetConnectionsWith(tentativePiece)
10    while connList is not empty and connection is none do
11      connection ← connList.GetRandomItem()
12      if checkOverlaps and map.IsOverlap (connection) then
13        connList.Remove (connection)
14        connection ← none
15    if connection is not none then
16      guidePiece.SnapWith(tentativePiece, connection)
17    else
18      failCount ← failCount + 1
19  while connection is none and failCount < maxFails
20    guidePiece ← genMethod.SelectGuidePiece(map)
21 while guidePiece is not none

```

TABLE III  
GENERAL PARAMETERS FOR THE GENERATION ALGORITHM

Parameter	Description
<code>maxFails</code>	Integer. Number of tentative pieces that the algorithm tries to connect with a guide piece.
<code>pieceDistance</code>	Real value. The spacing between two joined connectors.
<code>checkOverlaps</code>	Boolean. If true, connections will be invalidated if there is an overlap between tentative piece and map geometry.

pieces. The latter represents a valid connection pair between the current guide and tentative pieces.

The algorithm then enters the tentative piece selection and placement loop (lines 7–19). A tentative piece is randomly selected from `pieceList` (line 8), and all possible connector pairings between the guide piece and the tentative piece are evaluated. Valid pairings are stored in a temporary list (line 9). A connector pairing is considered valid if, and only if, the following conditions are met:

- 1) Both connectors are unused, thus available for pairing.
- 2) Both connectors fulfill the criteria described in the previous subsection, in accordance with the `matchingRules` parameter (see Table II).

The next steps—i.e., the while loop in lines 10–14—depend on whether overlap verification (i.e., the `checkOverlaps` parameter, see Table III) is enabled or not. If this verification is disabled, the while loop finishes right after a random pairing is drawn from the temporary list and placed in the `connection` variable (line 11). However, if overlap verification is enabled, the algorithm will check if the tentative piece, when connected to the guide piece by the randomly selected pairing at a distance of `pieceDistance` (see Table III), overlaps with existing geometry (line 12). If so, the pairing is removed from the temporary list (line 13) and the `connection` variable is set to *none* (line 14). In such case, the while loop (lines 10–14) continues until a non-overlapping solution is found or there are no more pairings left in the temporary list.

If the previous step yielded a valid pairing (line 15), the guide and tentative pieces are finally snapped together at

that location (line 16) and with a distance defined by the `pieceDistance` parameter (see Table III). However, if no valid pairing was found, the algorithm will keep the same guide piece and randomly select another tentative piece from `pieceList`. This process is repeated until a valid pairing is found or a limit of failed attempts (defined in the `maxFails` parameter, see Table III) is reached for the current guide piece (line 19).

Whether or not a new piece was placed on the map during the tentative piece selection and placement loop (lines 7–19), a new guide piece will be selected by the generation method (line 20). As will be discussed in the next subsection, generation methods select the guide piece based on the pieces currently placed on the map. Consequently, if the tentative piece selection and placement loop was unsuccessful, the generation method will determine the next guide piece based on exactly the same scenario. Thus, if the generation method is deterministic, the same guide piece will be selected again. This leads to an infinite loop if no other piece can be connected with the guide piece in question. Therefore, the algorithm needs to detect if the same guide piece is chosen two times in a row and the number of free connectors in it remains the same—which most likely means the generation process is unable to go any further. In the proposed algorithm, this detection mechanism is assumed to be encapsulated in the `SelectGuidePiece()` function (line 20), and works by returning *none* when such a scenario is detected. The function may also return *none* according to the internal logic of the generation method in place, as discussed in the next subsection. In any case, when no guide piece is returned, the map generation ends (line 21).

### C. Generation Methods

The different generation methods produce distinct map layouts by determining how the generation algorithm selects the starting piece (line 1 of Algorithm 1) and the guide pieces (line 20 of Algorithm 1). Four methods are proposed and discussed here, namely *arena*, *corridor*, *star* and *branch*. Fig. 3 shows examples of maps created by each of these methods.

Different methods have specific parameter sets, as detailed in Table IV. The first parameter, `starterConTol`, impacts all methods, determining the connector tolerance for selecting the starting piece. Generation methods select the starting piece based on the amount of connectors it has, and `starterConTol` provides a tolerance in this selection. Subsections III-C1–III-C4 describe each of the four methods and their parameter sets with additional detail.

1) *The arena generation method*: This method (Fig. 3a) aims to create maps that sprawl in all directions from the starting piece, covering the surrounding area with geometry.

The piece with most connectors is selected as the starting piece. If there are multiple pieces with the same highest number of connectors and/or if more pieces are considered for selection due to the `starterConTol` parameter, one of them is picked at random. The goal is to have a central piece with many connections so that geometry can spread in various directions.

For the selection of the next guide piece, the *arena* method checks if the current guide piece has unused connectors, and

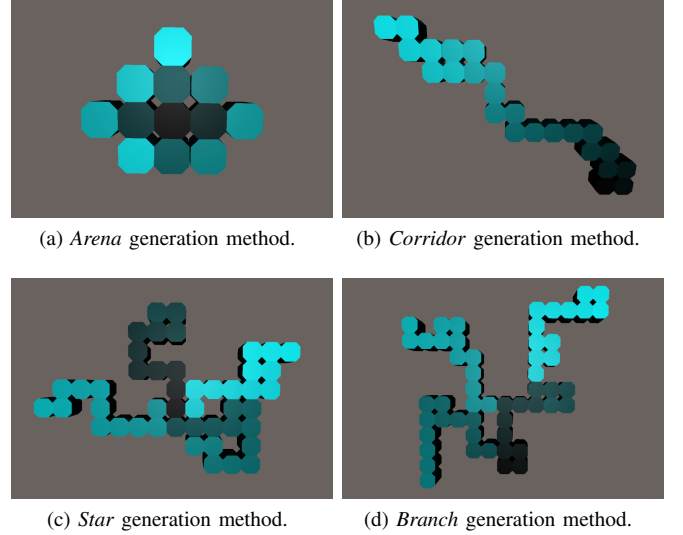


Fig. 3. Example outputs of the proposed generation methods. In these examples, the piece color is lighter the later it is placed on the map. Thus, the starting piece is shown with the darkest color, while the last snapped piece appears with the lightest color.

if so, keeps it as the guide piece in the next tentative piece selection and placement loop. Otherwise, the piece placed immediately after the current guide piece is selected as the next guide piece. This way, the method preferentially fills center locations near the original starting piece. The *arena* method stops when the number of pieces placed after the starting piece is higher than `maxPieces`, as described in Table IV.

2) *The corridor generation method*: The goal of the *corridor* generation method is to generate narrow maps where the geometry seemingly follows a line, as shown in Fig. 3b.

The piece with least connectors is selected as the starting piece. If there are multiple pieces with the same lowest number of connectors and/or if more pieces are considered for selection due to the `starterConTol` parameter, one of them is selected at random. The selected guide piece is always the most recently placed piece, such that pieces will have at most two connections: one with the previous placed piece and the other with next compatible tentative piece.

3) *The star generation method*: This method is a mix of the *arena* and *corridor* generation methods, creating lanes sprawling from the starting piece and ending when that piece has no more available connectors. Thus, the number of arms in the “star” is equal to the number of available connectors in the starting piece, which acts as a central hub for the map layout. The starting piece is selected the same way as in the case of the *arena* method, i.e., based on the highest amount of connectors. As with the other methods, the designer can force a specific piece or pieces to be used as the central hub by manipulating the `useStarter` and `starterList` parameters (see Table I).

Each arm of the star,  $i$ , will have a uniformly random length (i.e., number of pieces) of  $l_i = \text{armLength} \pm \text{armLengthVar}$  (see Table IV), which, nonetheless, cannot be smaller than one. For this purpose, the selected guide piece will be the last placed piece while the length of the current arm  $i$  is lower

TABLE IV  
PARAMETERS FOR THE GENERATION METHODS

Method	Parameter	Description
All	starterConTol	Integer. The starting piece is selected among the set of pieces with most ( <i>arena, star</i> ) or fewest ( <i>branch, corridor</i> ) connectors, $n_{\max}$ or $n_{\min}$ , respectively. This parameter represents the tolerance, in number of connectors, from the piece(s) with most (or fewest) connectors, allowing pieces with as few as $n_{\max} - \text{starterConTol}$ (or as much as $n_{\min} + \text{starterConTol}$ ) connectors to be selected as the starting piece.
<i>Arena, Corridor</i>	maxPieces	Integer. The maximum number of pieces the generator will place after the starting piece.
<i>Star</i>	armLength	Integer. The average amount of pieces an arm of the “star” will have.
	armLengthVar	Integer. The maximum variation from armLength in each arm.
<i>Branch</i>	branchCount	Integer. Number of branches to be created.
	branchLength	Integer. The average amount of pieces a branch will have.
	branchLengthVar	Integer. The maximum variation from branchLength in each branch.

than  $l_i$ . When the length of the current arm reaches  $l_i$ , the starting piece (acting as the central hub) is returned again as the guide piece, allowing for the creation of a new arm. If this piece has no connectors left, the method returns *none*, ending the generation process.

The *star* generation method will try its best to generate a map with (a) a number of arms equal to the amount of connectors in the starting piece, and, (b) arms with length within the interval  $\text{armLength} \pm \text{armLengthVar}$ . However, this might not be possible for two reasons. First, the generation algorithm may fail to find a tentative piece compatible with the guide piece within  $\text{maxFails}$  attempts (see Table III). Second, if there are pieces with a single connector, these would effectively work as premature arm terminals, in which case a new arm should be opened. Fig. 3c shows a map generated with the *star* generation method with four arms and arm length between 10 and 13 pieces.

4) *The branch generation method*: This method (Fig. 3d) creates branches in a similar manner to the *star* method. However, the main difference is that it does not return the starting piece as the guide piece when a branch is finished. Instead, the *branch* generation method selects one of the previously placed pieces to start a new branch, repeating this until the specified number of branches ( $\text{branchCount}$ , Table IV) is reached. Furthermore, in contrast to the *star* method and similarly to the *corridor* method, pieces with fewer connectors are preferably selected as the starting piece.

The exact process of selecting the guide piece is as follows. The first branch originates at the starting piece. The branch grows by using the last placed piece as the guide piece until its maximum size (uniformly randomly drawn from the interval  $\text{branchLength} \pm \text{branchLengthVar}$ ) is reached. At this time, it is necessary to select another map piece to be the root piece of a new branch. This selection is done by considering a list of pieces already placed on the map, from the starting piece to the last successfully placed tentative piece. The root piece is then selected by “jumping” from the starting piece in this list (index 0) to one of the other pieces. The base jump value is given by:

$$j_{\text{base}} = \max \left\{ 1, \left\lfloor \frac{\text{branchCount}}{\text{branchLength}} \right\rfloor \right\}$$

For each new branch  $i$ , where  $i = 0, \dots, \text{branchCount} - 1$ , the effective jump from the starting piece is given by:

$$j_i = i \cdot j_{\text{base}}$$

i.e., new branches will be based off pieces that were deployed after the root piece of the previous branch. If the new guide/root piece does not have available connectors, and to avoid premature termination of the generation process, the neighborhood  $[j_i - j_{\text{base}}, j_i + j_{\text{base}}]$  is searched back and forth from its center, until a piece with available connectors is found and returned as the new guide/branch root piece. If such piece is not found in the neighborhood, the method returns *none* and the generation process terminates.

#### D. Automatic Validation of Map Navigability

Depending on the generation parameters, or simply due to “unlucky” seeds, it is possible that the procedurally generated maps are mostly untraversable or contain several unconnected regions. Although the snappable meshes produces fully explainable outputs, designers may be more interested if a generated map is actually playable [1]. Therefore, some sort of automatic validation of map navigability becomes an important, if not crucial aspect in this type of algorithms [31]. We propose two metrics for this purpose, which can be obtained by deploying a predetermined amount  $n$  of randomly distributed navigation points on the map and verifying their connectivity using standard path finding. These metrics are:

- 1) The average percentage of valid connections between navigation points, or  $\bar{c}$ .
- 2) The relative area of the largest fully-connected (i.e., fully-navigable) region, or  $A_r^{\max}$ .

The first metric,  $\bar{c}$ , is given by  $\bar{c} = c_t / c_{\text{all}}$ , where  $c_t$  is the number of traversable connections between all  $n$  navigation points, and  $c_{\text{all}}$  is the number of all connections, traversable or not. Note that  $c_{\text{all}} = n(n-1)/2$ , i.e.,  $c_{\text{all}}$  is equal to the maximum number of connections between nodes in an undirected graph. Consequently, this approach has  $\mathcal{O}(n^2)$  complexity, which limits the amount of deployable navigation points,  $n$ .

The second metric,  $A_r^{\max}$ , requires determining the various fully-navigable—but separate—regions in the generated map. This can be done by analyzing each pair of connected navigation points as follows: (1) if they are both isolated, create a new cluster containing them; (2) if one is isolated and the other is not, add the former to the latter’s cluster; or, (3) if



they belong to different clusters, merge the clusters. Then, the approximate relative area represented by each cluster or region can be obtained by dividing the number of navigation points it contains by  $n$ , with  $A_r^{\max}$  representing the largest of these areas. Again, this procedure has  $\mathcal{O}(n^2)$  complexity and the same caveat.

The first metric offers a general view of map navigability. The second metric is arguably more useful, as it can be used, for example, to select a playable area for deploying agents and/or in determining if the largest region represents a large enough area of the map to be usable or above a predefined threshold.

While the algorithmic complexity of these procedures is  $\mathcal{O}(n^2)$ , in practice—and as will be discussed in Subsection V-C—the upper bound for the number of navigation points,  $n$ , is well above what is required for performing fast and accurate computations of the two metrics.

### E. Classification

The snappable meshes technique is a constraint solver focused on speed and simplicity. The method is able to quickly create maps—as will be shown in Section V—and is thus appropriate for runtime generation. Simplicity is a consequence of the visual and easy-to-understand constraints, mainly in the form of mesh connector rules.

According to the PCG taxonomy described by Togelius et al. [10], the proposed technique is *offline*, *necessary*, *generic* and *stochastic*. It is *offline* since maps are generated during game development or before the start of a game session. The method is *necessary* because it provides the main structure of the levels (i.e., the 3D maps). Content is generated without taking the player’s previous behavior into account, hence snappable meshes is a *generic* (or *experience-agnostic* [8]) PCG technique, as opposed to an *adaptive* (or *experience-driven* [8]) one. Finally, it is a *stochastic* technique, as it offers considerable map variability given the same set of input parameters<sup>1</sup>.

There are three other categories in this taxonomy where the snappable meshes technique does not fall under a specific classification. The first concerns autonomy, which differentiates between *autonomous* versus *MICC* PCG approaches. As stated in Section II, this separation is not clear-cut. On one hand, the technique works autonomously after the designer defines its input (parameters and map pieces). On the other, it is the designer who creates the fundamental building blocks of the generated maps, hence affecting their look and feel. Thus, the snappable meshes technique is essentially autonomous, though stating that it does not employ some form of “mixed-authorship” seems inaccurate. The second category, *degree and dimensions of control* (or *controllability* [8]), specifies the ways in which content generation can be controlled, for example using random seeds or content/parameter vectors. The proposed technique can generate content using both approaches simultaneously. More specifically, an (optionally seeded) pseudo-random number generator can drive content

<sup>1</sup>The method is technically *deterministic*, in the sense that it will generate the same output if also given the same seed.



Fig. 4. Map pieces included with the reference implementation. Connectors and other visual aids not shown for clarity. Piece names reflect their shape and are as follows: (a) “Platform”, (b) “Hallway”, (c) “Clover”, (d) “Ramp”, and (e) “Bunny”.

creation based on the content and parameters specified by the designer. The technique is thus *controllable*. The third category, *constructive versus generate-and-test*, defines whether content is generated in one pass (*constructive*) or oscillates between content generation and testing in a loop, until a suitable output is found. The snappable meshes methodology allows for both approaches. It has been used as a *constructive* method in the Trinity game, as will be discussed in Subsection V-A, but supports a *generate-and-test* loop using validation metrics such as the ones presented in the previous subsection.

## IV. A PROTOTYPE IMPLEMENTATION IN UNITY

A standalone demonstration prototype of the snappable meshes PCG technique was implemented in the Unity game engine, leveraging its editor tools to handle the input of the human designer. This is a simple reference implementation based on the code originally developed for the *Trinity* game, discussed in the next section, and is provided as a Unity project—i.e., it must be experimented within the Unity editor. The aim of this prototype is to allow designers to explore the proposed technique, particularly in how the chosen set of map pieces and the different algorithm parameters influence map generation. The prototype is bundled with five map pieces, shown in Fig. 4, allowing interested users to get started quickly. The code is fully documented and available at <https://github.com/VideojogosLusofona/snappable-meshes-pcg> under the open-source Apache 2.0 license, meaning it can be freely adapted and used in commercial contexts.

In Subsection IV-A, the reference implementation’s designer workflow and its editor-based user interface are described, while relevant implementation details are highlighted in Subsection IV-B.

### A. Designer Workflow and User Interface

The designer workflow is divided in roughly three parts:

- 1) Setup and configuration of the generation process. At this stage, the designer imports and/or selects the map pieces to use for the generation process, and defines the generation parameters.
- 2) Map generation and validation assessment. The designer generates the map, which appears in the scene view; the validation metrics—described in Subsection III-D—appear in the console, allowing the designer to quickly assess the map’s navigability.
- 3) Demo of an NPC traversing the map. The two previous steps occur in editor mode, i.e., when the “game”

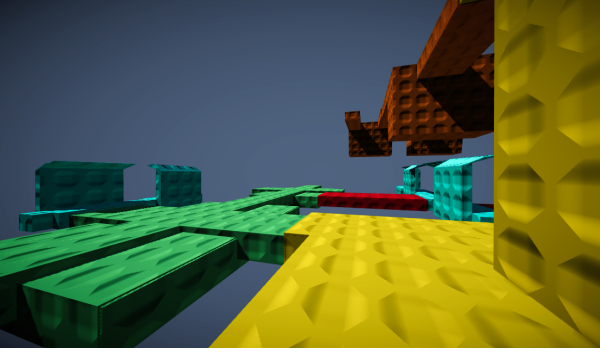


Fig. 5. Screenshot of the first-person demo mode.

is not running. To get a first-person feeling for the generated map, the designer can enter play mode, in which case a demo of an NPC traversing the map starts, as exemplified in Fig. 5.

Naturally, this workflow can be repeated and iterated upon until the designer is satisfied with the results. The next subsections further detail these steps, as well as the user interfaces which allow for this interaction.

1) *Setup and configuration of the generation process:* The designer sets up the generation process by interacting with the `GenerationManager` component, displayed in Unity’s inspector—see Fig. 6—when the homonymous game object is selected in the scene’s object hierarchy. Here, the designer can generate a new map or clear an existing one (Fig. 6a), select the pieces used to create the map (Fig. 6b, Table I), define the connection criteria (Fig. 6c, Table II), specify general parameters (Fig. 6d, Table III), and select and configure a generation method (Fig. 6e, Table IV).

Configuring map validation is also performed at this stage. This is done in a separate inspector panel, which appears when the `NavController` game object is selected in the object hierarchy. Among other aspects, the designer can define the dimension of NPCs and/or players navigating the map, as well as the number of navigation points used for determining the navigation metrics, as explained in Subsection III-D.

2) *Map generation and validation assessment:* After configuring the generation process, the designer can create a new map by clicking the “Generate” button (Fig. 6a). Besides the produced map, the process also outputs a detailed generation log in Unity’s console, listing each selected guide and tentative pieces, as well as successful and unsuccessful snaps, allowing the designer to follow all the steps of the generation process.

After the map is generated, the validation step is triggered, and a predefined number of navigation points (400 by default) are randomly placed on the map’s surface in order to obtain the validation metrics previously described, namely,  $\bar{c}$ , the map’s average relative connectivity, and,  $A_r^{\max}$ , the relative area of the largest fully-connected region. This information is also provided via a log in Unity’s console (separate from the generation log).

These metrics can be used to request a regeneration of the level if the average connectivity is below a certain threshold and/or the largest region does not represent a large enough

relative area of the generated map. Additionally,  $A_r^{\max}$  can be used to define the playable area of the map, where new players or NPCs are spawned, for example.

3) *Demo of an NPC traversing the map:* Having successfully generated a map, the designer can enter Unity’s play mode, where an NPC traverses the map using the navigation points (initially created for map validation) as randomly selected waypoints. The NPC is placed in the largest fully-navigable area of the map, also determined during the validation procedure, thus avoiding getting stuck in poorly connected regions. While this demo is not useful in a real-world automatic generation process, it constitutes a visual aid for the designer to get a first-person awareness of the generated map. An example of this demo mode is shown in Fig. 5.

## B. Implementation Details

In this section we highlight a number of implementation details in the Unity prototype which might be relevant for helping researchers understand the code and/or for developers implementing their own versions of snappable meshes.

1) *Piece design and deployment:* When the designer creates a map piece, it is necessary to specify its mesh, individual connectors (each with a color and a number of pins), and one or more colliders<sup>2</sup> in case the piece overlap is to be avoided (as discussed in Subsection IV-B2). In this context, human-designed pieces are created as *prefabs*, Unity’s implementation of the Prototype design pattern [32]. Therefore, pieces in the `piecesList` and `starterList` (Table I) are prototypes, and the pieces actually placed on the map are effectively copies of the original designs.

2) *Overlap Detection:* An important part of the proposed technique is the ability to generate maps without intersecting geometry. To guarantee this, when a tentative piece is selected, an optional verification ensures that the piece does not overlap with existing geometry for each of its possible connections (line 12 of Algorithm 1). The `checkOverlaps` parameter (Fig. 6d, Table III), determines whether this verification is performed or not.

For overlap verification to work, pieces must contain one or more box colliders, i.e., rectangular cuboid-shaped bounding volumes. These should approximately mirror the piece’s shape, allowing Unity to detect if the tentative piece overlaps with existing map geometry in a quick and relatively accurate fashion. We opted for box colliders since in Unity, due to optimization concerns, general convex mesh colliders are limited to 255 triangles and often display inaccurate behavior. These box colliders are tagged in a separate object layer, so that the application is able to find them while creating the map and safely delete them when the generation process is finalized. By default, this layer is named *SnappableColliders* (Fig. 6d). Nonetheless, the user can specify another name.

3) *Generation Methods:* The Strategy design pattern [32] was used to decouple the generation methods from the generation algorithm itself. What this means is that the different methods are placed in distinct classes derived from a common base class. Any existing generation method classes are then

<sup>2</sup>A collider is Unity’s terminology for a bounding volume.



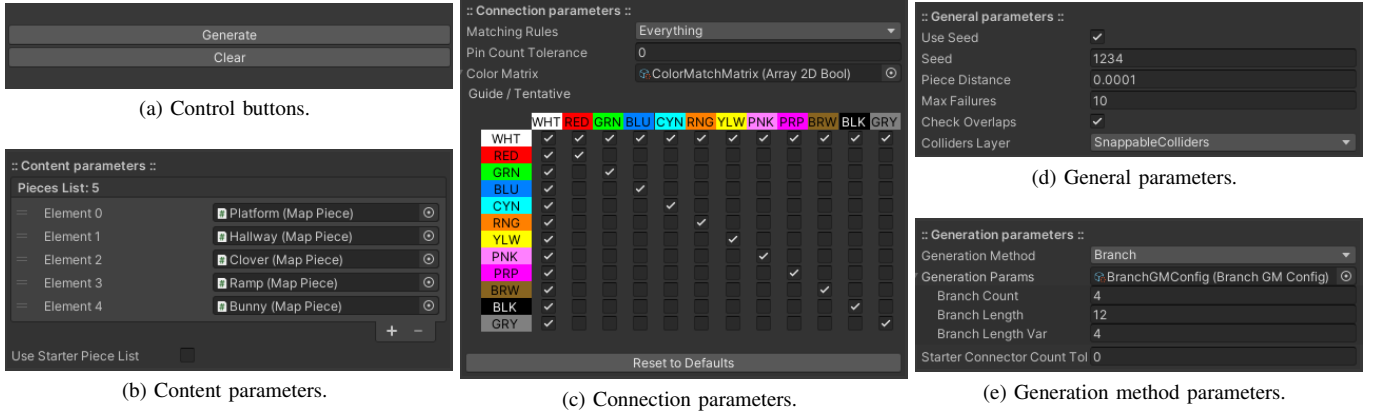


Fig. 6. The map generation parameters and control buttons, part of the *GameManager* component, as shown in Unity's inspector. The different generation parameter blocks, (b)–(e), essentially correspond to the parameters respectively presented in Tables I–IV.

“discovered” using C#'s reflection, and matched with an appropriate configuration object. This object is then used by the *GameManager* component to present the user the available parameters for the current generation method, selected from a drop-down list populated during the “discovery” process. Fig. 6e shows what is presented to the user when the *branch* generation method is selected.

This approach simplifies the creation of new generation methods, requiring only two classes: one for the generation method itself, and the other for configuring it.

4) *Map Validation and Demo*: Map validation occurs after the generation process, and is performed using Unity's built-in navigation mesh—or navmesh—system. A navmesh is a mesh of convex polygons that define traversable areas on a map. These polygons can be considered nodes in a graph, with adjacent polygons forming valid paths, or in graph terminology, a connection between nodes. Thus, a path finding algorithm such as A\* can be used to find if a path exists between any two nodes [33].

Unity's navmesh system allows the runtime creation of navmeshes on existing geometry, and is used in our reference implementation for this purpose. After a navmesh is created for a generated map, a predetermined number of navigation points is deployed in the navmesh. At this stage, Unity's path finding system is used for determining if there are valid paths between each pair of navigation points. With this information, the metrics discussed in Subsections III-D and IV-A2 can be easily computed. Finding traversable paths for the first-person demo (Subsection IV-A3), is similarly straightforward.

To aid in the visual inspection of the generated maps, navigation points placed in the largest fully-traversable region of the map are rendered in green, while points deployed in other regions are shown in red (see Fig. 9).

## V. CASE STUDIES

In this section several case studies are investigated with the purpose of highlighting the potential of the snappable meshes PCG technique, as well as its limitations. In Subsection V-A we first examine how the proposed method was used to generate the maps for the *Trinity* third-person shooter game,



Fig. 7. Screenshot of *Trinity* during a match.

enabling the desired gameplay style and replayability. An analysis of the different parameters and generation methods is performed in Subsection V-B, where a number of illustrative examples are explored. Finally, in Subsection V-C, these same examples are dissected from a validation perspective.

### A. *Trinity*—a Third-Person Multiplayer Shooter

*Trinity* is a competitive, split-screen multiplayer game (Fig. 7), developed as a semester project at Lusófona University's Bachelor in Videogames [4]. It is a third-person shooter in which players navigate the environment trying to eliminate their opponents using weapons that shoot different types of ammunition with various effects and counters-effects.

The proposed technique was initially developed to create maps for this game. The method allowed designers to quickly experiment with many different map types during the development stage. Due to the controllability of the technique, highlighted in Subsection III-E, they were able, together with testers, to swiftly home in on a set of map pieces and algorithm parameters deemed suitable for the goals set forth for *Trinity*. In the final game, a single set of map pieces and parameters were selected for generating maps. The *arena* generation method was chosen since it created satisfactory layouts—typically large areas with both open spaces and plenty of options for platforming and cover. The *corridor* method was also considered. This method was better suited for “capture

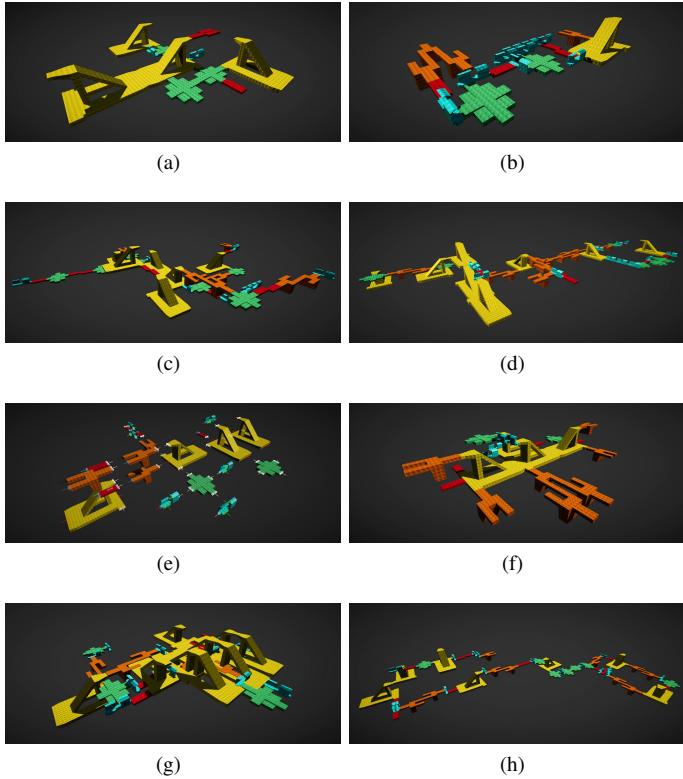


Fig. 8. Several illustrative maps generated with snappable meshes using the map pieces bundled with the Unity prototype implementation (Fig. 4). The parameters used to generate each of these maps are given in Table V.

the flag”-style matches due to its tendency to create layouts that flowed along one direction. However, this game mode was not implemented, thus *corridor* generation was left out of the final version of the game.

Although limited to one parameter set in the final game, the technique enhanced the game’s replayability. More specifically, the procedurally generated levels changed the conventional play style of shooter games, since in *Trinity*, players have to quickly adapt to the playfield, instead of memorizing and using prior knowledge of the levels.

### B. Illustrative Cases

A number of experiments were performed in order to provide a better understanding of the capabilities and limitations of the proposed technique. These experiments were carried out using the map pieces included with the prototype implementation (Fig. 4). Many different maps were generated during these experiments, and several illustrative cases are shown in Fig. 8, with their respective parameters given in Table V.

Figs. 8a–8d display experimental maps created with the different generation methods. A typical *arena* method-generated layout ( $\text{maxPieces}=12$ ) is shown in Fig. 8a, where the map’s tendency to grow in all directions is clear. In turn, Fig. 8b shows a map generated with the *corridor* method ( $\text{maxPieces}=20$ ). The *corridor* characteristics are not immediately obvious, since, in this particular example, each piece is being placed in a way that changes the direction

established by the previous piece. A larger map, created with the *star* generation method, is displayed in Fig. 8c, where the starting piece is a “ramp” (Fig. 4d), which has five connectors. Therefore, and as expected, the *star* has five arms stretching out from the initial, center piece. Note that one of these arms—the one expanding to the right in the figure—starts unfurling at a higher vertical quota than the remaining arms. Finally, the map displayed in Fig. 8d depicts the intended behavior of the *branch* generation method, with new “branches” created at specific points in the previously placed pieces.

In Fig. 8e, the `pieceDistance` parameter was set to 6, creating a map with several “islands”. The connectors are shown to help visualize the connections. The matching rules in this experiment were set to “colors”, i.e., pieces snap together based only on connector color, ignoring their pin count. The color matrix was set to its default values (Fig. 6c), where connectors snap with connectors of the same color, and white is set as a wildcard color, i.e., white connectors are able to snap with connectors of any other color. Changing the `pieceDistance` parameter in this way generates mostly untraversable maps, but allows for visual inspection or debugging, for example to verify if connections are occurring according to the specified matching rules.

Contrary to the previous experiments, a pins-only matching rule was used to generate the map displayed in Fig. 8f. As can be observed, the map has the prototypical *arena* layout, but the type of connections—without the color matching constraint—are considerably different from those shown in Fig. 8a.

An interesting experiment is shown in Fig. 8g, where the overlap checking is disabled. Since pieces are snapped together without consideration for collisions between them, the resulting map loses the flow and clean appearance observed in the remaining experiments. Disabling this option will, in most use cases, likely create map-wide geometry and texture misalignments. Nonetheless, this may be desirable in some situations.

The goal in the last of these experiments was to create a long corridor-like map. The *corridor* generation method, with the `maxPieces` parameter set to 120, was used for this purpose. In order to avoid premature termination of the algorithm, a pins-only matching rule was defined—thus eliminating the color matching constraint—and the `maxFails` parameter was set to 50 (a value of 10 was used in the previous experiments). The resulting map, displayed in Fig. 8h, is indeed a long corridor; however, the total number of pieces composing it is less than half of `maxPieces`. This highlights the fact that, depending on parameter and geometry constraints, the generated map may end up being smaller than envisaged by the designer. Thus, it may be important to verify if the generated map attained some minimum threshold concerning the number of placed pieces.

The generation time in these experiments was as low as 7 ms for the map shown in Fig. 8a, and up to 71 ms for the map in Fig. 8h. Generation times are highlighted in Table VI. All experiments were performed with an AMD Ryzen 7 5800X CPU, Ubuntu 20.04.2 LTS and Unity 2020.1.17f1.

TABLE V  
PARAMETERS USED TO GENERATE THE MAPS SHOWN IN FIG. 8

Map	Gen. method	Generation method parameters	Matching rules	Check overlaps	Max. fails	Piece distance	Seed
(a)	<i>arena</i>	maxPieces=12	Pins + Colors	✓	10	0.0001	−267402550
(b)	<i>corridor</i>	maxPieces=20	Pins + Colors	✓	10	0.0001	−2095385667
(c)	<i>star</i>	armLength=8, armLengthVar=2	Pins + Colors	✓	10	0.0001	277759099
(d)	<i>branch</i>	branchCount=4, branchLength=12, branchLengthVar=4	Pins + Colors	✓	10	0.0001	1388449552
(e)	<i>arena</i>	maxPieces=20	Colors <sup>a</sup>	✓	10	6.0000	811974397
(f)	<i>arena</i>	maxPieces=20	Pins	✓	10	0.0001	−359152709
(g)	<i>star</i>	armLength=10, armLengthVar=4	Pins + Colors	✗	10	0.0001	1242840355
(h)	<i>corridor</i>	maxPieces=120 <sup>b</sup>	Pins	✓	50	0.0001	−1444708658

Note: The `piecesList` parameter includes the five pieces shown in Fig. 4, with `useStarter` set to false. When applicable, `pinTolerance` is set to 0 and `colorMatrix` is as shown in Fig. 6c. The `starterConTol` generation method parameter is set to 0.

<sup>a</sup>Connector colors are made visible in this example. Note that white connectors are configured as wildcards (see Fig. 6c).

<sup>b</sup>Only 55 pieces were placed since max. failures was reached when trying to snap a new piece at that point.

### C. Validation Analysis

In this subsection, the illustrative maps discussed in Subsection V-B are analyzed from two perspectives, namely (1) the time it takes to accurately execute the validation step, and, (2) the overall navigability of the generated maps. The former viewpoint clarifies if the validation step is usable and accurate for levels generated at runtime, given its quadratic nature; the latter demonstrates whether the snappable meshes technique is overall able to generate valid, navigable maps. The validation step was performed on the maps shown in Fig. 8 with 400 and 4000 navigation points, and the following data was collected for each case:  $\bar{c}$  (average percentage of valid connections between navigation points),  $A_r^{\max}$  (relative area of the largest fully-navigable region), number of regions which are not connected to any other, and the duration of the validation step. Results are presented in Table VI.

The quadratic nature of the validation step, explained in Subsection III-D, is made obvious from the results: a  $10\times$  increase in the number of navigation points leads to an approximately  $100\times$  longer validation step. While the duration of the validation step for 400 navigation points, between 0.5 and 2 seconds, is likely acceptable for runtime map generation, this is clearly not the case for 4000 points. The question here is whether there is a significant difference in validation accuracy when using  $10\times$  more navigation points. As Table VI shows, validation results are quite similar when deploying 400 or 4000 points, with no clear tendency for an increase or decrease in percentage for both the  $\bar{c}$  and  $A_r^{\max}$  validation metrics. Thus, it seems possible to conclude that a relatively low amount of navigation points produces sufficiently accurate validation metrics, while being fast enough for runtime map generation. A perspective of map (a) (Fig. 8a), with 400 and 4000 navigation points rendered on top of the navigable surfaces is shown in Figs. 9a and 9b, respectively.

With respect to the overall navigability of the generated maps, results hint that the proposed method is robust, yielding highly-traversable maps for a variety of parameterizations. We have performed a large number of additional experiments, with various parameters and seeds, and have observed that  $\bar{c}$  is rarely below 85 %, while  $A_r^{\max}$  is typically above 90 %. This is of course assuming sensible parameterizations. For example, map (e), shown in Fig. 8e, has very poor navigability

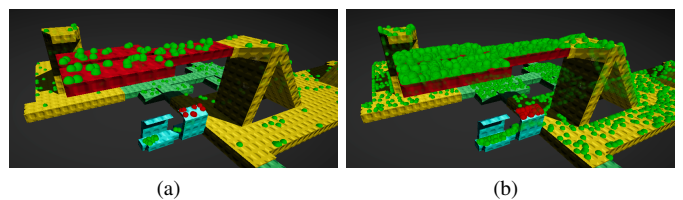


Fig. 9. Another perspective of map (a) (Fig. 8a), with the navigation points shown. Green navigation points belong to the largest fully-traversable region of the map, while red navigation points belong to other regions. (a) Using 400 navigation points; (b) Using 4000 navigation points.

due to the large `pieceDistance`. An interesting aspect in these validation experiments, which can be observed in the red navigation points in Fig. 9, is that the low-navigability areas in the generated maps are essentially limited to the rooftops of the “hallway” piece (Fig. 4b). Therefore, it is clear that piece design has a considerable influence on the validation metrics, and that the results presented here, although showing promise for general use cases, should be mainly considered in the context of the utilized pieces.

## VI. DISCUSSION

In this section we start by contextualizing snappable meshes as a designer-centric approach, framing our reasoning with recent literature (Subsection VI-A). A discussion of the technique’s use cases is undertaken in Subsection VI-B, where its potential as a prototyping system is highlighted. Subsection VI-C points out a number of limitations in this study, namely at the level of the proposed method and the provided prototype implementation, as well as their evaluation. Finally, a number of alternative uses and possible improvements are explored in Subsection VI-D.

### A. Snappable meshes as a designer-centric approach

Togelius et al. [10] put forward five desirable properties of a PCG solution, namely *speed*, *reliability*, *controllability*, *expressivity/diversity*, and *creativity/believability*. As shown in the previous section, the snappable meshes algorithm is relatively *fast*, with generation times in the order of milliseconds, and is highly *controllable*, in the sense that the human

TABLE VI  
GENERATION AND VALIDATION METRICS

Map	Piece count	$t_g$ (ms)	$\bar{c}$ (%)		$A_r^{\max}$ (%)		# regions		$t_v$ (s)	
			400	4000	400	4000	400	4000	400	4000
(a)	13	7	96.07	97.34	98.00	98.65	2	2	0.53	52.2
(b)	20	15	88.44	89.71	94.00	94.68	5	5	0.66	68.1
(c)	41	41	94.10	92.56	97.00	96.20	7	10	1.29	125.0
(d)	52	65	97.52	96.54	98.75	98.25	4	6	1.54	155.0
(e)	21	13	6.03	6.25	9.75	10.05	23	23	0.13	13.4
(f)	21	16	97.02	95.37	98.50	97.65	4	4	0.57	54.9
(g)	52	40	88.37	87.46	94.00	93.50	12	14	1.62	156.6
(h)	55	71	98.01	95.80	99.00	97.88	3	8	1.92	195.9

Note: Metrics obtained with 400 and 4000 navigation points, for the maps shown in Fig. 8 with parameters given in Table V. Piece count indicates the number of pieces in the generated map, while  $t_g$  shows the map generation time, in milliseconds.  $\bar{c}$  represents the average percentage of valid connections between navigation points.  $A_r^{\max}$  is the relative area of the largest fully-navigable region. # regions indicates the number of isolated regions, i.e., of regions which are not connected to any another. The duration, in seconds, of the validation step, is represented by  $t_v$ . Experiments were performed with an AMD Ryzen 7 5800X CPU, Ubuntu 20.04.2 LTS and Unity 2020.1.17f1.  $t_g$  and  $t_v$  are medians over 10 runs. All other values are deterministic (i.e., they depend on the specified seed).

designer specifies the basic building blocks and the general process of how they are combined. The method is also able to provide *reliable* maps—from a traversability perspective, at least—if the generated maps are validated with the criteria defined in Subsection III-D. Since the technique requires map pieces to be created and provided by the designer, it has a high *expressivity* and *diversity* potential, being able to generate distinct maps given different building blocks. However, for this same reason, the snappable meshes technique cannot, by itself, guarantee *creative* and *believable* maps. If given poorly designed pieces, the method will likely produce maps that are neither creative nor believable.

According to Zhu et al. [1], a common issue with AI techniques in general and PCG methods in particular is that of increasing algorithmic complexity, which hinders the designer’s understanding and trust about what the algorithm is doing. Consequently, designers are likely to avoid using such techniques to their full potential or not use them at all. A possible solution or mitigation for this problem is to develop, from the ground up, designer-oriented and fully explainable PCG methods and techniques [1]. The proposed snappable meshes technique was designed with these considerations in mind. It has a straightforward and designer-centric workflow, and is fully explainable, as shown by the generated logs in the Unity prototype implementation. As suggested by Zhu et al. [1], the generative process is narrated in the form of a sequential textual description, in which the algorithm’s decisions are explained.

Snappable meshes imposes few restrictions. Issues can generally be solved via editing map pieces, changing the algorithm parameters, or, if necessary, by creating new generation methods. Further, it provides immediate results, avoiding lengthy or computationally costly procedures common in search-based [9] and interactive evolution approaches, which may result in user fatigue [11], as well as in difficulties in fully understanding how to control the generation process [1], [34], [35]. In edge cases, new generation methods could implement or incorporate search or machine learning-based strategies in a compositional fashion [36]—though this would undermine the simplicity and speed offered out of the box by the proposed

method.

In addition, the snappable meshes technique aims to respect the designer according to the three pillars set forth by Lai et al. [2], namely (1) *respect designer control*, (2) *respect the creative process*, and, (3) *respect existing work processes*. In regard to pillar 1, the proposed technique respects designer control since, as already discussed, it provides “enough control to bring out the designer’s vision” [2]. Pillar 2, respecting the creative process, “concerns itself with having a feedback loop that is short enough that the creative process is not disturbed” [2]. This is guaranteed by the technique’s short generation and validation time. Finally, the snappable meshes approach respects existing work processes, the third pillar, since the algorithm can be integrated in existing workflows (e.g., game engines), and make use of existing assets—although these need to be “decorated” with connectors. The validation metrics, discussed in Section III-D, offer yet another perspective of respect for the designer, as they cater for designers mainly interested on why a map is “deemed unplayable by the AI agent” [1]. Considering the increasing rift between academia and industry related to communication and used methodologies [2], we believe the simplicity, explainability, extensibility and respect for the designer embedded in the proposed technique grants it the potential to reduce this gap.

## B. Uses Cases

The most obvious use case for the snappable meshes technique is the one it was initially developed for: generating maps for 3D multiplayer shooters, possibly in a generate-and-test loop to guarantee adequately navigable levels. This is, however, a reductionist view of the technique’s potential, since there’s nothing limiting its use in other game genres or scenarios. On the contrary: since the fundamental blocks of a map are created by the human designer, and given the possibility of adding new generation methods, snappable meshes can be considered more of a meta-PCG approach rather than a concrete algorithm or tool for specific use cases. However, framing the technique on such general terms is also not helpful, as one might be tempted to simply state that it can eventually create anything. Therefore, we will



highlight an important use case, not related to any particular game type or genre: using snappable meshes as a prototyping method or visual map design approach [35], appropriate to designers with little to no programming experience, boosting their design space [37], allowing for fast iteration and speeding up development.

Particularizing on the use of the proposed technique as a visual prototyping method, connectors can be used as measuring aids for spacing in the game world. A designer can easily define a passage as  $n$  pins wide or tall, keeping consistency in the design of the layout of the individual pieces being made separately. Not only can a snappable meshes implementation be used as a level creation tool, but the generated maps can also be used to kickstart discussions between collaborating developers and to create basic rules for the construction of pieces, even if the algorithm ends up not being used in the final designs. Further, by using the color matching rules, the pieces developed by one designer can be grouped in the final outputs, allowing for focused design and prototyping of pieces belonging to specific areas or sections that can be seamlessly combined together while keeping a mixed-authorship approach (both human-human and human-computer) throughout the whole process.

### C. Limitations

While the proposed approach frees the designer of grid and space restrictions when creating map pieces, care must be taken in their design in order to maintain cohesion and predictability of the generated output. In other words, and highlighting what was stated in Subsection VI-A, the algorithm will most likely produce poor maps given substandard building blocks.

Another issue with the snappable meshes technique concerns the navigability validation presented in Subsection III-D, where we proposed deploying a predetermined amount of randomly distributed navigation points on the map, and then verify their connectivity. In the prototype Unity implementation these points are randomly placed in the runtime-generated navmesh. As shown in Fig. 9, some of these points may be placed on rooftops or other areas not intended for navigation; thus, if this approach is followed as-is for indoor maps with hollow map pieces, it may lead to invalid paths outside the intended play area. Consequently, individual map pieces may require additional metadata specifying valid movement zones.

Another limitation in the provided Unity prototype, also related with navigation, is the fact that it currently does not support jumps. While this is essentially an implementation detail—nothing stops an improved implementation of providing this functionality—it can hinder a more thorough experimentation by interested readers.

The generality of snappable meshes as a meta-PCG technique, as opposed to more objective PCG tools, creates some difficulties pertaining to runtime validation and comprehensive method evaluation. With respect to runtime validation, it is not feasible to exhaustively test or validate generated maps without knowing the specific context in which they will be deployed. As such, no validation metrics are presented in this

paper other than navigability. This is the same reason why a comprehensive method evaluation is not performed in this paper. Such evaluations offer quality assurances on the generated content, and typically involve a top-down statistical analysis of the technique’s generation space [37]. An analysis of this kind is difficult to perform on an open-ended method such as snappable meshes, which, as already stated, is essentially a meta-generator, heavily dependent on the designer-provided blocks and lacking a predefined goal on the type of maps to generate. Thus, the difficulties in obtaining general statistical assurances on the generated content are in effect a limitation of the snappable meshes technique.

### D. Alternative Uses and Possible Improvements

Given the open-endedness of the proposed technique, alternative or unanticipated uses are possible within the presented framework simply with smart and/or creative map piece design, as well as by implementing new generation methods. An interesting possibility would be to use connector constraints (e.g., connector color constraints) to combine not only full map pieces, but also props, obstacles, and even simple cosmetic changes to those same pieces—possibly even players or NPCs. The possibility of creating more “final” maps also opens the door for validation metrics beyond navigability, such as cover ratios, target visibility, or detection of dangerous hotspots. Level difficulty could be assessed by determining path costs taking enemies and obstacles in consideration, as done by Togelius et al. [36], for example.

Looking outside of the presented framework, the algorithm may be extended by performing multiple generation passes. This could potentially produce maps with several floors, adding verticality to the designs, and foster more complex layouts by allowing the designer to specify different parameters for each pass. Additional passes could also be used to connect large separated clusters, for example.

## VII. CONCLUSIONS

In this paper we presented the snappable meshes PCG technique for creating gridless 3D maps based on designer-modeled meshes with visual connection constraints. The approach was thoroughly described from an algorithmic perspective, and a Unity prototype implementation was introduced as a practical way of experimenting, testing, and studying the method. The case studies discussed in Section V showed that the technique can be used for generating levels in a concrete game scenario, and is able to generate a variety of map layouts, even with a limited set of building blocks. Further, both map generation and validation were shown to be fast procedures, opening the door for using snappable meshes in runtime generate-and-test loops. We argued that the technique respects the designer, offering a degree of control on the look and feel of the generated maps, while being adaptable to existing workflows. We also highlighted the potential of snappable meshes as a collaborative prototyping methodology, while discussing its limitations, alternative use cases and possible algorithmic improvements. In sum, the proposed method was shown to be a viable map creation alternative, allowing for faster and/or collaborative game level prototyping and design.



## ACKNOWLEDGMENT

The authors would like to thank Phil Lopes for his valuable suggestions. This work is supported by Fundação para a Ciência e a Tecnologia under Grant No.: UIDB/04111/2020 (COPELABS).

## REFERENCES

- [1] J. Zhu, A. Liapis, S. Risi, R. Bidarra, and G. M. Youngblood, "Explainable AI for designers: A human-centered perspective on mixed-initiative co-creation," in *2018 IEEE Conference on Computational Intelligence and Games (CIG)*. IEEE, 2018, pp. 1–8.
- [2] G. Lai, W. Latham, and F. F. Leymarie, "Towards friendly mixed initiative procedural content generation: Three pillars of industry," in *International Conference on the Foundations of Digital Games*, ser. FDG '20. New York, NY, USA: ACM, Sep. 2020.
- [3] R. D. Peng, "Reproducible research in computational science," *Science*, vol. 334, no. 6060, pp. 1226–1227, Dec. 2011.
- [4] N. Fachada and N. Códices, "Top-down design of a CS curriculum for a computer games BA," in *Proceedings of the 2020 ACM Conference on Innovation and Technology in Computer Science Education*, ser. ITiCSE '20. New York, NY, USA: ACM, Jun. 2020, pp. 300–306. [Online]. Available: <https://doi.org/10.1145/3341525.3387378>
- [5] R. C. e Silva, N. Fachada, N. Códices, and D. de Andrade, "Procedural game level generation by joining geometry with hand-placed connectors," in *Videojogos - 12th International Conference on Videogames Sciences and Arts*. SPCV, 2020.
- [6] Unity Technologies, "Unity®," 2021. [Online]. Available: <https://unity.com/>
- [7] J. Aycok, "Procedural content generation," in *Retrogame Archeology: Exploring Old Computer Games*. Springer, Cham, 2016, ch. 6, pp. 109–143.
- [8] G. N. Yannakakis and J. Togelius, *Artificial Intelligence and Games*. Springer, 2018, <http://gameaibook.org>.
- [9] J. Togelius, G. N. Yannakakis, K. O. Stanley, and C. Browne, "Search-based procedural content generation: A taxonomy and survey," *IEEE Transactions on Computational Intelligence and AI in Games*, vol. 3, no. 3, pp. 172–186, 2011.
- [10] J. Togelius, N. Shaker, and M. J. Nelson, "Introduction," in *Procedural Content Generation in Games: A Textbook and an Overview of Current Research*, N. Shaker, J. Togelius, and M. J. Nelson, Eds. Switzerland: Springer, Cham, 2016, ch. 1, pp. 1–15.
- [11] A. Liapis, G. Smith, and N. Shaker, "Mixed-initiative content creation," in *Procedural Content Generation in Games: A Textbook and an Overview of Current Research*, N. Shaker, J. Togelius, and M. J. Nelson, Eds. Switzerland: Springer, Cham, 2016, ch. 11, pp. 195–214.
- [12] G. Smith, J. Whitehead, and M. Mateas, "Tanagra: A mixed-initiative level design tool," in *Proceedings of the Fifth International Conference on the Foundations of Digital Games*, ser. FDG '10. New York, NY, USA: ACM, 2010, pp. 209–216.
- [13] P. Mawhorter and M. Mateas, "Procedural level generation using occupancy-regulated extension," in *Proceedings of the 2010 IEEE Conference on Computational Intelligence and Games*. IEEE, Aug. 2010, pp. 351–358.
- [14] A. Baldwin, S. Dahlskog, J. M. Font, and J. Holmberg, "Mixed-initiative procedural generation of dungeons using game design patterns," in *2017 IEEE Conference on Computational Intelligence and Games (CIG)*. IEEE, 2017, pp. 25–32.
- [15] S. P. Walton, A. A. M. Rahat, and J. Stovold, "Evaluating mixed-initiative procedural level design tools using a triple-blind mixed-method user study," *IEEE Transactions on Games*, 2021.
- [16] A. Liapis, G. N. Yannakakis, and J. Togelius, "Sentient sketchbook: computer-assisted game level authoring," in *8th International Conference on the Foundations of Digital Games*. ACM, 2013.
- [17] P. Migkotzidis and A. Liapis, "SuSketch: Surrogate models of gameplay as a design assistant," *IEEE Transactions on Games*, 2021.
- [18] P. T. Ølsted, B. Ma, and S. Risi, "Interactive evolution of levels for a competitive multiplayer FPS," in *2015 IEEE Congress on Evolutionary Computation (CEC)*. IEEE, May 2015, pp. 1527–1534.
- [19] A. Apted, "Oblige level maker 7.70," Sourceforge, Oct. 2017, last accessed on 17/07/2021. [Online]. Available: <http://oblige.sourceforge.net/>
- [20] E. Butler, A. M. Smith, Y.-E. Liu, and Z. Popovic, "A mixed-initiative tool for designing level progressions in games," in *Proceedings of the 26th Annual ACM Symposium on User Interface Software and Technology*, ser. UIST '13. New York, NY, USA: Association for Computing Machinery, 2013, pp. 377–386. [Online]. Available: <https://doi.org/10.1145/2501988.2502011>
- [21] D. Yu, "Spelunky Classic," Mossmouth, LLC, Dec. 2009. [Online]. Available: <https://www.spelunkyworld.com/original.html>
- [22] E. McMillen, "The Binding of Isaac: Rebirth," Nicalis, Inc., Nov. 2014. [Online]. Available: <https://www.nicalis.com/>
- [23] Dodge Roll, "Enter the Gungeon," Devolver Digital, Apr. 2016. [Online]. Available: <https://www.dodgeroll.com/gungeon/>
- [24] D. Yu, *Spelunky: Boss Fight Books# 11*. Boss Fight Books, Mar. 2016.
- [25] D. Kazemi, "Spelunky generator lessons," Tiny Subversions, Oct. 2013, last accessed on 13/07/2021. [Online]. Available: <http://tinysubversions.com/spelunkyGen>
- [26] F. Hims, "Binding of Isaac: Room generation explained!" Gamesquid – YouTube, Apr. 2020, last accessed on 19/06/2021. [Online]. Available: <https://www.youtube.com/watch?v=l-HIA6-LBJc>
- [27] Trashboyjet, "The Binding of Isaac: Rebirth (windows)," The Cutting Room Wiki, Jul. 2020, last accessed on 01/07/2021. [Online]. Available: [https://tcrf.net/The\\_Binding\\_of\\_Isaac:\\_Rebirth\\_\(Windows\)](https://tcrf.net/The_Binding_of_Isaac:_Rebirth_(Windows))
- [28] Boris, "Dungeon generation in Enter The Gungeon," Boris The Brave personal blog, Jul. 2019, last accessed on 29/06/2021. [Online]. Available: <https://www.boristhebrave.com/2019/07/28/dungeon-generation-in-enter-the-gungeon/>
- [29] I. Dykeman, "Introducing generate worlds for procedural generation without code," Personal Blog, May 2019, last accessed on 15/05/2021. [Online]. Available: [https://ijdykeman.github.io/procedural\\_generation/2019/05/17/introducing-generate-worlds.html](https://ijdykeman.github.io/procedural_generation/2019/05/17/introducing-generate-worlds.html)
- [30] —, "Procedural worlds from simple tiles," Personal Blog, Oct. 2017, last accessed on 15/05/2021. [Online]. Available: <https://ijdykeman.github.io/ml/2017/10/12/wang-tile-procedural-generation.html>
- [31] L. H. S. Lelis, W. M. P. Reis, and Y. Gal, "Procedural generation of game maps with human-in-the-loop algorithms," *IEEE Transactions on Games*, vol. 10, no. 3, pp. 271–280, 2018.
- [32] R. Nystrom, *Game programming patterns*. Genever Benning, 2014. [Online]. Available: <https://gameprogrammingpatterns.com/>
- [33] I. Millington, *AI for Games*, 3rd ed. Boca Raton, FL, USA: CRC Press, Mar. 2019. [Online]. Available: <https://doi.org/10.1201/9781351053303>
- [34] A. Baldwin, S. Dahlskog, J. M. Font, and J. Holmberg, "Towards pattern-based mixed-initiative dungeon generation," in *Proceedings of the 12th International Conference on the Foundations of Digital Games*, ser. FDG '17. New York, NY, USA: ACM, 2017, pp. 1–10.
- [35] M. S. O. Almeida and F. S. C. da Silva, "A systematic review of game design methods and tools," in *International Conference on Entertainment Computing – ICEC 2013*, ser. Lecture Notes in Computer Science, J. C. Anacleto, E. W. G. Clua, F. S. C. da Silva, S. Fels, and H. S. Yang, Eds., vol. 8215. Springer Berlin Heidelberg, 2013, pp. 17–29.
- [36] J. Togelius, T. Justinussen, and A. Hartzen, "Compositional procedural content generation," in *Proceedings of the The Third workshop on Procedural Content Generation in Games*, ser. PCG'12. New York, NY, USA: ACM, 2012, pp. 1–4.
- [37] N. Shaker, G. Smith, and G. Yannakakis, "Evaluating content generators," in *Procedural Content Generation in Games: A Textbook and an Overview of Current Research*, N. Shaker, J. Togelius, and M. J. Nelson, Eds. Switzerland: Springer, Cham, 2016, ch. 12, pp. 215–224.