

A Novel Simplified Swarm Optimization for Generalized Reliability Redundancy Allocation Problem

Zhenyao Liu¹, Jen-Hsuan Chen¹, Shi-Yi Tan¹, Wei-Chang Yeh¹

¹Integration and Collaboration Laboratory, Department of Industrial Engineering and Engineering Management, National Tsing Hua University, Hsinchu 30013, Taiwan

Abstract

Network systems are commonly used in various fields, such as power grid, Internet of Things (IoT), and gas networks. Reliability redundancy allocation problem (RRAP) is a well-known reliability design tool, which needs to be developed when the system is extended from the series-parallel structure to a more general network structure. Therefore, this study proposes a novel RRAP called General RRAP (GRRAP) to be applied to network systems. The Binary Addition Tree Algorithm (BAT) is used to solve the network reliability. Since GRRAP is an NP-hard problem, a new algorithm called Binary-addition simplified swarm optimization (BSSO) is also proposed in this study. BSSO combines the accuracy of the BAT with the efficiency of SSO, which can effectively reduce the solution space and speed up the time to find high-quality solutions. The experimental results show that BSSO outperforms three well-known algorithms, Genetic Algorithm (GA), Particle Swarm Optimization (PSO), and Swarm Optimization (SSO), on six network benchmarks.

Keywords: Reliability redundancy allocation problem (RRAP), Network reliability,

Binary-addition tree (BAT), Simplified swarm algorithm (SSO), Soft computing

1. INTRODUCTION

The reliability of network systems has long been a focus of research in various fields, such as computing and communications, power transmission, distribution and transportation, and the IoT [1-7]. Many studies have shown that the systems in engineering, industrial and scientific applications can benefit from improving reliability from the initial phases of design [8-12].

Reliability design is an important tool in system design and management. There are two main approaches to improve reliability: improving component reliability and providing redundant components [10, 12-14]. These two approaches can create different types of reliability design problems. The first is the Redundancy allocation problem (RAP), which focuses on optimizing redundant components as a decision variable in the case of determining component reliability.

Conventional RRAP subsystems are mostly connected in series or series-parallel, and the components in the subsystems are connected in parallel. Let m be the number of subsystems in the series, n_i be the number of components that can be used in parallel in subsystem i , r_i be the reliability of each component used in subsystem i . Since the components in the subsystem are in parallel, the i th subsystem reliability R_i is calculated as follows:

$$R_i = 1 - (1 - r_i)^{n_i} \quad (1)$$

As mentioned earlier, most of the RRAP connect subsystems in series or series-

parallel. However, many systems are more complex general network systems, so RRAP subsystem connections need to be developed more generally. Yeh proposed a generalized redundancy allocation problem (GRAP) [15], which is an extension of RAP to the general network system. In the GRAP, subsystems are not limited to series or series-parallel connections. Each subsystem can be connected to any subsystem in the system. In this study, the activity on arc (AOA) network is used as the system structure. However, to the best of our knowledge, no studies have discussed the generalized RRAP (GRRAP), which extends traditional RRAP to general subsystem structures. Fig. 1 exemplifies a GRRAP configuration with six subsystems.

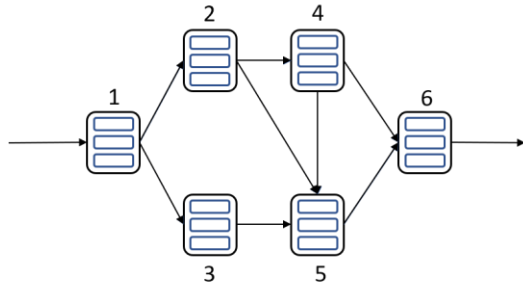


Fig. 1. A GRRAP configuration

The RRAP is a well-known NP-hard problem [13], whose computational resource requirements will grow exponentially as the number of components in the system increases. Therefore, it is difficult to find a solution in a reasonable time. To reduce its computational burden, many studies have been devoted to developing soft computing methods such as artificial bee colony algorithm (ABC) [16], genetic algorithm (GA) [17, 18], immune algorithm (IAs) [19], simplified swarm optimization (SSO) [20, 21], combining both PSO and SSO (PSSO)

[22].

When RRAP is extended to GRRAP, the computation complexity of GRRAP is more difficult because the network reliability calculation is also an NP-hard problem. Therefore, this paper proposed a new soft computing method called Binary-addition Simplified Swarm Optimization (BSSO), which combines the Binary Addition Tree algorithm (BAT) proposed by Yeh [23], and the update mechanism of SSO [24]. The features and advantages of this algorithm are that it is simple but can produce high-quality solutions efficiently.

This paper is organized as follows, Section 2 provides the definition of the proposed GRRAP. Section 3 presents the research methods used to solve the problem, including the network reliability calculation, multi-state BAT, and two different SSO update mechanisms for updating discrete and continuous variables respectively. Section 4 explains the proposed BSSO method for solving the GRRAP, including the solution representation, a new SSO-based update mechanism combining multi-state BAT, a new penalty function that remove weight and volume constraint, and finally the flow chart. Section 5 presents a designed experiment according to orthogonal array test $L_8(2^4)$ to get the best combination of update mechanisms. To verify the performance of BSSO, further comparison with GA, PSO, and SSO was made. Finally, the conclusion and discussion are given in Section 6.

2. Problem description of the proposed GRRAP

The GRRAP model proposed in this study is an active RRAP that extends to general network systems, allowing subsystems to be connected to any subsystem in the system without being limited to serial connections. Unlike GRAP, which is presented in an AOA network [15], this study uses the more intuitive AON network, which transforms each subsystem into a node in the network. The reliability of each subsystem depends on the reliability of the parallel components in the subsystem, not all of which are reliable. The network reliability problem with unreliable nodes and reliable arcs can be solved by using the network reliability solution method [23].

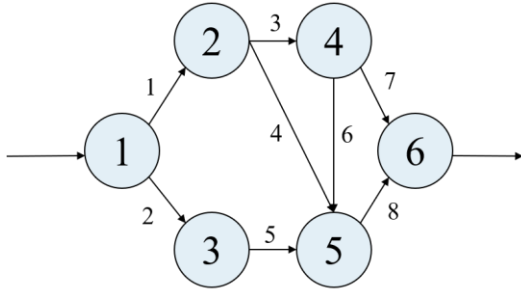


Fig. 2. AON binary-state network

transformed from Fig. 1.

2.1. Proposed GRRAP

The GRRAP proposed in this study is a nonlinear mix-integer programming problem that requires determining the number of components and component reliability in each subsystem to maximize the system reliability. However, GRRAP only extends the system into the general network, so the problem assumptions are almost identical to

RRAP. The only difference is that the system reliability is calculated using the network reliability calculation method.

The mathematical model of GRRAP is as follow:

$$\text{Max } R_s(N, R) \quad (2)$$

s.t.

$$g_c(N, R) = \sum_{i=1}^{N_{var}} \alpha_i (-1000 / \ln r_i)^{\beta_i} (n_i + \exp(n_i/4)) \leq C_{ub} \quad (3)$$

$$g_v(N, R) = \sum_{i=1}^{N_{var}} w_i v_i^2 n_i^2 \leq V_{ub} \quad (4)$$

$$g_w(N, R) = \sum_{i=1}^{N_{var}} w_i n_i \exp(n_i/4) \leq W_{ub} \quad (5)$$

$$n_{lb} \leq n = (n_1, n_2, \dots, n_{N_{var}}) \leq n_{ub} \quad (6)$$

$$r_{lb} \leq r = (r_1, r_2, \dots, r_{N_{var}}) \leq r_{ub} \quad (7)$$

The objective function provided in Eq. (2) is set to maximize $R_s(N, R)$. Eqs. (3)-(5) require that the final solution satisfy three conditions: the total cost $g_c(N, R)$, volume $g_v(N, R)$, and weight $g_w(N, R)$ must be less than or equal to the predefined limits C_{ub} , V_{ub} , and W_{ub} , respectively. Eq. (6) represents the number of components that must be between the upper and lower bounds, while Eq. (7) regulates the range of component reliability.

2.2. GRRAP example description

The following example further explicates the GRRAP in Fig. 2 to demonstrate how to calculate the reliability of each subsystem, cost, volume, and weight if a solution $X = (N, R)$ is given. Assume that the system parameters of the network system in Fig.2 are shown in Table 1, and calculate the subsystem reliability with a solution $X = (4, 2, 2, 2, 2, 2, 3, 0.8168, 0.8534, 0.8554, 0.8740, 0.8288, 0.8781)$. The first six coordinates of the vector represent the

number of components and the last six coordinates are the corresponding component reliability.

Table 1 Information for the components in Fig. 2.

i	$10^5 \alpha_i$	β_i	$w_i v_i^2$	w_i	V	C	W
1	2.5	1.5	2	3.5	220	210	120
2	1.45	1.5	4	4.0			
3	0.541	1.5	5	4.0			
4	0.541	1.5	8	3.5			
5	2.1	1.5	4	4.5			
6	2.1	1.5	4	4.5			

* i : the i_{th} subsystem

Table 2 Subsystem reliability for Fig.2.

i	R_i	C_i	W_i	V_i
1	$1 - (1 - 0.8168)^4$ 0.99887	= 58.3 456	38.0 559	3 2
2	$1 - (1 - 0.8534)^2$ 0.97851	= 26.5 066	13.1 898	1 6
3	$1 - (1 - 0.8554)^2$ 0.97909	= 10.1 129	13.1 898	2 0
4	$1 - (1 - 0.8740)^2$ 0.98412	= 12.6 301	11.5 410	3 2
5	$1 - (1 - 0.8288)^2$ 0.97069	= 29.7 782	14.8 385	1 6
6	$1 - (1 - 0.8781)^3$ 0.99819	= 72.5 013	28.5 795	3 6
S				1
U		209.	119.	5
M		8747	3945	2

The reliability calculation for each subsystem can be obtained according to Eq. (1) like column 2 in Table 2. After calculating the reliability of each subsystem, we can further calculate the reliability of the whole system. The calculation of system reliability will be explained in later section. The

remaining cost, volume, and weight calculations are described below and column 3-5 in Table 2.

$$g_c(N, R): \sum_{i=1}^6 \alpha_i (-1000 /$$

$$\ln r_i)^{\beta_i} (n_i + \exp(n_i/4)) = 209.8747$$

$$g_v(N, R): \sum_{i=1}^6 w_i v_i^2 n_i^2 = 152$$

$$g_w(N, R): \sum_{i=1}^6 w_i n_i \exp\left(\frac{n_i}{4}\right) = 119.39$$

54

3. Overview of the network reliability methods, multi-state BAT, and SSO

3.1. Network reliability methods

Before demonstrating how to calculate the network reliability calculation, it is necessary to introduce the BAT algorithm, a new heuristic search method proposed by Yeh [23]. BAT is easy to understand, encode, and can be customized according to the problem requirements. Therefore, BAT has been used in many areas of research, such as wildfire propagation [25], computer viruses [26], and network reliability [23, 27, 28]. It has also evolved from the traditional binary state BAT to multi-state BAT [29].

BAT is one of the direct algorithms in the network reliability algorithm. It has been proved in past studies that BAT is faster than the MP algorithms and MC algorithms from the viewpoint of the time complexity [23]. It can find all possible state vectors of the network by binary addition computing, and during the process uses Path-based Layered Search Algorithm (PLSA) and other methods to remove the state vectors that can't be connected. The network reliability is obtained by calculating the occurrence

probability and the summed probability of the connection state vectors. The pseudocode of BAT is described below:

Pseudocode for Traditional Binary-Addition Tree

Input: $G(V, E)$, V = node set, E = arc set

Output: All possible node state vectors without duplications

Step 1 Let $SUM = 0$, $k = 1$, and let $X_1 = X$ be a zero vector with m coordinates

Step 2 Let $i = m$

Step 3 If $X(v_i) = 0$, let $X(v_i) = 1$, $k = k + 1$, $X_k = X$, $SUM = SUM + 1$, and proceed to **Step 5**

Step 4 Let $X(v_i) = 0$, if $i > 1$, $i = i - 1$, and proceed to **Step 3**.

Step 5 If $SUM = m$, halt and X_1, X_2, \dots, X_k are all possible node state vectors. Otherwise, proceed to **STEP 2**

And we continue to demonstrate the network reliability calculation of Fig 2 using the subsystem reliability in Table 2. Originally, the BAT is used to find 2^6 number of node state vectors, because the system has 6 subsystems. However, since the network is a two-terminals AON network, the basic connection requirement is that the node states of the two terminals must be 1. Therefore, only 4 nodes between are required to be found by BAT. It means the number of state vector are reduced from 2^6 to 2^4 . All node state vectors are listed in Table 3.

Table 3 All node state vector found by BAT.

i	X_i	i	X_i
1	(1, 0 , 0 , 0 , 0 , 1)	9	(1, 1 , 0 , 0 , 0 , 1)
2	(1, 0 , 0 , 0 , 1 , 1)	10	(1, 1 , 0 , 0 , 1 , 1)
3	(1, 0 , 0 , 1 , 0 , 1)	11	(1, 1 , 0 , 1 , 0 , 1)
4	(1, 0 , 0 , 1 , 1 , 1)	12	(1, 1 , 0 , 1 , 1 , 1)
5	(1, 0 , 1 , 0 , 0 , 1)	13	(1, 1 , 1 , 0 , 0 , 1)
6	(1, 0 , 1 , 0 , 1 , 1)	14	(1, 1 , 1 , 0 , 1 , 1)
7	(1, 0 , 1 , 1 , 0 , 1)	15	(1, 1 , 1 , 1 , 0 , 1)
8	(1, 0 , 1 , 1 , 1 , 1)	16	(1, 1 , 1 , 1 , 1 , 1)


* The states of vectors shown in blue are obtained by BAT

Before using PLSA to check whether each state vector is connectable, it is possible to compare the sum of node state vectors with np to reduce the number of nodes to be examined. np is defined here as the minimum number of nodes required to create a connectable path, for example, np is 4 in Fig 2, so all state vectors that add up to less than 4 can be removed

Then we use the PLSA to do remaining checking process. The PLSA is a search algorithm, which can search the network layer by layer through the connectable nodes and check whether the network can connect the two terminals. Here we demonstrate the PLSA verification process with the state vector $X_7 = (1, 0, 1, 1, 0, 1)$. From Table 4, the node of the first layer is node 1, so $L_1 = \{1\}$, and the nodes of the second layer L_2 have node 3, so $L_2 = \{3\}$. Node 3 has no nodes that can be connected to it, so the layer $L_{(2+1)}$ is the empty set \emptyset , and finally, the set of nodes V^* does not contain the sink node. It is verified that the subnetwork X_7 is

not a connected state vector. The red letters in Table 5 are the state vectors removed by the PLSA.

Table 4 Process from the PLSA for $X_7 = (1,0,1,1,0,1)$.

 <p style="text-align: center;">$G(X_7)$</p>		subnetwork $X_7 = (1,0,1,1,0,1)$			
i	L_i	L_{i+1}	V^*		
1	{1}	{3}	{1, 3}		
2	{3}	\emptyset	{1, 3}		

Therefore, the probability of each state vector can be calculated by substituting the node reliability, as in Eq. (8). The sum of these probabilities is the network reliability, as in Eq. (9). The detailed calculation procedure is shown in Table 6.

Table 5 All the state vectors that can be connected.

i	X_i	i	X_i
1	(1, 0, 1, 0, 1, 1)	5	(1, 1, 0, 1, 1, 1)
2	(1, 0, 1, 1, 1, 1)	6	(1, 1, 1, 0, 1, 1)
3	(1, 1, 0, 0, 1, 1)	7	(1, 1, 1, 1, 0, 1)
4	(1, 1, 0, 1, 0, 1)	8	(1, 1, 1, 1, 1, 1)

$$Pr(X_i) = \prod_{j=1}^m Pr(X_i(R_j)) \quad (8)$$

$$R_s = \sum_{X \in \mathcal{X}} Pr(X) \quad (9)$$

Table 6 Final network reliability calculation.

i	X_i	$Pr(X_i(R_j))$	$Pr(X_i)$
1	(1, 0, 1, 0, 1, 1)	$0.99887 \times (1 - 0.97851) \times 0.97909 \times (1 - 0.98412) \times 0.97069 \times 0.99819$	0.00032

2	(1, 0, 1, 1, 1, 1)	$0.99887 \times$	0.02004
		$(1-$	
		$0.97851)$	
		$\times 0.97909$	
		$\times 0.98412$	
3	(1, 1, 0, 0, 1, 1)	$\times 0.97069$	0.00031
		$\times 0.99819$	
		0.99887	
		$\times 0.97851$	
		$\times (1-$	
4	(1, 1, 0, 1, 0, 1)	$0.97909) \times$	0.00059
		$(1-$	
		$0.98412) \times$	
		0.97069	
		$\times 0.99819$	
5	(1, 1, 0, 1, 1, 1)	0.99887	0.01949
		$\times 0.97851$	
		$\times (1-$	
		$0.97909)$	
		$\times 0.98412$	
6	(1, 1, 1, 0, 1, 1)	$\times 0.97069$	0.01472
		$\times 0.99819$	
		0.99887	
		$\times 0.97851$	
		$\times 0.97909$	
7	(1, 1, 1, 1, 0, 1)	$\times (1-$	0.02755
		$0.98412)$	
		$\times 0.97069$	
		$\times 0.99819$	
		0.99887	
8	(1, 1, 1, 1, 1, 1)	$\times 0.97851$	0.91251
		$\times 0.97909$	
		$\times 0.98412$	
		$\times 0.97069$	
		$\times 0.99819$	
SUM			0.99553

At the end, the network reliability $R_s = 0.00032 + 0.02004 + 0.00031 + 0.00059 + 0.01949 + 0.01472 + 0.02755 + 0.91251 = 0.99553$. The above is the complete network

reliability calculation process when a solution X is calculated to obtain the subsystem reliability.

3.2. Multi-state BAT

In BSSO, the integer variable represents the number of components in the node, and it is necessary to use multi-state BAT to find out all the state vectors $X = (x_1, x_2, \dots, x_m)$, each state vector represent an integer combination. The traditional multi-state BAT algorithm is proposed by Yeh [29]. As the number of subsystems and components increases, the number of variable combinations that BAT needs to find will become very large. Therefore, this study proposes an improved multi-state BAT shown as follow:

Pseudocode for Improved Multi-state Binary-Addition Tree Algorithm

	Upper and lower bound set
Input:	(UB, LB) of integer variable, weight limit, and volume limit
	A set $Comb$ that contains all combinations of integer variables that satisfy the constraints
Output:	
Step 1:	Let $i = m$, $x_k = lb_k$ for $k = 0, 1, 2, \dots, m$ If $x_i < ub_i$, let $x_i = x_i + 1$,
Step 2:	$i = m$, X is a new combination
Step 3:	Calculate the volume and weight of X If X does not violate the limit
Step 4:	V, W , put X into $Comb$ and go back to Step 2

Step 5: If $i = 0$, halt and all combination are found.

Let $x_i = lb_i$, $i = i - 1$, X is a new combination, and go back to **Step 3**

The improved multi-state BAT can check whether the state vector violates the limit (e.g., Step 4 in the pseudocode), so that the feasible state vectors can be added into the variable combination $Comb$. If a state vector does not meet the limit, it can be determined in advance that the next state vector obtained by the addition process must not meet the limit, so it can be stopped and move to another coordinate (as in Step 6 of the pseudocode). In this way, as the restrictions become more stringent, more steps can be skipped in the improved multi-state BAT, which can save more computation time. Therefore, this study will use the improved multi-state BAT to find all the combinations of integer variables more quickly.

3.3. Introduction of SSO and iSSO

SSO is an emerging population-based optimization algorithm first proposed by Yeh [24, 30]. It was initially designed to complement PSO in solving discrete problems, but eventually became a soft computing method with the advantages of simplicity, efficiency and flexibility. SSO has been applied in many fields [31-36].

Since there are two different types of variables in GRRAP, the BSSO proposed in this study will refer to two SSO algorithms that are suitable for different variables. These two types of SSO will be introduced and explained following. Let $Nvar$, $Nsol$, $Ngen$, and $Nrun$ represent the number of variables,

solutions, generations, and independent replications.

The traditional SSO is designed for discrete variables as in Eq. (10). Let x_{ij}^t , P_{ij}^t , and g_j be the values of the j th variable in X_i , P_i , and g , respectively. ρ_{ij}^t is a random number between 0 and 1. When ρ_{ij}^t falls between 0 and C_g , x_{ij}^{t+1} is updated according to the variable of the solution $gBest$, and when it falls between C_g and C_p , x_{ij}^{t+1} is updated according to the variable of the solution $pBest$. When it falls in the interval from C_p to C_w , x_{ij}^{t+1} does not make any change and directly takes the previous generation variable x_{ij}^t as the new variable, and when it falls in the interval from C_w to 1, x_{ij}^{t+1} is newly generated between the upper and lower bounds of the variable

$$x_{ij}^{t+1} = \begin{cases} g_j & \text{if } \rho_{ij}^t \in [0, C_g = c_g) \\ P_{ij}^t & \text{if } \rho_{ij}^t \in [C_p, C_p = C_g + c_p) \\ x_{ij}^t & \text{if } \rho_{ij}^t \in [C_w, C_w = C_p + c_w) \\ x & \text{if } \rho_{ij}^t \in [C_w, 1) \end{cases} \quad (10)$$

$[-.5, .5]$ The iSSO is improved from the traditional SSO to solve continuous variables. It use u_j in Eq. (12) to determine the search range and removing $pBest$, leaving only $gBest$ [37]. ρ_{ij}^t is a random number between 0 and 1, and when ρ_{ij}^t falls in the interval from 0 to C_r , x_{ij}^{t+1} is updated to the neighbor of the $gBest$, and when it falls in the interval from C_r to C_g , x_{ij}^{t+1} is

$$x_{ij}^{t+1} = \begin{cases} x_{ij}^t + \rho_{[-.5, .5]} \cdot u_j & \text{if } x_{ij}^t = g_j \text{ or } \rho_{[0,1]} \in [0, C_r = c_r) \\ g_j + \rho_{[0,1]} \cdot u_j & \text{if } x_{ij}^t \neq g_j \text{ and } \rho_{[0,1]} \in [C_r, C_g = c_r + c_g) \\ x_{ij}^t + \rho_{[-.5, .5]} \cdot (x_{ij}^t - g_j) & \text{if } x_{ij}^t \neq g_j \text{ and } \rho_{[0,1]} \in [C_g, 1 = c_r + c_g + c_w] \end{cases} \quad (11)$$

where

$$u_j = \frac{x_j^{min} - x_j^{max}}{2 \cdot Nvar} \quad (12)$$

updated to the neighbor of the original variable x_{ij}^t , and when it falls between C_g and 1, x_{ij}^{t+1} is updated to a random range between the original variable x_{ij}^t and g_j as the new value. The iSSO is shown as Eq. (11) and Eq. (12).

4. Proposed BSSO

The proposed BSSO is formed by the combination of SSO, iSSO, multi-state BAT and network reliability methods. Referring to Huang [22], N-UM and R-UM are used to represent the update mechanisms of integer variables and continuous variables, respectively.

4.1. Solution representation

GRRAP needs to consider both the number of components and the reliability of the components. To make it easier to update them separately with different update mechanisms, the solution codes are divided into two segments according to the variable types. For example, in Fig.3, $X = (N, R)$ is i th solution, the first N_{var} variables represent the number of components, and the last N_{var} variables represent the reliability of the components.



Fig. 3. Solution representation of $X = (N, R)$

The major difference between BSSO and SSO is that BSSO recombines integer variables in advance by multi-state BAT and uses these combinations as the new integer variables. Since GRRAP has three main constraints, cost, size, and weight. The volume and weight are related to the number of components only, so it is possible to use multi-state BAT to find all the combinations of components that meet the volume and weight constraints and store them in the variable combinations set $Comb$. These combinations will be treated as new integer variable for SSO to select and update. This step also reduces the number of integer variable of the solution to one, thus reducing the dimension of the solution, as shown in Fig. 4. It also ensures that the solutions updated by SSO satisfy both the volume and weight constraints.

The complete process of multi-BAT filtering of integer variable combinations:

Step BAT find all m-dimensional state

1: vector $N_i = (n_1, n_2, \dots, n_m)$

Step Check whether the state vector N_i
2: meets the weight and volume limits, if not, go back to **Step 1**

Step Add the state vector N_i that meet
3: the constraints to the set of variable combination $Comb$.



Fig. 4 (a). Original solution structure



Fig.4 (b). Solution structure in BSSO

4.2. N-UM for number of components

The original integer update mechanism N-UM is the update mechanism of the traditional SSO, as shown in Eq. (13). The updated variable n_{ij}^t is the number of components in each subsystem. BSSO has reorganized the integer variables using multi-state BAT, so the integer update mechanism N-UM is shown in Eq. (14). Therefore, the updated variable is changed from the number of components n_{ij}^t to a feasible combination of the number of components $comb_i^t$. \widehat{comb}_g is the variable of $gBest$, \widehat{comb}_i is the variable of $pBest$.

$$n_{ij}^{t+1} = \begin{cases} \hat{n}_{g,j} & \text{if } \rho_{ij}^t \in [0, C_g = c_g) \\ \hat{n}_{i,j} & \text{if } \rho_{ij}^t \in [C_p, C_p = C_g + c_p) \\ n_{ij}^t & \text{if } \rho_{ij}^t \in [C_w, C_w = C_p + c_w) \\ n & \text{if } \rho_{ij}^t \in [C_w, 1) \end{cases} \quad (13)$$

$$comb_i^{t+1} = \begin{cases} \widehat{comb}_g & \text{if } \rho_i^t \in [0, C_g = c_g) \\ \widehat{comb}_i & \text{if } \rho_i^t \in [C_p, C_p = C_g + c_p) \\ comb_i^t & \text{if } \rho_i^t \in [C_w, C_w = C_p + c_w) \\ comb & \text{if } \rho_i^t \in [C_w, 1) \end{cases} \quad (14)$$

4.3. R-UM for components reliability

In the part of update mechanism R-UM, the update mechanism of the original iSSO is shown in Eq. (11). We believe that in RRAP, keeping the diversity of solutions will get better result, so the update mechanism reinserts $pBest$ as the new R-UM shown in Eq. (15). $\hat{r}_{g,j}$ is the variable of $gBest$, \tilde{r}_{ij} is the variable of $pBest$.

$$r_{ij}^{t+1} = \begin{cases} \hat{r}_{g,j} + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t \neq \hat{r}_{g,j} \text{ and } \rho_{[0,1]} \in [0, C_g = c_g) \\ \hat{r}_{i,j} + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t \neq \hat{r}_{i,j} \text{ and } \rho_{[0,1]} \in [C_p, C_p = C_g + c_p) \\ r_{ij}^t + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t = \hat{r}_{g,j} \text{ or } \rho_{[0,1]} \in [C_p, C_w = C_p + c_w) \\ r_{ij}^t + \rho_{[-.5,.5]} \cdot (r_{ij}^t - \hat{r}_{g,j}) & \text{if } r_{ij}^t \neq \hat{r}_{g,j} \text{ and } \rho_{[0,1]} \in [C_w, 1] \end{cases} \quad (15)$$

where

$$u_j = \frac{r_j^{\min} - r_j^{\max}}{2 \left(\frac{\text{Ngen} + t}{\text{Ngen}} \right) \cdot \text{Nvar}} \quad (16)$$

The parameter u_j in iSSO is mainly used to determine the search range of variables, and it was a constant value in original iSSO. To make the search range vary in different generations and to enhance the local search ability in the later generations, the new u_j is proposed and shown as Eq. (16).

If the updated variable r_{ij}^{t+1} exceeds the upper and lower bounds, a new value within the upper and lower bounds is randomly generated as the value of r_{ij}^{t+1} .

4.3. The two-stage parameter C_g

The C_g parameter in previous SSO studies is mostly constant in every generation [20, 32, 38], but in this study, the impact of $gBest$ is adjusted by adjusting the C_g parameter. The first half generations of C_g is 0, and the original value is recovery after

$$F_R(X) = \begin{cases} R_s & \text{if } X = (N, R) \text{ is a feasible solution} \\ R_s \left(\text{Min} \left\{ \left[\frac{V_{ub}}{g_v(N, R)} \right], \left[\frac{C_{ub}}{g_c(N, R)} \right], \left[\frac{W_{ub}}{g_w(N, R)} \right] \right\} \right)^\gamma & \text{otherwise} \end{cases} \quad (18)$$

half the generations, which is a two-stage C_g , as in Eq. (17). Such an adjustment can preserve the diversity of solutions in the initial stage and improve the solution quality in the later stage by referring to the global best solution.

$$C_g = \begin{cases} 0 & \text{if } t < \text{Ngen}/2 \\ c_g & \text{otherwise} \end{cases} \quad (17)$$

4.4. Penalized reliability function and

fitness function

Aiming at solving infeasible solutions that violate at least one constraint, the fitness function in the proposed BSSO is an adapted penalty reliability function that encourages the exploration of all possible solutions, both feasible and infeasible, in the solution space near the feasible solution bounds [11, 15, 22].

When a solution is obtained, the reliability of each subsystem in the system can be calculated, then the system reliability of whole GRRAP can be obtained by BAT network reliability method. C_{ub} , V_{ub} and W_{ub} are the upper bounds for the network cost, volume limit, and weight limit for the network, respectively. For a solution X with a total system cost $g_c(N, R)$, volume $g_v(N, R)$, and weight $g_w(N, R)$, the fitness function is calculated that showed in Eq. (18).

if $X = (N, R)$ is a feasible solution

otherwise

However, since BSSO already uses multi-state BAT to filter out integer combinations of variables that violate the volume and weight limits. Therefore, all the solutions updated by BSSO satisfy the volume and weight limits, which also leads to a penalty function that only needs to penalize solutions that violate the cost constraint. The fitness function in BSSO becomes as Eq. (19) shows.

$$F_R(X) = \begin{cases} R_s & \text{if } X = (N, R) \text{ is a feasible solution} \\ R_s \left(\frac{C_{ub}}{g_c(N, R)} \right)^\gamma & \text{otherwise} \end{cases} \quad (19)$$

4.5. Procedure of the proposed BSSO

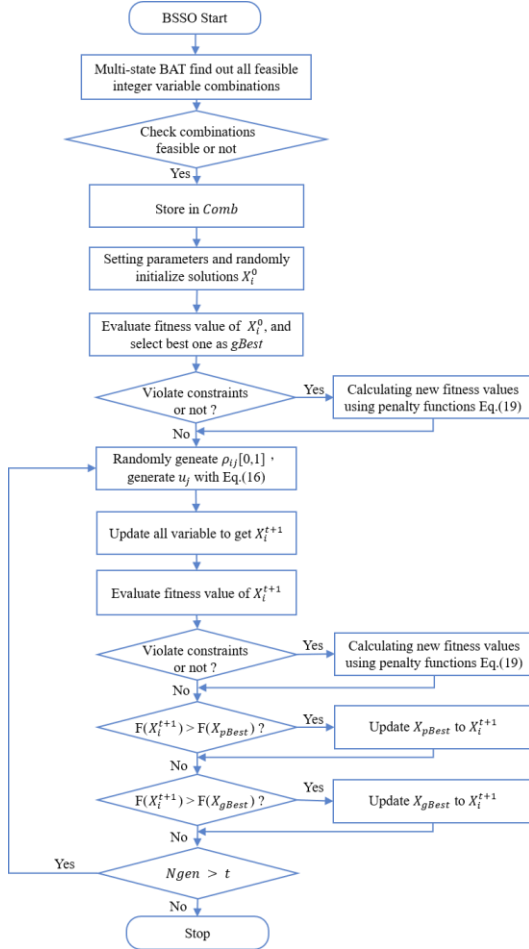


Fig. 5. Procedure of the proposed BSSO.

5. Numerical example

5.1. Experimental setup

The type of N-UM, whether the parameter C_g changes, whether $pBest$ is added back to R-UM, and whether u_j in R-UM changes are the four factors incorporated in the proposed algorithm. Each of these four factors has two levels shown as Table 7, and the experimental design using $L_8(2^4)$ orthogonal array produced a total of eight

combinations in Ex1 (Table 8). All tested algorithms were coded in Python version 3.8 and run on a desktop computer with AMD Ryzen 5 3600 processor, 3.59 GHz, 16 GB RAM, and Windows 10

For each tested algorithm, the number of solutions was set to 100 ($N_{sol} = 100$), the number of independent runs was set to 50, and the stopping criterion, i.e., the number of generators, was set to a maximum of 1000 ($N_{gen} = 1000$). Each solution in each algorithm was used to calculate the fitness function for that generation once. In addition, the fitness functions of all the algorithms are used in the method described in Section 3.1. The γ in the Penalized reliability function is set to 3 with reference to the previous study [22].

All parameters required for GA, PSO, SSO, and nine combinations of Ex1 and Ex2 (including BSSO) are listed below:

BSSO: $C_g = 0.25$, $C_p = 0.5$, and $C_w = 0.6$ (combination 8)

GA: Uniform mutation with a mutation rate of 0.4, two-point crossover with a crossover rate of 0.6, and elite selection

PSO: $w_{max} = 0.9$, $w_{min} = 0.4$, $c_1 = 2$, $c_2 = 2$, w is linearly decreased from w_{max} to w_{min}

SSO: $C_g = 0.25$, $C_p = 0.5$, and $C_w = 0.6$ (combination 1)

Six benchmark problems in the field of network reliability were used to test all relevant algorithms, and all of them were adjusted to AON networks, as shown in Fig.7.

Table 7 Factor level table

Fact or	Level 1	Level 2
N- UM	$n_{ij}^{t+1} = \begin{cases} \hat{n}_{g,j} & \text{if } \rho_{ij}^t \in [0, C_g) \\ \hat{n}_{i,j} & \text{if } \rho_{ij}^t \in [C_p, C_P) \\ n_{ij}^t & \text{if } \rho_{ij}^t \in [C_w, C_w) \\ n & \text{if } \rho_{ij}^t \in [C_w, 1) \end{cases}$	$comb_i^{t+1} = \begin{cases} \widehat{comb}_g & \text{if } \rho_i^t \in [0, C_g) \\ \widehat{comb}_i & \text{if } \rho_i^t \in [C_p, C_P) \\ comb_i^t & \text{if } \rho_i^t \in [C_w, C_w) \\ comb & \text{if } \rho_i^t \in [C_w, 1) \end{cases}$
C_g	$C_g = c_g$	$C_g = \begin{cases} 0 & \text{if } t < \text{Ngen}/2 \\ c_g & \text{otherwise} \end{cases}$
R- UM	$r_{ij}^{t+1} = \begin{cases} \hat{r}_{g,j} + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t \neq \hat{r}_{g,j} \text{ and } \rho_{[0,1]} \in [0, .5) \\ r_{ij}^t + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t = \hat{r}_{g,j} \text{ or } \rho_{[0,1]} \in [.5, 1) \\ r_{ij}^t + \rho_{[-.5,.5]} \cdot (r_{ij}^t - \hat{r}_{g,j}) & \text{if } r_{ij}^t \neq \hat{r}_{g,j} \text{ and } \rho_{[0,1]} \in [.5, 1) \end{cases}$	$r_{ij}^{t+1} = \begin{cases} \hat{r}_{g,j} + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t \neq \hat{r}_{g,j} \text{ and } \rho_{[0,1]} \in [0, .5) \\ \hat{r}_{i,j} + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t \neq \hat{r}_{g,j} \text{ and } \rho_{[0,1]} \in [.5, 1) \\ r_{ij}^t + \rho_{[-.5,.5]} \cdot u_j & \text{if } r_{ij}^t = \hat{r}_{g,j} \text{ or } \rho_{[0,1]} \in [0, .5) \\ r_{ij}^t + \rho_{[-.5,.5]} \cdot (r_{ij}^t - \hat{r}_{g,j}) & \text{if } r_{ij}^t \neq \hat{r}_{g,j} \text{ and } \rho_{[0,1]} \in [.5, 1) \end{cases}$
u_j	$u_j = \frac{r_j^{\min} - r_j^{\max}}{2 \cdot \text{Nvar}}$	$u_j = \frac{r_j^{\min} - r_j^{\max}}{2(\frac{\text{Ngen} + t}{\text{Ngen}}) \cdot \text{Nvar}}$

The first four benchmark problems are the same as those used in GRAP [15], and two additional larger networks are added [23]. It is worth noting that the first four benchmark problems are used in Ex1 to test the performance of the algorithm combinations, while Ex2 uses all benchmark problems for the comparison of the algorithms.

In all six benchmark problems, the

reliability, cost, volume, and weight of each component are based on the data from the RRAP research of Hikita et al. and Dhingra [14, 39]. Detailed data are listed in the Appendix. In addition, to make the results more distinguishable, adjustments will be made for the three limitations of cost, volume, and weight. Let the notation F_{avg} , F_{max} , F_{min} , and F_{stdev} , indicate the mean, maximum (best), minimum (worst), and

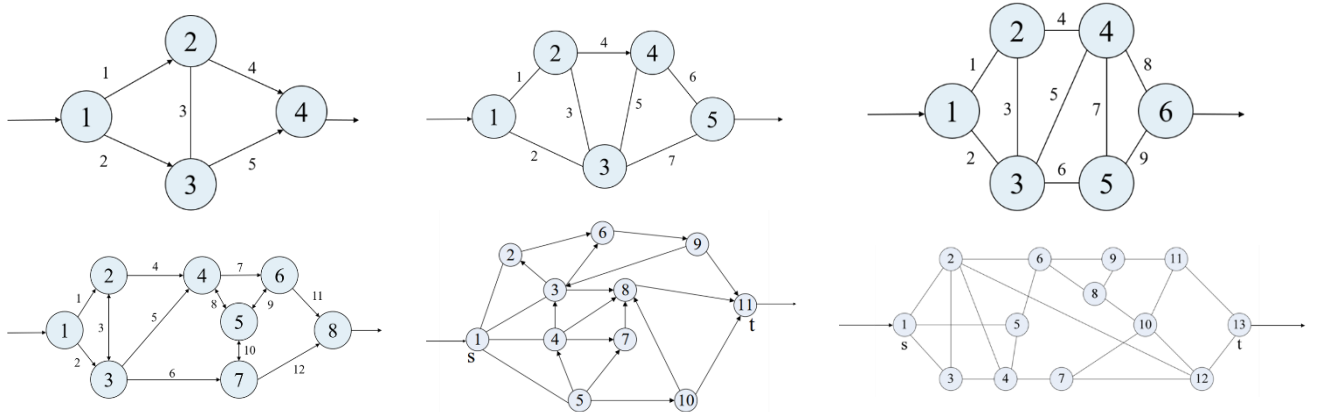


Fig. 6. Network diagram of the six benchmark problems.

standard deviation, respectively. Let T_{avg} be the average running time. In addition, the bold values denote the best results of the test problem.

5.2. Ex1: finding the best combination

The result of the 50 independent experiments for each of the 8 combinations is shown in Table 9-14. The values in the table are the fitness values obtained by the algorithm.

Table 9 Overall results of eight combinations for BSSO in benchmark 1.

N o.	F _{avg}	F _{stdev}	F _{max}	F _{min}
1	0.9758 844807	0.0013 448597	0.9765 968718	0.9712 918309
2	0.9758 797390	0.0016 140715	0.9766 026878	0.9714 137324
3	0.9758 847098	0.0015 017933	0.9766 216746	0.9713 328318
4	0.9762 916136	0.0002 258091	0.9766 010825	0.9752 591320
5	0.9765 582325	0.0000 517135	0.9766 346548	0.9763 452985
6	0.9765 221505	0.0000 567250	0.9766 289410	0.9764 161625
7	0.9764 037829	0.0001 493598	0.9766 303825	0.9758 557315
8	0.9765 765892	0.0000 296157	0.9766 322743	0.9765 144736
9	0.9764 926010	0.0000 769853	0.9766 205061	0.9763 310255

Table 10 Overall results of eight combinations for BSSO in benchmark 2.

N o.	F _{avg}	F _{stdev}	F _{max}	F _{min}
1	0.9950 529947	0.0002 522171	0.9953 591780	0.9945 261946
2	0.9952 300200	0.0001 442508	0.9953 623098	0.9947 635892
3	0.9951 118221	0.0002 758800	0.9953 634134	0.9939 635610
4	0.9952 156178	0.0000 927362	0.9953 817582	0.9949 017554
5	0.9952 539071	0.0002 195056	0.9954 502752	0.9947 238361
6	0.9952 611711	0.0001 761174	0.9954 424849	0.9947 251596

7	0.9952 629972	0.0001 303164	0.9953 937764	0.9948 250707
8	0.9953 583757	0.0000 315751	0.9954 298077	0.9952 747159

Table 11 Overall results of eight combinations for BSSO in benchmark 3.

N o.	F _{avg}	F _{stdev}	F _{max}	F _{min}
1	0.9954 575001	0.0005 549384	0.9963 741061	0.9933 866372
2	0.9957 516843	0.0004 278140	0.9964 189726	0.9942 283490
3	0.9956 640209	0.0002 935374	0.9963 832146	0.9950 776347
4	0.9955 978581	0.0002 998385	0.9963 022427	0.9950 291115
5	0.9958 348099	0.0003 981162	0.9964 173750	0.9952 408678
6	0.9958 385357	0.0003 676733	0.9964 105251	0.9951 445707
7	0.9957 038251	0.0003 623215	0.9963 950593	0.9950 261873
8	0.9963 297279	0.0001 770982	0.9964 272846	0.9956 984483

Table 12 Overall results of eight combinations for BSSO in benchmark 4.

N o.	F _{avg}	F _{stdev}	F _{max}	F _{min}
1	0.9983 664768	0.0009 099681	0.9989 740925	0.9937 572894
2	0.9987 179769	0.0002 807252	0.9990 856572	0.9978 838841
3	0.9984 959950	0.0004 580234	0.9990 787505	0.9971 666361
4	0.9986 088023	0.0003 206662	0.9989 868418	0.9975 749729
5	0.9987 356853	0.0003 618973	0.9991 471500	0.9977 291209
6	0.9988 241703	0.0002 615493	0.9991 321419	0.9979 941116
7	0.9986 470691	0.0002 923474	0.9991 002030	0.9979 033734
8	0.9990 157953	0.0000 877533	0.9991 517465	0.9988 319879

From the experimental results, it is observed that combination 8 has the best average value for all benchmark problems. For the maximum values, the best results are obtained in benchmark 3 and 4 and the

average results. Overall, the algorithm of combination 8 (all factors set at level 2) has the best performance in the first four benchmark problems.

The above observations were further investigated using statistical analysis to find the effect of each factor on the response values. Analysis of Variance, main effects analysis and interaction analysis will be performed. Through these results, the optimal combination of factor levels will be identified. The following benchmark problem 4 is taken as an illustration, and the rest of the detailed results can be seen in the Appendix.

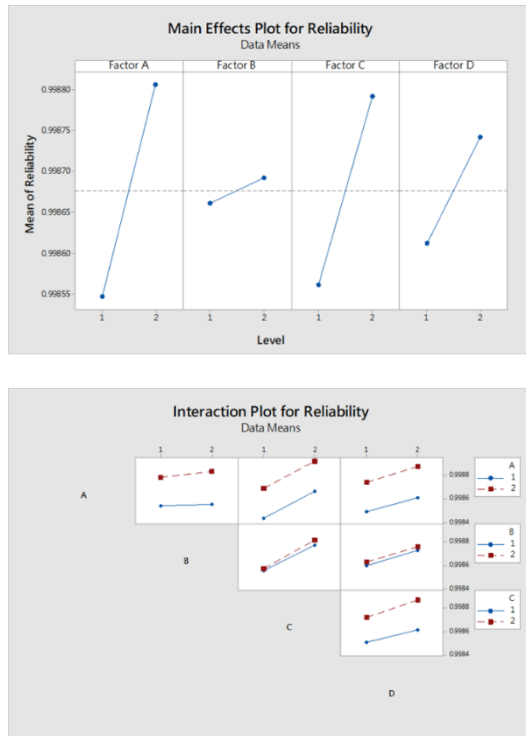


Fig. 4. Main effects analysis and interaction analysis for reliability of benchmark 4.

Table 4 ANOVA table for reliability of benchmark 4.

Source	D F	SS	MS	F-value	P-value
A	1	0.00	0.00	372	0.00

		0000	0000	.14	0***
B	1	0.00	0.00	5.3	0.10
		0000	0000	0	5
C	1	0.00	0.00	295	0.00
		0000	0000	.88	0***
D	1	0.00	0.00	93.	0.00
		0000	0000	83	2**
Error	3	0.00	0.00		
		0000	0000		
Total	7	0.00	0.00		
		0000	0000		
S=0.00		R-Sq=99.6%		R-Sq	
001894				(adj)=	
				99.1%	

* $P \leq 0.05$, ** $P \leq 0.01$, *** $P \leq 0.001$

From the main effects and interaction analysis in Fig. 8, we can observe that all the factors have better responses when they are set at level 2. The ANOVA in Table 15 shows that the p-values of the three factors A, C, and D are less than 0.05, reject the null hypothesis and showing a significant effect on the response values when the confidence level is 95%.

Based on the above analysis, we can see that the way of finding all feasible combinations of integer variables with multi-state BAT (Factor A) has a significant impact on the improvement of the solution results. Moreover, since combination 8 is the best one, it will also be the final version of BSSO.

5.3. Ex2: comparing the GA, PSO, SSO, and BSSO

5.3.1. Solution comparison

It can be observed from Table 14 that the proposed BSSO has the best performance in all problems in terms of F_{avg} , F_{min} , and F_{stddev} of the fitness values. However, in terms of the F_{max} , although PSO performs better in benchmark 1-3, the difference with BSSO is very small. But as the size of the problem increases, F_{max} of BSSO

outperforms the algorithms in benchmark 4-6. Since PSO is better at updating continuous variables, the disadvantage of PSO in updating integer variables is not obvious when the problem size is small. When the problem size increases, the disadvantage becomes obvious, resulting in worse results than the other algorithms. In terms of overall results, BSSO is the best performing algorithm in terms of solution quality, obtaining higher quality solutions for each problem of different sizes.

According to Table 14, the T_{avg} of BSSO is the shortest in problems 1-4. The reason is that BSSO has used multi-state BAT to find

out the solutions that satisfy the weight and volume limits. Therefore, there is no need to recalculate and check the volume and weight of the solutions during the iterative process. The rest of the algorithms require a lot of volume and weight calculations during the iterative process to be applied to the penalized fitness function. However, in problems 5-6, as the problem expands, the time required to find all feasible combinations of variables in the multi-state BAT increases significantly, resulting in a higher T_{avg} for the BSSO than the other algorithms. Based on the result, it can be found that even for larger problems, if the

Table 14 BSSO, GA, PSO, and SSO results.

ID	method	F_{avg}	F_{max}	F_{min}	F_{stddev}	T_{avg}
1	BSSO	0.976577	0.976646	0.976462	0.000038	2.307349
	GA	0.970359	0.976507	0.957192	0.005123	3.924821
	PSO	0.974756	0.976649	0.971617	0.002402	3.499959
	SSO	0.975762	0.976550	0.971143	0.001480	2.819058
2	BSSO	0.995362	0.995430	0.995258	0.000036	2.925581
	GA	0.993871	0.995250	0.988281	0.001643	3.879048
	PSO	0.995025	0.995483	0.991496	0.000916	4.418789
	SSO	0.995067	0.995362	0.994173	0.000271	3.669631
3	BSSO	0.996283	0.996423	0.995628	0.000243	3.628899
	GA	0.993580	0.996165	0.988294	0.002173	4.690570
	PSO	0.995660	0.996430	0.992077	0.000611	5.399903
	SSO	0.995379	0.996418	0.993021	0.000615	4.530452
4	BSSO	0.999025	0.999152	0.998839	0.000096	7.105688
	GA	0.997749	0.999027	0.990882	0.001337	7.873402
	PSO	0.997568	0.999019	0.993861	0.001351	8.975268
	SSO	0.998540	0.999118	0.996217	0.000545	7.831062
5	BSSO	0.995358	0.995847	0.994120	0.000406	57.682561
	GA	0.985215	0.995002	0.938137	0.009893	57.268283
	PSO	0.956265	0.987118	0.845108	0.029860	59.371770
	SSO	0.986015	0.994312	0.970786	0.006025	56.580192
6	BSSO	0.987793	0.988890	0.985012	0.000826	155.586186
	GA	0.966887	0.987143	0.886465	0.016875	154.577601
	PSO	0.761224	0.952302	0.361390	0.142731	156.991670
	SSO	0.930147	0.982299	0.821940	0.043094	152.319698
Avg	BSSO	0.991733	0.992065	0.990886	0.000274	38.206044
	GA	0.984610	0.991516	0.958208	0.006174	38.702287
	PSO	0.946750	0.984500	0.859258	0.029645	39.776227
	SSO	0.980152	0.990676	0.957880	0.008672	37.958349

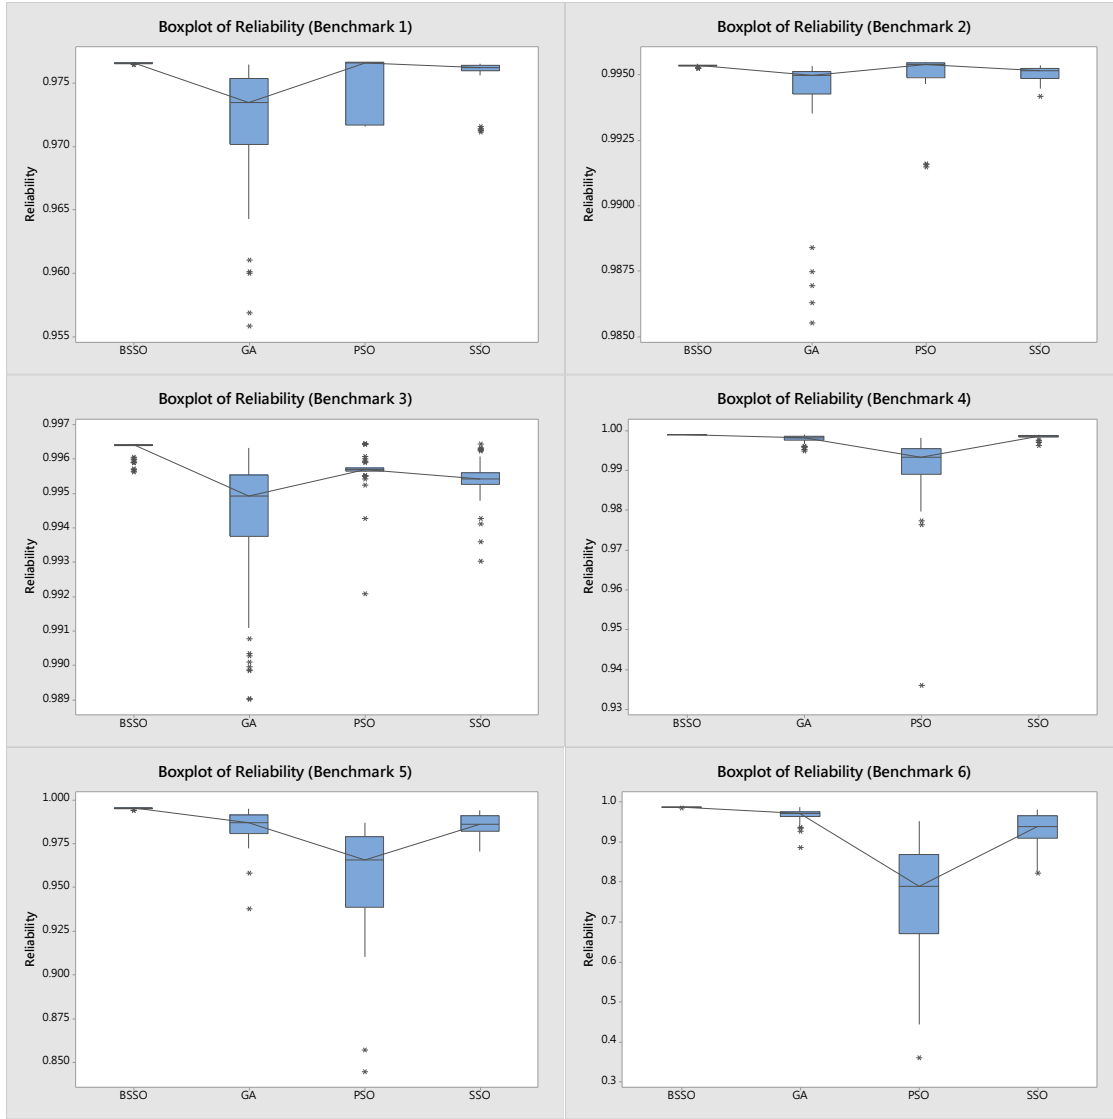


Fig.8. Boxplot for the reliability in Ex2.

problem weight and volume restrictions are strict enough. Even if BSSO additionally uses multi-state BAT to find out all feasible integer variable combinations, it does not take too much computation time, making the overall computation time is similar or even faster than other algorithms.

Based on Table 14, it is observed that BSSO has the smallest F_{stddev} in all benchmarks. This means that BSSO has been able to obtain stable results in several independent experiments. Also, the standard deviation of BSSO does not significantly change when facing different problems

because of the difference in the number of nodes and network structure. The boxplot in Fig.8 also shows that the distribution of BSSO fitness values is highly consistent across all benchmark problems, and there are few outliers. It can be seen that BSSO performs much better than the other three algorithms (GA, PSO, and SSO) in terms of stability

6. Conclusion

In this study, a GRRAP problem and a new soft computing method BSSO are proposed. The proposed BSSO is a combination of

multi-state BAT and SSO with iSSO, and some update mechanisms are adjusted for GRRAP. The BAT method is then used for network reliability calculation. The traditional RRAP is a common reliability design problem. The proposed GRRAP is an extension of RRAP, which allows the system configuration to be extended to general network structure without the limit of series or series-parallel connection, making the application scope more extensive.

The proposed BSSO performs the best in the comparison experiments with GA, PSO, and SSO, and not only obtains high quality solutions but also has high stability. From the experimental results, BSSO is a promising soft computing method that combines the efficiency of SSO with the accuracy of BAT.


The proposed GRRAP is an NP-hard problem, especially the network reliability is very difficult to solve. Even though the BAT method is one of the most efficient methods to calculate the binary-state network reliability, it still requires a very large amount of computation time when the network system is scaled up. Therefore, in the future, it may be possible to use Monte Carlo simulation method to obtain approximate values of network reliability instead of exact values to reduce the computation burden [40]. In addition, the proposed GRRAP can be extended to more types of redundant strategies such as cold-standby and mixed-standby. Ultimately, BSSO is expected to be applied to problems in different fields.

APPENDIX

Table 1 Data from the six GRRAP test

problems.								
ID	i	$10^5 \alpha_i$	β_i	$w_i v_i^2$	w_i	V	C	W
1	1	1.0	1.5	1	6	50	80	100
	2	2.3	1.5	2	6			
	3	0.3	1.5	3	8			
	4	2.3	1.5	2	7			
2	1	2.330	1.5	1	7	110	175	200
	2	1.450	1.5	2	8			
	3	0.541	1.5	3	8			
	4	8.050	1.5	4	6			
	5	1.950	1.5	2	9			
3 and 4	1	2.5	1.5	2	3.5	220	210	120
	2	1.45	1.5	4	4.0	285	280	160
	3	0.541	1.5	5	4.0			
	4	0.541	1.5	8	3.5			
	5	2.1	1.5	4	4.5			
	6	2.1	1.5	4	4.5			
	7	1.45	1.5	4	4.0			
	8	0.541	1.5	5	4.0			
5 and 6	1	2.5	1.5	2	3.5	225	225	130
	2	1.45	1.5	4	4.0	225	225	130
	3	0.541	1.5	5	4.0			
	4	0.541	1.5	8	3.5			
	5	2.1	1.5	4	4.5			
	6	2.5	1.5	2	3.5			
	7	1.45	1.5	4	4.0			
	8	0.541	1.5	5	4.0			
	9	0.541	1.5	8	3.5			
	10	2.1	1.5	4	4.5			
	11	2.5	1.5	2	3.5			
	12	1.45	1.5	4	4.0			
	13	0.541	1.5	5	4.0			

Statistical analysis of benchmark problem 1

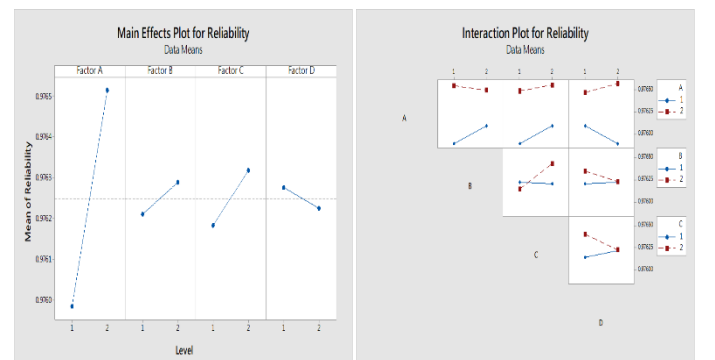


Source	D	SS	MS	F-value	P-value
A	1	0.000000	0.000000	372.14	0.000***

B	1	0.00	0.00	5.3	0.10
		0000	0000	0	5
C	1	0.00	0.00	295	0.00
		0000	0000	.88	0***
D	1	0.00	0.00	93.	0.00
		0000	0000	83	2**
Error	3	0.00	0.00		
		0000	0000		
Total	7	0.00	0.00		
		0000	0000		
S=0.00		R-Sq=99.6%		R-Sq	
001894				(adj)=	
				99.1%	

* $P \leq 0.05$, ** $P \leq 0.01$, *** $P \leq 0.001$

Statistical analysis of benchmark problem 2

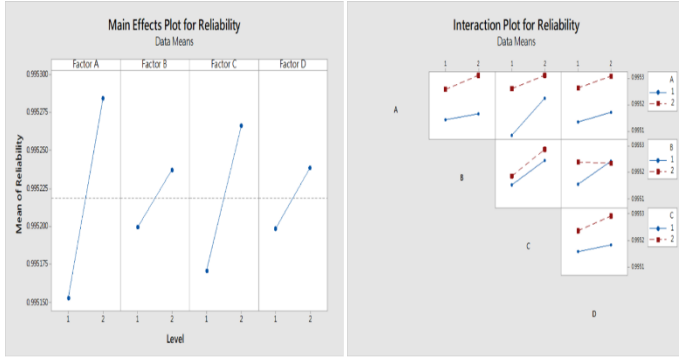

Source	D	SS	MS	F-value	P-value
	F				
A	1	0.00	0.00	372	0.00
		0000	0000	.14	0***
B	1	0.00	0.00	5.3	0.10
		0000	0000	0	5
C	1	0.00	0.00	295	0.00
		0000	0000	.88	0***
D	1	0.00	0.00	93.	0.00
		0000	0000	83	2**
Error	3	0.00	0.00		
		0000	0000		
Total	7	0.00	0.00		
		0000	0000		
S=0.00		R-Sq=99.6%		R-Sq	
001894				(adj)=	
				99.1%	

Statistical analysis of benchmark problem 3

Source	D	SS	MS	F-value	P-value
	F				
A	1	0.00	0.00	372	0.00
		0000	0000	.14	0***

B	1	0.00	0.00	5.3	0.10
		0000	0000	0	5
C	1	0.00	0.00	295	0.00
		0000	0000	.88	0***
D	1	0.00	0.00	93.	0.00
		0000	0000	83	2**
Error	3	0.00	0.00		
		0000	0000		
Total	7	0.00	0.00		
		0000	0000		
S=0.00		R-Sq=99.6%		R-Sq	
001894				(adj)=	
				99.1%	

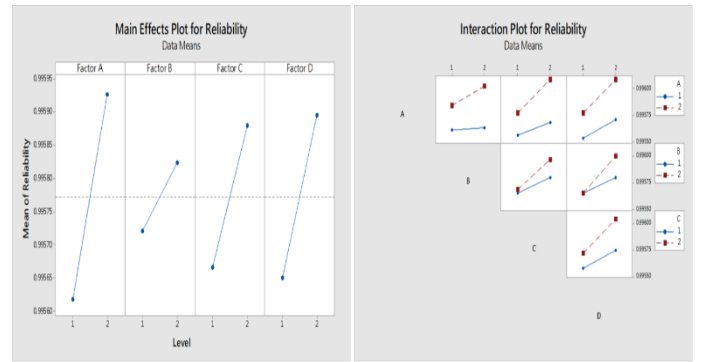


Table 2 The final results obtained from BSSO, GA, PSO, and SSO in benchmark 1

	BSSO	GA	PSO	SSO
n	(2, 1, 2, 3)	(2, 1, 2, 3)	(2, 1, 2, 3)	(2, 1, 2, 3)
r_1	0.8945	0.8933	0.8945	0.8917
	28	14	98	24
r_2	0.5837	0.5262	0.5841	0.6029
	16	31	60	20
r_3	0.9048	0.9134	0.9041	0.8993
	96	04	67	54
r_4	0.7948	0.7941	0.7951	0.8010
	40	01	76	45
R	0.9766	0.9765	0.9766	0.9765
	455382	070256	489194	497536

Table 3 The final results obtained from BSSO, GA, PSO, and SSO in benchmark 2

	BSSO	GA	PSO	SSO
n	(3, 2, 3, 1, 3)	(3, 1, 3, 2, 3)	(3, 1, 3, 1, 3)	(3, 1, 3, 2, 3)
r_1	0.8741	0.8655	0.8748	0.8730
	85	31	80	16
r_2	0.2093	0.5593	0.1070	0.3393
	94	55	96	25
r_3	0.9055	0.9004	0.9062	0.9015
	45	67	50	38
r_4	0.0512	0.1568	0.0034	0.1490

	40	75	64	29
r_5	0.8793	0.8855	0.8797	0.8798
	03	46	00	99
R	0.9954	0.9952	0.9954	0.9953
	302822	496200	830911	616775

Table 4 The final results obtained from BSSO, GA, PSO, and SSO in benchmark 3

	BSSO	GA	PSO	SSO
n	(4, 2, 2, 2, 2, 3)	(4, 2, 2, 2, 2, 3)	(4, 2, 2, 2, 2, 3)	(4, 2, 2, 2, 2, 3)
r_1	0.8222	0.8264	0.8239	0.8253
	30	97	81	10
r_2	0.7912	0.7701	0.7859	0.7903
	77	10	51	78
r_3	0.8992	0.8925	0.9006	0.9006
	35	43	24	73
r_4	0.9093	0.9217	0.9062	0.9073
	21	81	48	59
r_5	0.7522	0.7926	0.7556	0.7598
	24	19	41	26
r_6	0.8839	0.8740	0.8840	0.8818
	95	94	28	32
R	0.9964	0.9961	0.9964	0.9964
	225431	651960	295536	181892

Table 5 The final results obtained from BSSO, GA, PSO, and SSO in benchmark 4

	BSSO	GA	PSO	SSO
n	(4, 1, 3, 2, 1, 3, 2, 3)	(4, 1, 3, 2, 1, 3, 2, 3)	(4, 2, 3, 3, 1, 2, 2, 3)	(4, 1, 3, 2, 1, 3, 2, 3)
r_1	0.8691	0.8815	0.8636	0.8668
	02	54	42	16
r_2	0.7474	0.8440	0.7381	0.7561
	83	46	19	88
r_3	0.9189	0.9093	0.8918	0.9179
	43	95	12	46
r_4	0.8675	0.8783	0.8358	0.8306
	83	73	01	82
r_5	0.0455	0.4128	0.0072	0.3959
	60	48	47	14
r_6	0.8430	0.8188	0.8719	0.8617
	24	31	62	46
r_7	0.8263	0.8316	0.8775	0.7887
	62	78	87	41
r_8	0.9396	0.9271	0.9406	0.9396
	76	40	07	36
R	0.9991	0.9990	0.9990	0.9991
	521239	273441	188162	178284

Table 6 The final results obtained from BSSO, GA, PSO, and SSO in benchmark 5

	BSSO	GA	PSO	SSO
n	(4, 1, 2, 2, 1, 1, 1, 2, 1, 1, 3)	(4, 1, 2, 1, 1, 1, 1, 2, 2, 1, 3)	(3, 1, 1, 3, 1, 2, 1, 2, 2, 1, 3)	(4, 1, 2, 2, 1, 1, 1, 2, 2, 1, 3)
r_1	0.8194	0.8261	0.8081	0.8175
	61	85	99	91
r_2	0.3284	0.7082	0.5206	0.8819
	71	76	56	20
r_3	0.8396	0.9179	0.8504	0.8145
	79	17	98	36
r_4	0.8320	0.8048	0.9013	0.8359
	91	05	71	15
r_5	0.7289	0.7565	0.3395	0.7688
	13	13	34	97
r_6	0.7016	0.6332	0.6183	0.5870
	51	88	81	87
r_7	0.2126	0.2617	0.5491	0.3102
	58	01	34	95
r_8	0.9293	0.9164	0.8738	0.9228
	99	31	75	94
r_9	0.8268	0.6250	0.6868	0.7097
	25	82	49	09
r_{10}	0.7186	0.6602	0.3275	0.6195
	45	09	90	31
r_{11}	0.8778	0.8709	0.8786	0.8639
	40	55	76	55
R	0.9958	0.9950	0.9871	0.9943
	472260	017722	182661	118982

Table 7 The final results obtained from BSSO, GA, PSO, and SSO in benchmark 6

	BSSO	GA	PSO	SSO
n	(3, 2, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 2, 3)	(3, 2, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 2, 3)	(3, 2, 1, 2, 1, 1, 1, 2, 1, 2, 1, 1, 1, 2)	(3, 2, 1, 1, 1, 1, 1, 2, 1, 1, 1, 1, 1, 3)
r_1	0.8508	0.8256	0.8014	0.8246
	77	79	71	37
r_2	0.8802	0.8832	0.8747	0.8943
	93	52	90	84
r_3	0.7960	0.7662	0.5103	0.5925
	28	02	77	95
r_4	0.8562	0.8677	0.6703	0.5465
	32	86	00	53
r_5	0.7239	0.7638	0.7682	0.6811
	35	54	64	09
r_6	0.7271	0.7277	0.5243	0.8282
	90	57	62	41
r_7	0.8131	0.8547	0.8061	0.7426
	93	28	82	63
r_8	0.5829	0.6556	0.2004	0.7634
	16	42	53	98
r_9	0.8232	0.7177	0.5446	0.3657
	78	25	11	07

r_{10}	0.6582 54	0.7196 60	0.7692 57	0.6023 30
r_{11}	0.6724 13	0.5976 52	0.8308 24	0.4142 48
r_{12}	0.8874 37	0.8371 89	0.9327 18	0.8856 17
r_{13}	0.8937 25	0.9393 90	0.8844 80	0.9176 33
R	0.9888 899307	0.9871 433406	0.9523 024807	0.9822 988387

Reference

- [1] P. Kubat, "Estimation of reliability for communication/computer networks simulation/analytic approach," *IEEE Transactions on Communications*, vol. 37, no. 9, pp. 927-933, 1989.
- [2] M. L. Shooman, *Reliability of computer systems and networks*. Wiley Online Library, 2002.
- [3] C. J. Colbourn, *The combinatorics of network reliability*. Oxford University Press, Inc., 1987.
- [4] D. R. Shier, *Network reliability and algebraic structures*. Clarendon Press, 1991.
- [5] W.-C. Yeh and J.-S. Lin, "New parallel swarm algorithm for smart sensor systems redundancy allocation problems in the Internet of Things," *The Journal of Supercomputing*, vol. 74, no. 9, pp. 4358-4384, 2016, doi: 10.1007/s11227-016-1903-8.
- [6] T. Aven, "Availability evaluation of oil/gas production and transportation systems," *Reliability engineering*, vol. 18, no. 1, pp. 35-44, 1987.
- [7] A. Soltani-Sobh, K. Heaslip, A. Stevanovic, J. El Khoury, and Z. Song, "Evaluation of transportation network reliability during unexpected events with multiple uncertainties," *International journal of disaster risk reduction*, vol. 17, pp. 128-136, 2016.
- [8] D. W. Coit and A. E. Smith, "Reliability optimization of series-parallel systems using a genetic algorithm," *IEEE Transactions on reliability*, vol. 45, no. 2, pp. 254-260, 1996.
- [9] D. E. Fyffe, W. W. Hines, and N. K. Lee, "System reliability allocation and a computational algorithm," *IEEE Transactions on Reliability*, vol. 17, no. 2, pp. 64-69, 1968.
- [10] F. A. Tillman, C.-L. Hwang, and W. Kuo, "Determining component reliability and redundancy for optimum system reliability," *IEEE Transactions on Reliability*, vol. 26, no. 3, pp. 162-165, 1977.
- [11] T.-J. Hsieh and W.-C. Yeh, "Penalty guided bees search for redundancy allocation problems with a mix of components in series-parallel systems," *Computers & Operations Research*, vol. 39, no. 11, pp. 2688-2704, 2012.
- [12] W. Kuo and R. Wan, "Recent advances in optimal reliability allocation," *IEEE Transactions on Systems, Man, and Cybernetics-Part A: Systems and Humans*, vol. 37, no. 2, pp. 143-156, 2007.

- [13] W. Kuo and V. R. Prasad, "An annotated overview of system-reliability optimization," *IEEE Transactions on reliability*, vol. 49, no. 2, pp. 176-187, 2000.
- [14] M. Hikita, Y. Nakagawa, K. Nakashima, and H. Narihisa, "Reliability optimization of systems by a surrogate-constraints algorithm," *IEEE Transactions on Reliability*, vol. 41, no. 3, pp. 473-480, 1992.
- [15] W.-C. Yeh, "A new exact solution algorithm for a novel generalized redundancy allocation problem," *Information Sciences*, vol. 408, pp. 182-197, 2017.
- [16] W.-C. Yeh and T.-J. Hsieh, "Solving reliability redundancy allocation problems using an artificial bee colony algorithm," *Computers & Operations Research*, vol. 38, no. 11, pp. 1465-1473, 2011.
- [17] Y.-C. Hsieh, T.-C. Chen, and D. L. Bricker, "Genetic algorithms for reliability design problems," *Microelectronics Reliability*, vol. 38, no. 10, pp. 1599-1605, 1998.
- [18] H. Kim and P. Kim, "Reliability-redundancy allocation problem considering optimal redundancy strategy using parallel genetic algorithm," *Reliability Engineering & System Safety*, vol. 159, pp. 153-160, 2017.
- [19] T.-C. Chen, "IAs based approach for reliability redundancy allocation problems," *Applied Mathematics and Computation*, vol. 182, no. 2, pp. 1556-1567, 2006.
- [20] W.-C. Yeh, V. Y. Y. Chung, Y.-Z. Jiang, and X. He, "Solving reliability redundancy allocation problems with orthogonal simplified swarm optimization," in *2015 International Joint Conference on Neural Networks (IJCNN)*, 2015: IEEE, pp. 1-7.
- [21] W.-C. Yeh, "A novel boundary swarm optimization method for reliability redundancy allocation problems," *Reliability Engineering & System Safety*, vol. 192, p. 106060, 2019.
- [22] C.-L. Huang, "A particle-based simplified swarm optimization algorithm for reliability redundancy allocation problems," *Reliability Engineering & System Safety*, vol. 142, pp. 221-230, 2015.
- [23] W.-C. Yeh, "Novel binary-addition tree algorithm (BAT) for binary-state network reliability problem," *Reliability Engineering & System Safety*, vol. 208, p. 107448, 2021.
- [24] W.-C. Yeh, "A two-stage discrete particle swarm optimization for the problem of multiple multi-level redundancy allocation in series systems," *Expert Systems with Applications*, vol. 36, no. 5, pp. 9192-9200, 2009.
- [25] W.-C. Yeh and C.-C. Kuo, "Predicting and Modeling Wildfire Propagation Areas with BAT and Maximum-State PageRank,"

- Applied Sciences*, vol. 10, no. 23, p. 8349, 2020.
- [26] W. Yeh, W. Zhu, and N. Xiong, "Predicting Spread Probability of Learning-Effect Computer Virus," *IEEE Access*, 2020.
- [27] Y.-Z. Su and W.-C. Yeh, "Binary-addition tree algorithm-based resilience assessment for binary-state network problems," *Electronics*, vol. 9, no. 8, p. 1207, 2020.
- [28] W.-C. Yeh, Z. Hao, M. Forghani-elahabad, G.-G. Wang, and Y.-L. Lin, "Novel binary-addition tree algorithm for reliability evaluation of acyclic multistate information networks," *Reliability Engineering & System Safety*, vol. 210, p. 107427, 2021.
- [29] W.-C. Yeh, "One-batch Preempt Deterioration-effect Multi-state Multi-rework Network Reliability Problem and Algorithms," *arXiv preprint arXiv:2103.04325*, 2021.
- [30] W.-C. Yeh, *A simple hybrid particle swarm optimization*. Citeseer, 2008.
- [31] W. C. Yeh, "New parameter-free simplified swarm optimization for artificial neural network training and its application in the prediction of time series," *IEEE Trans Neural Netw Learn Syst*, vol. 24, no. 4, pp. 661-5, Apr 2013, doi: 10.1109/TNNLS.2012.2232678.
- [32] W.-C. Yeh, "Orthogonal simplified swarm optimization for the series-parallel redundancy allocation problem with a mix of components," *Knowledge-Based Systems*, vol. 64, pp. 1-12, 2014.
- [33] Y. K. Ever, "Using simplified swarm optimization on path planning for intelligent mobile robot," *Procedia computer science*, vol. 120, pp. 83-90, 2017.
- [34] C.-M. Lai, C.-C. Chiu, W.-C. Liu, and W.-C. Yeh, "A novel nondominated sorting simplified swarm optimization for multi-stage capacitated facility location problems with multiple quantitative and qualitative objectives," *Applied Soft Computing*, vol. 84, p. 105684, 2019.
- [35] W.-C. Yeh, C.-M. Lai, and M.-H. Tsai, "Nurse scheduling problem using Simplified Swarm Optimization," in *Journal of Physics: Conference Series*, 2019, vol. 1411, no. 1: IOP Publishing, p. 012010.
- [36] W.-C. Yeh, Y.-P. Lin, Y.-C. Liang, and C.-M. Lai, "Convolution Neural Network Hyperparameter Optimization Using Simplified Swarm Optimization," *arXiv preprint arXiv:2103.03995*, 2021.
- [37] W.-C. Yeh, "An improved simplified swarm optimization," *Knowledge-Based Systems*, vol. 82, pp. 60-69, 2015.
- [38] W.-C. Yeh, C.-M. Lai, and J.-Y. Tsai, "Simplified swarm optimization for optimal deployment of fog computing

- system of industry 4.0 smart factory," in *Journal of Physics: Conference Series*, 2019, vol. 1411, no. 1: IOP Publishing, p. 012005.
- [39] A. K. Dhingra, "Optimal apportionment of reliability and redundancy in series systems under multiple objectives," *IEEE Transactions on reliability*, vol. 41, no. 4, pp. 576-582, 1992.
- [40] W.-C. Yeh, Y.-C. Lin, Y. Y. Chung, and M. Chih, "A particle swarm optimization approach based on Monte Carlo simulation for solving the complex network reliability problem," *IEEE Transactions on Reliability*, vol. 59, no. 1, pp. 212-221, 2010.