Determination of the refractive index of water and glass using smartphone cameras by estimating the apparent depth of an object

Sanjoy Kumar Pal¹,Soumen Sarkar², Surajit Chakrabarti³

¹Anandapur H.S. School, Anandapur,Paschim Medinipur,WB,India

²Karui P.C.High School, Hooghly, WB, India

³Ramakrishna Mission Vidyamandira, Belur Math, Howrah, WB,India

E-mail: sanjoypal83@gmail.com;tosoumen84@gmail.com;

surnamchakrabarti@gmail.com

1 Abstract

A smartphone camera can be used for measuring the width and distance of an object by taking its photographs. The focal length of the camera lens can be determined very accurately by finding the width of the image of an object on the camera sensor to micron level accuracy. The level of accuracy achieved with the help of camera sensors, allows us to determine the refractive index of water upto four significant digits by finding the apparent depth of an object immersed in it. We have also measured the refractive index of glass by the same method, using three glass slides of different thicknesses, the smallest being 1.2 mm.

2 Introduction

A smart phone is a powerful instrument in the hands of a large section of people around the world. Students of physics in particular, can use it to perform many experiments, as is evident from different publications in educational journals from all over the world. We have performed an experiment on optics using the cameras of smartphones. Camera sensors in smartphones use sophisticated technology to produce images in a two dimensional array, called pixels, with length dimensions accurate to microns. We have taken the advantage of this accuracy to measure the

refractive index of water and glass with great accuracy, by taking photographs of an object and its apparent positions when kept beneath water or glass.

In some recent works [1,2] the method of determining the focal length of the lens of a smartphone camera, has been discussed. In the present paper we have first determined the focal lengths of lenses in two smartphone cameras used in this experiment. By photographing an object from a suitable position, we can find the image size on the camera sensor in terms of pixel, using software called Paint and Preview, available freely from the internet for Windows and Apple Mac operating systems, respectively. If we know the transverse dimensions of the object, we can easily find its transverse magnification. From the magnification and the focal length of the lens, we can accurately estimate the distance of the object[3]. This allows us to find the apparent depth of an object placed beneath water or glass, very accurately. From this we determine the refractive index of water or glass by the standard formula [4-9]

$$\mu = \frac{\text{Real Depth}}{\text{Apparent Depth}}.$$
 (1)

We have measured the refractive indices of water and glass with Apple smartphones of model IPhone 12-Mini and IPhone 12 Pro Max respectively.

3 Determination of the focal length of the lens

We can easily show that the object distance u from a convex lens of focal length f_c can be related to its transverse magnification m as [3]

$$u = f_c(\frac{1}{m} - 1). \tag{2}$$

In our sign convention, the focal length is positive and the object distance for the real image is negative and the magnification is negative. If we know the object size and the focal length of the lens, we can find the distance of the object using the algebraic equation (2).

For an accurate determination of the focal length of the lens, we photograph the object from two positions of the camera shifted by a distance D along the line

of sight of the lens. If u1 and u2 are the distances of the object from two positions of the camera with transverse magnifications m_1 and m_2 respectively, we get

$$D = f_c(\frac{1}{m_2} - \frac{1}{m_1}) \tag{3}$$

where D = u2 - u1. This displacement should be along the line of sight of the camera lens. In terms of the object and image sizes we can write $m_1 = \frac{I_1}{O}$ and $m_2 = \frac{I_2}{O}$ where O is the size of the object and I_1 and I_2 are the sizes of the images formed on the camera sensor. We can write equation (3) as

$$f_c = \frac{|D|}{\left| \left(\frac{1}{m_2} - \frac{1}{m_1} \right) \right|}.$$
 (4)

In equation (3) the displacement D can be both towards or away from the object photographed. In figure 1, we show the lens configuration. The lens in the displaced position has been shown with dash marks. In this figure D is positive and m_2 is less than m_1 . So, f_c becomes positive as it should. Similarly, when the camera is brought closer to the object, D is negative and the denominator in equation (3) is also negative. So, we have written equation (4) with absolute signs. We determine f_c using equation (4) by determining I_1 , I_2 of an object of known width O and known displacement D of the lens. Once we determine the focal length, we can determine the distance of an object using equation (2).

4 Experiment

We first determine the focal lengths of the two camera lenses. In table 1 we present the data for one lens. We take a plastic ruler and photograph it from two distances with displacement D along the line of sight of the lens. u1 and u2 are the two distances of the camera from the ruler. When the image of the ruler is opened by the software Paint, one can select a certain part of the image using the cursors of the software and can find the pixel difference between its two ends. We select 7cm equivalent length on the image plane and the pixel equivalent has been presented as the pixel diff. in the table. From the internet one can find the pixel length

for the particular model of the camera. For our lens, 1 pixel was equal to 1.4 μm [10]. From this we determine the magnifications of the images which are obtained by taking the ratio of the image size to the object size which was 7cm. From this and the displacement of the camera, we determine the focal length very accurately using equation (3). There is an uncertainty in the actual position of the lens inside the smartphone. We displace the smartphone by a known distance in order to eliminate this uncertainty. Here the displacement of the lens is the same as the displacement of the phone. In exactly the same way, we determine the focal length of the other camera lens for which 1 pixel is equal to 1.7 μm [10].

To determine the refractive index of water we take an empty bucket and keep a small ruler at the bottom. From a distance about 10cm above the bucket we photograph the ruler with a smartphone held by a stand. By analysing the photograph with the Paint software, we can easily find the image size in terms of pixels. Specifically we find the image width for two marks on the ruler separated by 4cm and find the magnification. Using equation (2) we get the distance of the ruler from the camera. Now putting some water in the bucket we can, in the same way, find the distance of the virtual object. Finally, we float the ruler on the surface of water in the bucket and hence find the distance of the surface of water from the camera. All these three photographs are taken from the same position of the camera. From these three measurements we can determine the real depth as well as the apparent depth of the object. We then determine the refractive index of water using equation (1).

In a similar way, we determine the refractive index of glass. We take three slides of the same glass material, of nominal thicknesses of 1,4,6 mm. We take a strip of a graph sheet secured on a wooden stool. We take a photograph of the graph sheet from a fixed distance with a smartphone held by a stand. Then we put the glass slide, of a definite thickness, on the graph sheet. We take the photograph of the graph paper through the glass slide. Finally we remove the graph paper from the bottom of the glass slide and secure it on top of the glass. Then we take the third photograph of the graph sheet. Here also the camera position is kept

fixed for the three photographs. From these photographs we determine the real depth which is nothing but the thickness of the glass slide. For each glass slide we determine the apparent depth inside the glass. From these we determine the refractive index of glass.

5 Experimental Results

The first row of table 1 shows that our camera is at a distance of u1 = 30.0cm from the ruler. The camera was then shifted by 100.0cm to take the second photograpph from a distance u2 = 130.0cm. Magnifications in these two positions are determined and using equation (4) we determine the focal length of the lens. The process is repeated for 9 more times varying u1 and D. The average focal length turns out to be $f_c = 0.423 \pm 0.001$ cm. Similarly we get the focal length of the second camera lens $f_c = 0.531 \pm 0.001$ cm. We have not shown the data for this camera in tabular form.

In tables 2 and 3 we discuss the measurement of the refractive index of water. In table 2, u1 denotes the distance of the ruler, placed at the bottom of the empty bucket, from the camera. The bucket is partially filled with water. The distance of the apparent position of the ruler, as seen by the camera, is u3. After taking two photographs we take up the ruler and float it carefully on the water. Once again it is photographed. Its distance from the camera is denoted by u2. Each row of table 2 corresponds to the same row of table 3.Image sizes are determined from pixel readings and the transverse magnifications are obtained. Using equation (2) we calculate all distances u1, u2, and u3. From these we determine the real depth and the apparent depth of the ruler and hence the refractive index. We get the average value of the refractive index of water as $\mu = 1.327 \pm 0.004$. The refractive index of pure water with respect to air at 20°C has been given by [11] as 1.3312 at 656 nm. Our sample of water is not pure. The refractive index of water goes down with the rise in temperature [12]. In our case the room temperature was 30°C. Assuming the presence of a small amount of dissolved material in our sample, we

can claim that our result upto 4 significant figures matches that given in [11] within experimental uncertainty.

We have determined the refractive index of glass using a second smartphone camera. In tables 4 and 5 we show our data with the three glass slides. Here also each row of table 4 corresponds to the corresponding row of table 5. For each slide we determine u1,u2,u3 from the same position of the camera in the same way as described for water. For each slide we have taken photographs fron 4 positions. As shown in table 4 the average measured thicknesses of the slides turn out to be 1.2 mm, 4.0 mm and 6.0 mm. In table 5 we show the average refractive index of glass slides which we determine to be 1.50 ± 0.01 .

6 Conclusions

Taking advantage of the accuracy to micron level in the image sizes on the sensor of smartphone cameras, we have been able to determine the refractive index of water to 4 significant digits. We have measured the apparent depth of an object immersed in water by taking photograph of the object, looking vertically downwards. Using the same technique we have determined the refractive index of glass taking glass slides with thickness as small as 1.2 mm. The accuracy of the refractive index also indicates that our measurement of the thickness of the glass slides is also accurate. So the photographic technique introduced here is an alternative method for determination of the thickness of a thin sheet. The technique is easy and fast. We can determine the refractive index of any transparent liquid or a transparent solid, in the shape of slides, very accurately, using this photographic method.

Table 1: Pixel data for the image sizes on the camera sensor from two distances: Object size = 7 cm

Smartphone :Apple IPhone 12-Mini ; 1 pixel= $1.4\mu m$

obs	u_1	pixel	I_1	u_2	pixel	I_2	f_c
no.	cm	diff. 1	cm	cm	diff. 2	cm	cm
1	30.0	712	0.0997	130.0	163	0.0228	0.422
2	40.0	537	0.0752	140.0	152	0.0213	0.424
3	30.0	712	0.0997	140.0	152	0.0213	0.426
4	40.0	537	0.0752	150.0	142	0.0199	0.425
5	50.0	427	0.0598	160.0	132	0.0185	0.421
6	40.0	537	0.0752	160.0	132	0.0185	0.421
7	50.0	427	0.0598	170.0	124	0.0174	0.421
8	30.0	712	0.0997	160.0	132	0.0185	0.422
9	40.0	537	0.0752	180.0	118	0.0165	0.423
10	30.0	712	0.0997	180.0	118	0.0165	0.424

References

- 1. Wang J and Sun W 2019 Measuring the focal length of a camera lens in a smart-phone with a ruler Phys.Teach. 57 54
- 2. Girot A, Goy N-A, Vilquin A, and Delabre U 2020 Studying ray optics with a smartphone Phys. Teach. **58** 133
- 3. Sarkar S,Pal S, and Chakrabarti S 2021 Paper submitted to Phys.Teach.(AAPT)
- 4. Nassar A 1994 Apparent Depth Phys. Teach. **32** 526
- 5. Newburg et al. 2000 Using the small-angle approximation to measure the index of refraction of water Phys.Teach. **38** 478
- 6. Baki S B O and Mansur Y 2019 Depth-imaging Analysis for Refractive Index Measurement Journal of Multidisciplinary Engineering Science Technique 6(12) 97, Special Issue

Table 2: Data for refractive index of water u1=Distance to the bottom of the bucket from the camera u2=Distance to the top of the water surface from the camera Object size:4cm

Focal length of the lens f_c =0.423 cm

obs	pixel	m1	u1	pixel	m2	u2	Depth of water
no.	diff. 1		cm	diff. 2		cm	(u1-u2)cm
1	303	0.01060	40.33	333	0.01166	36.70	3.63
2	240	0.00840	50.78	272	0.00952	44.86	5.92
3	303	0.01060	40.33	373	0.01306	32.81	7.52
4	316	0.01106	38.67	401	0.01404	30.55	8.12
5	329	0.01152	37.14	449	0.01572	27.33	9.81
6	329	0.01152	37.14	601	0.02104	20.53	16.61
7	329	0.01152	37.14	772	0.02702	16.08	21.06
8	329	0.01152	37.14	1065	0.03728	11.77	25.37

- 7. Goehl J F 2003 Previous Apparent-Depth Papers Phys. Teach. 41 4
- 8. Palmer G and Clark T A 1976 Determination of refractive index of glass Phys. Educ. **11(6)** 424
- 9. Lombardi S et al 2010 Measuring variable refractive indices using digital photos Phys. Educ. **45** 83
- 10. https://www.metadata2go.com/
- 11. Atkins P and Paula J d 2002 Atkins' Physical Chemistry 7th edn (Oxford University Press) 1100
- 12. Tan C-Y and Huang Y-X 2015 Dependence of Refractive index on concentration and temperature in Electrolytic solution, Polar Solution, Nonpolar solution, and Protein solution Journal of Chemical and Engineering data (JCED) Sept.1,2015, doi:10.1021/acs.jced.5b00018; Sept.2, 2015 http://pubs.acs.org

Table 3: Data for refractive index of water u3= Distance of the virtual object from the camera Object size :4cm

Focal length of the lens f_c =0.423cm

obs		m3		Apparent depth	$\mu = \frac{u1 - u2}{u3 - u2}$	Av μ
no.	diff. 3		cm	(u3-u2)cm		
1	310	0.01085	39.41	2.71	1.339	
2	247	0.00864	49.38	4.52	1.310	
3	318	0.01113	38.43	5.62	1.338	
4	333	0.01166	36.70	6.15	1.320	1.327 ± 0.004
5	352	0.01232	34.76	7.43	1.320	
6	371	0.01298	33.01	12.48	1.331	
7	383	0.01340	31.99	15.91	1.324	
8	397	0.01390	30.85	19.08	1.330	

Table 4: Data for refractive index of glass

Object size=6cm

Smartphone: Apple IPhone 12 pro \max

Pixel size=1.7 μm ; Focal length of the camera lens $f_c=0.531\pm0.001{\rm cm}$

u1=Distance of the graph sheet from the camera

u2=Distance to the top of glass slide

	Nominal thickness	pixel	m1	u1	pixel	m2	u2	Thickness of glass
obs	of slides	diff. 1			diff. 2			slides(u1-u2)
no.	mm			cm			cm	cm
1		1749	0.04956	11.24	1770	0.05015	11.12	0.12
2	1	1606	0.04550	12.20	1623	0.04598	12.08	0.12
3		1504	0.04261	12.99	1519	0.04304	12.87	0.12
4		1321	0.03743	14.72	1333	0.03777	14.59	0.13
5		1659	0.04700	11.83	1719	0.04870	11.43	0.40
6	4	1435	0.04066	13.59	1479	0.04190	13.20	0.39
7		1282	0.03632	15.15	1317	0.03732	14.76	0.39
8		1207	0.03420	16.06	1238	0.03508	15.67	0.39
9		1659	0.04700	11.83	1751	0.04961	11.23	0.60
10	6	1435	0.04066	13.59	1503	0.04258	13.00	0.59
11		1282	0.03632	15.15	1336	0.03785	14.56	0.59
12		1207	0.03420	16.06	1255	0.03556	15.46	0.60

Table 5: Data for refractive index of glass $u3 {=} \ Distance \ of \ the \ virtual \ object \ from \ the \ camera$

Object size :6cm									
	obs	pixel	m3	u3	Apparent depth	$\mu = \frac{u1 - u2}{u3 - u2}$	Av μ		
	no.	diff. 3		cm	(u3-u2)cm				
	1	1756	0.04975	11.20	0.08	1.50			
	2	1612	0.04567	12.16	0.08	1.50			
	3	1509	0.04276	12.95	0.08	1.50			
	4	1325	0.03754	14.68	0.09	1.44			
	5	1679	0.04757	11.69	0.26	1.54			
	6	1449	0.04106	13.46	0.26	1.50	1.50 ± 0.01		
	7	1293	0.03664	15.02	0.26	1.50			
	8	1217	0.03448	15.93	0.26	1.50			
	9	1689	0.04786	11.62	0.39	1.54			
	10	1457	0.04128	13.39	0.39	1.51			
	11	1299	0.03680	14.96	0.40	1.48			
	12	1223	0.03465	15.86	0.40	1.50			

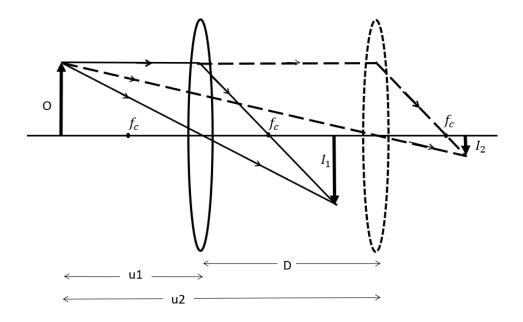


Fig.1 Image formation at the two positions of the lens $\,$