

**DIVERGENCE-CONFORMING VELOCITY AND VORTICITY  
APPROXIMATIONS FOR INCOMPRESSIBLE FLUIDS  
OBTAINED WITH MINIMAL INTER-ELEMENT COUPLING**

J. GOPALAKRISHNAN, L. KOGLER, P. L. LEDERER, AND J. SCHÖBERL

**ABSTRACT.** We introduce a novel minimal order hybrid Discontinuous Galerkin (HDG) and a novel mass conserving mixed stress (MCS) method for the approximation of incompressible flows. For this we employ the  $H(\text{div})$ -conforming linear Brezzi-Douglas-Marini space and the lowest order Raviart-Thomas space for the approximation of the velocity and the vorticity, respectively. Our methods are based on the physically correct diffusive flux  $-\nu\varepsilon(u)$  and provide exactly divergence-free discrete velocity solutions, optimal (pressure robust) error estimates and a minimal number of coupling degrees of freedom. For the stability analysis we introduce a new Korn-like inequality for vector-valued element-wise  $H^1$  and normal continuous functions. Numerical examples conclude the work where the theoretical findings are validated and the novel methods are compared in terms of condition numbers with respect to discrete stability parameters.

**Keywords:** incompressible Stokes equations, mixed finite elements, pressure-robustness, Hybrid Discontinuous Galerkin methods, discrete Korn inequality

## 1. INTRODUCTION

In this work we introduce two new methods for the discretization of the steady incompressible Stokes equations in three space dimensions. To this end let  $\Omega \subset \mathbb{R}^3$  be an open bounded domain with Lipschitz boundary  $\partial\Omega$  that is split into the Dirichlet boundary  $\Gamma_D$  (with  $|\Gamma_D| > 0$ ) and outflow boundary  $\Gamma_N$ . For the velocity  $u$  and the pressure  $p$  the velocity-pressure formulation of the Stokes equations is given by

$$-\text{div}(\nu\varepsilon(u)) + \nabla p = f \quad \text{in } \Omega, \tag{1a}$$

$$\text{div}(u) = 0 \quad \text{in } \Omega, \tag{1b}$$

$$u = 0 \quad \text{on } \Gamma_D, \tag{1c}$$

$$(-\nu\varepsilon(u) + pI)n = 0 \quad \text{on } \Gamma_N, \tag{1d}$$

where  $\varepsilon(u) := (\nabla u + \nabla u^T)/2$  is the symmetric gradient,  $f : \Omega \rightarrow \mathbb{R}^3$  is an external body force,  $\nu$  is twice the kinematic viscosity,  $n$  is the (outward facing) normal vector and  $I \in \mathbb{R}^{3 \times 3}$  is the identity matrix. For simplicity, in addition to the positive boundary measure condition  $|\Gamma_D| > 0$  we will also assume  $|\Gamma_N| > 0$  for the rest of this paper. (As usual, when  $|\Gamma_N| = 0$  the pressure space must be adapted to obtain a unique pressure [13].) Introducing two auxiliary variables  $\sigma = -\nu\varepsilon(u)$

and  $\omega = \text{curl}(u)$ , we can rewrite the above system as

$$-\nu^{-1} \text{dev } \sigma - \nabla u + \kappa(\omega) = 0 \quad \text{in } \Omega, \quad (2a)$$

$$\text{div}(\sigma) + \nabla p = f \quad \text{in } \Omega, \quad (2b)$$

$$\sigma - \sigma^T = 0 \quad \text{in } \Omega, \quad (2c)$$

$$\text{div}(u) = 0 \quad \text{in } \Omega, \quad (2d)$$

$$u = 0 \quad \text{on } \Gamma_D, \quad (2e)$$

$$(\sigma + pI)n = 0 \quad \text{on } \Gamma_N. \quad (2f)$$

Here we used the deviatoric part of a matrix  $\tau$  given by  $\text{dev } \tau := \tau - \frac{1}{3} \text{tr}(\tau)I$ , the matrix trace  $\text{tr}(\tau) := \sum_{i=1}^3 \tau_{ii}$ , the operator

$$\kappa : \mathbb{R}^3 \rightarrow \{\tau \in \mathbb{R}^{3 \times 3} : \tau + \tau^T = 0\} \quad \text{with} \quad \kappa(v) = \frac{1}{2} \begin{pmatrix} 0 & -v_3 & v_2 \\ v_3 & 0 & -v_1 \\ -v_2 & v_1 & 0 \end{pmatrix},$$

and the obvious decomposition  $\nabla u = \varepsilon(u) + \kappa(\text{curl}(u))$ . We will refer to system (1) as the primal formulation and system (2) as the mixed formulation.

The literature on discretizations of (1) and (2) is too vast to list here. The relatively recent quest for exactly divergence-free velocity solutions and pressure-independent a priori error estimates for velocity, often referred to as pressure robust estimates [21, 18], has rejuvenated the field. A recurring theme in this vast literature, from the early non-conforming method of [7] to the more recent [20], is the desire to improve computational efficiency by minimizing inter-element coupling. However, less studied are its side effects on stability when the actual physical flux replaces the often-used simplified diffusive flux, i.e., when

$$-\text{div}(\nu \varepsilon(u)) \quad \text{replaces} \quad -\text{div}(\nu \nabla u), \quad (3)$$

even though an early work [8] cautions how the lowest order method of [7] can become unstable when doing so. Such instabilities arise because the larger null space of  $\varepsilon$  necessitates increased inter-element coupling (as explained in more detail below) and are manifested in certain lowest order cases with insufficient inter-element coupling. In this work, focusing on the lowest order case, we identify new stable finite element methods, with the minimal necessary inter-element coupling, that yield exactly divergence-free and pressure robust velocities. New methods based on both the primal and the mixed formulations are designed.

Yet another reason for focusing on the lowest order case is its utility in preconditioning. Roughly speaking, a common strategy for preconditioning high order Stokes discretizations involves combining local (high order) error dampers via, say block Jacobi or other smoothers, with a global (low order) error corrector such as multigrid (or even a direct solver) applied to the smaller lowest order discretization. From this point of view, it is desirable to have stable low order versions (that remain stable under (3)) of high order methods for design of preconditioners, an interesting topic which we shall not touch upon further in this paper.

To delve deeper into the mechanics of the above-mentioned instability, consider the kernel of  $\varepsilon$ , consisting of rigid displacements of the form  $x \rightarrow a + b \times x$  with  $a, b \in \mathbb{R}^3$ . Reasonable methods approximating the operator  $-\text{div}(\nu \varepsilon(u))$  produce element matrices whose nullspaces contain these rigid displacements. Ideally, when these element-wise rigid displacements are subjected to the inter-element continuity

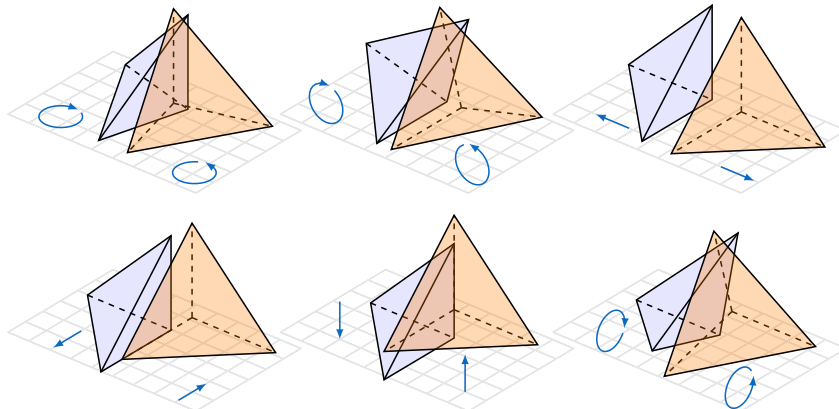


FIGURE 1. Configurations of adjacent elements after deformation by piecewise rigid displacements of two adjacent elements  $T_{\pm}$ .

conditions of the discrete velocity space, they should equal element-wise restrictions of a global rigid displacement on  $\Omega$  (which can then be eliminated by boundary conditions). However, if the inter-element coupling in the discrete velocity space is so weak to allow for the existence of a  $u$  in it that does not equal a global rigid displacement on  $\Omega$  even though  $u|_T$  is a rigid displacement on every mesh element  $T$ , then instabilities can arise.

The discrete velocity space we have in mind is the lowest order (piecewise linear)  $H(\text{div})$ -conforming Brezzi-Douglas-Marini ( $\mathcal{BDM}^1$ ) space [2]. (A basic premise of this paper is the unquestionable utility of  $H(\text{div})$ -conforming velocity spaces to obtain exactly divergence-free discrete Stokes velocity fields, well established in prior works [5, 6, 20, 14, 15].) Hence, to understand how to avoid the above-mentioned instability while setting velocity in the  $\mathcal{BDM}^1$  space, we ask the following question: *how many coupling degrees of freedom (dofs) are needed to guarantee that two rigid displacements  $u_{\pm}$ , given respectively on two adjacent elements  $T_{\pm}$ , coincide on the common interface  $F = \partial T_+ \cap \partial T_-$ ?*

The pictorial representations of the deformations created by  $u_{\pm}$  in Figure 1 lead to the answer. Three of the pictured deformations are just translations (generated by the  $a$ -vector in  $a + b \times x$ ). For a unit vector  $b$ , letting  $R_{\theta}^b$  denote the unitary operator that performs a counterclockwise rotation by angle  $\theta$  around  $b$ , it is easy to see that  $R_{\theta}^b x = x + \theta(b \times x) + \mathcal{O}(\theta^2)$  as  $\theta \rightarrow 0$ . Therefore the deformation created by the rigid displacement  $b \times x$  can be viewed as an infinitesimal rotation about  $b$ . These deformations are portrayed in Figure 1 as rotations about three differently directed  $b$ -vectors. The first row in Figure 1 illustrates deformations generated by piecewise rigid displacements forbidden in the  $\mathcal{BDM}^1$  space due to their discontinuous normal component on  $F$ : they are given by two  $b$ -vectors coplanar with  $F$  and an  $a$ -vector normal to  $F$ . In other words, the three  $\mathcal{BDM}^1$  dofs of the facet  $F$  illustrated in the left diagram in Figure 2 “control” the rigid displacements portrayed in the first row of Figure 1.

It remains to control the rigid displacements of the second row of Figure 1 using three additional dofs per facet. To this end, our new methods have two additional spaces: (i) one that approximates the in-plane components of the velocity on facets,

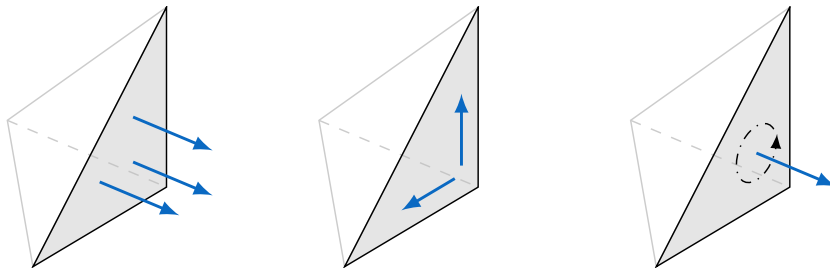


FIGURE 2. Classification of facet dofs in our new methods into three types: (1) normal velocity components in the form of  $\mathcal{BDM}^1$  facet dofs, (2) tangential facet velocities, (3) normal vorticity as  $\mathcal{RT}^0$  facet dof.

illustrated in the middle diagram of Figure 2, used to control the first two rigid displacements in the second row of Figure 1; and (ii) a second space, schematically indicated in the last diagram of Figure 2, that controls the third deformation in the second row of Figure 1. The latter deformation arises from piecewise rigid displacements of the form  $u_{\pm} = b_{\pm} \times x$  with  $b_{\pm}$  collinear to  $n$ , a unit normal of  $F$ . Since  $\text{curl}(b_{\pm} \times x) = 2b_{\pm}$ , we can make the two rigid displacements coincide on  $F$  by requiring continuity of  $(\text{curl } u_{\pm}) \cdot n$ . While continuity of  $(\text{curl } u) \cdot n$  certainly holds if  $u$  is the exact Stokes velocity, it does not generally hold for  $u$  in  $\mathcal{BDM}^1$ . Hence, keeping in view that  $\omega = \text{curl } u$  represents vorticity, we incorporate this constraint in our new methods by approximating vorticity  $\omega$  in the lowest order Raviart-Thomas space. This is our second additional space. Its single dof per facet is shown schematically in the last diagram of Figure 2.

In the first part of the paper we will employ these additional spaces to construct a novel HDG method to approximate (1) and present a detailed stability and error analysis. The key technical ingredient in the analysis that reflects the insight garnered from the above pictorial discussion is a discrete Korn-like inequality for the  $\mathcal{BDM}^1$  space (see Lemma 3.1 below), very similar to the Korn inequalities established by others [3].

The second part of this work discusses the derivation of a novel mixed method for the approximation of (2) and is motivated by our previous two papers [14, 15] and the many other works on discretizing (2) such as [9, 10, 11, 12]. In [15] we derived the “mass conserving mixed stress” (MCS) formulation where symmetry of  $\sigma$  was incorporated in a weak sense by means of a Lagrange multiplier that approximates  $\omega = \text{curl}(u)$ . While the  $\omega$  there was approximated using element-wise linear (or higher degree) functions *without* any inter-element continuity requirements, the new mixed method we propose here will approximate  $\omega$  in the lowest order Raviart-Thomas space instead. The lowest order case that was proved to be stable in [15] had nine coupling dofs per facet. We are able to reduce this number to the minimal six (the dimension of rigid displacements) in this paper.

Other methods that approximate the operator  $\text{div}(\nu \nabla u)$ , such as [7, 20, 14], are able to reduce the number of coupling dofs per facet even further. Since our focus here is on methods that approximate  $\text{div}(\nu \varepsilon(u))$ , we restrict ourselves to a brief remark on this. Since the kernel of  $\nabla$  (applied to vector fields) is three dimensional, we expect the minimal number of coupling dofs per facet to be three

when approximating  $\text{div}(\nu \nabla u)$ . A method this minimal coupling was achieved early by [7]. To also obtain pressure robust and exactly divergence-free solutions, prior works [20, 14] settled for a slightly higher five coupling **dofs** per facet in the lowest order case. It is now known that this can be improved by employing the technique of “relaxed  $H(\text{div}, \Omega)$ -conformity,” see [16, 17], which results in a method with the minimal three coupling **dofs** per facet and yet, thanks to a simple post-processing, provides optimal convergence orders and pressure robustness.

The new HDG method and the new mixed method proposed in this paper both have the same coupling **dofs**, same velocity convergence orders and same structure preservation properties like pressure robustness and mass conservation. On closer comparison, two advantages of the mixed method are notable. One is its direct approximation of viscous stresses. Another is the absence of any stabilization parameters in it. In fact, in our numerical studies, the conditioning of a matrix block arising the parameter-free mixed method was found to be better than the analogous HDG block for all ranges of the HDG stabilization parameter we considered.

**Outline.** We set up general notation in Section 2 and follow up with a description of the variational framework used throughout the paper. Finite element spaces, a discrete Korn-like inequality, and resulting norm equivalences are introduced in Section 3. A list of interpolation operators into these spaces and their properties with references to literature can also be found there. In Section 4 we introduce and analyze the HDG method for the primal set of equations (1) and in Section 5 we do the same for the MCS method for the mixed set of equations (2). Finally, in Section 6 we perform numerical experiments to illustrate and complement our theoretical findings.

## 2. NOTATION AND WEAK FORMS

By  $\mathbb{M}$  we denote the vector space of real  $3 \times 3$  matrices and by  $\mathbb{K}$  we denote the vector space of  $3 \times 3$  skew symmetric matrices, i.e.,  $\mathbb{K} = \text{skw}(\mathbb{M})$ . Further, let  $\mathbb{D} := \text{dev}(\mathbb{M})$ . To indicate vector and matrix-valued functions on  $\Omega$ , we include the range in the notation, thus while  $L^2(\Omega) = L^2(\Omega, \mathbb{R})$  denotes the space of square integrable and weakly differentiable  $\mathbb{R}$ -valued functions on  $\Omega$ , the corresponding vector and matrix-valued function spaces are defined by  $L^2(\Omega, \mathbb{R}^3) := \{u : \Omega \rightarrow \mathbb{R}^3 \mid u_i \in L^2(\Omega)\}$  and  $L^2(\Omega, \mathbb{M}) := \{\tau : \Omega \rightarrow \mathbb{M} \mid \tau_{ij} \in L^2(\Omega)\}$ , respectively. Now let  $\omega \subseteq \Omega$  be an arbitrary subset, then we denote by  $(\cdot, \cdot)_\omega$  the inner product on  $L^2(\omega)$  (or its vector- and matrix-valued versions). Similarly, we extend this notation and write  $\|\cdot\|_\omega$  for the corresponding  $L^2$ -norm of a function on the domain  $\omega$ . In the case  $\omega = \Omega$  we will omit the subscript in the inner product, i.e. we have  $(\cdot, \cdot)_\omega = (\cdot, \cdot)$  and we will use the notation  $\|\cdot\|_0 = \|\cdot\|_\Omega$ .

In addition to the differential operators we have already used,  $\nabla, \varepsilon, \text{curl}$ , we understand  $\text{div}(\Phi)$  as either  $\sum_{i=1}^3 \partial_i \Phi_i$  for a vector-valued function  $\Phi$ , or the row-wise divergence  $\sum_{j=1}^3 \partial_j \tau_{ij}$  for a matrix-valued function  $\tau$ . In addition to the standard Sobolev spaces  $H^m(\Omega)$  for any  $m \in \mathbb{R}$ , we shall also use the well-known spaces  $H(\text{div}, \Omega) = \{v \in L^2(\Omega, \mathbb{R}^3) : \text{div}(v) \in L^2(\Omega)\}$  and  $H(\text{curl}, \Omega) = \{v \in L^2(\Omega, \mathbb{R}^3) : \text{curl}(v) \in L^2(\Omega, \mathbb{R}^3)\}$ . We use  $H_{0,B}^1(\Omega)$ ,  $H_{0,B}(\text{div}, \Omega)$  and  $H_{0,B}(\text{curl}, \Omega)$ , to denote the spaces of functions whose trace, normal trace and tangential trace respectively vanish on  $\Gamma_B$ , for  $B \in \{D, N\}$ . The only somewhat nonstandard Sobolev space that

we shall use is

$$H(\text{curl div}, \Omega) := \{\tau \in L^2(\Omega, \mathbb{D}) : \text{div}(\tau) \in H_{0,D}(\text{div}, \Omega)^*\},$$

where  $H_{0,D}(\text{div}, \Omega)^*$  is the dual space of  $H_{0,D}(\text{div}, \Omega)$ .

We denote by  $\mathcal{T}$  a quasiuniform and shape regular triangulation of the domain  $\Omega$  into tetrahedra. Let  $h$  denote the maximum of the diameters of all elements in  $\mathcal{T}$ . Throughout this work we write  $A \sim B$  when there exist two constants  $c, C > 0$  independent of the mesh size  $h$  as well as the viscosity  $\nu$  such that  $cA \leq B \leq CA$ . Similarly, we use the notation  $A \lesssim B$  if there exists a similar constant  $C$  (independent of  $h$  and  $\nu$ ) such that  $A \leq CB$ . Henceforth we assume that  $\nu$  is a constant. Due to quasiuniformity we have  $h \sim \text{diam}(T)$  for any  $T \in \mathcal{T}$ . The set of element interfaces and boundaries is denoted by  $\mathcal{F}$ . By an abuse of notation, we shall also use  $\mathcal{F}$  to denote the domain formed by union of all  $F \in \mathcal{F}$ . On each facet  $F \in \mathcal{F}$  we denote by  $[[\cdot]]$  and  $\{\cdot\}$  the standard jump and mean value operator. For facets on the boundary these operators are just the identity. On each element boundary, and similarly on each facet on the global boundary we denote by  $n$  the outward unit normal vector. Then the normal and tangential trace of a smooth enough function  $v$  is given by

$$v_n = v \cdot n \quad \text{and} \quad v_t = v - v_n n.$$

According to this definition the normal trace is a scalar function and the tangential trace is a vector function. In a similar manner we introduce the normal-normal trace and the normal-tangential trace of a matrix valued function  $\tau$  by

$$\tau_{nn} := \tau : n \otimes n = n^T \tau n \quad \text{and} \quad \tau_{nt} = (\tau n)_t.$$

For any  $\omega \subseteq \Omega$ , we denote by  $P^k(\omega) = P^k(\omega, \mathbb{R})$  the set of polynomials of degree at most  $k$ . Let  $P^k(\omega, \mathbb{R}^3)$  and  $P^k(\omega, \mathbb{M})$  denote the analogous vector- and matrix-valued versions whose components are in  $P^k(\omega)$ . With respect to these spaces we then define  $\Pi_\omega^k$  the  $L^2$ -projection on  $\omega$  into the space  $P^k(\omega)$  or its vector- of matrix-valued versions. We omit subscript from  $\Pi_\omega^k$  if it is clear from context. For the space of functions the restrictions of which are in  $P^k(T)$  for all  $T \in \mathcal{T}$  we write simply  $P^k(\mathcal{T})$ . The analogous convention holds for  $H^k(\mathcal{T}), L^2(\mathcal{F})$ , etc. Now let  $T \in \mathcal{T}$  be arbitrary and  $F \subset \partial T$  be an arbitrary facet.

The standard variational formulation of (1) (see e.g., [13]) is to find  $u \in H_{0,D}^1(\Omega, \mathbb{R}^3)$  and  $p \in L^2(\Omega)$  such that

$$\nu(\varepsilon(u), \varepsilon(v)) - (\text{div}(v), p) = (f, v) \quad \text{for all } v \in H_{0,D}^1(\Omega, \mathbb{R}^3), \quad (4a)$$

$$-(\text{div}(u), q) = 0 \quad \text{for all } q \in L^2(\Omega). \quad (4b)$$

However our novel methods use  $H(\text{div})$ -conforming spaces for the approximation of the velocity  $u$ . Another weak form where velocity is set in  $H(\text{div})$  was given in [14, 15, 19] using  $\Sigma^{\text{sym}} := \{\tau \in H(\text{curl div}, \Omega) : \tau = \tau^T\}$ . It finds  $(\sigma, u, p) \in \Sigma^{\text{sym}} \times H_{0,D}(\text{div}, \Omega) \times L^2(\Omega)$  such that

$$-(\nu^{-1}\sigma, \tau) + \langle \text{div}(\tau), u \rangle_{\text{div}} = 0 \quad \text{for all } \tau \in \Sigma^{\text{sym}}, \quad (5a)$$

$$\langle \text{div}(\sigma), v \rangle_{\text{div}} - (\text{div}(v), p) = (f, v) \quad \text{for all } v \in H_{0,D}(\text{div}, \Omega), \quad (5b)$$

$$-(\text{div}(u), q) = 0 \quad \text{for all } q \in L^2(\Omega), \quad (5c)$$

where  $\Sigma^{\text{sym}} := \{\tau \in H(\text{curl div}, \Omega) : \tau = \tau^T\}$ . Here  $\langle \cdot, \cdot \rangle_{\text{div}}$  denotes the duality pairing on  $H_{0,D}(\text{div}, \Omega)^* \times H_{0,D}(\text{div}, \Omega)$ . Note that since  $\sigma \in L^2(\Omega, \mathbb{D})$  we have

$\text{tr}(\sigma) = 0$  which is motivated by (2a). In [19] a detailed well-posedness analysis of (5) was provided, but in this paper, (5) will serve merely to motivate the new mixed method of Section 5.

### 3. FINITE ELEMENTS AND NORM EQUIVALENCES

We begin by defining the following approximation spaces:

$$V_h := \{v_h \in H_{0,D}(\text{div}, \Omega) : v_h|_T \in P^1(T, \mathbb{R}^3)\} = H_{0,D}(\text{div}, \Omega) \cap \mathcal{BDM}^1, \quad (6a)$$

$$\begin{aligned} \widehat{V}_h := \{ \widehat{v}_h \in L^2(\mathcal{F}, \mathbb{R}^3) : \widehat{v}_h = 0 \text{ on } \Gamma_D, \text{ and for all } F \in \mathcal{F}, \\ \widehat{v}_h|_F \in P^0(F, \mathbb{R}^3) \text{ and } (\widehat{v}_h)_n|_F = 0 \}, \end{aligned} \quad (6b)$$

$$W_h := \{\eta_h \in H_{0,D}(\text{div}, \Omega) : \eta_h|_T \in P^0(T, \mathbb{R}^3) + xP^0(T, \mathbb{R}) \text{ for all } T \in \mathcal{T}\}, \quad (6c)$$

$$\Sigma_h := \{\tau_h \in L^2(\Omega, \mathbb{D}) : \tau_h|_T \in P^1(T, \mathbb{D}), (\tau_h)_{nt}|_F \in P^0(F, \mathbb{R}^2)\}, \quad (6d)$$

$$Q_h := P^0(\mathcal{T}). \quad (6e)$$

Note that  $(\tau_h)_{nt} : F \rightarrow n^\perp$ , where  $n^\perp$  denotes the orthogonal complement of  $n$ . Above, by a slight abuse of notation, we have written  $(\tau_h)_{nt} \in P^0(F, \mathbb{R}^2)$  after identifying  $n^\perp$  with  $\mathbb{R}^2$ . Note also that  $V_h$  and  $W_h$  are the lowest order Brezzi-Douglas-Marini and Raviart-Thomas space, respectively [2].

The product space for the kinematic variables is given by  $U_h := V_h \times \widehat{V}_h \times W_h$ . For the analysis we define the norms

$$\begin{aligned} \|u_h, \widehat{u}_h\|_{\nabla}^2 &:= \sum_{T \in \mathcal{T}} \|\nabla u_h\|_T^2 + h^{-1} \|\Pi^0(u_h - \widehat{u}_h)_t\|_{\partial T}^2, \\ \|u_h, \widehat{u}_h, \omega_h\|_{\varepsilon, *}^2 &:= \sum_{T \in \mathcal{T}} \|\varepsilon(u_h)\|_T^2 + h \|(\text{curl}(u_h) - \omega_h)_n\|_{\partial T}^2 + h^{-1} \|\Pi^0(u_h - \widehat{u}_h)_t\|_{\partial T}^2, \\ \|u_h, \widehat{u}_h, \omega_h\|_{\varepsilon}^2 &:= \sum_{T \in \mathcal{T}} \|\varepsilon(u_h)\|_T^2 + \|\text{curl}(u_h) - \omega_h\|_T^2 + h^{-1} \|\Pi^0(u_h - \widehat{u}_h)_t\|_{\partial T}^2, \\ \|u_h, \widehat{u}_h, \omega_h\|_{U_h, *}^2 &:= \sum_{T \in \mathcal{T}} \|\text{dev}(\nabla u_h) - \Pi^0 \kappa(\omega_h)\|_T^2 + h^{-1} \|\Pi^0(u_h - \widehat{u}_h)_t\|_{\partial T}^2, \end{aligned}$$

and the space of vector-valued normal continuous piecewise  $H^1$ -functions

$$H^{1,n}(\mathcal{T}, \mathbb{R}^3) := \{u \in H^1(T, \mathbb{R}^3) \forall T \in \mathcal{T}, \llbracket u \rrbracket_n = 0 \text{ on all } F \in \mathcal{F}\}.$$

**3.1. Interpolation operators.** In subsequent sections we will require various well-known interpolation operators into the spaces (6a)-(6e) which we collect here.

An  $H(\text{div})$  interpolation into  $V_h$ , denoted by  $I_V : H^{1,n}(\mathcal{T}) \rightarrow V_h$ , is defined using the degrees of freedom from [2, Proposition 2.3.2]: for all  $q \in P^1(F)$  and  $F \in \mathcal{F}$ ,

$$\int_F (u - I_V u)_n q \, ds = 0. \quad (7)$$

Similarly,  $I_W : H^{1,n}(\mathcal{T}) \rightarrow W_h$  is defined by

$$\int_F (\omega - I_W \omega)_n q \, ds = 0 \quad (8)$$

for all  $q \in P^0(F)$  and all  $F \in \mathcal{F}$ . On the set of facets  $\mathcal{F}$ , we denote the (tangential)  $L^2$ -projection operator  $I_{\widehat{V}} : L^2(\mathcal{F}, \mathbb{R}^3) \rightarrow \widehat{V}_h$  by

$$\int_F (\widehat{u} - I_{\widehat{V}} \widehat{u})_t \cdot q \, ds = 0 \quad (9)$$

for all  $q \in P^0(F, \mathbb{R}^3)$  with  $q_n = 0$  on all  $F \in \mathcal{F}$ . Note that for a  $u \in H^1(\Omega, \mathbb{R}^3) \cap H^2(\mathcal{T})$ , we have  $\text{curl}(u) \in H^{1,n}(\mathcal{T})$ . Hence  $(I_V u, I_{\hat{V}} u_t, I_W \text{curl}(u)) \in U_h$  and using standard scaling arguments and the Bramble-Hilbert lemma, we get (see e.g., [2])

$$\begin{aligned} & \|(u - I_V u, u_t - I_{\hat{V}} u_t, \text{curl}(u) - I_W \text{curl}(u))\|_{\varepsilon,*} \\ & + \left( \sum_{T \in \mathcal{T}} h \|\nabla(I_V u - u)_{nt}\|_{\partial T}^2 \right)^{1/2} \lesssim h \|u\|_{H^2(\mathcal{T})}. \end{aligned} \quad (10)$$

An interpolation operator for the stress space  $I_\Sigma : \{\tau \in H^1(\mathcal{T}, \mathbb{D}) : \llbracket \tau \rrbracket_{nt} = 0\} \rightarrow \Sigma_h$  is constructed in [14] and it satisfies

$$\begin{aligned} & \int_F (I_\Sigma \sigma - \sigma)_{nt} \cdot q \, ds = 0, \quad \text{for all } q \in P^0(F, \mathbb{R}^3) \text{ with } q_n = 0, \quad \text{for all } F \in \mathcal{F}, \\ & \int_T (I_\Sigma \sigma - \sigma) : q \, ds = 0, \quad \text{for all } q \in P^0(T, \mathbb{D}), \quad \text{for all } T \in \mathcal{T}. \end{aligned}$$

As shown in [14, Theorem 5.8], for all  $\sigma \in H^1(\mathcal{T}, \mathbb{D})$  with  $\llbracket \sigma \rrbracket_{nt} = 0$  on all facets  $F \in \mathcal{F}$  it fulfills the error estimate

$$\|\sigma - I_\Sigma \sigma\|_0 + \left( \sum_{T \in \mathcal{T}} h \|(\sigma - I_\Sigma \sigma)_{nt}\|_{\partial T}^2 \right)^{1/2} \lesssim h \|\sigma\|_{H^1(\mathcal{T})}. \quad (11)$$

Finally, the interpolation into  $Q_h$ , denoted by  $I_Q : L^2(\Omega) \rightarrow Q_h$  is simply the appropriate  $L^2$  projection

$$\int_T (p - I_Q p) q \, dx = 0 \quad (12)$$

for all  $q \in P^0(T)$  and  $T \in \mathcal{T}$ .

**3.2. Norm equivalences.** We begin with a Korn-type estimate for piecewise vector fields whose normal components are continuous. Let  $\Pi_R$  denote the facet-wise  $L^2$  projection onto  $R_F := \{t + \alpha n \times x : t \in n^\perp, \alpha \in \mathbb{R}\}$ , the space of tangential components (on  $F$ ) of the rigid displacements, or simply the space of two-dimensional rigid displacements on  $F$ .

**Lemma 3.1.** *For all  $u \in H^{1,n}(\mathcal{T}, \mathbb{R}^3)$ ,*

$$\sum_{T \in \mathcal{T}} \|\nabla u\|_T^2 \lesssim \sum_{T \in \mathcal{T}} \|\varepsilon(u)\|_T^2 + \sum_{F \in \mathcal{F}} h^{-1} \|\Pi_R \llbracket u_t \rrbracket\|_F^2, \quad (13)$$

and furthermore, for discrete functions  $u_h \in V_h$ ,

$$\begin{aligned} & \sum_{T \in \mathcal{T}} \|\varepsilon(u_h)\|_T^2 + \sum_{F \in \mathcal{F}} h^{-1} \|\Pi_R \llbracket u_h \rrbracket_t\|_F^2 \sim \\ & \sum_{T \in \mathcal{T}} \|\varepsilon(u_h)\|_T^2 + \sum_{F \in \mathcal{F}} h^{-1} \|\Pi_0 \llbracket u_h \rrbracket_t\|_F^2 + h \|\llbracket n \cdot \text{curl}(u_h) \rrbracket\|_F^2. \end{aligned} \quad (14)$$

*Proof.* The first statement almost directly follows from Lemma 3.1 in [3], which implies that for  $u \in H^{1,n}(\mathcal{T}, \mathbb{R}^3)$  there holds

$$\|\nabla u\|_0^2 \lesssim \sum_{T \in \mathcal{T}} \|\varepsilon(u)\|_T^2 + \sum_{F \in \mathcal{F}} h^{-1} \|\Pi^1 \llbracket u \rrbracket_t\|_F^2.$$

The only differences between this and (13) is the appearance of  $\Pi_R$  instead of  $\Pi^1$  in the facet term. As the proof given for said Lemma 3.1 in [3] can be completely reused to show (13) by simply replacing the projectors we shall not replicate it here and instead go on to prove the second statement.



Due to  $L^2$ -orthogonality there holds  $\|\Pi_R u_h\|_F^2 = \|\Pi^0 u_h\|_F^2 + \|(\Pi_R - \Pi^0)u_h\|_F^2$ . Hence (14) would follow once we prove that for all  $F \in \mathcal{F}$  and all  $u_h \in V_h$ ,

$$\begin{aligned} h\|\llbracket \text{curl}(u_h) \rrbracket_n\|_F^2 + \sum_{T:F \subseteq \partial T} \|\varepsilon(u_h)\|_T^2 \\ \sim h^{-1}\|(\Pi_R - \Pi_0)\llbracket u_h \rrbracket_t\|_F^2 + \sum_{T:F \subseteq \partial T} \|\varepsilon(u_h)\|_T^2. \end{aligned} \quad (15)$$

To prove (15), first note that, restricted to every facet,  $\Pi_R - \Pi^0$  is a projection onto a one dimensional space which, with  $x_F := \frac{1}{|F|} \int_F x \, dx$  such that  $\forall p \in P^1(F) : \int_F (p(x) - p(x_F)) \, dx = 0$  or equivalently  $\Pi^0 p = p(x_F)$ , is spanned by  $r_F(x) := n \times (x - x_F)$  and we see that

$$((\Pi_R - \Pi_0)\llbracket u_h \rrbracket_t)|_F = \frac{(r_F, \llbracket u_h \rrbracket)_F}{\|r_F\|_F^2} r_F \quad \text{and} \quad \|(\Pi_R - \Pi^0)u_t\|_F = \frac{(r_F, \llbracket u_h \rrbracket)_F}{\|r_F\|_F}. \quad (16)$$

As  $u_h \in V_h$  is piecewise linear,  $(r_F, \llbracket u_h \rrbracket)_F$  can easily be computed by hand. For an element  $T$  such that  $F \subset \partial T$  we now write  $u_{h,T} := (u_h)|_T$  and see

$$(r_F, u_{h,T})_F = \int_F r_F(x) \cdot (u_{h,T}(x_F) + \nabla u_{h,T}(x - x_F)) \, dx$$

where  $\int_F r_F(x) \cdot u_{h,T}(x_F) \, dx = 0$  as  $r_F$  is linear and  $r_F(x_F) = 0$ . With the identity  $2\kappa(a)b = a \times b$  it follows that

$$\begin{aligned} (r_F, u_{h,T})_F &= \int_F (n \times (x - x_F)) \cdot (\varepsilon(u_{h,T}) + \kappa(\text{curl}(u_{h,T}))) (x - x_F) \, dx \\ &= \int_F (n \times (x - x_F)) \cdot \varepsilon(u_{h,T})(x - x_F) \, dx \\ &\quad + \frac{1}{2} \int_F (n \times (x - x_F)) \cdot (\text{curl}(u_{h,T}) \times (x - x_F)) \, dx. \end{aligned}$$

Now, as for  $x \in F$  clearly  $(x - x_F) \perp n$ , using the identity  $(a \times b) \cdot (c \times b) = |b|^2(a \cdot c) - (a \cdot b)(c \cdot b)$  we can simplify the last term and see

$$\begin{aligned} (r_F, u_{h,T})_F &= \int_F (n \times (x - x_F)) \cdot \varepsilon(u_{h,T})(x - x_F) \, dx \\ &\quad + \frac{1}{2} \int_F |x - x_F|^2 \text{curl}(u_{h,T}) \cdot n \, dx. \end{aligned}$$

The term involving  $\varepsilon(u_{h,T})$  can be bounded by  $\|\varepsilon(u)\|_T$  as follows:

$$\begin{aligned} \left| \int_F (n \times (x - x_F)) \cdot \varepsilon(u_{h,T})(x - x_F) \, dx \right| &\lesssim \int_F |n \times (x - x_F)|^2 |\varepsilon(u_{h,T})| \, dx \\ &= \|r_F\|_F^2 |\varepsilon(u_{h,T})| \lesssim h^{1/2} \|r_F\|_F \|\varepsilon(u_{h,T})\|_T, \end{aligned}$$

where we used  $|n \times (x - x_F)| = |x - x_F|$ ,  $\|x - x_F\|_F \lesssim h\sqrt{|F|} \lesssim \sqrt{h|T|}$  and the fact that  $\varepsilon(u_{h,T})$  is constant. By combining terms from both elements  $T$  such that

$F \subset \partial T$ , we see that

$$\begin{aligned} (r_F, \llbracket u_h \rrbracket)_F &= \int_F (n \times (x - x_F)) \cdot \llbracket \varepsilon(u_h) \rrbracket (x - x_F) \, dx \\ &\quad + \frac{1}{2} \int_F |x - x_F|^2 \llbracket \operatorname{curl}(u_h) \rrbracket_n \, dx \end{aligned} \quad (17)$$

and, as shown above, we can bound

$$\left| \int_F n \times (x - x_F) \cdot \llbracket \varepsilon(u) \rrbracket (x - x_F) \, dx \right| \lesssim h^{1/2} \|r_F\|_F \sum_{T: F \subset \partial T} \|\varepsilon(u)\|_T. \quad (18)$$

Now, to show (15), we see that, as  $\operatorname{curl}(u_h)$  is piecewise constant,

$$\begin{aligned} h^{1/2} \|\llbracket \operatorname{curl}(u_h) \rrbracket_n\|_F &\lesssim h^{d/2} \left| (\llbracket \operatorname{curl}(u_h) \rrbracket_n)_F \right| \\ &\lesssim h^{-1/2} \|r_F\|_F^{-1} \left| \frac{1}{2} \int_F |x - x_F|^2 \llbracket \operatorname{curl}(u_h) \cdot n \rrbracket \, dx \right| \end{aligned}$$

where we used  $\|x - x_F\|_F^2 \sim h^{1+d}$ , at which point we use (17) to get

$$\begin{aligned} &h^{1/2} \|\llbracket \operatorname{curl}(u_h) \rrbracket_n\|_F \\ &\lesssim h^{-1/2} \|r_F\|_F^{-1} \left| (r_F, \llbracket u_h \rrbracket)_F - \int_F n \times (x - x_F) \cdot \llbracket \varepsilon(u) \rrbracket (x - x_F) \, dx \right| \\ &\lesssim h^{-1/2} \frac{(r_F, \llbracket u_h \rrbracket)_F}{\|r_F\|_F} + h^{-1/2} \|r_F\|_F^{-1} \left| \int_F n \times (x - x_F) \cdot \llbracket \varepsilon(u) \rrbracket (x - x_F) \, dx \right|. \end{aligned}$$

Bounding the first term with (16) and the second with (18) leads to

$$h^{1/2} \|\llbracket \operatorname{curl}(u_h) \rrbracket_n\|_F \lesssim h^{-1/2} \|(\Pi_R - \Pi^0)[u_h]_t\|_F + \sum_{T: F \subset \partial T} \|\varepsilon(u_h)\|_T,$$

and, after squaring both sides (and applying Young's inequality),

$$h \|\operatorname{curl}(u)_n\|_F^2 \lesssim h^{-1} \|(\Pi_R - \Pi^0)[u_h]_t\|_F^2 + \sum_{T: F \subset \partial T} \|\varepsilon(u_h)\|_T^2.$$

Analogously, we can show

$$h^{-1} \|(\Pi_R - \Pi^0)u_t\|_F^2 \lesssim h \|\operatorname{curl}(u)_n\|_F + \sum_{T: F \subset \partial T} \|\varepsilon(u)\|_T^2,$$

by simply shifting the term involving  $\varepsilon(u_h)$  in (17) to the left hand side and using the same kind of scaling arguments. Summing up over all facets  $F \in \mathcal{F}$  yields (15) and thus finishes the proof.  $\square$

Although Lemma 3.1 is formulated in terms of norms using the standard jump operator (useful for DG methods), a similar result also holds for our HDG norms.

**Corollary 3.2.** *For all  $(u_h, \hat{u}_h, \omega_h) \in U_h$ , we have the Korn-like inequality*

$$\|u_h, \hat{u}_h\|_{\nabla} \lesssim \|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *}. \quad (19)$$

*The reverse inequality holds in the sense that for any  $(u_h, \hat{u}_h) \in V_h \times \hat{V}_h$  there exists a  $\omega_h \in W_h$  such that*

$$\|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *} \lesssim \|u_h, \hat{u}_h\|_{\nabla}. \quad (20)$$

*Proof.* When translating between DG and HDG norms, the central observation is that on the one hand, adding  $\pm \hat{u}_h$  and  $\pm w_h$  in the jump terms shows

$$\begin{aligned} \sum_{F \in \mathcal{F}} \|\Pi^0 \llbracket u_h \rrbracket_t\|_F^2 &\lesssim \sum_{T \in \mathcal{T}} \|\Pi^0(u_h - \hat{u}_h)_t\|_{\partial T}^2, \\ \sum_{F \in \mathcal{F}} \|\llbracket \text{curl}(u_h) \rrbracket_n\|_F^2 &\lesssim \sum_{T \in \mathcal{T}} \|(\text{curl}(u_h) - w_h)_n\|_{\partial T}^2, \end{aligned}$$

and, as  $\llbracket u_h \rrbracket_t = (u_{h,L} - \{u_h\})_t + (\{u_h\} - u_{h,R})_t$ , with  $u_{h,L}, u_{h,R}$  denoting the values of  $u$  restricted to the two elements sharing a facet (and the analogous equality for  $\llbracket \text{curl}(u_h)_n \rrbracket$ ),

$$\begin{aligned} \sum_{F \in \mathcal{F}} \|\Pi^0 \llbracket u_h \rrbracket_t\|_F^2 &\sim \sum_{T \in \mathcal{T}} \|\Pi^0(u_h - \{u_h\})_t\|_{\partial T}^2, \\ \sum_{F \in \mathcal{F}} \|\llbracket \text{curl}(u_h) \rrbracket_n\|_F^2 &\sim \sum_{T \in \mathcal{T}} \|\text{curl}(u_h)_n - \{\text{curl}(u_h)_n\}\|_{\partial T}^2. \end{aligned}$$

In other words, DG norms are always bounded by HDG norms, regardless of the hybrid variables, and if the hybrid variables take certain values, HDG norms are also bounded by DG norms. With this in mind, (19) can be shown by simply applying (14) from Lemma 3.1 to the volume terms in  $\|\cdot\|_{\nabla}$  and then switching from DG jump terms to HDG ones as just shown:

$$\begin{aligned} \|u_h, \hat{u}_h\|_{\nabla}^2 &= \sum_{T \in \mathcal{T}} \|\nabla(u_h)\|_T^2 + h^{-1} \|\Pi^0(u_h - \hat{u}_h)_t\|_{\partial T}^2 \\ &\lesssim \sum_T \|\varepsilon(u_h)\|_T^2 + h^{-1} \|\Pi^0 \llbracket u_h \rrbracket_t\|_{\partial T}^2 \\ &\quad + h \|\llbracket \text{curl}(u_h) \rrbracket_n\|_{\partial T}^2 + h^{-1} \|\Pi^0(u_h - \hat{u}_h)_t\|_{\partial T}^2 \lesssim \|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *}. \end{aligned}$$

Inequality (20) follows by choosing  $\omega_h \in W_h$  such that  $(\omega_h)_n = \{\text{curl}(u_h)_n\} \forall F \in \mathcal{F}$ , which is possible due to the degrees of freedom given in (8) for the Raviart-Thomas interpolation, above observations, and an inverse estimate for discrete functions to bound  $h \|\llbracket \text{curl}(u_h) \rrbracket_n\|_F$ .  $\square$

**Lemma 3.3.** *For any  $u_h \in V_h$ ,  $\omega_h \in W_h$ , and  $T \in \mathcal{T}$ ,*

$$\|\text{curl}(u_h) - \omega_h\|_T^2 \sim h \|(\text{curl}(u_h) - \omega_h)_n\|_{\partial T}^2, \quad (21a)$$

$$\|\text{curl}(\kappa(\omega_h))\|_T \sim \|\nabla(\kappa(\omega_h))\|_T \sim \|\text{div}(\omega_h)\|_T, \quad (21b)$$

$$\begin{aligned} \|\varepsilon(u_h)\|_T^2 + \|\text{curl}(u_h) - \omega_h\|_T^2 &\sim \|\text{dev } \nabla(u_h) - \Pi^0 \kappa(\omega_h)\|_T^2 \\ &\quad + h^2 \|\text{div}(\omega_h)\|_T^2 + \|\text{div}(u_h)\|_T^2. \end{aligned} \quad (21c)$$

*Proof.* The first and second equivalence follow by norm equivalence on finite dimensional spaces and simple scaling arguments. We continue with (21c). Let  $T \in \mathcal{T}$  be arbitrary, then we have by the Pythagoras theorem (twice)

$$\begin{aligned} \|\varepsilon(u_h)\|_T^2 + \|\text{curl}(u_h) - \omega_h\|_T^2 &= \|\nabla(u_h) - \kappa(\omega_h)\|_T^2 \\ &= \|\text{dev } \nabla(u_h) - \kappa(\omega_h)\|_T^2 + \|\text{div}(u_h)\|_T^2. \end{aligned}$$

Using  $\text{curl}(u_h) \in P^0(T)$  and an inverse inequality for polynomials we show the estimate

$$\begin{aligned} h^2 \|\text{div}(\omega_h)\|_T^2 &\sim h^2 \|\text{curl}(\kappa(\omega_h))\|_T^2 = h^2 \|\text{curl}[\kappa(\omega_h) - \kappa(\text{curl}(u_h))]\|_T^2 \\ &\lesssim \|\omega_h - \text{curl}(u_h)\|_T^2. \end{aligned}$$

From this and the continuity of the  $L^2$  projection we conclude that the right side of (21c) can be bounded by the left side. To bound the left side note that since  $\operatorname{dev} \nabla u_h \in P^0(T)$ , by (21b), we have

$$\begin{aligned} \|\operatorname{dev} \nabla(u_h) - \kappa(\omega_h)\|_T^2 &= \|\operatorname{dev} \nabla(u_h) - \Pi^0 \kappa(\omega_h)\|_T^2 + \|(\operatorname{id} - \Pi^0) \kappa(\omega_h)\|_T^2 \\ &\leq \|\operatorname{dev} \nabla(u_h) - \Pi^0 \kappa(\omega_h)\|_T^2 + h^2 \|\nabla \kappa(\omega_h)\|_T^2 \\ &\sim \|\operatorname{dev} \nabla(u_h) - \Pi^0 \kappa(\omega_h)\|_T^2 + h^2 \|\operatorname{div}(\omega_h)\|_T^2, \end{aligned}$$

which concludes the proof.  $\square$

**Corollary 3.4.** *There hold the norm equivalences*

$$\|u_h, \hat{u}_h, \omega_h\|_\varepsilon^2 \sim \|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *}, \quad (22a)$$

$$\|u_h, \hat{u}_h, \omega_h\|_\varepsilon^2 \sim \|u_h, \hat{u}_h, \omega_h\|_{U_h, *}^2 + \|\operatorname{div}(u_h)\|_0^2 + \sum_{T \in \mathcal{T}} h^2 \|\operatorname{div}(\omega_h)\|_T^2. \quad (22b)$$

*Proof.* This is a direct consequence of Lemma 3.3.  $\square$

#### 4. AN $H(\operatorname{div})$ -CONFORMING VELOCITY–VORTICITY HDG SCHEME

In the following we derive our novel HDG scheme to approximate (4). To this end let  $u, p$  be a sufficiently smooth exact solution of (1) and let  $v_h \in V_h$  be an arbitrary test function. Multiplying (1) by  $v_h$ , and apply integration by parts locally on each element gives

$$-\nu \int_\Omega \operatorname{div}(\varepsilon(u)) v_h \, dx = \nu \sum_T \int_T \varepsilon(u) : \varepsilon(v_h) \, dx - \nu \int_{\partial T} (\varepsilon(u)n) \cdot v_h \, ds,$$

where we used the symmetry of  $\varepsilon(u)$ . Since  $\varepsilon(u)$  is continuous across facets in the interior where  $\hat{v}_h \in \hat{V}_h$  is single valued,  $\varepsilon(u)_{nt} = 0$  on  $\Gamma_N$  due to (1d) and  $\hat{v}_h = 0$  on  $\Gamma_D$  (see (6b)), we get

$$\begin{aligned} -\nu \int_\Omega \operatorname{div}(\varepsilon(u)) v_h \, dx &= \nu \sum_T \int_T \varepsilon(u) : \varepsilon(v_h) \, dx \\ &\quad + \nu \int_{\partial T} (\varepsilon(u)n) \cdot (\hat{v}_h - v_h)_t \, ds - \nu \sum_T \int_{\partial T \cap \Gamma_N} (\varepsilon(u)n) \cdot v_h \, ds, \end{aligned}$$

where we applied the tangential projection on the term  $(\hat{v}_h - v_h)$  since  $v_h$  is normal continuous in the interior and  $(\hat{v}_h)_t = \hat{v}_h$ . Next let  $\omega = \operatorname{curl}(u)$  and  $\hat{u} = u_t$  on each boundary  $\partial T$ , then we can add the consistent terms

$$-\nu \sum_T \int_{\partial T} (\varepsilon(v_h)n) \cdot (\hat{u} - u)_t \, ds + \frac{\nu \alpha}{h} \int_{\partial T} \Pi^0(\hat{u} - u)_t \cdot \Pi^0(\hat{v}_h - v_h)_t \, ds \quad (23)$$

and

$$\nu \sum_T h \int_{\partial T} (\operatorname{curl}(u) - \omega)_n (\operatorname{curl}(v_h) - \eta_h)_n \, dx, \quad (24)$$

for some test function  $\eta_h \in W_h$  and some constant  $\alpha > 0$ . The projection in the last term in (23) is motivated by the fact that  $\varepsilon(v_h)$  is a constant, i.e., there holds on each element boundary the equation

$$\nu \int_{\partial T} (\varepsilon(v_h)n) \cdot (\hat{u} - u)_t \, ds = \nu \int_{\partial T} (\varepsilon(v_h)n) \cdot \Pi^0(\hat{u} - u)_t \, ds,$$

which shows that only the projected tangential jump needs to be stabilized. Summarizing, above findings motivates the definition of the bilinear form

$$\begin{aligned} a^{\text{hdg}}((u_h, \hat{u}_h, \omega_h); (v_h, \hat{v}_h, \eta_h)) &:= \sum_T \int_T \varepsilon(u_h) : \varepsilon(v_h) \, dx + \int_{\partial T} (\varepsilon(u_h)n) \cdot (\hat{v}_h - v_h)_t \, ds \\ &+ \int_{\partial T} (\varepsilon(v_h)n) \cdot (\hat{u}_h - u_h)_t \, ds + \frac{\alpha}{h} \int_{\partial T} \Pi^0(\hat{u}_h - u_h)_t \cdot \Pi^0(\hat{v}_h - v_h)_t \, ds \\ &+ h \int_{\partial T} (\text{curl}(u_h) - \omega_h)_n \cdot (\text{curl}(v_h) - \eta_h)_n \, ds. \end{aligned}$$

Now, since  $(v_h, \nabla p) = -(\text{div}(v_h), p) + \sum_{T \in \mathcal{T}} \int_{\partial T \cap \Gamma_N} (v_h)_n p \, ds$ , condition (1d) and (1b) results in the following problem: find  $(u_h, \hat{u}_h, \omega_h), p_h \in U_h \times Q_h$  such that

$$\nu a^{\text{hdg}}((u_h, \hat{u}_h, \omega_h); (v_h, \hat{v}_h, \eta_h)) - (\text{div}(v_h), p_h) = (f, v_h), \quad (25a)$$

$$-(\text{div}(u_h), q_h) = 0, \quad (25b)$$

for all  $(v_h, \hat{v}_h, \eta_h) \in U_h$  and  $q_h \in Q_h$ . Note that on  $\Gamma_D$  this enforces  $\Pi^0(u_h)_t = 0$  and due to the Dirichlet conditions built into  $W_h$ , see (6c), through the consistent term (24) additionally penalizes  $\|\Pi^0 \text{curl}(u_h)_n\|_{\Gamma_D}$ . System (25) may be thought of as a nonconforming HDG discretization of the standard weak form (4).

To show discrete solvability of (25) we apply the standard theory of saddle point problems [2]. To this end we show continuity, coercivity of  $a^{\text{hdg}}$  and a discrete Stokes LBB estimate.

**Lemma 4.1.** *Let  $(u_h, \hat{u}_h, \omega_h), (v_h, \hat{v}_h, \omega_h) \in U_h$  and  $q_h \in Q_h$  be arbitrary. There holds the continuity estimate*

$$\nu a^{\text{hdg}}((u_h, \hat{u}_h, \omega_h); (v_h, \hat{v}_h, \omega_h)) \lesssim \nu \|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *} \|v_h, \hat{v}_h, \eta_h\|_{\varepsilon, *}, \quad (26)$$

$$(\text{div}(u_h), q_h) \lesssim \|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *} \|q_h\|_0. \quad (27)$$

*Proof.* This is a direct consequence of a subsequent application of the Cauchy-Schwarz inequality.  $\square$

**Lemma 4.2** (Coercivity of  $a^{\text{hdg}}$ ). *Let  $\alpha > 0$  be sufficiently big enough and  $(u_h, \hat{u}_h, \omega_h) \in U_h$  arbitrary, then there holds the coercivity estimate*

$$a^{\text{hdg}}((u_h, \hat{u}_h, \omega_h); (u_h, \hat{u}_h, \omega_h)) \gtrsim \nu \|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *}^2. \quad (28)$$

*Proof.* Following [24] there exists a constant  $c_{\text{inv}} > 0$  such that  $h \|\varepsilon(v_h)\|_{\partial T}^2 \leq c_{\text{inv}} \|\varepsilon(v_h)\|_T^2$  for all  $v_h \in V_h$ . Now choose  $\alpha > c_{\text{inv}}$ , then the proof follows by an application of the Cauchy-Schwarz and Young's inequality similarly to [4]. We conclude with Corollary 3.2, which shows that  $\|\cdot\|_{\varepsilon, *}$  is a norm.  $\square$

**Lemma 4.3** (HDG Stokes LBB). *For any  $p_h \in Q_h$  there exists a  $(u_h, \hat{u}_h, \omega_h) \in U_h$  with  $\|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *} \lesssim \|p_h\|_0$  and  $\text{div}(u_h) = p_h$ . In particular, there holds*

$$\sup_{(u_h, \hat{u}_h, \omega_h) \in U_h} \frac{(\text{div}(u_h), p_h)}{\|u_h, \hat{u}_h, \omega_h\|_{\varepsilon, *}} \gtrsim \|p_h\|_0. \quad (29)$$

*Proof.* From [20] we know that there exists some  $(u_h, \hat{u}_h) \in V_h \times \hat{V}_h$  with  $\text{div}(u_h) = p_h$  and  $\|u_h, \hat{u}_h\|_{\nabla} \lesssim \|p_h\|_0$ . With  $\omega_h \in W_h$  chosen as in (20), we conclude the proof:

$$\|u, \hat{u}, \omega_h\|_{\varepsilon, *} \lesssim \|u, \hat{u}\|_{\nabla} \lesssim \|p_h\|_0.$$

$\square$

**4.1. HDG error analysis.** For the a priori error analysis we make use of the following spaces with improved regularity

$$U_{\text{reg}} := (H_{0,D}^1(\Omega) \cap H^2(\mathcal{T})) \times L^2(\mathcal{F}) \times H^{1,n}(\mathcal{T}), \quad (30a)$$

$$Q_{\text{reg}} := Q \cap H^1(\mathcal{T}). \quad (30b)$$

Note that a solution of the weak formulation (4), for that also  $(u, u_t, \text{curl}(u)) \in U_{\text{reg}}$  and  $p \in Q_{\text{reg}}$ , automatically fulfills  $\llbracket (-\nu\varepsilon(u) + pI)n \rrbracket = 0$ . This can be seen by applying integration by parts on each element separately giving

$$\sum_{T \in \mathcal{T}} \int_T (-\nu \text{div}(\varepsilon(u)) + \nabla p - f)v \, dx + \sum_{F \in \mathcal{F}} \int_F \nu \llbracket (-\nu\varepsilon(u) + pI)n \rrbracket v \, ds = 0,$$

for all  $v \in H_{0,D}^1(\Omega)$ . Note that the facet integrals are well defined since  $\varepsilon(u) \in H^1(\mathcal{T})$  and  $p \in H^1(\mathcal{T})$ .

**Lemma 4.4** (HDG consistency). *Assume that the exact solution  $(u, p)$  of (4) fulfills the regularity assumption  $(u, u_t, \text{curl}(u), p) \in U_{\text{reg}} \times Q_{\text{reg}}$ , and let  $((u_h, \hat{u}_h, \omega_h), p_h) \in U_h \times Q_h$  be the solution of (25). Now let  $(v_h, \hat{v}_h, \eta_h) \in U_h$  then there holds the consistency*

$$\nu a^{\text{hdg}}(u - u_h, u_t - \hat{u}_h, \text{curl}(u) - \omega_h; v_h, \hat{v}_h, \eta_h) - (\text{div}(v_h), p - p_h) = 0$$

If there further holds  $\text{div}(v_h) = 0$ , then

$$\nu a^{\text{hdg}}(u - u_h, u_t - \hat{u}_h, \text{curl}(u) - \omega_h; v_h, \hat{v}_h, \eta_h) = 0$$

*Proof.* Following the same steps as in the derivation of the HDG method at the beginning of the Section 4 in reverse order shows that

$$\begin{aligned} & \nu a^{\text{hdg}}(u, u_t, \text{curl}(u); v_h, \hat{v}_h, \eta_h) - (\text{div}(v_h), p) \\ &= \sum_T \int_T -\nu \text{div}(\varepsilon(u)) \cdot v_h + v_h \cdot \nabla p \, dx = (f, v_h), \end{aligned}$$

where the last step follows due to (4) and the comment below (30). We conclude the proof by (25a). The second estimate follows with the same steps but further using  $\text{div}(u) = \text{div}(u_h) = 0$ .  $\square$

**Theorem 4.5.** *Assume that the exact solution  $(u, p)$  of (4) fulfills the regularity assumption  $(u, u_t, \text{curl}(u)) \in U_{\text{reg}}$  and  $p \in L^2(\Omega) \cap H^1(\Omega)$ , and let  $((u_h, \hat{u}_h, \omega_h), p_h) \in U_h \times Q_h$  be the solution of (25). There holds the pressure robust a priori error estimate*

$$\|u - u_h, u_t - \hat{u}_h, \text{curl}(u) - \omega_h\|_{\varepsilon,*} \lesssim h \|u\|_{H^2(\mathcal{T})}. \quad (31)$$

Furthermore, the pressure error is given by

$$\nu^{-1} \|p - p_h\|_0 \lesssim h (\|u\|_{H^2(\mathcal{T})} + \nu^{-1} \|p\|_{H_1}), \quad (32)$$

*Proof.* In the following let  $(v_h, \hat{v}_h, \eta_h) = (I_V u, I_{\hat{V}} u, I_W \text{curl} u)$ . Note that by the properties of  $I_V$  we have  $\text{div}(v_h) = \text{div}(I_V u) = \text{div}(u) = 0$ . Now for  $(w_h, \hat{w}_h, \theta_h) := (u_h - v_h, \hat{u}_h - \hat{v}_h, \omega_h - \eta_h)$ , Lemma 4.2 gives

$$\begin{aligned} \nu \|w_h, \hat{w}_h, \theta_h\|_{\varepsilon,*}^2 & \lesssim \nu a^{\text{hdg}}(w_h, \hat{w}_h, \theta_h; w_h, \hat{w}_h, \theta_h) \\ &= \nu a^{\text{hdg}}(u_h - u, \hat{u}_h - u_t, \eta_h - \text{curl}(u); w_h, \hat{w}_h, \theta_h) \\ & \quad + \nu a^{\text{hdg}}(u - v_h, u_t - \hat{v}_h, \text{curl}(u) - \eta_h; w_h, \hat{w}_h, \theta_h). \end{aligned}$$

The first term on the right hand side vanishes by applying Lemma 4.4 where we use that  $\text{div}(w_h) = \text{div}(u_h) - \text{div}(v_h) = 0$ . For the second term we get, similarly as in Lemma 4.2, and with (10)

$$\begin{aligned} & \nu a^{\text{hdg}}(u - v_h, u_t - \hat{v}_h, \text{curl}(u) - \eta_h; w_h, \hat{w}_h, \theta_h) \\ & \lesssim \nu \left( \|u - v_h, u_t - \hat{v}_h, \text{curl}(u) - \eta_h\|_{\varepsilon, *}^2 + \sum_{T \in \mathcal{T}} h \|\nabla(u - v_h)_{nt}\|_{\partial T}^2 \right)^{1/2} \|w_h, \hat{w}_h, \theta_h\|_{\varepsilon, *} \\ & \lesssim \nu h \|u\|_{H^2(\mathcal{T})} \|w_h, \hat{w}_h, \theta_h\|_{\varepsilon, *} \end{aligned}$$

By the above findings and the triangle inequality we then get

$$\begin{aligned} \nu \|u - u_h, u_t - \hat{u}_h, \text{curl}(u) - \omega_h\|_{\varepsilon, *} & \leq \nu \|u - v_h, u_t - \hat{v}_h, \text{curl}(u) - \eta_h\|_{\varepsilon, *} \\ & \quad + \nu \|w_h, \hat{w}_h, \theta_h\|_{\varepsilon, *} \\ & \lesssim \nu h \|u\|_{H^2(\mathcal{T})}, \end{aligned}$$

where we again used (10) for the first term. For the pressure estimate, the triangle inequality and the discrete Stokes LBB Lemma 4.3 gives

$$\begin{aligned} \nu^{-1} \|p - p_h\|_0 & \leq \nu^{-1} \|p - I_Q p\|_0 + \nu^{-1} \|I_Q p - p_h\|_0 \\ & \lesssim \nu^{-1} \|p - I_Q p\|_0 + \nu^{-1} \sup_{(v_h, \hat{v}_h, \eta_h) \in U_h} \frac{(\text{div}(v_h), p_h - I_Q p)}{\|v_h, \hat{v}_h, \eta_h\|_{\varepsilon, *}}. \end{aligned}$$

Using the boundary moments in (7) and Lemma 4.4 we get

$$\begin{aligned} (\text{div}(v_h), p_h - I_Q p) & = (\text{div}(v_h), p_h - p) \\ & = \nu a^{\text{hdg}}(u - u_h, u_t - \hat{u}_h, \text{curl}(u) - \omega_h; v_h, \hat{v}_h, \eta_h), \end{aligned}$$

With similar steps as before we get  $(\text{div}(v_h), p_h - I_Q p) \lesssim \nu \|u\|_{H^2(\mathcal{T})} \|v_h, \hat{v}_h, \eta_h\|_{\varepsilon, *}$ . We conclude the proof by the properties of the  $L^2$  projection  $I_Q$ .  $\square$

## 5. AN MCS FORMULATION WITH $H(\text{div})$ -CONFORMING VORTICITY

In this section we derive a new mixed method for the approximation of (2), motivated by the weak formulation (5). Let

$$\begin{aligned} \langle \text{div}(\sigma_h), (v_h, \hat{v}_h, \eta_h) \rangle_{U_h} & = \sum_T \left( \int_T \text{div}(\sigma_h) \cdot v_h \, dx - \int_{\partial T} (\sigma_h)_{nn} \cdot (v_h)_n \, ds \right) \\ & \quad - \sum_T \int_{\partial T} (\sigma_h)_{nt} \cdot (\hat{v}_h)_t \, ds + \sum_T \int_T \sigma_h : \kappa(\eta_h) \, dx. \end{aligned}$$

In above definition each sum has a different purpose. If  $(\sigma_h)_{nt}$  were continuous across element interfaces, then the first sum would be a realization of the duality pairing introduced in Section 2, namely  $\langle \text{div}(\sigma), v_h \rangle_{\text{div}}$ , per [15, Theorem 3.1]. Prior works [14, 15, 19] provided enough rationale to approximate matrix fields in  $\Sigma^{\text{sym}}$  using normal-tangential continuous finite elements. Hence for our discrete stress space  $\Sigma_h$ , we incorporate this continuity in a weak sense by the second sum above. Due to the Dirichlet conditions built into  $\hat{V}_h$  on  $\Gamma_D$  (see (6b)), this sum is comprised only of integrals over facets in the interior and on  $\Gamma_N$ , with the latter enforcing  $\sigma_{nt} = 0$  in  $\Gamma_N$  as demanded by (2f). Finally, the last sum above is useful to weakly

incorporate the symmetry constraint (2c). By integration by parts, we obtain a more compact form,

$$\begin{aligned} & \langle \operatorname{div}(\sigma_h), (v_h, \hat{v}_h, \eta_h) \rangle_{U_h} = \\ & = \sum_T - \int_T \sigma_h : (\nabla v_h - \kappa(\eta_h)) \, dx + \int_{\partial T} (\sigma_h)_{nt} \cdot (v_h - \hat{v}_h)_t \, ds. \end{aligned} \quad (33)$$

Thinking of (5) in terms of the above-introduced  $\langle \cdot, \cdot \rangle_{U_h}$ , we are motivated to introduce the following mixed method: find  $(u_h, \hat{u}_h, \omega_h) \in U_h$  and  $(\sigma_h, p_h) \in (\Sigma_h \times Q_h)$  satisfying

$$-\nu^{-1}(\sigma_h, \tau_h) + \langle \operatorname{div}(\tau_h), (u_h, \hat{u}_h, \omega_h) \rangle_{U_h} = 0 \quad (34a)$$

$$\langle \operatorname{div}(\sigma_h), (v_h, \hat{v}_h, \eta_h) \rangle_{U_h} - (\operatorname{div}(v_h), p_h) + c(\omega_h, \eta_h) = (f, v_h) \quad (34b)$$

$$-(\operatorname{div}(u_h), q_h) = 0, \quad (34c)$$

for all  $\tau_h \in \Sigma_h$ ,  $(v_h, \hat{v}_h, \eta_h) \in U_h$ , and  $q_h \in Q_h$ , with the stabilizing bilinear form  $c(\omega_h, \eta_h) := \nu h^2 (\operatorname{div}(\omega_h), \operatorname{div}(\eta_h))_\Omega$ . Note that since  $\omega_h$  approximates the vorticity  $\omega = \operatorname{curl}(u)$ , we have  $\operatorname{div}(\omega) = 0$ , thus  $c(\cdot, \cdot)$  is a consistent addition. Also, similarly to the HDG method, the boundary conditions built into  $W_h$ , see (6c), penalize  $\|\Pi^0 \operatorname{curl}(u_h)_n\|_{\Gamma_D}$ . Further note that in accordance with the definition of the continuous stress space  $\Sigma^{\text{sym}}$ , the discrete stress functions have a zero trace, see (6d). Although the weak formulation (34) is very similar to the formulations from [14] and [15], there are some crucial differences. First of all, in contrast to the works [14, 15] where the discrete stress space is normal-tangential continuous, our space uses a discontinuous approximation where normal-tangential continuity is incorporated by means of Lagrange multipliers in the space  $\hat{V}_h$  as known from (hybrid) mixed methods for the Poisson problem, see [1]. Secondly, although we use the same local element-wise normal-tangential bubbles as in [14], we use the weak symmetric setting from [15]. In the latter, the Lagrange multiplier for the weak symmetry constraint was given by an element-wise discontinuous approximation, whereas this work considers the normal continuous space  $W_h$ .

In contrast to the HDG method from the previous section we will show solvability of (34) by means of an overall inf-sup condition and continuity estimates. Further, due to the representation of the bilinear form (33) and since  $\omega_h$  appears in integrals on elements  $T \in \mathcal{T}$ , and not only in boundary integrals as in (25), our analysis is based on the more natural norms  $\|\cdot\|_{U_h, *}$  and  $\|\cdot\|_\varepsilon$ . Note however, that due to the norm equivalences given in Corollary 3.4 the derived estimates are in accordance with the HDG results from the previous section.

**Lemma 5.1** (Continuity MCS). *The bilinear forms involved in problem (34) are continuous, i.e., there holds for all  $\sigma_h, \tau_h \in \Sigma_h$ ,  $p_h \in Q_h$ ,  $\eta_h \in W_h$  and  $(u_h, \hat{u}_h, \omega_h) \in U_h$  the estimates*

$$\begin{aligned} \nu^{-1}(\sigma_h, \tau_h) &\lesssim \nu^{-1/2} \|\sigma_h\|_0 \nu^{-1/2} \|\tau_h\|_0, \\ (\operatorname{div}(u_h), p_h) &\lesssim \|(u_h, \hat{u}_h, \omega_h)\|_\varepsilon \|p_h\|_0, \\ \langle \operatorname{div}(\sigma_h), (u_h, \hat{u}_h, \omega_h) \rangle_{U_h} &\lesssim \|\sigma_h\|_0 \|(u_h, \hat{u}_h, \omega_h)\|_\varepsilon, \\ c(\omega_h, \eta_h) &\lesssim \nu h^2 \|\operatorname{div}(\omega_h)\|_0 \|\operatorname{div}(\eta_h)\|_0. \end{aligned}$$

*Proof.* The first, the second and the last statement follow with the Cauchy-Schwarz inequality. For the third estimate we follow the same steps as in [14], i.e., we apply



the Cauchy-Schwarz inequality on elements and on facets separately and use the norm equivalence given in Lemma 6.1 in [14].  $\square$

**Lemma 5.2.** *For any  $(u_h, \hat{u}_h, \omega_h) \in U_h$  there exists a  $(\tau_h, q_h) \in \Sigma_h \times Q_h$  with  $\|\tau_h\|_0 + \|q_h\|_0 \lesssim \|u, \hat{u}, \omega\|_{U_h, *}$  and  $\|\operatorname{div}(u_h)\|_0$  and*

$$\langle \operatorname{div}(\tau_h), (u_h, \hat{u}_h, \omega_h) \rangle_{U_h} - (\operatorname{div}(u_h), q_h) \gtrsim (\|u_h, \hat{u}_h, \omega_h\|_{U_h, *} + \|\operatorname{div}(u_h)\|_0)^2.$$

*Proof.* Following the definition of the basis functions in [14] there exists for each element  $T \in \mathcal{T}$  and each  $F \subset \partial T$  two constant matrices  $S_0^F, S_1^F \in \mathbb{D}$  such that for  $i \in \{0, 1\}$  there holds  $(S_i^F)_{nt} \in P^0(F, n_F^\perp)$ ,  $\|(S_i^F)_{nt}\|_2 = 1$  on the facet  $F$ , and  $(S_i^F)_{nt}$  equals  $(0, 0, 0)^\top$  on all other facets in  $\mathcal{F}_h$ . Further we have that  $((S_0^F)_{nt}, (S_1^F)_{nt})_F = 0$ , i.e., the vectors  $(S_i^F)_{nt}$  span the tangential plane of  $F$ . Now let  $(u_h, \hat{u}_h, \omega_h) \in U_h$  be arbitrary, then we define

$$\begin{aligned} \tau_h^0 &:= \sum_{T \in \mathcal{T}} \sum_{F \subset \partial T} \sum_{i \in \{0, 1\}} -(S_i^F : \Pi^0 \operatorname{dev}(\nabla u_h - \kappa(\omega_h)))(S_i^F) \lambda^F \\ \tau_h^1 &:= \sum_{T \in \mathcal{T}} \sum_{F \subset \partial T} \sum_{i \in \{0, 1\}} \frac{1}{\sqrt{h}} \Pi^0((\hat{u}_h - u_h)_t) S_i^F, \end{aligned}$$

where  $\lambda_F$  is the linear barycentric coordinate function associated to the vertex opposite of the facet  $F$ . Since  $(S_i^F) \lambda^F$  has a vanishing normal-tangential trace and  $\Pi^0 \operatorname{dev}(\nabla u_h - \kappa(\omega_h)) \in \mathbb{D}$ , we see that  $\tau_h := \gamma_0 \tau_h^0 + \gamma_1 \tau_h^1$ , with two constants  $\gamma_0, \gamma_1 \in \mathbb{R}$ , is an element of  $\Sigma_h$ . With similar steps as in [14, 15], i.e., using Young's and the Cauchy-Schwarz inequality we can choose  $\gamma_0 > 0$  and  $\gamma_1 > 0$  such that  $\|\tau_h\|_0 \lesssim \|u, \hat{u}, \omega\|_{U_h, *}$  and

$$\langle \operatorname{div}(\tau_h), (u_h, \hat{u}_h, \omega_h) \rangle_{U_h} \gtrsim \|u, \hat{u}, \omega\|_{U_h, *}^2.$$

Next let  $q_h := -\operatorname{div}(u_h)$  then we have that  $-(\operatorname{div}(u_h), q_h) = \|\operatorname{div}(u_h)\|_0^2$ , thus again with Young's inequality we can conclude the proof.  $\square$

To simplify the notation for the analysis we define the bilinear form  $B$  by

$$\begin{aligned} B(\sigma_h, u_h, \hat{u}_h, \omega_h, p_h; \tau_h, v_h, \hat{v}_h, \eta_h, q_h) &:= -\nu^{-1}(\sigma_h, \tau_h) + \langle \operatorname{div}(\tau_h), (u_h, \hat{u}_h, \omega_h) \rangle_{U_h} \\ &\quad + \langle \operatorname{div}(\sigma_h), (v_h, \hat{v}_h, \eta_h) \rangle_{U_h} \\ &\quad - (\operatorname{div}(u_h), q_h) - (\operatorname{div}(v_h), p_h) + c(\omega_h, \eta_h), \end{aligned}$$

and the norm  $\|\cdot\|_*$  on the product space  $\Sigma_h \times V_h \times \hat{V}_h \times W_h \times Q_h$  by

$$\|\sigma_h, p_h, u_h, \hat{u}_h, \omega_h\|_* := \nu^{-1/2}(\|\sigma_h\|_0 + \|p_h\|_0) + \nu^{1/2}\|u_h, \hat{u}_h, \omega_h\|_\varepsilon.$$

Note that Corollary 3.2 shows that  $\|\cdot\|_{\varepsilon, *}$  is a norm and that therefore with Corollary 3.4 so is  $\|\cdot\|_*$ .

**Lemma 5.3** (MCS inf-sup). *Let  $(\sigma_h, u_h, \hat{u}_h, \omega_h, p_h) \in \Sigma_h \times U_h \times Q_h$  be arbitrary, then there exists a  $(\tau_h, v_h, \hat{v}_h, \eta_h, q_h) \in \Sigma_h \times U_h \times Q_h$  such that*

$$B(\sigma_h, u_h, \hat{u}_h, \omega_h, p_h; \tau_h, v_h, \hat{v}_h, \eta_h, q_h) \gtrsim \|\sigma_h, p_h, u_h, \hat{u}_h, \omega_h\|_*^2 \quad (35)$$

and  $\|\tau_h, q_h, v_h, \hat{v}_h, \eta_h\|_* \lesssim \|\sigma_h, p_h, u_h, \hat{u}_h, \omega_h\|_*$ .

*Proof.* Let  $(\sigma_h, u_h, \hat{u}_h, \omega_h, p_h) \in \Sigma_h \times U_h \times Q_h$  be arbitrary and choose  $(\tau_h^*, v_h^*, \hat{v}_h^*, \eta_h^*, q_h^*) := (-\sigma_h, u_h, \hat{u}_h, \omega_h, -p_h) \in \Sigma_h \times U_h \times Q_h$ , such that

$$B(\tau_h^*, v_h^*, \hat{v}_h^*, \eta_h^*, q_h^*; \sigma_h, u_h, \hat{u}_h, \omega_h, p_h) = \frac{1}{\nu} \|\sigma_h\|_0^2 + \nu h^2 \|\operatorname{div}(\omega_h)\|_0^2,$$

and

$$\begin{aligned} & \nu^{-1/2}(\|\tau_h^*\|_0 + \|q_h^*\|_0) + \nu^{1/2}\|v_h^*, \widehat{v}_h^*, \eta_h^*\|_{U_h,*} \\ & \lesssim \nu^{-1/2}(\|\sigma_h\|_0 + \|p_h\|_0) + \nu^{1/2}\|u_h, \widehat{u}_h, \omega_h\|_{U_h,*}. \end{aligned} \quad (36)$$

According to Lemma 5.2 there also exist functions  $(\tilde{\tau}_h, \tilde{q}_h) \in \Sigma_h \times Q_h$  and a constant  $\tilde{C} > 0$  such that

$$\begin{aligned} & \langle \operatorname{div}(\tilde{\tau}_h), (u_h, \widehat{u}_h, \omega_h) \rangle_{U_h} - (\operatorname{div}(u_h), \tilde{q}_h) \gtrsim \nu \left( \|u_h, \widehat{u}_h, \omega_h\|_{U_h,*}^2 + \|\operatorname{div}(u_h)\|_0^2 \right), \\ & \text{and } \nu^{-1}(\|\tilde{\tau}_h\|_0^2 + \|\tilde{q}_h\|_0^2) \leq \tilde{C}\nu \left( \|u_h, \widehat{u}_h, \omega_h\|_{U_h,*}^2 + \|\operatorname{div}(u_h)\|_0^2 \right). \end{aligned} \quad (37)$$

Finally, by Lemma 4.3 there exists a  $(v_h^\Delta, \widehat{v}_h^\Delta, \eta_h^\Delta) \in U_h$  and a constant  $C^\Delta$  such that

$$\operatorname{div}(v_h^\Delta) = \nu^{-1}p_h \quad \text{and} \quad \nu\|v_h^\Delta, \widehat{v}_h^\Delta, \eta_h^\Delta\|_{\varepsilon,*}^2 \leq C^\Delta \nu^{-1}\|p_h\|_0^2, \quad (38)$$

where the continuity estimate follows with Lemma 5.1. Now let  $\alpha \in \mathbb{R}$  with  $\alpha > 0$  be a constant yet to be chosen, and define the linear combination  $(\tau_h, v_h, \widehat{v}_h, \eta_h, q_h) := (\alpha\tau_h^* + \tilde{\tau}_h, \alpha v_h^* + v_h^\Delta, \alpha\widehat{v}_h + \widehat{v}_h^\Delta, \alpha\eta_h^* + \eta_h^\Delta, \alpha q_h^* + \tilde{q}_h)$ , then we have

$$\begin{aligned} & B(\tau_h, v_h, \widehat{v}_h, \eta_h, q_h; \sigma_h, u_h, \widehat{u}_h, \omega_h, p_h) \\ & \gtrsim \frac{\alpha}{\nu}\|\sigma_h\|_0^2 + \alpha\nu h^2\|\operatorname{div}(\omega_h)\|_0^2 + \nu\|u_h, \widehat{u}_h, \omega_h\|_{U_h,*}^2 + \nu\|\operatorname{div}(u_h)\|_0^2 + \nu^{-1}\|p_h\|_0^2, \\ & \quad - \|\sigma_h\|_0\|v_h^\Delta, \widehat{v}_h^\Delta, \eta_h^\Delta\|_\varepsilon - \frac{1}{\nu}\|\sigma_h\|_0\|\tilde{\tau}_h\| \\ & \gtrsim \frac{\alpha}{\nu}\|\sigma_h\|_0^2 + \alpha\nu h^2\|\operatorname{div}(\omega_h)\|_0^2 + \nu\|u_h, \widehat{u}_h, \omega_h\|_{U_h,*}^2 + \nu\|\operatorname{div}(u_h)\|_0^2 + \nu^{-1}\|p_h\|_0^2 \\ & \quad - \frac{C^\Delta + \tilde{C}}{2\nu}\|\sigma_h\|_0^2 - \frac{\nu}{2C^\Delta}\|v_h^\Delta, \widehat{v}_h^\Delta, \eta_h^\Delta\|_\varepsilon - \frac{\tilde{C}}{2\nu}\|\sigma_h\|_0^2 - \frac{1}{C2\nu}\|\tilde{\tau}_h\|^2 \\ & \gtrsim \frac{\alpha - 0.5(\tilde{C} + C^\Delta)}{\nu}\|\sigma_h\|_0^2 + \alpha\nu h^2\|\operatorname{div}(\omega_h)\|_0^2 \\ & \quad + \frac{\nu}{2}\left(\|u_h, \widehat{u}_h, \omega_h\|_{U_h,*}^2 + \|\operatorname{div}(u_h)\|_0^2\right) + \frac{\nu^{-1}}{2}\|p_h\|_0^2, \end{aligned}$$

where we used Lemma 5.1, Young's inequality, and the continuity estimates (37) and (38). By choosing  $\alpha > 0.5(\tilde{C} + C^\Delta)$  we have according to Corollary 3.4

$$B(\tau_h, v_h, \widehat{v}_h, \eta_h, q_h; \sigma_h, u_h, \widehat{u}_h, \omega_h, p_h) \gtrsim \|u_h, \widehat{u}_h, \omega_h\|_\varepsilon^2 + \|\sigma_h\|_0^2 + \|p_h\|_0^2,$$

and due to (36) and (37) also

$$\|v_h, \widehat{v}_h, \eta_h\|_\varepsilon + \|\tau_h\|_0 + \|q_h\|_0 \lesssim \|u_h, \widehat{u}_h, \omega_h\|_\varepsilon + \|\sigma_h\|_0 + \|p_h\|_0$$

which proofs the result.  $\square$

**5.1. MCS error analysis.** Beside the spaces  $U_{\text{reg}}$  and  $Q_{\text{reg}}$ , the a priori error analysis will now further rely on the following stress space with improved regularity

$$\Sigma_{\text{reg}} := \Sigma^{\text{sym}} \cap H^1(\mathcal{T}, \mathbb{D}) \quad (39)$$

Similarly as discussed below (30), a solution to the weak formulation (5) for that also  $\sigma \in \Sigma_{\text{reg}}$  and  $p \in Q_{\text{reg}}$ , automatically fulfills  $\llbracket \sigma + pI \rrbracket_{nn} = 0$  and  $\llbracket \sigma \rrbracket_{nt} = 0$ .

**Lemma 5.4** (MCS consistency). *Assume that the exact solution  $(\sigma, u, p)$  of (5) fulfills the regularity assumption  $(u, u_t, \omega) \in U_{\text{reg}}$  and  $(\sigma, p) \in \Sigma_{\text{reg}} \times Q_{\text{reg}}$ , where  $\omega = \text{curl}(u)$ . Let  $(u_h, \hat{u}_h, \omega_h) \in U_h$  and  $(\sigma_h, p_h) \in \Sigma_h \times Q_h$  be the solution of (34), and  $(v_h, \hat{v}_h, \eta_h) \in U_h$  and  $(\tau_h, q_h) \in \Sigma_h \times Q_h$  be arbitrary test functions, then there holds the consistency result*

$$B(\sigma - \sigma_h, u - u_h, u_t - \hat{u}_h, \omega - \omega_h, p - p_h; \tau_h, v_h, \hat{v}_h, \eta_h, q_h) = 0 \quad (40)$$

*Proof.* Since  $\sigma$  is symmetric we have that  $\sigma : \kappa(\eta_h) = 0$ . Next, using the regularity assumptions, integration by parts gives

$$\begin{aligned} & \langle \text{div } \sigma; (v_h, \hat{v}_h, \eta_h) \rangle_{U_h} - (\text{div}(v_h), p_h) \\ &= \sum_T - \int_T (\sigma + pI) : \nabla v_h \, dx + \int_{\partial T} \sigma_{nt} \cdot (v_h - \hat{v}_h)_t \, ds \\ &= \sum_T \int_T \text{div}(\sigma + pI) \cdot v_h \, dx + \int_{\partial T} \sigma_{nt} \cdot (v_h - \hat{v}_h)_t \, ds - \int_{\partial T} ((\sigma + pI)n) \cdot v_h \\ &= \sum_T \int_T \text{div}(\sigma + pI) \cdot v_h \, dx - \int_{\partial T} \sigma_{nt} \cdot \hat{v}_h + (\sigma + pI)_{nn} (v_h)_n \, ds \\ &= \sum_T \int_T \text{div}(\sigma + pI) \cdot v_h \, dx - \sum_{F \in \mathcal{F}} \int_{\partial T} \llbracket \sigma \rrbracket_{nt} \cdot \hat{v}_h + \llbracket (\sigma + pI) \rrbracket_{nn} (v_h)_n \, ds \\ &= \sum_T \int_T \text{div}(\sigma + pI) \cdot v_h \, dx - \int_{\Gamma_N} (\sigma + pI)_{nn} (v_h)_n + \sigma_{nt} \hat{v}_h \, ds \\ &= \sum_T \int_T \text{div}(\sigma + pI) \cdot v_h \, dx = (f, v_h). \end{aligned}$$

where the boundary integrals vanished using (2f) given on  $\Gamma_N$  (incorporated in (5) in a weak sense, see Section 4 in [19]). On the other hand since  $-\nu^{-1}\sigma = \varepsilon(u) = \nabla u - \kappa(\omega)$  we have

$$\begin{aligned} & -\nu^{-1}(\sigma, \tau_h) + \langle \text{div } \tau_h; (u, \hat{u}, \omega) \rangle_{U_h} \\ &= -\nu^{-1}(\sigma, \tau_h) + \sum_T - \int_T \tau_h : (\nabla u - \kappa(\omega)) + \int_{\partial T} \tau_{nt} (u - u_t)_t \, ds = 0 \end{aligned}$$

Finally, since  $(\text{div}(u), q_h) = 0$  as  $\text{div}(u) = 0$ , we conclude the proof with (34).  $\square$

**Theorem 5.5.** *Assume that the exact solution  $(\sigma, u, p)$  of (5) fulfills the regularity assumption  $(u, u_t, \omega) \in U_{\text{reg}}$  and  $(\sigma, p) \in \Sigma_{\text{reg}} \times Q_{\text{reg}}$ , where  $\omega = \text{curl}(u)$ . Let  $(u_h, \hat{u}_h, \omega_h) \in U_h$  and  $(\sigma_h, p_h) \in \Sigma_h \times Q_h$  be the solution of (34). There holds the pressure robust a priori error estimate*

$$\begin{aligned} & \nu^{-1} \|\sigma - \sigma_h\|_0 + \|u - u_h, u_t - \hat{u}_h, \text{curl}(u) - \omega_h\|_\varepsilon \\ & \lesssim h(\nu^{-1} \|\sigma\|_{H^1(\mathcal{T})} + \|u\|_{H^2(\mathcal{T})} + \|\omega\|_{H^1(\mathcal{T})}). \end{aligned}$$

Furthermore, the pressure error can be bounded by

$$\nu^{-1} (\|p - p_h\|_0) \lesssim h(\nu^{-1} \|\sigma\|_{H^1(\mathcal{T})} + \nu^{-1} \|p\|_{H^1(\mathcal{T})} + \|u\|_{H^2(\mathcal{T})} + \|\omega\|_{H^1(\mathcal{T})}).$$

*Proof.* The proof follows with very similar steps as in [14, 15] and the error estimates of the HDG method, see Lemma 4.5, and is based on the well-posedness results Lemma 5.3, the consistency Lemma 5.4 and the interpolation operators  $I_\Sigma$  and  $I_Q$ , see (11) and (12). For simplicity we do not give any further details here.  $\square$

## 6. NUMERICAL EXAMPLES

In this last section we present a simple example to verify and compare our methods. Both methods were implemented within the finite element library NG-Solve/Netgen (see [22, 23] and [www.ngsolve.org](http://www.ngsolve.org)).

The computational domain is given by  $\Omega = [0, 1]^3$  and the velocity field is driven by the volume force determined by  $f = \operatorname{div}(\sigma) + \nabla p$  with the exact solution given by

$$\sigma = -\nu \varepsilon(\operatorname{curl}(\psi, \psi, \psi)), \quad \text{and} \quad p := x^5 + y^5 + z^5 - \frac{1}{2}.$$

Here  $\psi := x^2(x-1)^2y^2(y-1)^2z^2(z-1)^2$  defines a given potential and we choose the viscosity  $\nu = 10^{-4}$ . While this would lend itself to homogenous Dirichlet conditions being prescribed on the whole boundary, as we assume  $|\Gamma_N| > 0$  throughout the paper, we instead opt to impose non-homogenous Neumann conditions on  $\Gamma_N := \{0\} \times (0, 1) \times (0, 1)$  and homogenous Dirichlet conditions only on  $\Gamma_D := \partial\Omega \setminus \Gamma_N$ . Note that this involves the additional terms  $\int_{\Gamma_N} (-\sigma_{nn} - p)(v_h)_n \, ds$  and  $-\int_{\Gamma_N} \sigma_{nt} \hat{v}_h \, ds$  on the right hand side.

**Convergence.** An initial, relatively coarse mesh was generated and then refined multiple times. To be able to solve the problem also on the finer meshes we employed a preconditioned GMRes Krylov space solver with relative tolerance  $10^{-14}$ . Errors measured in different norms and their estimated order of convergence (eoc) are listed in Tables 1 for the HDG and Table 2 for the MCS method. For the HDG method we chose the stabilization parameter  $\alpha = 6$ . As predicted by the analysis from Lemma 4.5 and Lemma 5.5, the velocity error measured in the semi norm  $\|\varepsilon(u - u_h)\|_0$  and the  $L^2$ -norm of the vorticity and the pressure errors converge with optimal linear order. Further for the MCS methods we also see that the stress error converges optimal. Beside that, we also plotted the  $L^2$ -norm error of the velocity. Applying a standard Aubin-Nitsche like argument we expect a higher order of convergence whenever the dual problem shows enough regularity, see [2, 14]. Indeed we observe a quadratic convergence for the  $L^2$ -norm error of the velocity for both methods.

**Condition numbers.** For both HDG and MCS method, after static condensation within the  $(u_h, \hat{u}_h, \omega_h)$ - or  $(\sigma_h, u_h, \hat{u}_h, \omega_h)$ -block of the finite element matrix respectively, we obtain a symmetric and positive definite diagonal block, here simply referred to as the “A”-block, although due to the incompressibility constraint, the entire matrix is still of saddle point structure. Both A blocks have the same non-zero structure and are expected to have condition number  $\mathcal{O}(h^2)$  but discretize slightly different operators,  $\varepsilon$  for the HDG and  $\operatorname{dev}(\varepsilon)$  for the MCS method. As  $\varepsilon(u) = \operatorname{dev}(\varepsilon(u)) + \frac{1}{3} \operatorname{div}(u)I$  and the true solution is divergence-free, adding the (consistent) term  $\frac{1}{3} \operatorname{div}(u_h) \operatorname{div}(v_h)$  to the MCS bilinear form yields an A block that is directly comparable to the one of the HDG method. In Figure 3 we show approximate condition numbers (cond) of said A blocks for some of the meshes used in the previous computations and different values of  $\alpha$  in  $a^{\text{hdg}}$ . We see that in addition to the MCS method not being dependent on any stabilization parameter in the first place, there appears to be no possible choice of  $\alpha$  that would make the HDG A block better conditioned.

$ \mathcal{T} $	$\ \varepsilon(u - u_h)\ _0$ (eoc)	$\ u - u_h\ _0$ (eoc)	$\ \omega - \omega_h\ _0$ (eoc)	$\ p - p_h\ _0$ (eoc)
63	$2.2 \cdot 10^{-3}$ (—)	$1.9 \cdot 10^{-4}$ (—)	$3.2 \cdot 10^{-3}$ (—)	$2.1 \cdot 10^{-1}$ (—)
504	$1.7 \cdot 10^{-3}$ (0.4)	$8.4 \cdot 10^{-5}$ (1.2)	$2.3 \cdot 10^{-3}$ (0.5)	$1.2 \cdot 10^{-1}$ (0.9)
4032	$9.3 \cdot 10^{-4}$ (0.9)	$2.4 \cdot 10^{-5}$ (1.8)	$1.2 \cdot 10^{-3}$ (0.9)	$6.1 \cdot 10^{-2}$ (0.9)
32256	$5.3 \cdot 10^{-4}$ (0.8)	$8.0 \cdot 10^{-6}$ (1.6)	$6.6 \cdot 10^{-4}$ (0.9)	$3.1 \cdot 10^{-2}$ (1.0)
258048	$2.8 \cdot 10^{-4}$ (0.9)	$2.3 \cdot 10^{-6}$ (1.8)	$3.5 \cdot 10^{-4}$ (0.9)	$1.6 \cdot 10^{-2}$ (1.0)
2064384	$1.4 \cdot 10^{-4}$ (1.0)	$6.3 \cdot 10^{-7}$ (1.9)	$1.8 \cdot 10^{-4}$ (1.0)	$7.8 \cdot 10^{-3}$ (1.0)

TABLE 1. Errors and estimated order of convergence (eoc) for the HDG method.

$ \mathcal{T} $	$\ \varepsilon(u - u_h)\ _0$ (eoc)	$\ u - u_h\ _0$ (eoc)	$\ \sigma - \sigma_h\ _0$ (eoc)	$\ \omega - \omega_h\ _0$ (eoc)	$\ p - p_h\ _0$ (eoc)
63	$2.6 \cdot 10^{-3}$ (—)	$2.1 \cdot 10^{-4}$ (—)	$4.0 \cdot 10^{-7}$ (—)	$3.2 \cdot 10^{-3}$ (—)	$2.1 \cdot 10^{-1}$ (—)
504	$1.9 \cdot 10^{-3}$ (0.4)	$1.0 \cdot 10^{-4}$ (1.0)	$2.9 \cdot 10^{-7}$ (0.5)	$2.2 \cdot 10^{-3}$ (0.5)	$1.2 \cdot 10^{-1}$ (0.9)
4032	$10.0 \cdot 10^{-4}$ (0.9)	$2.5 \cdot 10^{-5}$ (2.0)	$1.5 \cdot 10^{-7}$ (1.0)	$1.1 \cdot 10^{-3}$ (1.0)	$6.1 \cdot 10^{-2}$ (0.9)
32256	$6.0 \cdot 10^{-4}$ (0.7)	$7.8 \cdot 10^{-6}$ (1.7)	$7.9 \cdot 10^{-8}$ (0.9)	$6.1 \cdot 10^{-4}$ (0.9)	$3.1 \cdot 10^{-2}$ (1.0)
258048	$3.1 \cdot 10^{-4}$ (1.0)	$2.0 \cdot 10^{-6}$ (1.9)	$4.0 \cdot 10^{-8}$ (1.0)	$3.1 \cdot 10^{-4}$ (1.0)	$1.6 \cdot 10^{-2}$ (1.0)
2064384	$1.5 \cdot 10^{-4}$ (1.0)	$5.2 \cdot 10^{-7}$ (2.0)	$2.0 \cdot 10^{-8}$ (1.0)	$1.5 \cdot 10^{-4}$ (1.0)	$7.8 \cdot 10^{-3}$ (1.0)

TABLE 2. Errors and estimated order of convergence (eoc) for the MCS method.

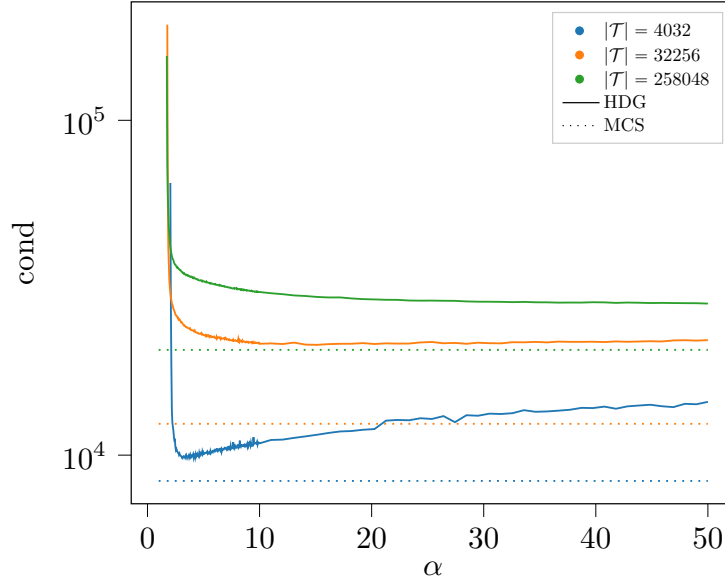


FIGURE 3. Approximate condition numbers of the corresponding  $A$  blocks of the HDG (solid lines) and the MCS (dotted lines in the same color) method on different meshes. Different values of  $\alpha$  on the x axis and approximate condition number (cond) on the y axis.

## ACKNOWLEDGEMENTS

The authors acknowledge support from the Austrian Science Fund (FWF) through the research program “Taming complexity in partial differential systems” (F65) - project “Automated discretization in multiphysics” (P10), the research program W1245, and the NSF grant DMS-1912779.

## REFERENCES

- [1] ARNOLD, D. N. AND BREZZI, F., *Mixed and nonconforming finite element methods : implementation, postprocessing and error estimates*, ESAIM: M2AN, 19 (1985), pp. 7–32.
- [2] D. BOFFI, F. BREZZI, AND M. FORTIN, *Mixed Finite Element Methods and Applications*, Springer Science & Business Media, 2013.
- [3] S. C. BRENNER, *Korn’s inequalities for piecewise  $H^1$  vector fields*, Math. Comp., 73 (2004), pp. 1067–1087.
- [4] B. COCKBURN, J. GOPALAKRISHNAN, AND R. LAZAROV, *Unified hybridization of discontinuous Galerkin, mixed, and continuous Galerkin methods for second order elliptic problems*, SIAM Journal on Numerical Analysis, 47 (2009), pp. 1319–1365.
- [5] B. COCKBURN, G. KANSCHAT, AND D. SCHÖTZAU, *A locally conservative LDG method for the incompressible Navier-Stokes equations*, Mathematics of Computation, 74 (2005), pp. 1067–1095.
- [6] ———, *A note on discontinuous Galerkin divergence-free solutions of the Navier–Stokes equations*, Journal of Scientific Computing, 31 (2007), pp. 61–73.
- [7] M. CROUZEIX AND P.-A. RAVIART, *Conforming and nonconforming finite element methods for solving the stationary Stokes equations I.*, RAIRO (Revue Française d’Automatique, Informatique et Recherche Opérationnelle), Analyse Numérique, R-3 (7<sup>e</sup> année) (1973), pp. 33–76.
- [8] R. S. FALK, *Nonconforming finite element methods for the equations of linear elasticity*, Math. Comp., 57 (1991), pp. 529–550.
- [9] M. FARHLOUL, *Mixed and nonconforming finite element methods for the stokes problem*, Canadian Applied Mathematics Quarterly, 3 (Fall 1995).
- [10] M. FARHLOUL AND M. FORTIN, *A new mixed finite element for the Stokes and elasticity problems*, SIAM J. Numer. Anal., 30 (1993), pp. 971–990.
- [11] M. FARHLOUL AND M. FORTIN, *Dual hybrid methods for the elasticity and the Stokes problems: a unified approach*, Numer. Math., 76 (1997), pp. 419–440.
- [12] M. FARHLOUL AND M. FORTIN, *Review and complements on mixed-hybrid finite element methods for fluid flows*, in Proceedings of the 9th International Congress on Computational and Applied Mathematics (Leuven, 2000), vol. 140, 2002, pp. 301–313.
- [13] V. GIRAULT AND P.-A. RAVIART, *Finite element methods for Navier-Stokes equations: theory and algorithms*, vol. 5, Springer Science & Business Media, 2012.
- [14] J. GOPALAKRISHNAN, P. L. LEDERER, AND J. SCHÖBERL, *A mass conserving mixed stress formulation for the stokes equations*, 40 (2019), pp. 1838–1874.
- [15] J. GOPALAKRISHNAN, P. L. LEDERER, AND J. SCHÖBERL, *A mass conserving mixed stress formulation for stokes flow with weakly imposed stress symmetry*, 58 (2020), pp. 706–732.
- [16] P. L. LEDERER, C. LEHRENFELD, AND J. SCHÖBERL, *Hybrid Discontinuous Galerkin methods with relaxed  $H(\text{div})$ -conformity for incompressible flows. Part I*, to appear in SIAM journal on numerical analysis (preprint arXiv:1707.02782), (2017).
- [17] ———, *Hybrid Discontinuous Galerkin methods with relaxed  $H(\text{div})$ -conformity for incompressible flows. Part II*, arXiv preprint arXiv:1805.06787, (2018).
- [18] P. L. LEDERER, A. LINKE, C. MERDON, AND J. SCHÖBERL, *Divergence-free Reconstruction Operators for Pressure-Robust Stokes Discretizations with Continuous Pressure Finite Elements*, SIAM J. Numer. Anal., 55 (2017), pp. 1291–1314.
- [19] LEDERER, PHILIP L., *A Mass Conserving Mixed Stress Formulation for Incompressible Flows*, PhD thesis, Technical University of Vienna, 2019.
- [20] C. LEHRENFELD AND J. SCHÖBERL, *High order exactly divergence-free hybrid discontinuous galerkin methods for unsteady incompressible flows*, Computer Methods in Applied Mechanics and Engineering, 307 (2016), pp. 339 – 361.

- [21] A. LINKE, *On the role of the Helmholtz decomposition in mixed methods for incompressible flows and a new variational crime*, Computer Methods in Applied Mechanics and Engineering, 268 (2014), pp. 782–800.
- [22] J. SCHÖBERL, *NETGEN An advancing front 2D/3D-mesh generator based on abstract rules*, Computing and Visualization in Science, 1 (1997), pp. 41–52.
- [23] J. SCHÖBERL, *C++11 implementation of finite elements in NGSolve*, Tech. Rep. ASC-2014-30, Institute for Analysis and Scientific Computing, September 2014.
- [24] T. WARBURTON AND J. HESTHAVEN, *On the constants in hp-finite element trace inverse inequalities*, Computer Methods in Applied Mechanics and Engineering, 192 (2003), pp. 2765 – 2773.

*Email address:* gjay@pdx.edu

PORTLAND STATE UNIVERSITY, PO BOX 751, PORTLAND OR 97207, USA

*Email address:* lukas.kogler@tuwien.ac.at

INSTITUTE FOR ANALYSIS AND SCIENTIFIC COMPUTING, TU WIEN, WIEDNER HAUPTSTRASSE 8-10, 1040 WIEN, AUSTRIA

*Email address:* philip.lederer@aalto.fi

DEPARTMENT OF MATHEMATICS AND SYSTEMS ANALYSIS, AALTO UNIVERSITY, OTAKAARI 1, ESPOO, FINLAND

*Email address:* joachim.schoeberl@tuwien.ac.at

INSTITUTE FOR ANALYSIS AND SCIENTIFIC COMPUTING, TU WIEN, WIEDNER HAUPTSTRASSE 8-10, 1040 WIEN, AUSTRIA