

FedHAP: Fast Federated Learning for LEO Constellations using Collaborative HAPs

Mohamed Elmahallawy, Tony T. Luo

Computer Science department, Missouri University of Science and Technology, USA

E-mail: {meqkx, tluo}@mst.edu

Abstract—Low Earth Orbit (LEO) satellite constellations have seen a surge in deployment over the past few years by virtue of their ability to provide broadband Internet access as well as to collect vast amounts of Earth observational data that can be utilised to develop AI on a global scale. As traditional machine learning (ML) approaches which train a model by downloading satellite data to a ground station (GS) is not practical, Federated Learning (FL) offers a potential solution. However, existing FL approaches cannot be readily used because of excessively prolonged training time and unreliable satellite-GS communication channels. In this paper, we propose FedHAP by introducing high-altitude platforms (HAPs) as distributed parameter servers (PSs) into FL for Satcom (or more concretely LEO constellations), to achieve fast and efficient model training. FedHAP consists of three components: 1) a layered communication topology, 2) a model propagation algorithm, and 3) a model aggregation algorithm. Our extensive simulations demonstrate that FedHAP significantly accelerates FL model convergence as compared to state-of-the-art baselines, cutting the training time from several days down to a few hours yet achieving higher accuracy.

I. INTRODUCTION

Low Earth Orbit (LEO) satellite constellations are a collection of small satellites orbiting in space between 500 and 2000 km above the Earth’s surface. Due to the low altitude of LEO satellites, as well as their lower cost and easier deployment, they have recently been increasingly deployed to support large-scale data collection (e.g., Earth observation imagery) in a wide range of applications such as urban planning, weather forecast, disaster management, and addressing climate change [1]. To reap the benefit of AI in processing these data, traditional machine learning (ML) approaches that download massive satellite data to a ground station (GS) and then train a centralized ML model are no longer practical, because of the limited bandwidth, intermittent and irregular satellite-GS connectivity, and data privacy [2].

Federated learning (FL) [3] emerged recently and appears to be a promising solution, in which clients (satellites in our case) would each train an ML model locally, without uploading data anywhere, and only transmit the model parameters after training to a parameter server (PS). The PS, typically a ground station (GS) in satcom, will then aggregate the received model parameters into a global model, and sends it back to all the satellites again for re-training. This procedure repeats iteratively until model convergence.

Challenges. However, this is not straightforward and applying FL to satcom involves several challenges. First, the connectivity or “visibility” of each satellite to the GS is highly intermittent and irregular, due to the distinction between satellite trajectories and Earth rotation. In fact, the interval between two consecutive visits of a satellite to the GS can vary from a couple of hours to more than a day [4, 5]. Thus due to the iterative nature of FL, such visibility will result in a huge convergence delay, up to several days [6]. The second challenge is that the wireless channels between satellites and GS are highly unpredictable and unreliable as they are constantly impacted by weather conditions (e.g., rain, fog, wind turbulence)

and radio interference, which are especially notable near the Earth’s surface. Third, satellite communication is subject to long propagation delay and transmission delay, which hints a pressing need for reducing communication distances and FL rounds.

Related work. Recently, FL has drawn intense interest due to its promising prospects in LEO constellations [4–7]. Chen et al. [6] applied the original FedAvg [8] to satcom to demonstrate the benefits as compared to the traditional centralized ML approach, but a clear limitation is the large delay. Razmi et al. [5] proposed FedISL which employs inter-satellite-link (ISL) to improve performance, but to increase visibility they assume a medium Earth orbit (MEO) satellite to serve as the PS which is typically not available. Moreover, the large speed difference between MEO and LEO satellites greatly amplifies the *Doppler shift* effect but has been overlooked in the study. In another work, [7] presents an asynchronous FL algorithm called FedSat, which assumes that each LEO satellite visits the GS periodically and at regular intervals. However, this is an ideal setup which is barely available. So et al. [4] developed a semi-asynchronous FL algorithm called FedSpace to balance the idleness in synchronous FL and staleness in asynchronous FL when applied to satcom. FedSpace uses an approach similar to FedBuff [9], but additionally designs an algorithm for scheduling the aggregation process to take satellite connectivity into account, and shows that it outperforms FedBuff. However, FedSpace requires each satellite to upload a portion of its raw data to the GS, which contradicts the desirable FL principles (on communication efficiency and privacy).

Contributions. In this paper, we introduce high altitude platforms (HAPs) into FL to orchestrate the training process as PSs for LEO constellation, and thereby propose a new synchronous framework, FedHAP, for more efficient FL. The main idea is to explore inter-satellite and inter-HAP collaborations using a novel *model propagation* algorithm and *partial model aggregation*, under a layered communication topology (as opposed to the star topology in conventional FL). A HAP is a semi-stationary aerial station that floats in the stratosphere at 18–24 km above the Earth’s surface [10, 11] and is equipped with communication and computing facilities. Compared to GSs or MEO satellites, HAPs have the following advantages: 1) *lower cost*—a GS or an MEO satellite typically costs over a million dollars while a HAP costs only a small fraction of it [12, 13]; 2) *improved visibility* to satellites due to the much elevated altitude than GSs (a HAP will see more satellites at a time or see each satellite more often); 3) *better communication environment* since the space above the stratosphere is much clearer, stabler, and less interfered than the troposphere (right above the ground); 4) HAPs can *easily relocate* when the LEO constellation has changes (e.g., more satellites and orbits are launched into space) so as to adapt and obtain better visibility to satellites.

However, introducing HAPs calls for new architecture and

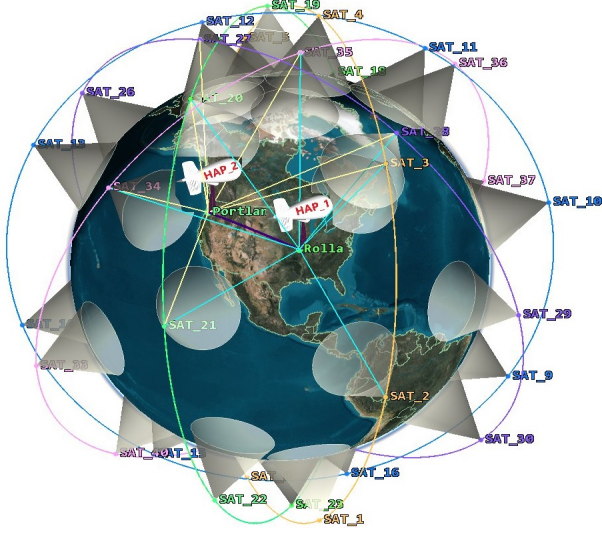


Fig. 1: A Walker constellation [14] with $L = 5$ orbital planes, each carrying $K_l = 8$ satellites. The constellation is orchestrated by $H = 2$ HAPs. Each gray cone depicts the covered area of a satellite.

algorithm designs. Accordingly, this paper makes the following contributions:

- We introduce HAPs in lieu of GSs to act as PSs into FL to train ML models collaboratively with satellites, in a multi-orbit LEO constellation to achieve much faster convergence.
- We propose a FedHAP framework which consists of three new components: (i) a layered non-star communication topology, (ii) a model propagation algorithm that overcomes the challenge of sporadic satellite-HAP visits, and (iii) partial model aggregation that accelerates global model convergence.
- We evaluate the performance of FedHAP in a wide range of settings (IID vs. non-IID, CNN vs. MLP, GS vs. HAP, single HAP vs. multi-HAPs) with multiple state-of-art FL-satcom approaches. The results show that FedHAP significantly outperforms them on both convergence speed and model accuracy.

II. SYSTEM MODEL

Consider a LEO constellation that consists of L orbits (a.k.a. orbital planes), where each orbit l carries K_l equally-spaced satellites. Each satellite has a unique ID, and travels on orbit l with speed $v_l = \frac{2\pi(R_E + h_l)}{T_l}$, where R_E is the radius of the Earth, h_l is the orbital height, and T_l is the orbital period given by $T_l = \frac{2\pi}{\sqrt{GM}}(R_E + h_l)^{3/2}$, where G is the gravitational constant and M is the mass of the Earth. In addition, there are H HAPs where each HAP h acts as a PS that communicates with a varying number of satellites from different orbital planes at any given time, and perform (partial or full) model aggregation for FL. An illustration is given in Fig. 1.

A. Federated learning in LEO Constellations

For the ease of description, in this section we assume a single PS as in classical FL. Later in Section III, we propose a more sophisticated scheme that involves multiple HAPs acting as PSs and a new communication (non-star) topology.

Given a LEO constellation $\mathcal{K}$, the overarching goal of the PS and all the satellites $k \in \mathcal{K}$ is to collaboratively solve the following optimization problem:

$$\arg \min_{w \in \mathbb{R}^d} F(w) = \sum_{k \in \mathcal{K}} \frac{n_k}{n} F_k(w), \quad (1)$$

where w represents the target ML model (i.e., its parameters), n_k is the data size of satellite k , $n = \sum_{k \in \mathcal{K}} n_k$ is the total size, and F_k is the loss function that satellite k aims to minimize, as defined by

$$F_k(w) = \frac{1}{n_k} \sum_{x \in D_k} l(w; x), \quad (2)$$

where $l(w; x)$ is the training loss over a data point x and D_k is satellite k 's local dataset whose size is $n_k = |D_k|$.

To solve the above problem, the PS first creates an ML model (e.g., a neural network) with initial parameters w^0 and disseminates it to all or a subset of the satellites when they (successively) come into its visible zone. Each satellite k then applies a local optimization method such as mini-batch gradient descent for I local epochs, to update the model as

$$w_k^{\beta, i+1} = w_k^{\beta, i} - \zeta \nabla F_k(w_k^{\beta, i}; X_k^i), \quad i = 0, 1, 2, \dots, I-1, \quad (3)$$

where $w_k^{\beta, i}$ is the local model of satellite k at local iteration i in a global communication round β , ζ is the learning rate, $X_k^i \subset D_k$ represents the i -th mini-batch. As soon as the PS receives the updated parameters from those satellites, it aggregates them as

$$w^{\beta+1} = \sum_{k \in \mathcal{K}} \frac{n_k}{n} w_k^{\beta, I}, \quad \beta = 0, 1, 2, \dots \quad (4)$$

In other words, the PS starts a new round $\beta+1$ by transmitting the updated w to all the satellites again when they become visible, and the above procedure repeats until the FL model is converged (e.g., a target loss or accuracy is achieved).

There are two general FL approaches. **Synchronous FL** as originally proposed by McMahan et al. [8] is similar to what is described above, in which the PS must wait until all the selected satellites to finish their local training and send their trained parameters back to the PS in order to proceed to the next round of training. **Asynchronous FL**, such as proposed in [15], allows the PS to proceed earlier to the next round with only a (varying) subset of the satellites' training results, in order to avoid bottleneck or straggler satellites. Although this sounds appealing, it does not necessarily lead to improved performance because it requires a careful trade-off between the reduced waiting time (desired) and less training progress (undesired) in each round, as well as handling *stale* model parameters from *straggler* satellites.

We propose a synchronous FL approach, FedHAP, to accelerate convergence and address multiple challenges faced by FL in Satcom. We also compare FedHAP to both synchronous and asynchronous methods from the state of the art.

B. Communication Links

We consider the following types of communication links: 1) ISL, 2) satellite-HAP link (SHL), 3) inter-HAP link (IHL), and 4) satellite/HAP-ground link (S/HGL). The communication links between satellites and the GS are radio frequency (RF) links which are full-duplex, while between satellites and HAPs are free-space optical (FSO) links which are half-duplex.

1) **RF Links:** In order to compare our proposed approach that uses HAPs as PSs to the state-of-the-art that use GS as a PS, we used RF as a communication link thanks to their reliability for long-range communication. Without loss of generality, let us consider a satellite k and a GS g , where they will only be feasible to each other (i.e., establish a SGL between them for communicating) if the following condition is satisfied: $\angle(r_g(t), (r_k(t) - r_g(t))) \leq \frac{\pi}{2} - \alpha_{min}$ where $r_k(t)$ and $r_g(t)$ are the trajectories of satellite k and GS g , respectively, and

α_{min} is the minimum elevation angle. Moreover, when taking into account that the wireless channel in free space is AWGN (additive white Gaussian noise), the signal-to-noise ratio (SNR) between any two objects a and b (i.e., satellite and GS or HAP) can be written as:

$$SNR_{RF} = \frac{P_t G_a G_b}{K_B T B \mathcal{L}_{a,b}}, \quad (5)$$

where P_t is the power transmitted by sender, and G_a, G_b are the total antenna gain of the sender and receiver, respectively, K_B is the Boltzmann constant, T is the noise temperature at the receiver, B is the channel bandwidth, and $\mathcal{L}_{a,b}$ is the free-space pass loss, which can be given by:

$$\mathcal{L}_{a,b} = \left(\frac{4\pi \|a, b\|_2 f}{c} \right)^2, \quad \text{when } \|a, b\|_2 \leq \ell_{a,b}, \quad (6)$$

where $\|a, b\|_2$ is the Euclidean distance between a and b , f is the carrier frequency, and $\ell_{a,b}$ is the minimum distance between a and b that enables them to communicate with each other (i.e., a line-of-sight link (LoS) exists between them). In other words, the visibility between the objects a and b will be obstructed by the Earth if $\|a, b\|_2 > \ell_{a,b}$. The overall time delay t_d of the communication link between objects a and b can be formulated as:

$$t_d = \underbrace{\frac{z|\mathcal{D}|}{R}}_{t_t} + \underbrace{\frac{\|a, b\|_2}{c}}_{t_p} + t_a + t_b, \quad (7)$$

where t_t and t_p are the transmission and propagation delay between the sender and receiver, respectively, t_a and t_b are the processing delay at a and b , when one of the objects acts as a sender, and the other as a receiver, $|\mathcal{D}|$ is the number of data samples, z is the bits number of each sample, and R is the data rate, which can be approximately calculated using the Shannon formula:

$$R \approx B \log_2(1 + SNR) \quad (8)$$

2) *FSO Links*: FSO is more suitable for short-range communications due to its higher data rates and resistance to interference. HAPs operate as PSs and communicate with each other or with satellites via FSO (but we remove this difference in our simulation for a fair comparison). Consider again two objects a and b (e.g., satellites or HAPs), one as a receiver equipped with photodetectors and the other as a sender equipped with light-emitting diodes (LEDs). When a LoS optical link is established between a and b , the channel gain can be expressed as [16]:

$$G = \frac{\sigma + 1}{2\pi(\|a, b\|_2)^2} \mathcal{A}_0 \cos^\sigma(\alpha_e) T_f g(\theta) \cos(\theta), \quad (9)$$

where σ represents the radiation coefficient (Lambertian emission), $\mathcal{A}_0$ is the active area of the photodetector, α_e is the viewing angle, T_f is the filter transmission coefficient, $g(\theta)$ is the concentration gain, and θ is the incident angle at the receiver axis. Therefore, the SNR at the receiver can be determined as follows:

$$SNR_{FSO} = \frac{(\rho G P_t)^2 B}{NR}, \quad (10)$$

where ρ is the responsibility of the photodetector, and N represents the noise variance. When the light is spread due to changes in the atmosphere, the receiver collects less power, resulting in poor communication. This detected as a geometrical loss at the receiver, and can be calculated as follows:

$$l_g = \frac{4\pi r^2}{\pi(\xi \|a, b\|_2)^2}, \quad (11)$$

where r is the receiver aperture radius and ξ is the divergence angle. Turbulence loss is another loss where its intensity is based on the refractive index parameter $\mathcal{M}^2(z)$, which can be estimated using the Hufnagel-Valley (H-V) model as follows:

$$\mathcal{M}^2(z) = 0.00594 \left(\frac{\mathcal{V}}{27} \right)^2 \left(10^{-5} z \right)^{10} \exp \left(\frac{-z}{1000} \right) + 2.7 \times 10^{-16} \exp \left(\frac{-z}{1500} \right) + \mathcal{K} \exp \left(\frac{-z}{100} \right), \quad (12)$$

where $\mathcal{V}$ is the wind speed, z is the object altitude, and $\mathcal{K}$ is constant ($1.7 \times 10^{-14} m^{-2/3}$). Once the value $\mathcal{M}^2(z)$ is estimated, the turbulence loss l_t can be determined as follows:

$$l_t = \sqrt[2]{23.17 \left(\frac{2\pi f}{c} 10^9 \right)^{7/6} \mathcal{M}^2(z) (\|a, b\|_2)^{11/6}} \quad (13)$$

In our simulation (Section IV), the parameters for the formulas presented above will be set.

III. THE FEDHAP FRAMEWORK

FedHAP is a synchronous FL framework tailored to satcom to accelerate the convergence of FL and improve its accuracy. FedHAP addresses two main challenges: (i) sporadic connectivity between satellites and PS, which causes long convergence time in traditional FL approaches (e.g., FedAvg [8]); (ii) the large number of communication rounds typically required for FL convergence. By introducing HAPs, the number of visible satellites at a time by a PS is increased (a GS can only “see” an angular range of $180^\circ - \alpha$ where α is the elevation angle, while a HAP can “see” even beyond 180°). Furthermore, three new components as mention in Section I are proposed to enable and leverage inter-satellite and inter-HAP collaborations to accelerate convergence and improve accuracy.

A. Layered Communication Topology

We consider a hierarchical topology consisting of two layers. The first, *worker layer* is comprised of all the satellites of the LEO constellation $\mathcal{K}$, which trains and transmits local models using ISL or SHL. The second, *server layer* is comprised of all the HAPs that aggregate and transmit global models using IHL or SHL. Each satellite have four antennas, two on the *roll axis* for intra-plane ISL communications, and two on the *pitch axis* for inter-plane ISL communications. As the latter is strongly affected by the *Doppler shift*, we only use the former (intra-plane ISL) and refer to it as ISL for short in the rest of the paper unless otherwise specified, for the ease of description.

In the traditional FL topology, i.e., star, each satellite individually communicates with the PS and thus the PS has to wait for each satellite to come into its visible zone, thereby incurring a very large delay even for a single round of collecting all the model updates. In contrast, we lay a *ring topology* on each orbit in the worker layer, and only one of the visible satellites (with long visibility window) on each orbital plane will be responsible for communicating with the server layer (detailed in the next subsection). In the server layer, the HAPs are organized in a ring topology too, for communication among themselves (explained in the next subsection), but each HAP also communicates with a set of satellites from different orbital planes, forming a small star topology. Thus overall, this creates a *ring of multiple small star-topology*.


This layered communication structure significantly enhances the continuity of the satellite-PS connectivity, via parallel communications among rings and among small-stars. Even when there is only a single HAP, the concurrency among rings

would still reap substantial efficiency gain, since a satellite no longer needs to wait for its own next visit to the PS (which takes hours) in order to send or receive models, but can leverage the currently or soon-to-be visible satellite. In addition, all links without GS (IHL, SHL, and ISL) can take advantage of FSO links which have higher data rates than RF links (although we do not apply this benefit in our experiments, for a fair comparison with baselines).

B. Propagation of Local and Global Models

We propose a model propagation algorithm that relays local and global models within and between the worker and server layers. The main objective of this algorithm is to minimize the *idleness* existing in traditional synchronous FL approaches, where a PS has to idly wait for all the invisible satellites to become visible (successively) in order to send or receive model updates. To this end, we allow each visible satellite to relay both its local model and the global model (received from server layer) to its next-hop invisible satellite which will perform partial aggregation (cf. (14), explained later), until reaching the next visible satellite, thereby reducing idle waits significantly. Our propagation algorithm is divided into three phases which we explain below.

1) *Inter-HAP Relay of Global Models*: It is carried out at the server layer only when there are multiple HAPs. One HAP is pre-designated as the *source* and another (e.g., the one farthest from the source) as the *sink*. The source HAP generates an initial global model, w^0 , and then transmits it to its adjacent HAPs via IHL. It also transmits w^0 to all of its currently visible satellites via SHL. Upon receiving w^0 , each HAP relays w^0 to its next-hop neighbor on the server-ring topology and also transmits w^0 to all of its currently visible satellites via the small-star topology, similarly to the source HAP. This continues until the sink HAP receives the model and transmits to its currently visible satellites. In Fig. 2a, the yellow curved arrows illustrate this relay process. In the subsequent rounds $\beta = 1, 2, \dots$, w^0 is substituted by w^β while the procedure remains the same.

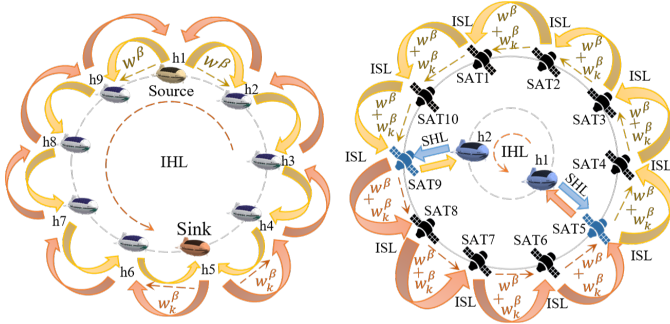

(a) Inter-HAP model relay.

(b) Inter-satellite model relay.

Fig. 2: Illustration of the proposed model propagation algorithm. In (a), a source HAP (h1) is relaying a *global model* to a sink HAP (h5), indicated by yellow arrows; later on, the sink HAP will also relay a *partial-global model* to the source HAP, as indicated by orange arrows. In (b), blue satellites represent visible satellites while black ones represent invisible satellites, to HAPs h1 and h2; yellow and orange arrows represent propagation of models (each satellite's local model and an updated partial global model) from SAT5 and SAT9, respectively.

2) *Inter-Satellite Relay of Local and Partial-Global Models*: In the worker layer, each visible satellite k in the LEO constellation will perform two tasks upon receiving the global

model w^β in the β -th round. The first is to retrain w^β on its own data to generate an updated local model w_k^β . The second task is to relay both w^β and w_k^β to its next-hop satellite k' via ISL (the propagation direction is pre-designated, either clockwise or counter-clockwise). If the neighbor k' is invisible to the PS, it will do the same as k but, additionally, also perform a *partial aggregation* of its generated local model $w_{k'}^\beta$ and the received w_k^β as follows:

$$w_k^\beta = (1 - \gamma_{k'})w_k^\beta + \gamma_{k'}w_{k'}^\beta \quad (14)$$

where $\gamma_{k'} = m_{k'}/m$ is a scaling factor, $m_{k'}$ is the data size of the invisible satellite k' and m is the total data size of the satellites on the same orbit. Thus, w_k^β is a partially aggregated model which we call a *partial-global model* and will be sent to the next invisible satellite together with the global model w^β . The above process continues until reaching the next visible satellite, who will then transmit the updated w_k^β to its visible HAP, and stop relaying further (while the relay *originating from itself* to the same direction has started earlier). Fig. 2b gives an illustration. If the neighbor k' is visible, this is simply a special case of the above.

In summary, unlike traditional FL where the PS must wait for all the satellites to be visible (successively) to receive their updated local models and then aggregate into a global model, our inter-satellite model propagation, together with partial aggregation, “activates” all the satellites even though some are invisible, and is thus able to speed up the training process.

3) *Inter-HAP Relay of Partial-Global Models*: Once all the HAPs receive the partial-global models from their respective visible satellites, they will relay these partial models in the *reverse* direction by starting from the *sink* HAP until reaching the *source* HAP. Then, the source HAP will aggregate all the received partial models into an updated global model $w^{\beta+1}$, following Section III-C (Eq. 16), and propagate $w^{\beta+1}$ to all the HAPs, following Section III-B1.

Algorithm 1 summarizes the entire process, and Lines 2-13 correspond to the above three stages.

C. Partial and Full Model Aggregation

Once the source HAP has collected all the partial-global models from its collaborative HAPs on the server layer, it organizes these models as follows:

$$\mathcal{U} = \left\{ \underbrace{\{\mathcal{U}_{h1}, \dots, \mathcal{U}_H\}_{l_1}}_{S_{l_1}}, \underbrace{\{\mathcal{U}_{h1}, \dots, \mathcal{U}_H\}_{l_2}}_{S_{l_2}}, \dots, \underbrace{\{\mathcal{U}_{h1}, \dots, \mathcal{U}_H\}_{l_L}}_{S_L} \right\} \quad (15)$$

where $\mathcal{U}$ is a set cover that contains all the received partial models, $\{\mathcal{U}_h\}_l$ represents the partial models collected by HAP h from an orbital plane l , and S_l is the subset of all the partial models from orbital plane l collected by all the H HAPs. Since a satellite may be visible to more than one HAP, FedHAP will filter out redundant partial models from each S_l based on satellite ID, and obtain $\mathcal{U}' = \{S'_{l_1}, S'_{l_2}, \dots, S'_{l_L}\}$ where S'_l contains partial-global models from unique satellite IDs only, for each orbital plane l . Next, FedHAP will check if there is any orbit l being left out in $\mathcal{U}$, which could happen when there were no visible satellites at all on orbit l up to now. In such cases, FedHAP will reschedule the generation of the global model to the next global epoch $\beta + 1$ (and so on until $\mathcal{U}$ contains the partial model from this particular orbit l). When

models are received from all orbit planes, FedHAP aggregates them as follows:

$$w^{\beta+1} = \sum_{s'_l \in \mathcal{S}'_L} \sum_{\mathcal{U}_h=1}^{\mathcal{U}_H} \frac{m_{\mathcal{U}_h}}{m_l} w_k^\beta \quad (16)$$

where $m_{\mathcal{U}_h}$ represents the data size of the partial global model collected by HAP h , and m_l represents the entire data size collected by satellites within an orbital plane l . Lines 14-18 of Algorithm 1 summarize the above. Then, the entire process will start over from Section III-B1 again, until the final convergence.

Algorithm 1: FedHAP Model Propagation and Aggregation

```

Initialize: Global epoch  $\beta=0$ , global model  $w^\beta$ ,  $\mathcal{U}_h|_{h=1}^H = \phi$ 
1 while Stopping criteria is not met do
2   foreach  $h$  from source to sink HAP do  $\triangleright$  Inter-HAP
     relay of the global model
3     Transmit  $w^\beta$  to all visible satellites of  $h$ 
4     foreach  $k \in \mathcal{K}$  that is visible to  $h$  do  $\triangleright$  Inter-Sat
        relay of local and partial-global models
5       Retrain  $w^\beta$  on  $k$ 's own data to obtain  $w_k^\beta$ 
6       foreach invisible  $k'$  between  $k$  and  $k+1$  do
           $\triangleright$  Aggregate partial models
7         Retrain  $w^\beta$  on  $k'$ 's local data to obtain  $w_{k'}^\beta$ 
8         Aggregate  $w_k^\beta$  and  $w_{k'}^\beta$  using (14)
9         Propagate both  $w^\beta$  and  $w_{k'}^\beta$  to next  $k'$ 
10       $k+1$  transmits  $w_k^\beta$  to its visible HAP
11      Update  $\mathcal{U}_h \leftarrow \mathcal{U}_h \cup \{w_k^\beta\}$  and record all the
        relaying Sat IDs
12   foreach  $h$  from sink to source HAP do  $\triangleright$  Inter-HAP
     relay of partial models
13     Transmit  $\mathcal{U}_h$  to the next neighboring HAP
14   if Source HAP receives all partial models then
15     Filter out redundant models from  $\mathcal{U}$  (15) based on sat
      ID
16     Aggregate  $w^{\beta+1}$  using (16)
17   else
18     Reschedule model aggregation to the next epoch
19    $\beta \leftarrow \beta + 1$ 

```

IV. PERFORMANCE EVALUATION

A. Experiment setup

LEO Constellation and Communication Links. We consider a Walker-delta constellation [14] consisting of five orbit planes with eight LEO satellites equally spaced in each orbit. Each orbital plane is at 2000 km above the Earth's surface and is inclined with an angle of 80 degrees. We consider both single-HAP and multi-HAP scenarios. In the former, the HAP floats above Rolla, Missouri, USA (the same location is also used by the GS in baselines). In the latter, one HAP floats above Rolla and the other above Dallas, Texas, USA. All the HAPs float at 20 km above the Earth's surface with a minimum elevation angle of 10 degrees (the same degree as a typical GS). The parameters of communication links discussed in Section II-B, which determines the connectivity between satellites and PSs, are given in Table I, for both FedHAP and the baselines we compare to. Note that all the FSO parameters are chosen in such a way that FSO links behave similarly as RF links, to ensure a fair comparison with baselines (so in reality FedHAP would perform even better). We run each simulation for three days to obtain each set of results.

TABLE I: Communication Parameters

Parameter	RF Link	FSO Link
G (sender & receiver)	6.98 dBi	same
P_t (satellite & PS)	40 dBm	10 dBm
f	2.4 GHz	same
T	354.81 K	same
R	16 Mb/sec	same
$\mathcal{V}$	—	0.021 km/sec

Dataset and ML models. We use MNIST dataset as is used by most of the FL-satcom studies in the literature. This dataset contains 70,000 images of handwritten digits of ten classes (0-9), in grayscale with a resolution of 28×28 pixels. We use two models at each satellite for model training: convolutional neural network (CNN) and multi-layer perceptron (MLP). In addition, we investigate both IID and non-IID data distributions. In the IID setting, we shuffle the training samples and randomly distribute them equally among all the satellites, with each having all the 10 classes of images. In the non-IID setting, satellites in three orbits have 6 classes (digits 0-5), while satellites in the other two orbits have 4 classes (digits 6-9). Finally for hyper-parameters, we set mini-batch size 32 and learning rate ζ 0.01.

Baselines. We compare FedHAP to the most recent (dated 2022) peer research as reviewed in Section I, including FedISL [5] (synchronous approach), FedSat [7] (asynchronous), and FedSpace [4] (asynchronous).

B. Results

Comparison with State of the Art. For a fair comparison, we use only a single HAP or GS and make two versions of FedHAP, FedHAP-GS and FedHAP-oneHAP, to compare with baselines (later we have a two-HAP version for more extensive evaluation). In FedHAP-GS, everything is the same as what is described in this paper, except that the HAP is replaced by a GS (so it will benefit from our model propagation and aggregation).

TABLE II: Comparing FedHAP to State of The Art (All non-IID)

FL model	Accuracy (%)	Convergence time (h)	Remark
FedISL [5]	63.74	72	GS at arbitrary location
FedISL (ideal) [5]	82.87	3.5	GS at NP or MEO above the equator
FedSat (ideal) [7]	88.83	12	GS at NP so all satellites visit GS periodically
FedSpace [4]	46.10	72	GS needs satellite raw data
FedHAP-GS	83.94	40	GS at arbitrary location
FedHAP-oneHAP	87.286	30	HAP at arbitrary location
FedHAP-twoHAP	80.45(89.83)	5 (30)	HAPs at arbitrary location

The comparative results are given in Table II and Fig. 3a. We can see that FedHAP-oneHAP converges to an accuracy of 87.3% in 30 hours (or 80 global epochs) without restriction on HAP locations. This is unlike FedISL [5] which requires an ideal setup where GS must be located at the NP, yet its accuracy (82.9%) is still lower than FedHAP. After removing this ideal condition, as shown in the first row, FedISL takes 72 hours (200 global epochs) to converge and the accuracy is only 63.7%. FedSat [7] assumes the same ideal setup in order to have regular visiting intervals. FedSpace [4] does not assume the ideal setup but converges much slower (72 hours) with a low accuracy (46.1%). Between FedHAP-GS and FedHAP-oneHAP, the latter outperforms the former in terms of both accuracy and convergence time, showing the advantages of

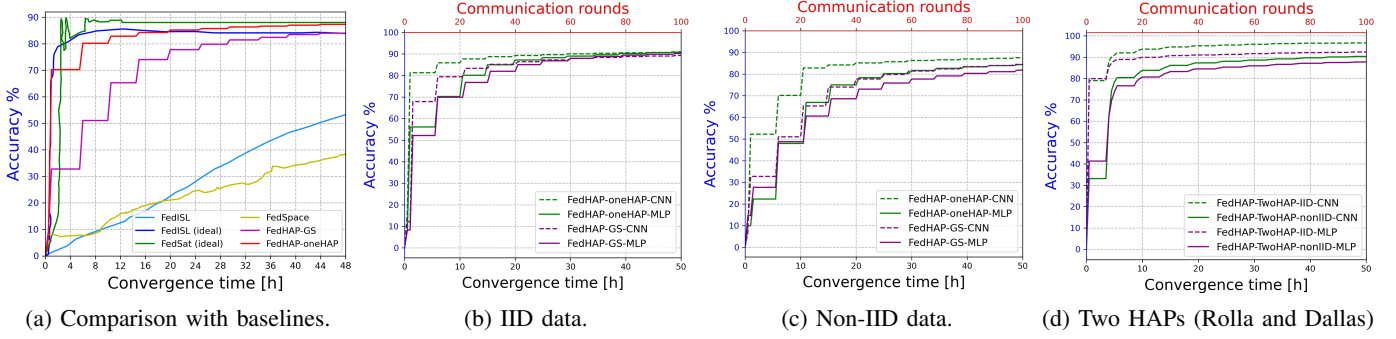


Fig. 3: Evaluation in multiple settings: IID vs. non-IID, CNN vs. MLP, GS vs. HAP, one vs. multiple HAPs.

using HAPs (recall Section I). Nonetheless, even FedHAP-GS performs quite well too, outperforming FedSpace and FedISL without the ideal setup by large margins.

In this set of results, CNN is used as the training model and data are non-IID. More scenarios are evaluated next.

Evaluating FedHAP in more extensive scenarios. We investigate FedHAP more thoroughly with more settings, including CNN vs. MLP, IID vs. non-IID data, and single PS vs. multiple PSs. See Fig. 3b for the results on IID data. When CNN is used, FedHAP achieves an accuracy of 90.13% within 20 hours using a single HAP, while FedHAP-GS achieves an accuracy of 89.3% after 35 hours. When MLP is used instead of CNN, the convergence time does not exhibit a notable change, and the accuracy of both oneHAP and GS versions drops by 1-3% only. Fig. 3c presents the results on non-IID data. It shows that FedHAP is robust to non-IID by performing rather closely to its IID counterpart: it converges in 60 global epochs (30 hours) and achieves an accuracy of 87.3% with a single HAP, and 80 global epochs (40 hours) and an accuracy of 84% with a GS. This difference in accuracy between HAP and GS is due to the fact that HAP is able to observe more LEO satellites than GS (by about 1-5 based on what we observe in simulations). Switching from CNN to MLP results in marginally reduced accuracy and a 10-hour increase of convergence time. However, this performance is still considerably better than other baseline methods.

In Fig. 3d, we present the results for two HAPs, under both IID and non-IID data settings. In the IID case, FedHAP reaches a high accuracy of 92.135% in only 5 hours and converges to an even higher 96.6% after 20 hours. In the non-IID case, it achieves an accuracy of 80.452% within 5 hours and 89.833% after 30 hours. When CNN is switched to MLP, the performance difference is negligible in the case of non-IID, while the accuracy drops about 5% (but still above 90%) in the case of IID, with approximately the same convergence time. Therefore, we can conclude that our proposed inter-satellite/HAP collaboration including model propagation and aggregation is effective in accelerating FL convergence and improving model accuracy for LEO constellations.

V. CONCLUSION

This paper introduces HAPs into FL for Satcom to orchestrate the iterative learning process, and proposes a novel synchronous FL framework, FedHAP, that leverages inter-satellite/HAP collaborations to accelerate FL convergence and improve accuracy. FedHAP tackles the challenge of highly sporadic and irregular satellite connectivity in LEO constellations using a layered communication architecture, a model propagation scheme, and a model aggregation algorithm. Our

simulation results demonstrate promising results of FedHAP as compared to the state-of-the-art (5 times faster and an accuracy as high as 97%), as well as its robustness to non-IID data as is typical in FL-satcom settings.

REFERENCES

- [1] A. Perez-Portero, J. F. Munoz-Martin, H. Park, and A. Camps, "Airborne gnss-r: A key enabling technology for environmental monitoring," *IEEE Jnl. of Sel. Topics in Applied Earth Observations and Remote Sensing*, vol. 14, pp. 6652–6661, 2021.
- [2] S. Z. Abbas, H. Ibrahim, and M. Khan, "A hybrid chaotic blow-fish encryption for high-resolution satellite imagery," *Multimedia Tools and Applications*, vol. 80, no. 17, pp. 26 069–26 091, 2021.
- [3] P. Kairouz, H. B. McMahan, B. Avent, A. Bellet, M. Bennis, A. N. Bhagoji, K. Bonawitz, Z. Charles, G. Cormode, R. Cummings *et al.*, "Advances and open problems in federated learning," *Foundations and Trends[®] in Machine Learning*, vol. 14, no. 1–2, pp. 1–210, 2021.
- [4] J. So, K. Hsieh, B. Arzani, S. Noghabi, S. Avestimehr, and R. Chandra, "FedSpace: An efficient federated learning framework at satellites and ground stations," *arXiv preprint arXiv:2202.01267*, 2022.
- [5] N. Razmi, B. Matthiesen, A. Dekorsy, and P. Popovski, "On-board federated learning for dense leo constellations," in *IEEE ICC*, May 2022.
- [6] H. Chen, M. Xiao, and Z. Pang, "Satellite-based computing networks with federated learning," *IEEE Wireless Communications*, vol. 29, no. 1, pp. 78–84, 2022.
- [7] N. Razmi, B. Matthiesen, A. Dekorsy, and P. Popovski, "Ground-assisted federated learning in leo satellite constellations," *IEEE Wireless Communications Letters*, 2022.
- [8] B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, "Communication-efficient learning of deep networks from decentralized data," in *AISTATS*, 2017, pp. 1273–1282.
- [9] J. Nguyen, K. Malik, H. Zhan, A. Yousefpour, M. Rabbat, M. Malek, and D. Huba, "Federated learning with buffered asynchronous aggregation," in *AISTATS*, 2022, pp. 3581–3607.
- [10] Y. Xing, F. Hsieh, A. Ghosh, and T. S. Rappaport, "High altitude platform stations (haps): Architecture and system performance," in *IEEE VTC-Spring*, 2021, pp. 1–6.
- [11] F. Hsieh, F. Jardel, E. Visotsky, F. Vook, A. Ghosh, and B. Picha, "Uav-based multi-cell haps communication: System design and performance evaluation," in *IEEE GLOBECOM*, 2020, pp. 1–6.
- [12] GSMA, "High altitude platform systems: Towers in the skies," *Technical report*, GSMA, 2021.
- [13] G. K. Kurt, M. G. Khoshkholgh, S. Alfattani, A. Ibrahim, T. S. Darwish, M. S. Alam, H. Yanikomeroglu, and A. Yongacoglu, "A vision and framework for the high altitude platform station (haps) networks of the future," *IEEE Communications Surveys & Tutorials*, vol. 23, no. 2, pp. 729–779, 2021.
- [14] J. G. Walker, "Satellite constellations," *Journal of the British Interplanetary Society*, vol. 37, p. 559, 1984.
- [15] C. Xie, S. Koyejo, and I. Gupta, "Asynchronous federated optimization," *arXiv preprint arXiv:1903.03934*, 2019.
- [16] N. Saeed, H. Almorad, H. Dahrouj, T. Y. Al-Naffouri, J. S. Shamma, and M.-S. Alouini, "Point-to-point communication in integrated satellite-aerial 6g networks: State-of-the-art and future challenges," *IEEE Open Jnl. of the Comm. Society*, 2021.