

Reconfigurable Intelligent Surfaces for Energy Efficiency in Full-duplex Communication System

Yiru Wang, *Graduate Student Member, IEEE*, Pengxin Guan, Hongkang Yu and Yuping Zhao

Abstract—In this letter, we study the reconfigurable intelligent surfaces (RIS) aided full-duplex (FD) communication system. By jointly designing the active beamforming of two multi-antenna sources and passive beamforming of RIS, we aim to maximize the energy efficiency of the system, where extra self-interference cancellation power consumption in FD system is also considered. We divide the optimization problem into active and passive beamforming design subproblems, and adopt the alternative optimization framework to solve them iteratively. Dinkelbach's method is used to tackle the fractional objective function in active beamforming problem. Penalty method and successive convex approximation are exploited for passive beamforming design. Simulation results show the energy efficiency of our scheme outperforms other benchmarks.

Index Terms—Reconfigurable intelligent surface, full-duplex, energy efficiency, alternative optimization.

I. INTRODUCTION

WITH the vision of 6-th Generation, the energy efficiency (EE) has been widely used as an important metric in green communications [1]. To improve the EE performance, a low-energy equipment named reconfigurable intelligent surface (RIS) has gained in popularity, which can dynamically change the wireless channels by adjusting the phase shifts [2]. A few literature have studied the EE maximization problem in RIS-aided system [3], [4]. The authors of [3] investigated the EE optimization of RIS-aided downlink multi-user communication from a multi-antenna base station. The EE design for a RIS-aided device-to-device half-duplex (HD) communication network was proposed in [4].

Theoretically, full-duplex (FD) technology can double the spectral efficiency by transmitting and receiving signals over the same time-frequency dimension, thus it further improves the communication performance compared to HD mode [5], [6]. However, FD systems would suffer from strong self-interference (SI) signal in practice. A number of SI cancellation (SIC) methods can suppress the SI power to the noise floor [7], but would also cause extra power consumption [8]. The optimization of the system EE for a RIS assisted FD communication system has been studied in [9], where each device transmit and receive signals with separative single antenna. However, the additional power consumption induced by SIC

This work was supported by Pengcheng National Laboratory No.PCL2021A04 of China. (*Corresponding author: Yuping Zhao.*)

Yiru Wang, Pengxin Guan and Yuping Zhao are with the School of Electronics Engineering and Computer Science, Peking University, Beijing 100080, China. (email: yiruwang@stu.pku.edu.cn; guanpengxin@pku.edu.cn; yuping.zhao@pku.edu.cn).

Hongkang Yu is with Wireless Product Research and Development Institute, ZTE Corporation, Shenzhen 518057, China. (email: yu.hongkang@zte.com.cn).

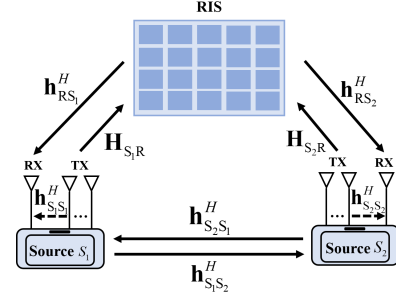


Fig. 1. A RIS assisted multi-antenna FD communication system.

in FD system has not been considered. Furthermore, how to jointly design active beamforming and passive beamforming to improve EE in a RIS-aided multi-antenna FD system is still a challenge.

This work studies the EE maximization problem of multi-antenna point-to-point FD communication system. The main contributions are summarized as follows:

- We study the EE maximization problem in RIS-aided FD system, subject to the minimum data rate demands and maximum transmit power constraints, together with the unit-modulus constraint at the RIS. The extra power consumption induced by SIC is also considered.
- We decouple the non-convex problem into active and passive beamforming subproblems and use the alternative optimization (AO) framework to solve them iteratively. We use Dinkelbach's method to tackle the fractional objective function in active beamforming problem. Penalty method and successive convex approximation (SCA) are exploited for passive beamforming design.
- Simulation results show the EE performance of RIS aided FD system is superior than other benchmarks.

Notation: $|x|$, $\|\mathbf{x}\|_2$ and $\|\mathbf{X}\|_F^2$ denote the absolute value of a scalar x , Euclidean norm of a column vector \mathbf{x} and Frobenius norm of matrix \mathbf{X} . $\text{Tr}(\mathbf{X})$, \mathbf{X}^T , \mathbf{X}^H , and $\text{rank}(\mathbf{X})$ denote the trace, transpose, conjugate transpose and rank of the matrix \mathbf{X} , respectively. $[\mathbf{x}]_m$ is the (m) -th element of vector \mathbf{x} . $\text{Diag}(\mathbf{x})$ is a diagonal matrix with the entries of \mathbf{x} on its main diagonal. $\mathbb{C}^{m \times n}$ denotes the space of $m \times n$ complex matrices.

II. SYSTEM MODEL AND PROBLEM FORMULATION

A. System Model Description

We consider a RIS-assisted point-to-point multi-input single-output system, as shown in Fig. 1. Sources S_1 and

S_2 are equipped with N transmit antennas and one receive antenna. Both sources operate in FD mode and communicate with each other with the assistance of the RIS. The RIS has M passive reflecting elements. $\Phi = \text{Diag}\{[\phi_1, \phi_2, \dots, \phi_M]\}$ is the phase-shift matrix of the RIS and $\phi_m = e^{j\theta_m}$, where $\theta_m \in [0, 2\pi)$ denotes the phase-shift of the m -th reflecting element.

The transmitted signal at each source is

$$\mathbf{x}_i = \mathbf{w}_i x_i, \quad i \in \{1, 2\}, \quad (1)$$

where x_i denotes the data symbol with normalized power and $\mathbf{w}_i \in \mathbb{C}^{N \times 1}$ is the beamforming vector at source S_i .

Let $\mathbf{H}_{S_1R} \in \mathbb{C}^{M \times N}$, $\mathbf{H}_{S_2R} \in \mathbb{C}^{M \times N}$, $\mathbf{h}_{RS_1}^H \in \mathbb{C}^{1 \times M}$, $\mathbf{h}_{RS_2}^H \in \mathbb{C}^{1 \times M}$, $\mathbf{h}_{S_1S_2}^H \in \mathbb{C}^{1 \times N}$, $\mathbf{h}_{S_2S_1}^H \in \mathbb{C}^{1 \times N}$ be the channel from S_1 to RIS, from S_2 to RIS, from RIS to S_1 , from RIS to S_2 , from S_1 to S_2 and from S_2 to S_1 , respectively¹. Let $\mathbf{h}_{S_1S_1}^H \in \mathbb{C}^{1 \times N}$ and $\mathbf{h}_{S_2S_2}^H \in \mathbb{C}^{1 \times N}$ be the SI channels at sources induced by the FD mode. The reflecting SI signal from the RIS can be reasonably neglected or eliminated according to [12], [13], thus it is ignored in the following formulations.

Then, the received signals at the sources can be expressed as

$$y_1 = (\mathbf{h}_{S_2S_1}^H + \mathbf{h}_{RS_1}^H \Phi \mathbf{H}_{S_2R}) \mathbf{x}_2 + \mathbf{h}_{S_1S_1}^H \mathbf{x}_1 + z_1, \quad (2)$$

and

$$y_2 = (\mathbf{h}_{S_1S_2}^H + \mathbf{h}_{RS_2}^H \Phi \mathbf{H}_{S_1R}) \mathbf{x}_1 + \mathbf{h}_{S_2S_2}^H \mathbf{x}_2 + z_2, \quad (3)$$

where $z_i \sim \mathcal{CN}(0, \sigma_i^2)$, $i \in \{1, 2\}$ is the additive white Gaussian noise with zero mean and variance of σ_i^2 at source S_i . Thus, we can express the achievable rate of the sources in bits second per Hertz (bps/Hz) as follows

$$R_1 = \log_2 \left[1 + \frac{|\mathbf{h}_{S_2S_1}^H + \mathbf{h}_{RS_1}^H \Phi \mathbf{H}_{S_2R}|^2 \mathbf{w}_2^2}{|\mathbf{h}_{S_1S_1}^H \mathbf{w}_1|^2 + \sigma_1^2} \right]. \quad (4)$$

$$R_2 = \log_2 \left[1 + \frac{|\mathbf{h}_{S_1S_2}^H + \mathbf{h}_{RS_2}^H \Phi \mathbf{H}_{S_1R}|^2 \mathbf{w}_1^2}{|\mathbf{h}_{S_2S_2}^H \mathbf{w}_2|^2 + \sigma_2^2} \right]. \quad (5)$$

The energy consumption of the RIS-assisted HD system can be classified into three major parts: 1) the transmit power; 2) the RIS power consumption; and 3) other hardware static power. However, in order to exploit the advantage of FD mode, the SI needs to be suppressed. Thus the sources would consume extra energy for SIC in FD mode compared to HD mode.

According to [8], analog SIC technology can substract the processed SI from the locally received signals after the propagation-domain SIC. Thus, we can model the SIC power consumption as a linear function of the transmit power as

$$P_{\text{SIC}} = \xi \left(\|\mathbf{w}_1\|^2 + \|\mathbf{w}_2\|^2 \right) + P_{\text{CC}}, \quad (6)$$

where ξ is the isolation factor (IF) representing the suppression ability of the SIC, and P_{CC} is the static power consumption introduced by the SIC circuits [8].

¹In this letter, we assume the channel state information (CSI) of all the communication links is perfectly known by each source (CSI estimation methods have been proposed in [10], [11])

Therefore, we can derive the total energy consumption as

$$P_{\text{tot}} = (1 + \xi) \left(\|\mathbf{w}_1\|^2 + \|\mathbf{w}_2\|^2 \right) + P_{\text{CC}} + MP_s + P_0, \quad (7)$$

where P_s is the hardware-dissipated power at each reflecting element and P_0 is other static power consumption of the system.

We then define the ratio between the achievable sum rate and the total power consumption as the energy efficiency (EE), which can be expressed as

$$\eta = \frac{R}{P_{\text{tot}}}, \quad (8)$$

where $R = R_1 + R_2$ is the achievable sum rate of the system.

B. Problem Formulation

In this letter, we aim to maximize the EE by jointly optimizing the active beamforming at the sources and the passive beamforming at the RIS, subject to the minimum data rate demands and maximum transmit power constraints. Mathematically, the optimization problem is formulated as

$$\mathcal{P}1 : \max_{\Phi, \mathbf{w}_1, \mathbf{w}_2} \eta \quad (9a)$$

$$\text{s.t. } R_i \geq \Gamma_i, \forall i \in \{1, 2\}, \quad (9b)$$

$$\|\mathbf{w}_i\|^2 \leq P_i^{\max}, \forall i \in \{1, 2\}, \quad (9c)$$

$$|\phi_m| = 1, m = 1, \dots, M, \quad (9d)$$

where Γ_i is the minimum data rate demand and P_i^{\max} is the maximum transmit power at the source S_i .

The problem $\mathcal{P}1$ is difficult to solve due to the non-convex constraints in (9b) and unit-modulus constraint in (9d). In addition, the active and passive beamforming vectors are highly-coupled, which also makes the optimization intractable.

III. ENERGY EFFICIENCY MAXIMIZATION ALGORITHM DESIGN

In this section, we adopt the AO method to address the coupling of the active and passive beamforming vectors in problem $\mathcal{P}1$, and decouple the problem $\mathcal{P}1$ into the active beamforming and passive beamforming design subproblems.

A. Active Beamforming Design With Given Φ

We define $\mathbf{F}_1 = (\mathbf{h}_{S_2S_1}^H + \mathbf{h}_{RS_1}^H \Phi \mathbf{H}_{S_2R})^H (\mathbf{h}_{S_2S_1}^H + \mathbf{h}_{RS_1}^H \Phi \mathbf{H}_{S_2R})$, $\mathbf{F}_2 = (\mathbf{h}_{S_1S_2}^H + \mathbf{h}_{RS_2}^H \Phi \mathbf{H}_{S_1R})^H (\mathbf{h}_{S_1S_2}^H + \mathbf{h}_{RS_2}^H \Phi \mathbf{H}_{S_1R})$, $\mathbf{F}_{11} = \mathbf{h}_{S_1S_1}^H \mathbf{h}_{S_1S_1}^H$, $\mathbf{F}_{22} = \mathbf{h}_{S_2S_2}^H \mathbf{h}_{S_2S_2}^H$, $\mathbf{W}_1 = \mathbf{w}_1 \mathbf{w}_1^H$ and $\mathbf{W}_2 = \mathbf{w}_2 \mathbf{w}_2^H$.

With a given Φ , the original problem $\mathcal{P}1$ can be transformed into active beamforming design subproblem as follows

$$\mathcal{P}2 : \max_{\mathbf{W}_1, \mathbf{W}_2} \frac{R(\mathbf{W}_1, \mathbf{W}_2)}{P_{\text{tot}}(\mathbf{W}_1, \mathbf{W}_2)} \quad (10a)$$

$$\text{s.t. } \text{Tr}(\mathbf{F}_1 \mathbf{W}_2) \geq \Gamma'_1 (\text{Tr}(\mathbf{F}_{11} \mathbf{W}_1) + \sigma_1^2), \quad (10b)$$

$$\text{Tr}(\mathbf{F}_2 \mathbf{W}_1) \geq \Gamma'_2 (\text{Tr}(\mathbf{F}_{22} \mathbf{W}_2) + \sigma_2^2), \quad (10c)$$

$$\text{Tr}(\mathbf{W}_i) \leq P_i^{\max}, \forall i \in \{1, 2\}, \quad (10d)$$

$$\text{rank}(\mathbf{W}_i) = 1, \forall i \in \{1, 2\}, \quad (10e)$$

where $\Gamma'_1 = 2^{\Gamma_1} - 1$ and $\Gamma'_2 = 2^{\Gamma_2} - 1$.

$$f_2'(\mathbf{W}_1, \mathbf{W}_2 | \mathbf{W}_1^{(t)}, \mathbf{W}_2^{(t)}) = \log_2 \left(\text{Tr}(\mathbf{W}_1^{(t)} \mathbf{F}_{11}) + \sigma_1^2 \right) + \frac{\text{Tr} \left[(\mathbf{W}_1 - \mathbf{W}_1^{(t)}) \mathbf{F}_{11} \right]}{\ln 2 \left[\text{Tr}(\mathbf{W}_1^{(t)} \mathbf{F}_{11}) + \sigma_1^2 \right]} + \log_2 \left(\text{Tr}(\mathbf{W}_2^{(t)} \mathbf{F}_{22}) + \sigma_2^2 \right) + \frac{\text{Tr} \left[(\mathbf{W}_2 - \mathbf{W}_2^{(t)}) \mathbf{F}_{22} \right]}{\ln 2 \left[\text{Tr}(\mathbf{W}_2^{(t)} \mathbf{F}_{22}) + \sigma_2^2 \right]}. \quad (16)$$

$\mathcal{P}2$ is difficult to solve because the object function is fractional and non-concave. Based on Dinkelbach's method [14], we introduce an auxiliary variable α and $\mathcal{P}2$ can be transformed into

$$\mathcal{P}2' : \max_{\mathbf{W}_1, \mathbf{W}_2} R(\mathbf{W}_1, \mathbf{W}_2) - \alpha P_{\text{tot}}(\mathbf{W}_1, \mathbf{W}_2) \quad (11a)$$

$$\text{s.t.} \quad (10b) - (10e), \quad (11b)$$

where α is updated iteratively by

$$\alpha^{(t)} = \frac{R(\mathbf{W}_1^{(t)}, \mathbf{W}_2^{(t)})}{P_{\text{tot}}(\mathbf{W}_1^{(t)}, \mathbf{W}_2^{(t)})}. \quad (12)$$

However, the objective function (11a) is still non-concave due to $R(\mathbf{W}_1, \mathbf{W}_2)$. However, $R(\mathbf{W}_1, \mathbf{W}_2)$ can be transformed as the of difference of concave functions (DC) as

$$R(\mathbf{W}_1, \mathbf{W}_2) = f_1(\mathbf{W}_1, \mathbf{W}_2) - f_2(\mathbf{W}_1, \mathbf{W}_2), \quad (13)$$

where

$$f_1(\mathbf{W}_1, \mathbf{W}_2) = \log_2 \left(\text{Tr}(\mathbf{W}_1 \mathbf{F}_{11}) + \sigma_1^2 + \text{Tr}(\mathbf{W}_2 \mathbf{F}_{11}) \right) + \log_2 \left(\text{Tr}(\mathbf{W}_2 \mathbf{F}_{22}) + \sigma_2^2 + \text{Tr}(\mathbf{W}_1 \mathbf{F}_{22}) \right), \quad (14)$$

$$f_2(\mathbf{W}_1, \mathbf{W}_2) = \log_2 \left(\text{Tr}(\mathbf{W}_1 \mathbf{F}_{11}) + \sigma_1^2 \right) + \log_2 \left(\text{Tr}(\mathbf{W}_2 \mathbf{F}_{22}) + \sigma_2^2 \right). \quad (15)$$

Since $f_2(\mathbf{W}_1, \mathbf{W}_2)$ is a differentiable concave function, we have its upperbound at t -th iteration as $f_2'(\mathbf{W}_1, \mathbf{W}_2 | \mathbf{W}_1^{(t)}, \mathbf{W}_2^{(t)})$ shown at the top of the page.

Therefore, at $(t+1)$ -th iteration, we aim to solve the lowerbound maximization problem of $\mathcal{P}2'$, which can be expressed as follows:

$$\mathcal{P}3 : \max_{\mathbf{W}_1, \mathbf{W}_2} f_1(\mathbf{W}_1, \mathbf{W}_2) - f_2'(\mathbf{W}_1, \mathbf{W}_2 | \mathbf{W}_1^{(t)}, \mathbf{W}_2^{(t)}) - \alpha P_{\text{tot}}(\mathbf{W}_1, \mathbf{W}_2) \quad (17a)$$

$$\text{s.t.} \quad (10b) - (10e). \quad (17b)$$

By using semidefinite relaxation (SDR) method [12], we drop the rank-one constraint of $\mathcal{P}3$ and get the optimized $\mathbf{W}_1^{(t+1)}$ and $\mathbf{W}_2^{(t+1)}$ by CVX. It should be noted that in order to ensure convergence, we use eigenvalue decomposition or Gaussian randomization to get the \mathbf{w}_1^* and \mathbf{w}_2^* at the end of the overall algorithm.

B. Passive Beamforming Optimization With Given $\mathbf{W}_1, \mathbf{W}_2$

With given \mathbf{W}_1 and \mathbf{W}_2 , the passive beamforming design subproblem is a sum rate maximization problem, which can be written as follows

$$\mathcal{P}4 : \max_{\theta} R(\theta) \quad (18a)$$

$$\text{s.t.} \quad \theta_m \in [0, 2\pi), m = 1, \dots, M, \quad (18b)$$

$$(9b), \quad (18c)$$

where $\theta = [\theta_1, \dots, \theta_M]^T$ is the phase-shifts of the RIS reflecting elements. By denoting $\mathbf{q} = [\phi_1, \dots, \phi_M, 1]^H$, $\mathbf{G}_1 = \begin{bmatrix} \text{Diag}(\mathbf{h}_{\text{RS}_1}^H) \mathbf{H}_{\text{S}_2\text{R}} \\ \mathbf{h}_{\text{S}_2\text{S}_1}^H \end{bmatrix}$ and $\mathbf{G}_2 = \begin{bmatrix} \text{Diag}(\mathbf{h}_{\text{RS}_2}^H) \mathbf{H}_{\text{S}_1\text{R}} \\ \mathbf{h}_{\text{S}_1\text{S}_2}^H \end{bmatrix}$, problem $\mathcal{P}4$ can be transformed as follows

$$\mathcal{P}4' : \max_{\mathbf{Q}} R(\mathbf{Q}) \quad (19a)$$

$$\text{s.t.} \quad \text{Tr}(\mathbf{Q} \Upsilon_1) \geq \Gamma'_1 (\text{Tr}(\mathbf{F}_{11} \mathbf{W}_1) + \sigma_1^2), \quad (19b)$$

$$\text{Tr}(\mathbf{Q} \Upsilon_2) \geq \Gamma'_2 (\text{Tr}(\mathbf{F}_{22} \mathbf{W}_2) + \sigma_2^2), \quad (19c)$$

$$[\mathbf{Q}]_{m,m} = 1, m = 1, \dots, M+1, \quad (19d)$$

$$\mathbf{Q} \geq \mathbf{0}, \quad (19e)$$

$$\text{rank}(\mathbf{Q}) = 1, \quad (19f)$$

where $\mathbf{Q} = \mathbf{q} \mathbf{q}^H$, $\Upsilon_1 = \mathbf{G}_1 \mathbf{W}_2 \mathbf{G}_1^H$, $\Upsilon_2 = \mathbf{G}_2 \mathbf{W}_1 \mathbf{G}_2^H$. The constraints (19d)-(19f) are imposed to guarantee that $\mathbf{Q} = \mathbf{q} \mathbf{q}^H$ holds after solving problem $\mathcal{P}4'$.

Problem $\mathcal{P}4'$ is non-convex because of the non-convex rank-one constraint in (19f). Hence, we exploit penalty method and SCA algorithm to find an optimal rank-one solution.

The non-convex rank-one constraint (19f) can be equivalently written as the following equality constraint [15]:

$$\|\mathbf{Q}\|_* - \mu_1(\mathbf{Q}) = 0, \quad (20)$$

where $\|\mathbf{Q}\|_* = \sum_l \mu_l(\mathbf{Q})$ denote the nuclear norm of \mathbf{Q} and $\mu_l(\mathbf{Q})$ denotes the l -th largest eigenvalue.

Note that the equation (20) indicates that when $\|\mathbf{Q}\|_* - \mu_1(\mathbf{Q}) \rightarrow 0$, \mathbf{Q} has only one non-zero eigenvalue, and then the rank-one constraint (19f) is satisfied. Hence, we transform problem $\mathcal{P}4'$ as follows

$$\mathcal{P}5 : \max_{\mathbf{Q}} R(\mathbf{Q}) - \frac{1}{\beta} [\|\mathbf{Q}\|_* - \mu_1(\mathbf{Q})] \quad (21a)$$

$$\text{s.t.} \quad (19b) - (19e). \quad (21b)$$

where $\beta > 0$ denotes the penalty coefficient used for penalizing the rank-one constraint (19f).

The penalty term is in the form of DC functions. For a given point $\mathbf{Q}^{(k)}$ in the k -th iteration of the SCA method, using first-order Taylor expansion, a convex upper bound for the penalty term can be given by:

$$\|\mathbf{Q}\|_* - \mu_1(\mathbf{Q}) \leq \|\mathbf{Q}\|_* - \bar{\mu}_1(\mathbf{Q}), \quad (22)$$

where $\bar{\mu}_1(\mathbf{Q}) = \mu_1(\mathbf{Q}^{(k)}) + \text{Tr}[\text{Re}\{\boldsymbol{\sigma}_1(\mathbf{Q}^{(k)}) \boldsymbol{\sigma}_1(\mathbf{Q}^{(k)})^H (\mathbf{Q} - \mathbf{Q}^{(k)})\}]$ and $\boldsymbol{\sigma}_1(\mathbf{Q}^{(k)})$ is the corresponding eigenvector of the largest eigenvalue.

Then, the solution at the $(k+1)$ -th iteration $\mathbf{Q}^{(k+1)}$ can be obtained by solving the following problem:

$$\mathcal{P}5' : \max_{\mathbf{Q}} R(\mathbf{Q}) - \frac{1}{\beta} (\|\mathbf{Q}\|_* - \bar{\mu}_1(\mathbf{Q})) \quad (23a)$$

$$\text{s.t.} \quad (19b) - (19e). \quad (23b)$$

In this way, we transform the non-trivial problem $\mathcal{P}4$ into a standard SDP Problem $\mathcal{P}5'$, which can be solved by CVX.

In summary, we exploit penalty method and SCA algorithm to solve the passive beamforming problem, which contains two loops implementation: 1) In the outer loop, we impose a scaling constant c to gradually decrease the penalty coefficient $c\beta$ such that $\|\mathbf{Q}\|_* - \mu_1(\mathbf{Q})$ is forced to zero eventually; 2) In the inner loop, we adopt SCA method to solve $\mathcal{P}4'$ until convergence. Let ε_1 and ε_2 be small thresholds. K represents the maximum numbers of iterations. The design of passive beamforming can be shown in Algorithm 1.

Algorithm 1 Passive Beamforming Algorithm for $\mathcal{P}4$

- 1: **Initialization:** Get initial $(\mathbf{W}_1, \mathbf{W}_2)$ and $\mathbf{Q}^{(0)}$. Set $k' = 0$ and $\beta^{(0)} > 0$.
 - 2: **repeat:outer loop**
 - 3: Set $k = 0$;
 - 4: **repeat:inner loop**
 - 5: Solve problem $\mathcal{P}5'$ to get $\mathbf{Q}^{(k+1)}$ with given $(\mathbf{W}_1, \mathbf{W}_2)$ and $\beta^{(k)}$;
 - 6: Update $k = k + 1$;
 - 7: **until** $\|\mathbf{Q}^{(k+1)} - \mathbf{Q}^{(k)}\|_F^2 < \varepsilon_1$ or $k > K$.
 - 8: Update $\beta^{(k+1)} = c\beta^{(k)}$;
 - 9: Update $k' = k' + 1$;
 - 10: **until** $\|\mathbf{Q}^{(k'+1)}\|_* - \mu_1(\mathbf{Q}^{(k'+1)}) < \varepsilon_2$.
 - 11: **Output:** \mathbf{Q}^* .
-

Finally, we can get the optimal \mathbf{q}^* by eigenvalue decomposition. The phase-shifts of the RIS can be given by

$$\theta_m = -\arg(\mathbf{q}_m^*/\mathbf{q}_{M+1}^*), \quad m = 1, \dots, M. \quad (24)$$

C. Overall Algorithm

Our proposed algorithm is summarized in Algorithm 1. ε_d is small threshold and T represents the maximum number of overall iterations. In order to ensure convergence, we use eigenvalue decomposition or Gaussian randomization to get the \mathbf{w}_1^* and \mathbf{w}_2^* in Step 9 at the end of the overall algorithm.

Proposition 1: Our proposed Algorithm 2 in step 2-8 is monotonically convergent.

Proof: Without loss of generality, we suppose that η denote the EE and $\mathbf{W} = (\mathbf{W}_1, \mathbf{W}_2)$, thus we have:

$$\eta(\mathbf{W}^{(t+1)}, \boldsymbol{\theta}^{(t+1)}) \stackrel{(a)}{\geq} \eta(\mathbf{W}^{(t+1)}, \boldsymbol{\theta}^{(t)}) \stackrel{(b)}{\geq} \eta(\mathbf{W}^{(t)}, \boldsymbol{\theta}^{(t)}), \quad (25)$$

where (a) holds because as the penalty coefficient decreases to comparatively small, the rank-one constraint will be satisfied, thus the SCA-based Algorithm 1 will converges to a stationary point of the original problem [16]. (b) holds due to optimization of problem $\mathcal{P}3$ and the update criterion (12) of α is non-decreasing according to [17], in which α stands for EE in power optimization subproblem. ■

The overall complexity is $O(I_1(2N^{3.5} + I_2I_3(M+1)^{4.5}))$, where I_1 is the iteration of AO algorithm, I_2 and I_3 are the iterations of inner loop and outer loop for solving $\mathcal{P}4$.

Algorithm 2 Overall Algorithm for $\mathcal{P}1$

- 1: **Initialization:** Set initial $\boldsymbol{\theta}^{(0)}$, $(\mathbf{W}_1^{(0)}, \mathbf{W}_2^{(0)})$ and $t = 0$.
 - 2: **repeat**
 - 3: Calculate $\alpha^{(t)}$ based on (12);
 - 4: Use SDR method to solve $\mathcal{P}3$ to get $(\mathbf{W}_1^{(t+1)}, \mathbf{W}_2^{(t+1)})$ with given $\boldsymbol{\theta}^{(t)}$ and $\alpha^{(t)}$;
 - 5: Solve problem $\mathcal{P}4$ according to **Algorithm 1**;
 - 6: Update phase-shift $\boldsymbol{\theta}^{(t+1)}$ based on (24);
 - 7: Update $t = t + 1$;
 - 8: **until** The fractional increase of (9a) is below ε_d or $t > T$.
 - 9: Use eigenvalue decomposition or Gaussian randomization to get $(\mathbf{w}_1^*, \mathbf{w}_2^*)$.
 - 10: Calculate EE based on (8).
 - 11: **Output:** active and passive beamforming vectors.
-

IV. SIMULATION RESULTS

This section provides simulation results to verify the performance of our proposed algorithm. We set the number of transmit antennas at each source to 4. We assume that the location of sources S_1 , source S_2 and RIS is (0m, 0m) and (200m, 0m) and (20m, 0m). We set $\sigma_A^2 = \sigma_B^2 = -80\text{dBm}$. The large-scale fading is modelled by $PL(d) = PL_0(d/d_0)^{-\varpi}$, where $PL_0 = -30\text{dB}$ is the path loss at the reference distance $d_0 = 1\text{m}$, d is the distance, and ϖ is the path-loss exponent, which is set to 2.5 for RIS related links and 3.5 for the two sources' direct links [12]. We adopt the Rician model for all channels, where the Rician factor is 5dB in SI channel [12] and 3dB for others [18]. The path loss of SI channel is set to -100dB due to SIC and the IF of SIC is set to 0.1 [8]. We assume the data rate requirements R_1 and R_2 are 1 bps/Hz. The static power consumption of the SIC circuits $P_{CC} = 50\text{mW}$ [8]. The hardware-dissipated power at each reflecting element $P_s = 10\text{mW}$ [3] and static power consumption $P_0 = 1000\text{mW}$ at each source [19]. We set $\beta^{(0)} = 100$, $c = 0.3$, $\varepsilon_1 = 10^{-5}$, $\varepsilon_2 = 10^{-7}$, $\varepsilon_d = 10^{-4}$.

The proposed EE optimization scheme for the RIS aided FD system, namely RIS-FD-EE, is compared to the following benchmark schemes:

- RIS aided FD system for sum rate maximization (RIS-FD-SR): We assume the system aims to maximize the sum rate without considering the power consumption, which is a special case of our proposed algorithm when α is set to 0 in active beamforming design.
- FD system for EE maximization without RIS (NoRIS-FD-EE): We only optimize the active beamforming at sources without the RIS deployment.
- RIS aided HD system for EE maximization (RIS-HD-EE): We assume source S_1 and source S_2 transmit and receive signals in equal time slot. Then the active and passive beamforming vectors in different slots are optimized separately.

Fig. 2 investigates the convergence of the proposed algorithm, where M is set to 40 and maximal transmit power P_{\max} is set to 30dBm at both sources. It is shown that all the algorithms increase to convergence. Note that the convergence

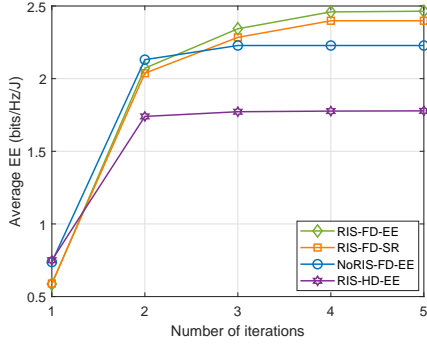


Fig. 2. Performance of the proposed method versus the number of iterations.

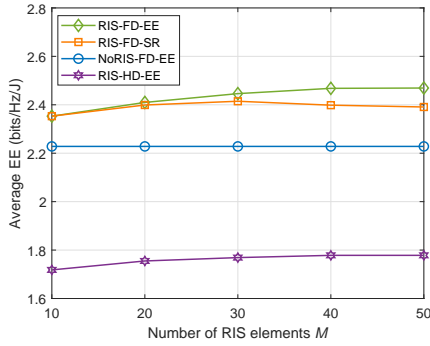


Fig. 3. EE versus the number of RIS elements M .

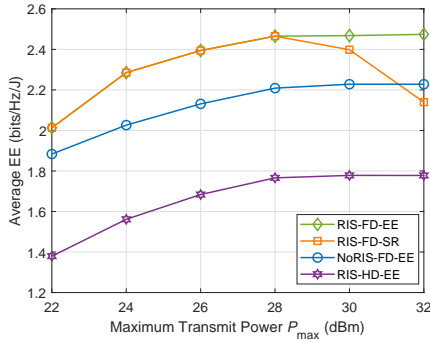


Fig. 4. EE versus maximal transmit power P_{\max} .

only needs four-time iterations, which verifies the effectiveness of the proposed algorithm.

Fig. 3 shows the EE versus the number of RIS elements, where the maximal transmit power P_{\max} is set to 30dBm at both sources. The EE of NoRIS-FD-EE scheme is a constant. The other three schemes increase to stable with the number of RIS elements, while our proposed RIS-FD-EE scheme achieves the highest EE.

Fig. 4 shows the EE versus different maximal transmit power constraint P_{\max} , which is set equally at both nodes. M is set to 40. It can be seen that the EE of all the schemes increase with P_{\max} except RIS-FD-SR, which deteriorates at large P_{\max} . That is because the best EE performance does not always require full transmit power.

V. CONCLUSION

In this letter, we studied the energy efficiency maximization problem in RIS aided full-duplex system, subject to the minimum data rate demands and maximum transmit power constraints. We divided the optimization problem into active and passive beamforming design subproblems, and adopted the alternative optimization framework to solve them iteratively. We evaluated our scheme under different settings, where extra self-interference cancellation power consumption in full-duplex system was also considered. Simulation results showed the energy efficiency of our scheme outperforms other benchmarks.

REFERENCES

- [1] T. Huang *et al.*, "A survey on green 6G network: Architecture and technologies," *IEEE Access*, vol. 7, pp. 175 758–175 768, Dec. 2019.
- [2] C. Pan *et al.*, "Reconfigurable intelligent surfaces for 6G systems: Principles, applications, and research directions," *IEEE Commun. Mag.*, vol. 59, no. 6, pp. 14–20, Jul. 2021.
- [3] C. Huang, A. Zappone, G. C. Alexandropoulos, M. Debbah, and C. Yuen, "Reconfigurable intelligent surfaces for energy efficiency in wireless communication," *IEEE Trans. Wireless Commun.*, vol. 18, no. 8, pp. 4157–4170, Jun. 2019.
- [4] S. Jia, X. Yuan, and Y.-C. Liang, "Reconfigurable intelligent surfaces for energy efficiency in D2D communication network," *IEEE Wireless Commun. Lett.*, vol. 10, no. 3, pp. 683–687, Dec. 2021.
- [5] Z. Zhang, K. Long, A. V. Vasilakos, and L. Hanzo, "Full-duplex wireless communications: Challenges, solutions, and future research directions," *Proc. IEEE*, vol. 104, no. 7, pp. 1369–1409, Feb. 2016.
- [6] A. Sabharwal *et al.*, "In-band full-duplex wireless: Challenges and opportunities," *IEEE J. Sel. Areas Commun.*, vol. 32, no. 9, pp. 1637–1652, Jun. 2014.
- [7] E. Everett, A. Sahai, and A. Sabharwal, "Passive self-interference suppression for full-duplex infrastructure nodes," *IEEE Trans. Wireless Commun.*, vol. 13, no. 2, pp. 680–694, Jan. 2014.
- [8] W. Guo, H. Zhang, and C. Huang, "Energy efficiency of two-way communications under various duplex modes," *IEEE Internet Things J.*, vol. 8, no. 3, pp. 1921–1933, Aug. 2021.
- [9] J. Zhao *et al.*, "Energy efficient full-duplex communication systems with reconfigurable intelligent surface," in *Proc. IEEE 92nd Veh. Technol. Conf. (VTC-Fall)*, Nov. 2020, pp. 1–5.
- [10] L. Wei *et al.*, "Channel estimation for ris-empowered multi-user MISO wireless communications," *IEEE Trans. Commun.*, vol. 69, no. 6, pp. 4144–4157, Mar. 2021.
- [11] C. Hu, L. Dai, S. Han, and X. Wang, "Two-timescale channel estimation for reconfigurable intelligent surface aided wireless communications," *IEEE Trans. Commun.*, vol. 69, no. 11, pp. 7736–7747, Apr. 2021.
- [12] H. Shen, T. Ding, W. Xu, and C. Zhao, "Beamforming design with fast convergence for IRS-aided full-duplex communication," *IEEE Commun. Lett.*, vol. 24, no. 12, pp. 2849–2853, Aug. 2020.
- [13] Y. Zhang, C. Zhong, Z. Zhang, and W. Lu, "Sum rate optimization for two way communications with intelligent reflecting surface," *IEEE Commun. Lett.*, vol. 24, no. 5, pp. 1090–1094, Mar. 2020.
- [14] W. Dinkelbach, "On nonlinear fractional programming," *Management Science*, vol. 13, no. 7, pp. 492–498, 1967.
- [15] K. Yang, T. Jiang, Y. Shi, and Z. Ding, "Federated learning via over-the-air computation," *IEEE Trans. Wireless Commun.*, vol. 19, no. 3, pp. 2022–2035, Jan 2020.
- [16] Q. T. Dinh and M. Diehl, "Local convergence of sequential convex programming for nonconvex optimization," in *Recent Advances in Optimization and its Applications in Engineering*. Springer, 2010, pp. 93–102.
- [17] M.-M. Zhao, Q. Wu, M.-J. Zhao, and R. Zhang, "IRS-aided wireless communication with imperfect CSI: Is amplitude control helpful or not?" in *Proc. IEEE Global Commun. Conf. (GLOBECOM)*, Dec. 2020, pp. 1–6.
- [18] X. Mu, Y. Liu, L. Guo, J. Lin, and R. Schober, "Simultaneously transmitting and reflecting (STAR) RIS-aided wireless communications," *IEEE Trans. Wireless Commun.*, pp. 1–1, Oct. 2021.
- [19] J. Liu *et al.*, "Energy efficiency in secure IRS-aided SWIPT," *IEEE Wireless Commun. Lett.*, vol. 9, no. 11, pp. 1884–1888, Jul. 2020.

This figure "Stru.png" is available in "png" format from:

<http://arxiv.org/ps/2205.12079v1>