Network Emulation in Large-Scale Virtual Edge Testbeds: A Note of Caution and the Way Forward

Soeren Becker*, Tobias Pfandzelter[†], Nils Japke[†], David Bermbach[†], Odej Kao^{*}

*Technische Universität Berlin Distributed and Operating Systems Research Group {soeren.becker,odej.kao}@tu-berlin.de

[†]Technische Universität Berlin & Einstein Center Digital Future

Mobile Cloud Computing Research Group

{tp,nj,db}@mcc.tu-berlin.de

Abstract—The growing research and industry interest in the Internet of Things and the edge computing paradigm has increased the need for cost-efficient virtual testbeds for large-scale distributed applications. Researchers, students, and practitioners need to test and evaluate the interplay of hundreds or thousands of real software components and services connected with a realistic edge network without access to physical infrastructure.

While advances in virtualization technologies have enabled parts of this, network emulation as a crucial part in the development of edge testbeds is lagging behind: As we show in this paper, NetEm, the current state-of-the-art network emulation tooling included in the Linux kernel, imposes prohibitive scalability limits. We quantify these limits, investigate possible causes, and present a way forward for network emulation in large-scale virtual edge testbeds based on eBPFs.

Index Terms—edge computing, internet of things, virtual testbeds, network emulation

I. INTRODUCTION

As edge computing and the Internet of Things are becoming more important in both research and industry, the demand for environments to test new algorithms, platforms, and software systems is increasing [1], [2]. Between simulation, which can efficiently analyze an abstracted subset of an edge or IoT system [3]–[5], and physical infrastructure, which is accurate yet expensive to implement and cumbersome to maintain [6], [7], virtual testbeds running real software on virtualized infrastructure have emerged. These testbeds enable a wide audience of researchers, students, and practitioners to evaluate software systems on large-scale distributed infrastructures by combining existing tooling for virtualization and emulation [8]–[10].

A key factor in building these testbeds for large-scale infrastructure is the scalability of the underlying tools itself. Yet, while process isolation and machine virtualization have received significant interest from industry with their broad adoption in fields such as cloud computing [11], [12], the network emulators required to reflect the communication characteristics of edge and IoT are lagging behind.

The Linux traffic control network emulator (NetEm) [13] was originally introduced in kernel version 2.6.7 and has been

continuously extended since then. Because of its wide availability, maturity, and high accuracy [10], [14]–[16], NetEm is a popular choice for network emulation in edge and IoT testbeds, e.g., [8], [9], [17]–[24]. We find, however, that NetEm has only limited applicability for *large*-scale testbeds as it struggles to support networks of hundreds or even thousands of nodes efficiently. In this paper, we show these limits to enable future research into large-scale virtual edge and IoT testbeds and outline a possible way forward.

The rest of this paper is structured as follows: We introduce NetEm and related concepts as well as alternative approaches in Section II. In a scalability analysis using the context of virtual edge testbeds, we analyze the performance of NetEm at scale, exposing bottlenecks in configuration, latency overheads, and impact on network throughput (Section III). We use novel Linux kernel features such as extended Berkeley Packet Filters (eBPF) and the EDT model to propose an alternative approach to network emulation for large scale IoT and edge testbeds and present promising preliminary performance results (Section IV). Finally, we conclude in Section V.

II. BACKGROUND & RELATED WORK

The Linux traffic control subsystem (tc) provides mechanisms to control the transmission of packets in the Linux kernel [13]. The main component of the traffic control subsystem are queuing disciplines (qdisc) that queue outgoing packets for a network device. The default queuing discipline is a FIFO queue, but other strategies are available to support more fine-grained control over traffic shaping, e.g., by prioritizing packets that match a certain description. This matching is performed by filters used to classify packets into queuing disciplines based on a classifier.

The NetEm network emulator (tc-netem) is an extension to the traffic control subsystem introduced to aid in the development of network protocols [25], succeeding NIST Net [26] and Dummynet [27]. At its core, NetEm is itself a queuing discipline, but provides further capabilities to emulate packet delay, loss, duplication, and reordering. Several empirical evaluations have shown NetEm to be more accurate and to have better performance than competing network emulators [10], [14]–[16], yet have not considered scalability of the emulator.

Partially funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) – 415899119 and 414984028.

Recent advances include extended Berkeley Packet Filters (eBPF) [28] and eXpress Data Path (XDP) [29]. An evolution of the original Berkeley Packet Filters (BPF), eBPF programs run in a kernel virtual machine, are statically checked when loaded into the kernel, and are limited in size and complexity. Applications can extend the kernel at runtime safely by attaching an eBPF program to one of the exposed hooks. As the lowest level of the Linux networking stack, XDP is one such hook and supports processing packets by eBPF even before memory is allocated by the operating system [30].

Based on XDP, Hemminger has presented XNetEm [31] as an update to the original NetEm. XNetEm runs an eBPF program as a kernel plugin that hooks into XDP processing on a network device and emulates packet loss, corruption, and marking. XDP offers high performance for packet processing yet is limited in functionality and cannot be used to inject emulated network delays, which are also required for packet reordering. As an alternative, the author suggests using Linux Traffic Control hooks that could expose the required functionality, an approach we take in our system (Section IV).

Kumar et al. [32] describe Bandwidth Enforcer (BwE), a solution to bandwidth allocation at Google. After finding that existing approaches with policies enforced on network routers cannot support TCP traffic efficiently, the authors develop BwE to enforce service-specific limits on hosts. In their work they leverage a global knowledge of the network topology in order to offer a hierachical bandwidth allocation for competing services across clusters of nodes connected in a WAN environment.

Saeed et al. [33] show that this approach of host-based traffic shaping at scale consumes considerable CPU and memory resources on the hosts and present Carousel as an alternative. In Carousel, a timestamp for each packet is computed before it is enqueued in a time-based queue and dequeued when the timestamp is met. By deploying a single queue per CPU core and enabling multicore lock-free coordination, Carousel is able to significantly increase the resource efficiency of host-based traffic shaping.

Although similar to our approach, BwE and Carousel aim to improve the network performance and utilization in wide area networks and data center communications whereas we target network emulation.

III. SCALABILITY ANALYSIS

Our performance analysis of NetEm concerns the overhead introduced by network emulation in the context of a virtual edge testbed. In this section, we describe this scenario in more detail (Section III-A), show bottlenecks encountered during NetEm configuration (Section III-B), and consider latency (Section III-C) and bandwidth overheads (Section III-D). We make our software artifacts available as open-source¹.

A. Motivation and Scenario

Our experiments are motivated by our work on Celestial [18], [19] which emulates low earth orbit (LEO) edge

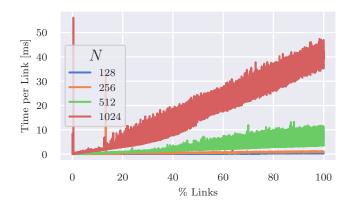


Fig. 1. As the percentage of configured links grows during the NetEm configuration, the time per configuration change increases linearly. At N = 1024, configuring one link takes up to 47.4ms.

infrastructure such as SpaceX' Starlink constellation. In Celestial, individual satellites are emulated through a Firecracker microVM [11] each and link characteristics are shaped through NetEm. Due to the sheer number of satellites in a constellation (which is usually in the 5,000 to 10,000 range according to current plans), the scalability of NetEm is a significant factor. Therefore, we derive the scenario characteristics from the Celestial use case and build on the Celestial prototype for experiments, leading to the following scenario:

We assume a fully meshed topology of N processes, each with their own network address. We assume all processes running on a single host. With emulated connections between these processes that let us make individual changes to the network link characteristics, we require emulation of $N \times (N-1)$ network links. This assumes one link per direction, e.g., a link attached to process A emulating network characteristics to a process B and a further link for the opposite direction attached to process B. While this does not reflect all network topologies encountered in IoT or edge computing deployments, it serves as a straightforward baseline example and allows us to show scalability in relation to the factor N.

Per process, we create a tap network device. All applications used for performance measurements are run in Firecracker microVMs attached to one of the network devices. We configure a root hierarchical token bucket (HTB) queuing discipline for each network device. For each outgoing link from this network device, we add a subordinate HTB queuing discipline using an ascending index. We then set the desired NetEm emulation properties on this queuing discipline and attach a filter that matches by destination IP address. Our experiments are executed on a single Google Cloud Platform n2-standard-32 machine with 32 vCPUs and 128 GB memory running Ubuntu 20.04 LTS in the eu-west-3 region.

B. Configuration Bottlenecks

Before examining the network performance impact of NetEm at scale, we consider the overhead of actually con-

¹https://github.com/srnbckr/ebpf-network-emulation

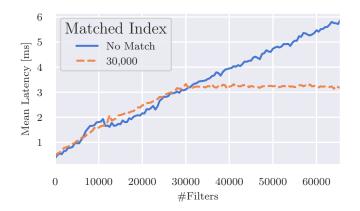


Fig. 2. Experiment results show that network delay increases as more filters and queuing disciplines are attached to the device. The latency overhead of NetEm is only approximately $0.1\mu s$ per filter, yet this accumulates to 5.7ms with more existing filters. Using a filter that matches our target address at the 30,000th location reveals that filters are checked in sequence and a match limits that overhead.

figuring link emulation. We observe considerable bottlenecks that inhibit large-scale emulated testbeds.

We consider N processes and $N \times (N-1)$ emulated links. In our experiment, configuring link emulation for the first link takes only 50µs. At the order of N = 1000, this overhead would accumulate to 50s if links were configured sequentially. Yet as Figure 1 shows, the overhead of configuring one link grows with the number of links that are already configured. As a result, the time to create links with N = 1024 grows to 19,422.7ms, or three hours and 24 minutes.

We identify two possible causes for this behavior: First, new queuing disciplines are attached to the root discipline in a tree, which requires traversing existing handles when attaching a new one. Second, the kernel might check for duplicate or otherwise conflicting queuing discipline entries, requiring reading all existing entries.

In a further test, we try to parallelize the filter creation by configuring each network device with a separate process. In theory, these links have independent queuing disciplines, and we expect a significant speed-up in link configuration. Unfortunately this did not change our results, possibly because a global lock for Traffic Control prevents concurrent changes to the network subsystem.

We decided to not further investigate and remedy the causes of the effects we observe in setting up large numbers of links for NetEm as our performance measurements do not justify using NetEm at this scale. Further, we note that our alternative approach (Section IV) does not exhibit any such configuration bottlenecks.

C. Latency

We first consider the network latency overhead caused by NetEm. Using the setup described in Section III-A, we run ping in one microVM and probe network delay to the underlying host. We consider a growing number of links configured for this node, yet set emulated network delay to




Fig. 3. Throughput tests show a 4.6Gbit/s baseline without any filters yet up to 7.3Gbit/s using 5,000 filters. After this peak, throughput decreases steadily to only 0.4Gbit/s at 65,000. Again, matching filter 30,000 with our test packets limits the throughput overhead for experiments with additional filters.

Oms and disable bandwidth throttling in HTB in order to have results reflect only additional overhead caused by processing in NetEm. We use a maximum of 65,000 links as we are limited by the 2^{16} address space of Traffic Control child handles. To account for the impact of a filter matching our ICMP packets, processing it, and returning before additional filters are checked, we test two scenarios: First, none of the filters match the target IP address, requiring NetEm to check all existing filters. Second, we add a filter matching the host's address at the 30,000th index to see whether this earlier entry in the filter sequence leads to lower overheads when NetEm does not check remaining filters.

We show the results of our delay measurement in Figure 2. Since the connection between VM and host machine is virtual, there should be minimal networking overhead during performance measurements, and we measure an average of 0.3ms round trip time as a baseline. With increasing numbers of filters attached to our network device, however, latency increases linearly to up to 6ms when processing 65,000 filters. As expected, a filter matching our test packet means that no further filters are tested by NetEm. In our tests, increasing the number of filters beyond 30,000 does not further increase latency of around 3.3ms when a filter matches at this index.

D. Bandwidth

Our evaluation of the bandwidth overhead of NetEm follows the same methodology as described in Section III-C, yet we use iperf3 [34] to perform TCP bandwidth measurements. Again we measure once without any filter matching our test packets and once with the filter at index 30,000 aligning with the host's address.

The results of our tests with NetEm are shown in Figure 3. As a baseline, we see a throughput of 4.6GBit/s without the use of any filters. Surprisingly, we observe a small drop in throughput to 3.9Gbit/s when attaching 2,000 filters yet see it increase to 7.3Gbit/s with 5,000 filters. While more throughput might be agreeable in general, unexpected effects

of running NetEm at scale are undesirable in research testbeds. In our case, we assume that mainly the interplay of nested virtualization with Firecracker, tap devices and iperf3 induces this behaviour, since it was not reproducable on a baremetal node. After this peak, throughput decreases steadily to only 0.4Gbit/s at 65,000 attached filters. As in our latency measurements, we see how a filter matching our packets impacts those results, with an increase in filters beyond 30,000 not further reducing throughput in these tests.

IV. SOLUTION

In order to tackle the aforementioned scalability issues, we propose a network emulation approach that leverages a Traffic Control classifier and eBPF program to adjust the departure timestamp of outgoing packets and subsequently forwards them to a single fair queuing (FQ) queuing discipline. A similar method was outlined in Carousel [33], yet only implemented in Software NICs since necessary features were not yet available in the kernel. With the recent switch of the Linux networking stack to the early departure time (EDT) model, each egress packet has a departure timestamp which in turn can be adjusted with eBPF programs [35]. Consequently, this enables the use of a timing wheel [36] packet scheduler that releases a packet to the network interface based on its departure timestamp instead of, e.g., bfifo or pfifo queues. In recent works [33], [35] this model was used for rate limiting and pacing in, e.g., data centers. We also consider it useful to efficiently emulate network characteristics in large scale virtual edge testbeds. Therefore, we propose an approach as depicted in Figure 4 using the following components:

- An eBPF map shared between the kernel and user space that contains network link parameters such as bandwidth limitations or latency to different destination IP addresses.
- A testbed agent running in user space which adjusts the map with parameters used to emulate the link settings to different nodes based on the destination IPs.

In addition, we attach an eBPF program to the locally generated traffic utilizing a Traffic Control egress hook which conducts the following steps for each outgoing packet: Initially, a map lookup with the destination IP of the packet is executed to check the shared eBPF map for potential network emulation parameters. In case no parameters exist for the destination, the packet is instantly forwarded to the network device, therefore only imposing a negligible overhead on traffic which should not be affected by any network emulation. When parameters are found, the program computes a new timestamp for the given packet.

Here we propose a two-fold approach: For a defined bandwidth limitation we apply an algorithm as outlined by Fomichev et al. [35], that introduces rate-limiting by adjusting the inter-packet gaps, while utilizing the last timestamp of a packet obtained from a second eBPF map. As described by Algorithm 1, if a previous timestamp exists, the inter-packet gap is increased by a delay depending on the packet size and given rate. Finally, the map is updated with the newly computed timestamp for the next packet. We further extend this method by storing the latest packet timestamps for several IP addresses in order to enable varying network emulation settings based on the destination.

Algorithm 1	Set the	departure	timestamp	for	egress	packets
-------------	---------	-----------	-----------	-----	--------	---------

```
1: Input: packet
```

- 2: $ip \leftarrow destIP(packet)$
- 3: $rate, latency \leftarrow mapLookup(map_{emulation}, ip)$
- 4: if rate then
- 5: throttle(*packet*, *rate*)
- 6: **end if**
- 7: **if** latency **then**
- 8: injectDelay(packet, latency)

```
9: end if
```

10: return packet

```
11: procedure THROTTLE(packet, rate)
```

- 12: $t_{last} \leftarrow mapLookup(map_{tstamp}, ip)$
- 13: $gap \leftarrow packet_{len} * 10^9/rate$
- 14: **if** t_{last} **then**
- 15: $t_{next} \leftarrow t_{last} + gap$

```
16: else
```

17:

- $t_{next} \leftarrow now$
- 18: end if
- 19: mapUpdate($map_{tstamp}, ip, t_{next}$)
- 20: updateTimestamp($packet, t_{next}$)

```
21: end procedure
```

```
22: procedure INJECTDELAY(packet, rate)
```

```
23: t_{next} \leftarrow packet_{tstamp} + latency
```

```
24: updateTimestamp(packet, t_{next})
```

```
25: end procedure
```

Moreover, in case an additional latency to the destination was defined in the eBPF map, the timestamp of the packet is further increased by that delay. Finally, the packet is enqueued in the timing wheel scheduler which subsequently releases the packet to the network interface when the departure timestamp is met.

Compared to NetEm, where in the worst case it is required to create a filter as well as HTB and NetEm queuing disciplines for each link that should be emulated, our approach relies on a single Traffic Control classifier, FQ queuing discipline, and shared eBPF map which significantly simplifies and accelerates the setup and adjustment process: In our experiments, filling the eBPF map with 65,000 IP and network emulation parameter pairs takes around 170ms and the values can be updated with a simple user space program. This is especially important considering the scenario depicted in Section III-A, which requires a vast amount of network characteristics to be set for different links. Additionally, IP pairs can be used as map keys, which allows to employ a single eBPF map describing all possible links.

We implement our approach as a proof-of-concept prototype that is able to limit bandwidth and inject latencies following the method outline above. While we omit more sophisticated network emulation settings such as delay distribution, packet

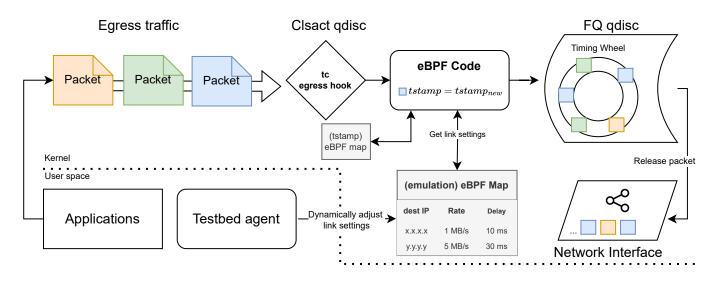


Fig. 4. Our proposed solution relies on a tc egress hook that forwards outgoing packets to an eBPF program which adjusts the departure time of packets. The eBPF code obtains network emulation parameters used to compute the new timestamp from an eBPF map that is configured via a testbed agent and a timing wheel scheduler is employed to release packets to the network interface when the departure time is met.

loss or corruption in this prototype, these could easily be implemented by adapting methods from XNetEm [31].

Preliminary evaluation: We conduct a preliminary evaluation of our prototype using the same experimental setup as described in Section III-A. Here, we employ the aforementioned NetEm method for up to 65,000 filters on a single network interface and compare the overhead to our eBPF approach and a map filled with the same amount of entries, repeating the experiments from Section III-C and Section III-D.

Figure 5 shows the increase in network latency overhead for ascending amounts of non-matching filter and map entries. Whereas NetEm increases the latency to up to 6ms, our prototype only poses a constant and negligible overhead of around 0.1ms on the latency. This is mainly due to the fact that packets can be checked in $\mathcal{O}(1)$ using our eBPF map whereas NetEm checks each filter individually in $\mathcal{O}(N)$. In our prototype, non-matching packets are then directly released to the network interface.

The same trend can be identified in Figure 6, which depicts the bandwidth overhead for non-matching filters: In case of our prototype, the bandwidth throughput is around 4.53GBit/s and therefore close to the optimum, regardless of the amount of map entries. As discussed in Section III-D, we assume that nested virtualization with Firecracker microVMs results in the increase of throughput at around 5,000 filters for NetEm and additionally tested the two methods on a AMD EPYC 7282 bare-metal machine with 32 CPU cores. Although the experiment was again conducted in two microVMs, the results depicted in Figure 7 show a baseline throughput of around 19.5GBit/s that is not exceeded anymore at 5,000 filters, therefore supporting this assumption and motivating further research in scenarios deviating from the use case described in Section III-A, that we mainly evaluated in this paper.




Fig. 5. Overhead of increasing queuing disciplines and filters for NetEm as well as map entries for the eBPF approach on the latency, without any matches. For eBPF the overhead stays relatively constant.

Finally, we also compared the accuracy of the latency injection and bandwidth limitation for both network emulation methods: Figure 8 shows the latency for an artificial delay of 20ms, monitored for one minute using ping and added as a single filter respectively map entry. As a baseline we monitored the latency without any emulation and increased the values by 20ms. As can be seen, our prototype is able to produce an emulation equivalent to NetEm.

Moreover, we also deployed two Firecracker microVMs, each connected to a tap device as described in Section III-A, limited the bandwidth between the nodes to 100Mbit/s and added a latency of 5ms with a single filter and map entry. We tested the available throughput between the nodes with iperf3, running in the microVMs. As can be seen in Figure 6, with both methods the throughput approaches the theoretical maximum and the eBPF emulation even slightly

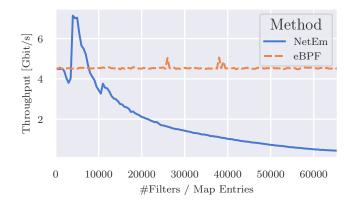


Fig. 6. Overhead of increasing queuing disciplines and filters for NetEm as well as map entries for the eBPF approach on the bandwidth, without any matches. Non-matching entries have a negligible impact on the overall bandwidth in our prototype and it is not affected by an unexpected peak like NetEm.

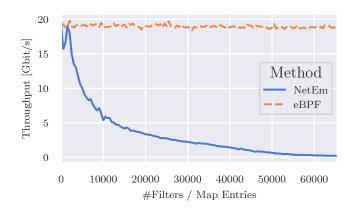


Fig. 7. Bandwidth throughput overhead on a bare-metal machine for increasing queuing disciplines and filters or map entries for the NetEm respectively eBPF approach. Compared to nested virtualization, the baseline throughput is not exceeded anymore in case of NetEm, although the drop at around 2,000 filters remains. The overhead of the eBPF approach is still negligible.

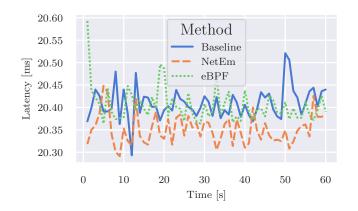


Fig. 8. Ping results for an emulated delay of 20ms using the NetEm method and our approach. Baseline refers to the measured latency without any emulation, increased by 20ms.




Fig. 9. iperf3 results for a bandwidth limitation of 100Mbit/s and emulated delay of 5ms. We show the mean throughput in the last 10 seconds for a duration of 10 minutes.

outperforms NetEm in terms of rate limit utilization in our experiment.

V. CONCLUSION & FUTURE WORK

In this paper, we discussed the caveats of using NetEm for building large-scale virtual testbeds for the edge and IoT. In a scalability analysis, we showed that NetEm causes considerable performance overheads during setup and execution which make it unsuitable for larger emulated networks.

Using novel Linux kernel features such as eBPFs and the EDT model, we are able to remedy some of these scalability issues without relying on complex dependencies. Our evaluation of this approach shows negligible latency and bandwidth overheads even with as many as 65,000 filters attached to a network device thanks to packet matching in constant time. We are already integrating this solution into a large-scale virtual testbed and hope that it can benefit the research community in building the next generation of IoT and edge computing testbed tools.

REFERENCES

- [1] D. Bermbach, F. Pallas, D. García Pérez, P. Plebani, M. Anderson, R. Kat, and S. Tai, "A research perspective on fog computing," in *Proceedings of the 2nd Workshop on IoT Systems Provisioning & Management for Context-Aware Smart Cities (ISYCC 2017)*, Nov. 2017, pp. 198–210.
- [2] T. Pfandzelter, J. Hasenburg, and D. Bermbach, "From zero to fog: Efficient engineering of fog-based internet of things applications," *Software: Practice and Experience*, vol. 51, no. 8, pp. 1798–1821, 2021.
- [3] X. Zeng, S. K. Garg, P. Strazdins, P. P. Jayaraman, D. Georgakopoulos, and R. Ranjan, "Iotsim: A simulator for analysing iot applications," *Journal of Systems Architecture*, vol. 72, pp. 93–107, 2017.
- [4] J. Hasenburg, S. Werner, and D. Bermbach, "Supporting the evaluation of fog-based IoT applications during the design phase," in *Proceedings* of the 5th Workshop on Middleware and Applications for the Internet of Things (M4IoT 2018), Dec. 2018, pp. 1–6.
- [5] —, "FogExplorer," in Proceedings of the 19th ACM/IFIP International Middleware Conference, Demos, and Posters (Middleware 2018), Dec. 2018, pp. 1–2.
- [6] B. C. Şenel, M. Mouchet, J. Cappos, O. Fourmaux, T. Friedman, and R. Mcgeer, "Edgenet: a multi-tenant and multi-provider edge cloud," in *Proceedings of the 4th International Workshop on Edge Systems*, *Analytics and Networking (EdgeSys 2021)*, Apr. 2021, pp. 49–54.

- [7] S. Wang, Q. Li, M. Xu, X. Ma, A. Zhou, and Q. Sun, "Tiansuan constellation: An open research platform," in *Proceedings of the 2021 IEEE International Conference on Edge Computing (EDGE 2021)*, Dec. 2021, pp. 94–101.
- [8] J. Hasenburg, M. Grambow, E. Grünewald, S. Huk, and D. Bermbach, "MockFog: Emulating fog computing infrastructure in the cloud," in Proceedings of the First IEEE International Conference on Fog Computing 2019 (ICFC 2019), Jun. 2019, pp. 144–152.
- [9] J. Hasenburg, M. Grambow, and D. Bermbach, "MockFog 2.0: Automated execution of fog application experiments in the cloud," *IEEE Transactions on Cloud Computing*, pp. 1–1, 2021.
- [10] Y. Li, R. Bartos, and C. Liang, "Are containers coupled with netem a reliable tool for performance study of network protocols?" in *Proceedings* of *IEEE SoutheastCon* 2019, Apr. 2019, pp. 1–7.
- [11] A. Agache, M. Brooker, A. Iordache, A. Liguori, R. Neugebauer, P. Piwonka, and D.-M. Popa, "Firecracker: Lightweight virtualization for serverless applications," in *Proceedings of the 17th USENIX symposium* on networked systems design and implementation (NSDI '20), 2020, pp. 419–434.
- [12] D. Ernst, D. Bermbach, and S. Tai, "Understanding the container ecosystem: A taxonomy of building blocks for container lifecycle and cluster management," in *Proceedings of the 2nd International Workshop* on Container Technologies and Container Clouds (WoC 2016), 2016.
- [13] M. A. Brown, "Traffic control howto," 2006.[14] A. Jurgelionis, J.-P. Laulajainen, M. Hirvonen, and A. I. Wang, "An
- [14] A. Jurgenoins, J.-F. Laurganen, M. Hirvohen, and A. I. Wang, An empirical study of netem network emulation functionalities," in *Proceedings of 20th international conference on computer communications and networks (ICCCN 2011)*, Aug. 2011, pp. 1–6.
- [15] L. Nussbaum and O. Richard, "A comparative study of network link emulators," in *Proceedings of the 12th Communications and Networking Simulation Symposium (CNS 2009)*, Mar. 2009.
- [16] R. Lübke, P. Büschel, D. Schuster, and A. Schill, "Measuring accuracy and performance of network emulators," in *Proceedings of the 2014 IEEE International Black Sea Conference on Communications and Networking (BlackSeaCom)*, May 2014, pp. 63–65.
- [17] S. Becker, F. Schmidt, and O. Kao, "Edgepier: P2p-based container image distribution in edge computing environments," in *Proceedings of the* 40th IEEE International Performance, Computing, and Communications Conference (IPCCC 2021), Oct. 2021, pp. 1–8.
- [18] T. Pfandzelter and D. Bermbach, "Celestial: Virtual software system testbeds for the leo edge," in *Proceedings of the 23rd ACM/IFIP International Middleware Conference (Middleware 2022)*, Nov. 2022.
- [19] —, "CELESTIAL: Virtual software system testbeds for the leo edge," TU Berlin & ECDF, Mobile Cloud Computing Research Group, Tech. Rep., Apr. 2022.
- [20] S. Herrnleben, R. Ailabouni, J. Grohmann, T. Prantl, C. Krupitzer, and S. Kounev, "An iot network emulator for analyzing the influence of varying network quality," in *Proceedings of the 12th EAI International Conference on Simulation Tools and Techniques (SIMUtools 2020)*, Aug. 2020, pp. 580–599.
- [21] A. G. Schmidt, V. Venugopalan, M. Paolieri, and M. French, "Constellations in the cloud: Virtualizing remote sensing systems," in *Proceedings* of the 2019 IEEE International Geoscience and Remote Sensing Symposium (IGARSS 2019), Aug. 2019, pp. 5351–5354.

- [22] H. Ahmed, S. Pierre, and A. Quintero, "A flexible testbed architecture for vanet," *Vehicular Communications*, vol. 9, pp. 115–126, 2017.
- [23] Q. Xu and J. Zhang, "pifogbed: A fog computing testbed based on raspberry pi," in *Proceedings of the 38th IEEE International Performance Computing and Communications Conference (IPCCC 2019)*, 2019, pp. 1–8.
- [24] I. Behnke, L. Thamsen, and O. Kao, "Héctor: A framework for testing iot applications across heterogeneous edge and cloud testbeds," in *Proceedings of the 12th IEEE/ACM International Conference on Utility* and Cloud Computing Companion, Dec. 2019, pp. 15–20.
- [25] S. Hemminger et al., "Network emulation with netem," no. Apr., 2005.
- [26] M. Carson and D. Santay, "Nist net: A linux-based network emulation tool," *SIGCOMM Computer Communication Review*, vol. 33, no. 3, pp. 111–126, 2003.
- [27] L. Rizzo, "Dummynet: a simple approach to the evaluation of network protocols," ACM SIGCOMM Computer Communication Review, vol. 27, no. 1, pp. 31–41, 1997.
- [28] J. Schulist, D. Borkmann, and A. Starovoitov, "Linux socket filtering aka berkeley packet filter (bpf)," https://www.kernel.org/doc/Documentation/ networking/filter.txt, 2019, accessed: 2022-7-7.
- [29] T. Høiland-Jørgensen, J. D. Brouer, D. Borkmann, J. Fastabend, T. Herbert, D. Ahern, and D. Miller, "The express data path: Fast programmable packet processing in the operating system kernel," in *Proceedings of the 14th International Conference on Emerging Networking EXperiments and Technologies (CoNEXT '18)*, Dec. 2018, pp. 54–66.
- [30] M. A. Vieira, M. S. Castanho, R. D. Pacífico, E. R. Santos, E. P. C. Júnior, and L. F. Vieira, "Fast packet processing with ebpf and xdp: Concepts, code, challenges, and applications," ACM Computing Surveys (CSUR), vol. 53, no. 1, pp. 1–36, 2020.
- [31] S. Hemminger, "Xnetem network emulation using xdp," in Proceedings of the 2017 Technical Conference on Linux Networking (NetDev 2.2), Nov. 2017.
- [32] A. Kumar, S. Jain, U. Naik, A. Raghuraman, N. Kasinadhuni, E. C. Zermeno, C. S. Gunn, J. Ai, B. Carlin, M. Amarandei-Stavila, M. Robin, A. Siganporia, S. Stuart, and A. Vahdat, "Bwe: Flexible, hierarchical bandwidth allocation for wan distributed computing," in *Proceedings of the 2015 ACM Conference on Special Interest Group on Data Communication (SIGCOMM '15)*, Aug. 2015, pp. 1–14.
- [33] A. Saeed, N. Dukkipati, V. Valancius, V. The Lam, C. Contavalli, and A. Vahdat, "Carousel: Scalable traffic shaping at end hosts," in *Proceedings of the Conference of the ACM Special Interest Group on Data Communication (SIGCOMM '17)*, Aug. 2017, pp. 404–417.
- [34] J. Dugan, S. Elliott, B. A. Mah, J. Poskanzer, and K. Prabhu, "iperf3," https://iperf.fr/, 2022, accessed: 2022-7-13.
- [35] S. Fomichev, E. Dumazet, W. de Bruijn, V. Dumitrescu, and B. Sommerfeld, "Replacing htb with edt and bpf," https://legacy.netdevconf.info/ 0x14/pub/papers/55/0x14-paper55-talk-paper.pdf, 2018, accessed: 2022-7-11.
- [36] G. Varghese and T. Lauck, "Hashed and hierarchical timing wheels: data structures for the efficient implementation of a timer facility," in *Proceedings of the 11th ACM Symposium on Operating Systems Principles (SOSP '87)*, Nov. 1987, pp. 25–38.