

Macro-micro decomposition for consistent and conservative model order reduction of hyperbolic shallow water moment equations:

A study using POD-Galerkin and dynamical low rank approximation

Julian Koellermeier*, Philipp Krahl†, Jonas Kusch‡

February 6, 2023

Abstract

Geophysical flow simulations using hyperbolic shallow water moment equations require an efficient discretization of a potentially large system of PDEs, the so-called moment system. This calls for tailored model order reduction techniques that allow for efficient and accurate simulations while guaranteeing physical properties like mass conservation.

In this paper, we develop the first model reduction for the hyperbolic shallow water moment equations and achieve mass conservation. This is accomplished using a macro-micro decomposition of the model into a macroscopic (conservative) part and a microscopic (non-conservative) part with subsequent model reduction using either POD-Galerkin or dynamical low-rank approximation only on the microscopic (non-conservative) part. Numerical experiments showcase the performance of the new model reduction methods including high accuracy and fast computation times together with guaranteed conservation and consistency properties.

Keywords: Model order reduction, shallow water moment equations, POD-Galerkin, dynamical low-rank approximation

1 Introduction

Accurate simulation of free-surface flows is necessary for prediction of natural hazards like floods, landslides, tsunami waves, and weather forecasting [10, 11]. However, the solution of the full incompressible Navier-Stokes equations is often too costly and simplified models like the *shallow water equations* (SWE) often yield inaccurate results, since the SWE model assumes a constant velocity over the vertical axis. The recently derived *hyperbolic shallow water moment equations* (HSWME) overcome this problem by allowing for polynomial velocity profiles [29]. The model is based on a hyperbolic regularization of [32] using techniques from kinetic theory [15, 30]. The increased accuracy of the model was shown in numerical simulations, including sediment transport [17]. However, the HSWME also

*Bernoulli Institute, University of Groningen j.koellermeier@rug.nl

†Institut de Mathématiques de Marseille (I2M), Aix-Marseille Université, philipp.krahl@univ-amu.fr

‡Institut für Mathematik, Universität Innsbruck, jonas.kusch1@gmail.com

lead to a higher computational cost and memory footprint due to additional nonlinear equations for the expansion coefficients of the polynomial velocity profile. The goal of this work is to perform an additional model reduction to improve efficiency of the model while at the same time preserving important properties like conservation of mass.

To reduce computational costs during the simulation of the HSWME we propose to project the system on a lower dimensional manifold using Galerkin methods. In this context we apply two model reduction techniques. First, the classical offline-online procedure (see for a review [34]), where important modes are calculated using a *proper orthogonal decomposition* (POD) in a so-called offline phase. This allows to conduct further online computations with the generated basis at significantly reduced computational costs. Second, the online adaptive basis method, *dynamical low-rank approximation* (DLRA) [26], that along with other methods like the *adaptive basis and adaptive sampling discrete empirical interpolation method* (AADEIM) [44], adapts the dominant modes by online updates to the solution locally in time. DLRA therefore does not require an offline computation since training is shifted to the online phase.

Most commonly in *model order reduction* (MOR) a reduced basis is computed with the help of the POD, that was first introduced in [41] in the context of fluid dynamics. In combination with Galerkin projection methods, POD-Galerkin has been successfully applied in fluid dynamics [37], including the SWE [39, 38, 55, 49, 50]. Since POD-Galerkin does not preserve conservation laws, one possibility is to introduce Hamilton formulations that ensure structure-preservation when constructing *reduced order models* (ROM) of SWE with the help of POD [22, 23]. In this paper we consider the HSWME that introduce N additional equations to the 1D-SWE to account for non-constant velocity profiles along the vertical axis. With the aim to reduce the HSWME to a system yielding a similar complexity as the SWE we then apply POD-Galerkin as the first approach. In contrast to existing SWE-ROM approaches [39, 38, 55, 49, 50, 22, 23], that try to reduce the high dimensional state-space by Galerkin projections onto the spatial modes, we utilize POD modes that reduce the system only in the vertical direction. Here, the idea is to replace the $N + 2$ dimensional HSWME system by a $r + 2$ (where $r \ll N$) dimensional system. This is achieved through a linear combination of global ansatz functions that are determined by POD. Similar ideas have been first introduced by [52, 53, 54] and later in fluid dynamics to study the pipe flow where a coarse model featuring the dominant dynamics in the flow direction is enriched by a fine model that accounts for the additional dynamics in the transverse direction with the help of a modal expansion [45, 47, 46, 42]. This so called hierarchical model order reduction was further expanded for non-linear PDEs in [48].

Dynamical low-rank approximation [26] for matrix differential equations approximates the solution by a low-rank matrix decomposition and derives evolution equations to update the factors of the solution in time. These evolution equations are determined by minimizing the defect while restricting the evolution of the solution to the manifold of low-rank matrices. Stable time integrators for the resulting DLRA system, which are robust irrespective of the curvature of the low-rank manifold [25], are the matrix projector-splitting integrator [40] as well as the “unconventional” *basis update & Galerkin step* (BUG) integrator of [7]. Here, we use the BUG integrator which only evolves the solution forward in time, thereby facilitating the construction of stable spatial discretizations [35]. Moreover, the BUG integrator enables a straightforward basis augmentation step [6] which simplifies the construction of rank adaptive methods [6, 36, 20] and allows for conservation properties [6, 14].

Comparing computational results for POD-Galerkin and DLRA, we note that the

generation of basis functions during the online computation makes dynamical low-rank approximation significantly more costly than the online computation of POD-Galerkin. However, since DLRA does not require an offline computation in which the full model needs to be evaluated repeatedly, it offers two main advantages over POD-Galerkin: First, when the full order model is expensive to compute or cannot be stored in memory at a desirable accuracy, the offline phase of POD-Galerkin can become unfeasible to compute. Second, DLRA allows a straightforward application in settings that require a retraining of the basis with POD-Galerkin and is moreover independent of the choice of snapshots. Second, since DLRA allows to adapt the basis during the online phase it is independent of the choice of snapshots and it is beneficial in settings where a precomputed linear basis might not describe the dynamics sufficiently. In particular DLRA is superior to POD-Galerkin for transport dominated systems, where the Kolmogorov n -width decays slowly [43, 18].

While model order reduction techniques promise a reduction of cost and memory, they can struggle to preserve important quantities of the full system such as boundary conditions or mass conservation. To guarantee preserving these properties, we propose to decompose the HSWME solution into two parts: (1) macroscopic variables: water height and momentum and (2) microscopic variables: higher-order moments of the velocity profile. Separate evolution equations for the macro and micro solution parts are derived and the model order reduction strategy is only applied to the computational and memory intensive microscopic part (2). Thereby, we facilitate imposing boundary conditions for the macroscopic water height and momentum while guaranteeing mass conservation. In addition, we achieve consistency with the underlying SWE model in case of vanishing microscopic structures.

The remaining parts of this paper are structured as follows: We present the main concept of the macro-micro decomposition as well as the correction terms for model order reduction in section 2. The mathematical model HSWME is briefly explained in section 3. Section 4 covers the numerical discretizations including the implementation of the macro-micro decomposition for the new model. The conservative POD-Galerkin method is adopted for the considered model in section 5, followed by the dynamical low-rank approximation in section 6. Numerical results showing the performance of both methods are presented in section 7 and the paper ends with a brief conclusion.

2 Concept

A core issue of model order reduction is the potential violation of crucial properties of the original problem. To preserve these properties we choose to first decompose the original dynamics into evolution equations describing the macroscopic (conservative) quantities on the one hand and microscopic (non-conservative) correction terms on the other hand. A reduced model is then derived only for the microscopic corrections terms, whereas the original macroscopic evolution equations remain unaltered. Thereby, basis functions which are important for overall solution properties remain unchanged, whereas the overall solution complexity that mainly arises from correction terms is reduced through model order reduction. The concept is visualized in fig. 1.

We consider equations of the following type

$$\partial_t \mathbf{q} + \mathbf{A}(\mathbf{q}) \partial_x \mathbf{q} = \mathbf{g}(\mathbf{q}), \quad (1)$$

where $\mathbf{A}(\mathbf{q}) \partial_x \mathbf{q}$ denotes the transport term and $\mathbf{g}(\mathbf{q})$ denotes the friction term. Furthermore, the variable vector $\mathbf{q} = (\mathbf{u}, \mathbf{v})$ contains both macroscopic variables \mathbf{u} and microscopic

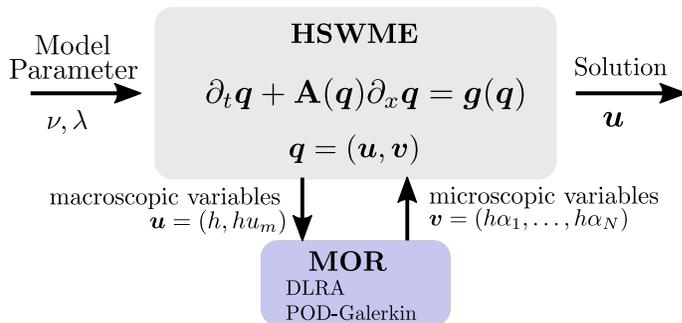


Figure 1: Concept of the macro-micro decomposition MOR approach for HSWME. The HSWME is decomposed in macroscopic variables \mathbf{u} and microscopic variables \mathbf{v} . While the macroscopic variables are computed with a standard conservative scheme, the microscopic variables are treated by MOR techniques DLRA or POD-Galerkin.

variables \mathbf{v} .

For the numerical solution, we perform two main steps: (I) A first order operator splitting to eq. (1), in which we split the transport part from the right-hand side friction part. (II) A decomposition of the solution into macroscopic (\mathbf{u}) and microscopic (\mathbf{v}) variables. Note that the operator splitting only introduce first order errors in time and space, which are of the same order as the discretization errors in the sub-steps. The macro-micro variable decomposition does not introduce an error but a decoupled solution of the macro and micro step will do so. The procedure can be summarized by the following steps

$$\text{Step 1: transport} \quad \partial_t \mathbf{q} + \mathbf{A}(\mathbf{q}) \partial_x \mathbf{q} = 0, \quad (2)$$

$$\text{Step 2: friction} \quad \partial_t \mathbf{q} = \mathbf{g}(\mathbf{q}), \quad (3)$$

and the subsequent macro-micro decomposition

$$\text{Step 1a: macro transport} \quad \mathbf{q}^n = (\mathbf{u}^n, \mathbf{v}^n) \xrightarrow{(2)} (\tilde{\mathbf{u}}^{n+1}, \mathbf{v}^n), \quad (4)$$

$$\text{Step 1b: micro transport} \quad (\tilde{\mathbf{u}}^{n+1}, \mathbf{v}^n) \xrightarrow{(2)} (\tilde{\mathbf{u}}^{n+1}, \tilde{\mathbf{v}}^{n+1}), \quad (5)$$

$$\text{Step 2a: macro friction} \quad \tilde{\mathbf{q}}^{n+1} = (\tilde{\mathbf{u}}^{n+1}, \tilde{\mathbf{v}}^{n+1}) \xrightarrow{(3)} (\mathbf{u}^{n+1}, \tilde{\mathbf{v}}^{n+1}), \quad (6)$$

$$\text{Step 2b: micro friction} \quad (\mathbf{u}^{n+1}, \tilde{\mathbf{v}}^{n+1}) \xrightarrow{(3)} (\mathbf{u}^{n+1}, \mathbf{v}^{n+1}). \quad (7)$$

Remark. Note that macro-micro decomposition has been used in a wide variety of applications in combination with model order reduction, see e.g. [13, 12]. In contrast to these works, we employ the macro-micro decomposition not to construct asymptotic-preserving schemes, but for two purposes: 1) Guarantee mass conservation and 2) ensure consistency with the SWE when the microscopic part tends to zero. Note that the latter also ensures that the model order reduction method does not reduce the approximation accuracy of water height and mean velocity. That is, these two quantities of interest can be represented accurately, independent of any chosen basis functions.

In the next sections, we will first introduce the full (coupled) model eq. (1), then discuss the space time discretization of the operator splitting of eq. (2) and eq. (3), before deriving a detailed scheme for the macro-micro decomposition system eq. (4) - eq. (7), which can then be efficiently used for model reduction algorithms like POD-Galerkin and DLRA of the micro steps eq. (5) and eq. (7).

3 Models for Shallow Flows

In the following we introduce two full models for shallow water flows: the shallow water moment equations and their hyperbolic formulation, the hyperbolic shallow water moment equations.

3.1 Shallow water moment equations

Shallow water flows are often modeled using the standard SWE, which are hyperbolic balance laws for the macroscopic variables water height h and the mean velocity u_m , derived from the underlying incompressible Navier-Stokes equations. For simplicity, we consider a one-dimensional vertical coordinate $x \in \mathbb{R}$, a flat bottom topography, and a Newtonian fluid. The SWE model for h and u_m then reads [32]

$$\partial_t \begin{pmatrix} h \\ hu_m \end{pmatrix} + \partial_x \begin{pmatrix} hu_m \\ hu_m^2 + \frac{1}{2}gh^2 \end{pmatrix} = -\frac{\nu}{\lambda} \begin{pmatrix} 0 \\ u_m \end{pmatrix},$$

with gravity constant g , slip length λ and kinematic viscosity ν . Note that the system is written in so-called *convective variables* (h, hu_m) , which will also be the case for the more advanced shallow water Moment model below. Further note that the concept can be readily extended to the 2D case.

Due to its simplicity with only the macroscopic mean velocity u_m , the SWE model cannot represent vertical variations of the velocity, representing micro structure of the profile. The assumption of a constant velocity profile breaks down for many applications, especially when considering strong bottom friction [24]. Even when starting with constant velocity profiles, bottom friction leads to a deceleration of the fluid close to the bottom giving rise to more complex velocity profiles.

The recently developed *shallow water moment equations* (SWME) [32] tackle this problem by introducing a polynomial expansion of the velocity profile $u(t, x, z)$ depending on the vertical variable $z \in [0, h]$ as follows

$$u(t, x, z) = u_m(t, x) + \sum_{j=1}^N \alpha_j(t, x) \phi_j \left(\frac{z}{h(t, x)} \right), \quad (8)$$

where $\phi_j : [0, 1] \rightarrow \mathbb{R}$ are the *scaled Legendre polynomials* of degree j defined by

$$\phi_j(\zeta) = \frac{1}{j!} \frac{d^j}{d\zeta^j} (\zeta - \zeta^2)^j. \quad (9)$$

The basis functions ϕ_j form an orthogonal basis, due to $\int_0^1 \phi_m(\zeta) \phi_n(\zeta) d\zeta = \frac{1}{2n+1} \delta_{mn}$, where δ_{mn} is the Kronecker delta.

The corresponding expansion coefficients α_j for $j = 1, 2, \dots, N$ of the polynomial expansion eq. (8) are also called *moments* in analogy to moment models from kinetic theory [51]. The moments represent micro variables that augment the macroscopic variables h and u_m .

The expansion eq. (8) then allows for the representation of complex velocity profiles, e.g., linear, quadratic, ..., up to the maximal polynomial degree $N \in \mathbb{N}$. While a larger maximal degree N leads to potentially higher accuracy of the velocity profile, more moments are used in the representation which leads to higher computational costs.

with slip length λ , viscosity ν , and constants $a_{i,j}$ given by

$$a_{i,j} = \begin{cases} 0 & \text{if } i + j = \text{even}, \\ \frac{\min(i-1,j)(\min(i-1,j)+1)}{2} & \text{if } i + j = \text{odd}. \end{cases}$$

Note that the first entry of the right-hand side friction term $\mathbf{g}(\mathbf{q})$ is zero, leading to the conservation of mass, which is the integral of the water height h . More importantly, the other entries given by $g_i(\mathbf{q})$ only depend non-linearly on the water height h , while depending linearly on the remaining u_m and α_i . This will be another important ingredient for efficient model reduction to be exploited later.

4 Space-time discretization with operator splitting

The right-hand side friction term of eq. (10) can be stiff for small λ or small h . This prohibits the use of standard explicit schemes to solve the coupled model eq. (10). While stable explicit schemes like projective integration exist [1], they typically require more time steps and some parameter tuning, which would be impractical for a robust model order reduction later. The left-hand side transport part is naturally discretised best with an explicit scheme using a standard CFL condition. We therefore split the full model eq. (10) into a transport step and a friction step. We then treat the space-time discretization of both terms separately.

As explained in section 2, for a single time step of a numerical solution we apply a first order operator splitting to eq. (10) in the same fashion as [21], in which we split the transport part eq. (2) from the right-hand side friction part eq. (3) as

$$\begin{aligned} \text{Step 1: transport} & \quad \partial_t \mathbf{q} + \mathbf{A}(\mathbf{q}) \partial_x \mathbf{q} = 0, \\ \text{Step 2: friction} & \quad \partial_t \mathbf{q} = \mathbf{g}(\mathbf{q}), \end{aligned}$$

where the solution of the transport and friction step will be considered separately in the following two subsections.

4.1 A new macro-micro decomposition scheme for the transport step

A straightforward discretization of the transport step eq. (2) via a standard path-conservative numerical schemes [28] is sufficient to solve the transport step of the full order model. However, preparing for the model reduction in section 5 and section 6, we here describe a new version exploiting the structure of the model using a macro-micro decomposition of the variables. This means additionally decomposing the vector of variables in the same way as they will be treated by the POD-Galerkin and DLRA methods in section 5 and section 6, respectively.

We first briefly describe a standard scheme. For the spatial discretization, we consider an equidistant mesh $x_j = j\Delta x$ with lattice spacing Δx and local state-variables, so that the full state vector at time t is given by $\mathbf{Q}(t) = [\mathbf{q}_i(x_j, t)]_{ij} \in \mathbb{R}^{N_x \times (N+2)}$ for N_x spatial discretization points. Furthermore, we denote the rows of this matrix as $\mathbf{Q}_j(t) \in \mathbb{R}^{N+2}$, which represents the corresponding solution vector evaluated at the spatial cell j .

The spatial discretization of eq. (2) for each cell j leads to a semi-discrete ODE for the unknowns $\mathbf{Q}_j(t)$. This step is performed via the following standard first-order path-conservative scheme [28, 5]

$$\dot{\mathbf{Q}}_j = -\frac{1}{\Delta x} \left(\mathbf{A}_{j+1}^- (\mathbf{Q}_{j+1} - \mathbf{Q}_j) + \mathbf{A}_j^+ (\mathbf{Q}_j - \mathbf{Q}_{j-1}) \right) =: (\mathbf{F}_q(\mathbf{Q}))_j, \quad (13)$$

where the so-called fluctuations $\mathbf{A}_{j+1}^\pm (\mathbf{Q}_{j+1} - \mathbf{Q}_j)$ can be computed in different ways. In this paper, we use the notation from [4] and include the system matrix evaluated at the average of adjacent cells as well as a Lax-Friedrichs type numerical diffusion term for stability as follows

$$\mathbf{A}_{j+1}^\pm = \frac{1}{2} \left(\mathbf{A} \left(\frac{\mathbf{Q}_j + \mathbf{Q}_{j+1}}{2} \right) \pm \frac{\Delta x}{\Delta t} \mathbf{I} \right). \quad (14)$$

Note, however, that different numerical schemes are possible that can readily be written in the form of eq. (15). For details we refer to [27].

Using an explicit Euler time integration scheme for eq. (13) yields the time discrete update formula of the transport step

$$\mathbf{Q}_j^{n+1} = \mathbf{Q}_j^n - \frac{\Delta t}{\Delta x} \left(\mathbf{A}_{j+1}^- (\mathbf{Q}_{j+1}^n - \mathbf{Q}_j^n) + \mathbf{A}_j^+ (\mathbf{Q}_j^n - \mathbf{Q}_{j-1}^n) \right). \quad (15)$$

The standard procedure as written in eq. (15) is to consider an update of the full state vector \mathbf{Q}_j^n to \mathbf{Q}_j^{n+1} . However, this does not allow to completely leverage the structure of the underlying model equations during the model reduction procedure later. To that end, we exploit the structure of the HSWME model eq. (10), by decomposing \mathbf{Q} into two parts: (1) the first two (macroscopic) variables for the water height h and the mean velocity u_m (called \mathbf{U}) on the one hand and (2) the last N (microscopic) variables for the moments α_i on the other hand (called \mathbf{V}). This can be written as

$$\begin{aligned} \mathbf{Q} &= [\mathbf{U} \quad \mathbf{V}], \quad \mathbf{U} = [h(x_j, t) \quad h(x_j, t) u_m(x_j, t)]_j \in \mathbb{R}^{N_x \times 2}, \\ \mathbf{V} &= [h(x_j, t) \alpha_1(x_j, t) \quad \dots \quad h(x_j, t) \alpha_N(x_j, t)]_j \in \mathbb{R}^{N_x \times N}. \end{aligned} \quad (16)$$

In the same fashion, we decompose the transport matrix $\mathbf{A}(\mathbf{q})$ into four blocks corresponding to the first two equations and the last N equations and variables, respectively

$$\mathbf{A}(\mathbf{q}) = \begin{bmatrix} \mathbf{A}_{uu} & \mathbf{A}_{uv} \\ \mathbf{A}_{vu} & \mathbf{A}_{vv} \end{bmatrix}, \quad (17)$$

with blocks

$$\begin{aligned} \mathbf{A}_{uu} &= \begin{bmatrix} gh - u_m^2 - \frac{1}{3}\alpha_1^2 & 1 \\ -2u_m\alpha_1 & 2\alpha_1 \end{bmatrix} \in \mathbb{R}^{2 \times 2}, & \mathbf{A}_{uv} &= \begin{bmatrix} \frac{2}{3}\alpha_1 & & & & \\ & u_m & \frac{3}{5}\alpha_1 & & \\ & \frac{1}{3}\alpha_1 & u_m & \ddots & \\ & & \ddots & \ddots & \frac{N+1}{2N+1}\alpha_1 \\ & & & \frac{N-1}{2N-1}\alpha_1 & u_m \end{bmatrix} \in \mathbb{R}^{2 \times N}, \\ \mathbf{A}_{vu} &= \begin{bmatrix} -2u_m\alpha_1 & 2\alpha_1 \\ -\frac{2}{3}\alpha_1^2 & \end{bmatrix} \in \mathbb{R}^{N \times 2}, & \mathbf{A}_{vv} &= \begin{bmatrix} u_m & \frac{3}{5}\alpha_1 & & & \\ \frac{1}{3}\alpha_1 & u_m & \ddots & & \\ & \ddots & \ddots & \ddots & \\ & & & \frac{N-1}{2N-1}\alpha_1 & u_m \end{bmatrix} \in \mathbb{R}^{N \times N}, \end{aligned}$$

where all other entries are zeros.

We decompose the system into a set of macroscopic variables U and another set of microscopic variables V . While the macroscopic variables are not reduced to allow structure preservation, the microscopic variables are used to generate an efficient reduced order model.

For the first order Lax-Friedrichs scheme used in eq. (14) the fluctuations for both sets of variables can then be derived as follows.

$$\begin{aligned}
\mathbf{A}_{j+1}^{\pm} &= \frac{1}{2} \left(\mathbf{A} \left(\frac{\mathbf{Q}_j + \mathbf{Q}_{j+1}}{2} \right) \pm \frac{\Delta x}{\Delta t} \mathbf{I} \right) \\
&= \frac{1}{2} \left(\begin{bmatrix} \mathbf{A}_{uu} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) & \mathbf{A}_{uv} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) \\ \mathbf{A}_{vu} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) & \mathbf{A}_{vv} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) \end{bmatrix} \pm \frac{\Delta x}{\Delta t} \begin{bmatrix} \mathbf{I}_2 & \mathbf{0} \\ \mathbf{0} & \mathbf{I}_N \end{bmatrix} \right) \\
&= \frac{1}{2} \begin{bmatrix} \mathbf{A}_{uu} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) \pm \frac{\Delta x}{\Delta t} \mathbf{I}_2 & \mathbf{A}_{uv} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) \\ \mathbf{A}_{vu} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) & \mathbf{A}_{vv} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right) \pm \frac{\Delta x}{\Delta t} \mathbf{I}_N \end{bmatrix} \\
&= \frac{1}{2} \begin{bmatrix} \mathbf{A}_{j+1,uu} \pm \frac{\Delta x}{\Delta t} \mathbf{I}_2 & \mathbf{A}_{j+1,uv} \\ \mathbf{A}_{j+1,vu} & \mathbf{A}_{j+1,vv} \pm \frac{\Delta x}{\Delta t} \mathbf{I}_N \end{bmatrix} \\
&= \frac{1}{2} \begin{bmatrix} \mathbf{A}_{j+1,uu}^{\pm} & \mathbf{A}_{j+1,uv}^{\pm} \\ \mathbf{A}_{j+1,vu}^{\pm} & \mathbf{A}_{j+1,vv}^{\pm} \end{bmatrix},
\end{aligned}$$

where we used the abbreviations $\mathbf{A}_{j+1,uu} := \mathbf{A}_{uu} \left(\frac{\mathbf{U}_j + \mathbf{U}_{j+1}}{2}, \frac{\mathbf{V}_j + \mathbf{V}_{j+1}}{2} \right)$ as well as the identity matrices $\mathbf{I}_2 \in \mathbb{R}^{2 \times 2}$ and $\mathbf{I}_N \in \mathbb{R}^{N \times N}$.

The semi-discrete version of eq. (13) then reads

$$\begin{aligned}
\dot{\mathbf{Q}}_j &= -\frac{1}{\Delta x} \left(\mathbf{A}_{j+1}^- (\mathbf{Q}_{j+1} - \mathbf{Q}_j) + \mathbf{A}_j^+ (\mathbf{Q}_j - \mathbf{Q}_{j-1}) \right) \\
\begin{bmatrix} \dot{\mathbf{U}}_j \\ \dot{\mathbf{V}}_j \end{bmatrix} &= -\frac{1}{\Delta x} \left(\frac{1}{2} \begin{bmatrix} \mathbf{A}_{j+1,uu}^- & \mathbf{A}_{j+1,uv}^- \\ \mathbf{A}_{j+1,vu}^- & \mathbf{A}_{j+1,vv}^- \end{bmatrix} \begin{bmatrix} \mathbf{U}_{j+1} - \mathbf{U}_j \\ \mathbf{V}_{j+1} - \mathbf{V}_j \end{bmatrix} + \begin{bmatrix} \mathbf{A}_{j,uu}^+ & \mathbf{A}_{j,uv}^+ \\ \mathbf{A}_{j,vu}^+ & \mathbf{A}_{j,vv}^+ \end{bmatrix} \begin{bmatrix} \mathbf{U}_j - \mathbf{U}_{j-1} \\ \mathbf{V}_j - \mathbf{V}_{j-1} \end{bmatrix} \right) \\
&= \frac{1}{2\Delta t} \begin{bmatrix} \mathbf{U}_{j+1} - 2\mathbf{U}_j + \mathbf{U}_{j-1} \\ \mathbf{V}_{j+1} - 2\mathbf{V}_j + \mathbf{V}_{j-1} \end{bmatrix} + \frac{1}{2\Delta x} \cdots \\
&\quad \begin{bmatrix} \mathbf{A}_{j+1,uu} (\mathbf{U}_{j+1} - \mathbf{U}_j) + \mathbf{A}_{j+1,uv} (\mathbf{V}_{j+1} - \mathbf{V}_j) + \mathbf{A}_{j,uu} (\mathbf{U}_j - \mathbf{U}_{j-1}) + \mathbf{A}_{j,uv} (\mathbf{V}_j - \mathbf{V}_{j-1}) \\ \mathbf{A}_{j+1,vu} (\mathbf{U}_{j+1} - \mathbf{U}_j) + \mathbf{A}_{j+1,vv} (\mathbf{V}_{j+1} - \mathbf{V}_j) + \mathbf{A}_{j,vu} (\mathbf{U}_j - \mathbf{U}_{j-1}) + \mathbf{A}_{j,vv} (\mathbf{V}_j - \mathbf{V}_{j-1}) \end{bmatrix} \\
&=: \begin{bmatrix} (\mathbf{F}_u(\mathbf{U}, \mathbf{V}))_j \\ (\mathbf{F}_v(\mathbf{U}, \mathbf{V}))_j \end{bmatrix}. \tag{18}
\end{aligned}$$

The matrices $\mathbf{A}_{j+1,uu}$, $\mathbf{A}_{j+1,uv}$, $\mathbf{A}_{j+1,vu}$, $\mathbf{A}_{j+1,vv}$ are given by eq. (17) evaluated at the averaged variables as follows

$$\begin{aligned}
\mathbf{A}_{j+1,uu} &= \begin{bmatrix} gh - \left(\frac{1}{2} (u_{m,j+1} + u_{m,j}) \right)^2 - \frac{1}{3} \left(\frac{1}{2} (\alpha_{1,j+1} + \alpha_{1,j}) \right)^2 & 1 \\ & u_{m,j+1} + u_{m,j} \end{bmatrix} \in \mathbb{R}^{2 \times 2}, \\
\mathbf{A}_{j+1,uv} &= \begin{bmatrix} & \\ \frac{1}{3} (\alpha_{1,j+1} + \alpha_{1,j}) & \end{bmatrix} \in \mathbb{R}^{2 \times N}, \\
\mathbf{A}_{j+1,vu} &= \begin{bmatrix} -\frac{1}{2} (u_{m,j+1} + u_{m,j}) (\alpha_{1,j+1} + \alpha_{1,j}) & \alpha_{1,j+1} + \alpha_{1,j} \\ -\frac{1}{6} (\alpha_{1,j+1} + \alpha_{1,j})^2 & \end{bmatrix} \in \mathbb{R}^{N \times 2},
\end{aligned}$$

$$\mathbf{A}_{j+1, \mathbf{v}\mathbf{v}} = \left(\frac{1}{2}(\alpha_{1,j+1} + \alpha_{1,j})\mathbf{A} + \frac{1}{2}(u_{m,j+1} + u_{m,j})\mathbf{I}_N \right) \in \mathbb{R}^{N \times N},$$

where the matrix $\mathbf{A} \in \mathbb{R}^{N \times N}$ is zero except for the off-diagonal entries

$$A_{j,j+1} = \frac{j+2}{2j+3}, \quad A_{j,j-1} = \frac{j-1}{2j-1}.$$

The semi-discrete transport step using an explicit Euler time integration scheme for eq. (18) leads to the time discrete transport update for the first two equations (macro transport step)

$$\begin{aligned} \mathbf{U}_j^{n+1} = & \frac{1}{2}(\mathbf{U}_{j+1}^n + \mathbf{U}_{j-1}^n) + \frac{\Delta t}{2\Delta x} (\mathbf{A}_{j+1, \mathbf{u}\mathbf{u}}(\mathbf{U}_{j+1}^n - \mathbf{U}_j^n) + \mathbf{A}_{j+1, \mathbf{u}\mathbf{v}}(\mathbf{V}_{j+1}^n - \mathbf{V}_j^n)) \\ & + \frac{\Delta t}{2\Delta x} (\mathbf{A}_{j, \mathbf{u}\mathbf{u}}(\mathbf{U}_j^n - \mathbf{U}_{j-1}^n) + \mathbf{A}_{j, \mathbf{u}\mathbf{v}}(\mathbf{V}_j^n - \mathbf{V}_{j-1}^n)), \end{aligned}$$

and to the time discrete transport update for the last N moment equations (micro transport step)

$$\begin{aligned} \mathbf{V}_j^{n+1} = & \frac{1}{2}(\mathbf{V}_{j+1}^n + \mathbf{V}_{j-1}^n) + \frac{\Delta t}{2\Delta x} (\mathbf{A}_{j+1, \mathbf{v}\mathbf{u}}(\mathbf{U}_{j+1}^n - \mathbf{U}_j^n) + \mathbf{A}_{j+1, \mathbf{v}\mathbf{v}}(\mathbf{V}_{j+1}^n - \mathbf{V}_j^n)) \\ & + \frac{\Delta t}{2\Delta x} (\mathbf{A}_{j, \mathbf{v}\mathbf{u}}(\mathbf{U}_j^n - \mathbf{U}_{j-1}^n) + \mathbf{A}_{j, \mathbf{v}\mathbf{v}}(\mathbf{V}_j^n - \mathbf{V}_{j-1}^n)). \end{aligned}$$

Note that the solution of the micro step for \mathbf{V}_j^{n+1} is later performed with the known values $\tilde{\mathbf{U}}_j^{n+1}$ from the first macro step, see eq. (5). The solution of the macro step should be performed with a conservative scheme, to ensure mass conservation.

After the solution of the transport step has been computed the scheme continues with the friction step, which is potentially stiff and requires a different, implicit scheme.

4.2 Friction step

To solve the space-homogeneous friction step eq. (3), an implicit scheme is necessary due to potential stiffness originating from small values for λ or h . We will use the scheme from [21], but adopt it to our decomposition of variables \mathbf{Q} into \mathbf{U} and \mathbf{V} as explained in this section.

The macro variables $\mathbf{u} = (h, hu_m)$ after the friction step are obtained using the definition of the source in eq. (12) and the two observations: (1) The height h remains constant in time during the friction step. (2) The micro moments α_i remain constant during the macro update. This leads to the updated values $(h^{n+1}, h^{n+1}u_m^{n+1})$.

For the update of the remaining micro coefficients \mathbf{V} during the micro friction step eq. (7), we make use of the fact that h and u_m are now constant and \mathbf{V} only occurs linearly. According to [21], eq. (3) for the last N moments can then be written as

$$\dot{\mathbf{V}}_j = \frac{1}{h_j^2}\mathbf{G}_1\mathbf{V}_j + \frac{1}{h_j}\mathbf{G}_2\mathbf{V}_j + u_{m,j}\mathbf{g}, \quad (19)$$

where $\mathbf{G}_1 \in \mathbb{R}^{N \times N}$ has entries

$$\mathbf{G}_{1,ij} = \begin{cases} -2\nu(2(i-1)+1) \cdot \min(i,j) \cdot (\min(i,j)+1) & \text{if } i+1+j \text{ is even} \\ 0 & \text{else} \end{cases}$$

and $\mathbf{G}_2 = \mathbf{g} \cdot \mathbf{1}^\top \in \mathbb{R}^{N \times N}$, where $\mathbf{g} \in \mathbb{R}^N$ has entries $g_i = -\frac{\nu}{\lambda}(2i + 1)$.

The micro friction step eq. (19) is then solved implicitly by a backward Euler method to overcome stability issues from potential stiffness. Note again that the water height h_j is constant during the whole friction step and $u_{m,j}^{n+1}$ is given by the solution of the macro friction step eq. (6). Applying the backward Euler method to eq. (19) yields

$$\mathbf{V}_j^{n+1} = \mathbf{V}_j^n + \Delta t \left(\frac{1}{h_j^2} \mathbf{G}_1 \mathbf{V}_j^{n+1} + \frac{1}{h_j} \mathbf{G}_2 \mathbf{V}_j^{n+1} + u_{m,j}^{n+1} \mathbf{g} \right). \quad (20)$$

We then define the matrix

$$\mathbf{D}_j = \mathbf{I}_N - \frac{\Delta t}{h_j^2} \mathbf{G}_1 - \frac{\Delta t}{h_j} \mathbf{G}_2$$

to arrive at the time update

$$\mathbf{V}_j^{n+1} = \mathbf{D}_j^{-1} \left(\mathbf{V}_j^n + \Delta t u_{m,j}^{n+1} \mathbf{g} \right). \quad (21)$$

We note that \mathbf{D}_j^{-1} can be precomputed efficiently, as it does not depend on u_m and α_i . Thus, the updated micro variables in eq. (21) can be computed efficiently without inverting a matrix during the online computation.

5 Macro-micro decomposition for conservative POD-Galerkin

The following section addresses the POD-Galerkin reduction of the HSWME model from section 3.2. As already pointed out in section 2 the presented approach applies the reduction only to the microscopic higher-order moments $\mathbf{v} = [h\alpha_1, \dots, h\alpha_N]^\top \in \mathbb{R}^N$. Furthermore, in contrast to the conventional POD-Galerkin approach that reduces the full state-space of the discretized PDE, we only reduce the dimensions of the PDEs' state-components. This leads to a decoupling between the time-space dynamics and the correlation between the components and avoids the separation of spatial-temporal dynamics that can lead to slow decaying approximation errors, known as the Kolmogorov N -width problem [43, 18]. To obtain a reduced model that allows rapid yet accurate predictions over a range of different parameters, one often uses a two phase offline-online procedure, which is explained in the following.

5.1 Offline phase

In the *offline phase* the reduced basis and the operators of the reduced model space are precomputed. Note that in contrast to the DLRA approach from section 6 one is willing to forego large up-front offline costs in favor of a more efficient reduced model for the online phase. The reduced basis is formed by collecting snapshots of the solution of eq. (10) at N_t different time/parameter instances

$$\mathcal{V} = \{\mathbf{v}(x, t_1), \dots, \mathbf{v}(x, t_{N_t-1})\}.$$

The POD approximates the microscopic higher moment vector using an orthonormal basis $\{\mathbf{w}\}_{k=1, \dots, r}$

$$\begin{aligned} \mathbf{v}(x, t) &\approx \tilde{\mathbf{v}}(x, t) = \sum_{k=1}^r \hat{\alpha}_k(x, t) \mathbf{w}_k, & r \ll N \leq N_t \\ &= \mathbf{W} \hat{\mathbf{v}}(x, t), \end{aligned}$$

where $\mathbf{W} = [\mathbf{w}_1, \dots, \mathbf{w}_r] \in \mathbb{R}^{N \times r}$ collects the basis vectors and $\hat{\mathbf{v}} = [\hat{\alpha}_1, \dots, \hat{\alpha}_r]^\top \in \mathbb{R}^r$ denotes the reduced space-time coefficients. In a fully discrete setting this basis is computed by a truncated *singular value decomposition* (SVD) of the *snapshot matrix*

$$\mathbf{V}^{\text{POD}} = \begin{bmatrix} \mathbf{V}^0 \\ \vdots \\ \mathbf{V}^{N_t-1} \end{bmatrix} \in \mathbb{R}^{(N_x N_t) \times N},$$

where the \mathbf{V}^n are defined in eq. (16). The truncated SVD of \mathbf{V}^{POD} yields

$$\mathbf{V}^{\text{POD}} = \mathbf{\Psi} \mathbf{\Sigma} \mathbf{W}^\top \quad (22)$$

Here, $\mathbf{\Sigma} = \text{diag}(\sigma_1, \dots, \sigma_r)$, $r \ll M$, is a diagonal matrix containing the largest r singular values $\sigma_1 \geq \sigma_2 \geq \dots \geq \sigma_r$ and $\mathbf{\Psi} \in \mathbb{R}^{(N_x N_t) \times r}$, $\mathbf{W} \in \mathbb{R}^{N \times r}$ are orthogonal matrices containing the left and right singular vectors, respectively. The latter are also termed *modes* in the following. For very large snapshot matrices it may be beneficial to use randomized or wavelet techniques to calculate the POD-modes [33, 19]. In the context of Galerkin projections the column space of \mathbf{W} yields the trial space

$$\mathbf{V}(t) \approx \tilde{\mathbf{V}}(t) = \mathbf{W} \hat{\mathbf{V}}(t), \quad \hat{\mathbf{V}}: [0, T] \rightarrow \mathbb{R}^{r \times N_x}.$$

5.2 Online Phase

As explained in section 2, the *online phase* evolves the dynamics in two steps. In the first step we evolve the first two macro variables \mathbf{U} without any model order reduction and in the second step we use the evolved \mathbf{U} as an input of our reduced system of the microscopic higher order moments \mathbf{V} . The reduced system is gathered by projecting eqs. (18) and (20) onto the test space which is the reduced subspace spanned by the columns of \mathbf{W} .

5.2.1 Transport step

For the transport part in eq. (18) we define the reduced transport term as

$$\widehat{\mathbf{F}}_{\mathbf{v}}(\hat{\mathbf{V}}) := \mathbf{W}^\top \mathbf{F}_{\mathbf{v}}(\mathbf{U}, \mathbf{W} \hat{\mathbf{V}}(t)) \in \mathbb{R}^{r \times N_x}.$$

Evaluating this at the j th cell we obtain:

$$\begin{aligned} [\widehat{\mathbf{F}}_{\mathbf{v}}(\hat{\mathbf{V}})]_j &= \frac{1}{2\Delta t} (\hat{\mathbf{V}}_{j-1} - 2\hat{\mathbf{V}}_j + \hat{\mathbf{V}}_{j+1}) \\ &\quad - \frac{1}{2\Delta x} \left(\hat{\mathbf{A}}_{j+1, \mathbf{v}\mathbf{u}} (\mathbf{U}_{j+1} - \mathbf{U}_j) + \hat{\mathbf{A}}_{j+1, \mathbf{v}\mathbf{v}} (\hat{\mathbf{V}}_{j+1} - \hat{\mathbf{V}}_j) \right) \\ &\quad - \frac{1}{2\Delta x} \left(\hat{\mathbf{A}}_{j, \mathbf{v}\mathbf{u}} (\mathbf{U}_j - \mathbf{U}_{j-1}) + \hat{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}} (\hat{\mathbf{V}}_j - \hat{\mathbf{V}}_{j-1}) \right), \end{aligned}$$

where we define the reduced non-linear operators $\hat{\mathbf{A}}_{j, \mathbf{v}\mathbf{u}} := \mathbf{W}^\top \mathbf{A}_{j, \mathbf{v}\mathbf{u}}$ and $\hat{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}}$, where:

$$\begin{aligned} \hat{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}} &:= \mathbf{W}^\top \mathbf{A}_{j, \mathbf{v}\mathbf{v}} \mathbf{W} = \left(\frac{1}{2} (\alpha_{1, j+1} + \alpha_{1, j}) \hat{\mathbf{A}} + \frac{1}{2} (u_{m, j+1} + u_{m, j}) \mathbf{I}_r \right) \\ \hat{\mathbf{A}} &:= \mathbf{W}^\top \mathbf{A} \mathbf{W} \in \mathbb{R}^{r \times r}, \end{aligned} \quad (23)$$

with identity matrix $\mathbf{I}_r \in \mathbb{R}^{r \times r}$. Note, since $\hat{\mathbf{A}}$ is precomputed in the offline phase, the non-linear term eq. (23) only has to be evaluated for r instead of N components, which

generates the speedup. To further simplify the non-linear terms POD is often used in combination with sparse sampling methods that sample the nonlinear terms at a few components to approximate them in a low-dimensional space. Examples are the *discrete empirical interpolation method* (DEIM) [9], the gappy POD [2], or the *energy-conserving sampling and weighting* (ECSW) method [16]. However, we refrain from using them here for a direct comparison with DLRA, that does not make use of sparse sampling methods, yet.

5.2.2 Friction step

Similar to the transport term we evaluate the micro friction term eq. (7) at the j th component projected onto the test space. We define the components of the reduced source term $\hat{\mathbf{G}}(\hat{\mathbf{V}}) := \mathbf{W}^\top \mathbf{G}(\mathbf{U}, \mathbf{W}\hat{\mathbf{V}}) \in \mathbb{R}^{r \times N_x}$ by

$$\begin{aligned} [\hat{\mathbf{G}}(\hat{\mathbf{V}})]_j &= \frac{1}{h_j^2} \hat{\mathbf{G}}_1 \hat{\mathbf{V}}_j + \hat{\mathbf{G}}_2 \hat{\mathbf{V}}_j + u_{m,j} \hat{\mathbf{g}} \\ \hat{\mathbf{G}}_1 &= \mathbf{W}^\top \mathbf{G}_1 \mathbf{W} \in \mathbb{R}^{r \times r}, \quad \hat{\mathbf{G}}_2 = \mathbf{W}^\top \mathbf{G}_2 \mathbf{W} \in \mathbb{R}^{r \times r}, \quad \hat{\mathbf{g}} = \mathbf{W}^\top \mathbf{g} \in \mathbb{R}^r \end{aligned}$$

The complexity of the source term computation is reduced, since only r components have to be evaluated.

6 Dynamical low-rank approximation

As an alternative to POD-Galerkin, we propose to evolve the microscopic higher-order moments with DLRA introduced in [26]. This method is data-driven in the sense that it closes the moment equations without assuming physical properties, based on the real-time solution data.

6.1 Macro-micro decomposition for dynamical low-rank approximation

The core idea of DLRA is to evolve the solution on a low-rank manifold. That is, DLRA represents the solution as a low-rank factorization and provides evolution equations for the individual factors. Therefore, DLRA can be interpreted as a Galerkin method which updates not only the expansion coefficients but also the basis functions in time. To preserve the structure of water height and momentum, we apply DLRA to the microscopic correction terms $v_i := h\alpha_i$ only. Collecting the spatially discretized correction terms in a matrix $\mathbf{V}(t) \in \mathbb{R}^{N_x \times N}$, where $v_{ji} = h(t, x_j)\alpha_i(t, x_j)$, we define a low-rank approximation as $\mathbf{V}(t) = \mathbf{X}(t)\mathbf{S}(t)\mathbf{W}(t)^\top$, where $\mathbf{X} \in \mathbb{R}^{N_x \times r}$ and $\mathbf{W} \in \mathbb{R}^{N \times r}$ can be interpreted as the collection of r basis vectors in space and moment order with a corresponding coefficient matrix $\mathbf{S} \in \mathbb{R}^{r \times r}$.

To benefit from this representation, we want to ensure that the method works on these factors only and never needs to compute and store the full solution \mathbf{V} . To preserve the low-rank structure of the solution, we therefore force the solution at all times t to remain in the manifold of rank r matrices, which we call \mathcal{M}_r . This can be ensured when the time derivative of \mathbf{V} lies in the tangent space of rank r matrices, i. e., the solution when advancing in time does not leave the manifold \mathcal{M}_r . We denote the tangent space at $\mathbf{V}(t)$ as $\mathcal{T}_{\mathbf{V}(t)}\mathcal{M}_r$. Then, the time evolution equations for the basis vectors and coefficients must satisfy

$$\dot{\mathbf{V}}(t) \in \mathcal{T}_{\mathbf{V}(t)}\mathcal{M}_r \quad \text{such that} \quad \|\dot{\mathbf{V}}(t) - \mathbf{R}_v(\mathbf{U}(t), \mathbf{V}(t))\| \rightarrow \min! \quad (24)$$

The first condition conserves the representation $\mathbf{V}(t) = \mathbf{X}(t)\mathbf{S}(t)\mathbf{W}(t)^\top$ and the second condition minimizes the residual, which is essentially a Galerkin condition. Hence, an equivalent formulation of (24) is

$$\left\langle \dot{\mathbf{V}}(t) - \mathbf{R}_v(\mathbf{U}(t), \mathbf{V}(t)), \delta\mathbf{V} \right\rangle = 0 \quad \forall \delta\mathbf{V} \in \mathcal{T}_{\mathbf{V}(t)}\mathcal{M}_r.$$

This represents a Galerkin method, which chooses test functions based on the solution data and the geometry of the manifold of rank r matrices. An admissible choice of $\delta\mathbf{V}$ when the solution reads $\mathbf{V}(t) = \mathbf{X}(t)\mathbf{S}(t)\mathbf{W}(t)^\top$ is $\delta\mathbf{V} = \mathbf{X}_i\mathbf{W}_j^\top$ which indeed lies in the tangent space. Here, \mathbf{X}_i and \mathbf{W}_j denote the i th and j th columns of the basis matrices, respectively. This test function yields an evolution equation for the coefficient matrix

$$\dot{\mathbf{S}}(t) = \mathbf{X}(t)^\top \mathbf{R}_v(\mathbf{X}(t)\mathbf{S}(t)\mathbf{W}(t)^\top) \mathbf{W}(t).$$

Choosing test functions $\delta\mathbf{V} = \mathbf{X}_i$ and $\delta\mathbf{V} = \mathbf{W}_i$, which again lie in the tangent space, results in evolution equations for the respective basis matrices

$$\begin{aligned} \dot{\mathbf{X}}(t) &= (\mathbf{I} - \mathbf{X}(t)\mathbf{X}(t)^\top) \mathbf{R}_v(\mathbf{X}(t)\mathbf{S}(t)\mathbf{W}(t)^\top) \mathbf{W}(t)\mathbf{S}(t)^{-1}, \\ \dot{\mathbf{W}}(t) &= (\mathbf{I} - \mathbf{W}(t)\mathbf{W}(t)^\top) \mathbf{R}_v(\mathbf{X}(t)\mathbf{S}(t)\mathbf{W}(t)^\top)^\top \mathbf{X}(t)\mathbf{S}(t)^{-\top}. \end{aligned}$$

Solving these evolution equations with classical time integration schemes is inefficient, since the coefficient matrices are often ill conditioned and the time step size is dictated by the smallest eigenvalue of \mathbf{S} . Two robust time integrators, which guarantee stability, are the *projector-splitting integrator* [40] as well as the BUG integrator [8]. Their main strategy is to not evolve \mathbf{X} and \mathbf{W} in time directly, but to evolve a linear transformation $\mathbf{K} := \mathbf{X}\mathbf{S}$ and $\mathbf{L} := \mathbf{W}\mathbf{S}^\top$ and retrieve the basis matrices through a QR-decomposition. In this work, we focus on the BUG integrator, which consists of three update steps

1. **K-step:** Update \mathbf{X}^0 to \mathbf{X}^1 via

$$\dot{\mathbf{K}}(t) = \mathbf{R}_v(\mathbf{K}(t)\mathbf{W}^{0,\top})\mathbf{W}^0, \quad \mathbf{K}(t_0) = \mathbf{X}^0\mathbf{S}^0.$$

Determine \mathbf{X}^1 with $\mathbf{K}(t_1) = \mathbf{X}^1\mathbf{R}$ and store $\mathbf{M} = \mathbf{X}^{1,\top}\mathbf{X}^0$.

2. **L-step:** Update \mathbf{W}^0 to \mathbf{W}^1 via

$$\dot{\mathbf{L}}(t) = \mathbf{R}_v(\mathbf{X}^0\mathbf{L}(t)^T)^T\mathbf{X}^0, \quad \mathbf{L}(t_0) = \mathbf{W}^0\mathbf{S}^\top.$$

Determine \mathbf{W}^1 with $\mathbf{L}(t_1) = \mathbf{W}^1\tilde{\mathbf{R}}$ and store $\mathbf{N} = \mathbf{W}^{1,\top}\mathbf{W}^0$.

3. **S-step:** Update \mathbf{S}^0 to \mathbf{S}^1 via

$$\dot{\mathbf{S}}(t) = \mathbf{X}^{1,\top} \mathbf{R}_v(\mathbf{X}^1\mathbf{S}(t)\mathbf{W}^{1,\top})\mathbf{W}^1, \quad \mathbf{S}(t_0) = \mathbf{M}\mathbf{S}^0\mathbf{N}^\top$$

and set $\mathbf{S}^1 = \mathbf{S}(t_1)$.

The solution at the next time step is then given by $\mathbf{V}(t_1) = \mathbf{X}^1\mathbf{S}^1\mathbf{W}^{1,\top}$. Note that the first two equations which evolve the basis in time can be updated in parallel followed by a serial update of the coefficient vector.

The classical dynamical low-rank approximation approach often does not preserve important physical properties. This stems from the fact that DLRA can remove basis functions which are needed for conservation. However, problem-dependent adaptations

to the classical DLRA integrators can provide conservation properties. As an example, conservation of solution invariants up to a tolerance parameter can be achieved with a basis augmentation step [6]. Moreover, [14] uses a basis augmentation as well as a reformulation of the K , L and S -step to preserve mass, momentum and energy in the Vlasov equations. Our approach in this work ensures local mass conservation by decomposing the dynamics of the macroscopic (conserved) water height and momentum from the dynamics of the microscopic correction terms. This means that the conservation law structure of the water height equation is not altered by DLRA.

6.2 Evolution equations for the low-rank HSWME

In the following we derive efficient representations of the K , L , and S -steps for the micro transport step eq. (5) and the micro friction step eq. (7) of the HSWME model. Note that the macroscopic variables are not altered by the DLRA and computed during the macro transport and macro friction step as explained in section 4.

6.2.1 Transport step

For the micro transport part eq. (5), the spatially discretized right-hand side eq. (18) is given by

$$\begin{aligned} [\mathbf{F}_v(\mathbf{U}, \mathbf{V})]_j &= \frac{1}{2\Delta t} (\mathbf{V}_{j-1} - 2\mathbf{V}_j + \mathbf{V}_{j+1}) \\ &\quad - \frac{1}{2\Delta x} (\mathbf{A}_{j+1, \mathbf{v}\mathbf{u}} (\mathbf{U}_{j+1} - \mathbf{U}_j) + \mathbf{A}_{j+1, \mathbf{v}\mathbf{v}} (\mathbf{V}_{j+1} - \mathbf{V}_j)) \\ &\quad - \frac{1}{2\Delta x} (\mathbf{A}_{j, \mathbf{v}\mathbf{u}} (\mathbf{U}_j - \mathbf{U}_{j-1}) + \mathbf{A}_{j, \mathbf{v}\mathbf{v}} (\mathbf{V}_j - \mathbf{V}_{j-1})). \end{aligned}$$

K -step: To derive the K -step, we denote the j -th row of \mathbf{K} as $\mathbf{K}_j(t) \in \mathbb{R}^r$ and represent the solution \mathbf{V} at spatial cell j as $\mathbf{V}_j(t) = \mathbf{W}^0 \mathbf{K}_j(t)$. Multiplying the right-hand side \mathbf{F}_v with $\mathbf{W}^{0, \top}$ then yields

$$\begin{aligned} \dot{\mathbf{K}}_j &= \frac{1}{2\Delta t} (\mathbf{K}_{j-1} - 2\mathbf{K}_j + \mathbf{K}_{j+1}) \\ &\quad - \frac{1}{2\Delta x} \left(\mathbf{W}^{0, \top} \mathbf{A}_{j+1, \mathbf{v}\mathbf{u}} (\mathbf{U}_{j+1} - \mathbf{U}_j) + \tilde{\mathbf{A}}_{j+1, \mathbf{v}\mathbf{v}} (\mathbf{K}_{j+1} - \mathbf{K}_j) \right) \\ &\quad - \frac{1}{2\Delta x} \left(\mathbf{W}^{0, \top} \mathbf{A}_{j, \mathbf{v}\mathbf{u}} (\mathbf{U}_j - \mathbf{U}_{j-1}) + \tilde{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}} (\mathbf{K}_j - \mathbf{K}_{j-1}) \right), \end{aligned}$$

where $\tilde{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}} := \mathbf{W}^{0, \top} \mathbf{A}_{j, \mathbf{v}\mathbf{v}} \mathbf{W}^0$. Note that since $\tilde{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}} \in \mathbb{R}^{r \times r}$ and $\mathbf{W}^{0, \top} \mathbf{A}_{j+1, \mathbf{v}\mathbf{u}} \in \mathbb{R}^{r \times 2}$, the main memory requirements stem from storing \mathbf{K}_j at all spatial cells j , i. e., memory requirements are $\mathcal{O}(r \cdot N_x)$ opposed to the original method's requirements of $\mathcal{O}(N_x \cdot N)$. An efficient computation of $\tilde{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}}$ precomputes $\tilde{\mathbf{A}} := \mathbf{W}^{0, \top} \mathbf{A} \mathbf{W}^0$ which requires $\mathcal{O}(r^2 \cdot N)$ operations. Using the matrix $\tilde{\mathbf{A}} \in \mathbb{R}^{r \times r}$ to compute $\tilde{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}}$ via

$$\tilde{\mathbf{A}}_{j, \mathbf{v}\mathbf{v}} = \left(\frac{1}{2} (\alpha_{1,j} + \alpha_{1,j-1}) \tilde{\mathbf{A}} + \frac{1}{2} (u_{m,j} + u_{m,j-1}) \mathbf{I}_r \right)$$

requires $\mathcal{O}(r^2 \cdot N_x)$ operations. Hence, the computational costs for the K -step are $C_K \lesssim r^2 \cdot (N_x + N)$.

L-step: To derive the L -step, we represent the solution \mathbf{V} at spatial cell j as $\mathbf{V}_j(t) = \mathbf{L}(t)\mathbf{X}_j^0$. Moreover, we test with \mathbf{X}^0 , meaning that we multiply the right-hand side with \mathbf{X}_j^0 and sum over j . Hence, using Einstein's sum convention and writing out $\tilde{\mathbf{A}}_{j,\mathbf{v}\mathbf{v}}$ we have

$$\begin{aligned} \dot{\mathbf{L}} &= \frac{1}{2\Delta t} \mathbf{L}(t) \cdot (\mathbf{X}_{j-1}^0 - 2\mathbf{X}_j^0 + \mathbf{X}_{j+1}^0) \mathbf{X}_j^{0,\top} \\ &\quad - \frac{1}{4\Delta x} (\mathbf{A}\mathbf{L}(t) \cdot (\alpha_{1,j+1} + \alpha_{1,j}) + \mathbf{L}(t) \cdot (u_{m,j+1} + u_{m,j})) \cdot (\mathbf{X}_{j+1}^0 - \mathbf{X}_j^0) \mathbf{X}_j^{0,\top} \\ &\quad - \frac{1}{4\Delta x} (\mathbf{A}\mathbf{L}(t) \cdot (\alpha_{1,j} + \alpha_{1,j-1}) + \mathbf{L}(t) \cdot (u_{m,j} + u_{m,j-1})) \cdot (\mathbf{X}_j^0 - \mathbf{X}_{j-1}^0) \mathbf{X}_j^{0,\top} \\ &\quad - \frac{1}{2\Delta x} \left(\mathbf{A}_{j+1,\mathbf{v}\mathbf{v}}(\mathbf{U}_{j+1} - \mathbf{U}_j) \mathbf{X}_j^{0,\top} + \mathbf{A}_{j,\mathbf{v}\mathbf{v}}(\mathbf{U}_j - \mathbf{U}_{j-1}) \mathbf{X}_j^{0,\top} \right). \end{aligned}$$

To simplify the structure of the resulting equations, we define

$$\begin{aligned} \tilde{\mathbf{X}}^0 &:= \sum_j (\mathbf{X}_{j-1}^0 - 2\mathbf{X}_j^0 + \mathbf{X}_{j+1}^0) \mathbf{X}_j^{0,\top}, \\ \tilde{\boldsymbol{\alpha}}_+^0 &:= \sum_j (\alpha_{1,j+1} + \alpha_{1,j}) (\mathbf{X}_{j+1}^0 - \mathbf{X}_j^0) \mathbf{X}_j^{0,\top}, \\ \tilde{\boldsymbol{\alpha}}_-^0 &:= \sum_j (\alpha_{1,j} + \alpha_{1,j-1}) (\mathbf{X}_j^0 - \mathbf{X}_{j-1}^0) \mathbf{X}_j^{0,\top}, \\ \tilde{\boldsymbol{u}}_+^0 &:= \sum_j (u_{m,j+1} + u_{m,j}) (\mathbf{X}_{j+1}^0 - \mathbf{X}_j^0) \mathbf{X}_j^{0,\top}, \\ \tilde{\boldsymbol{u}}_-^0 &:= \sum_j (u_{m,j} + u_{m,j-1}) (\mathbf{X}_j^0 - \mathbf{X}_{j-1}^0) \mathbf{X}_j^{0,\top}, \end{aligned}$$

and $\tilde{\boldsymbol{\alpha}}_-^0$ as well as $\tilde{\boldsymbol{u}}_-^0$ accordingly. This results in

$$\begin{aligned} \dot{\mathbf{L}} &= \frac{1}{2\Delta t} \mathbf{L}(t) \tilde{\mathbf{X}}^0 - \frac{1}{4\Delta x} (\mathbf{A}\mathbf{L}(t) (\tilde{\boldsymbol{\alpha}}_+^0 + \tilde{\boldsymbol{\alpha}}_-^0) + \mathbf{L}(t) (\tilde{\boldsymbol{u}}_+^0 + \tilde{\boldsymbol{u}}_-^0)) \\ &\quad - \frac{1}{2\Delta x} \left(\mathbf{A}_{j+1,\mathbf{v}\mathbf{v}}(\mathbf{U}_{j+1} - \mathbf{U}_j) \mathbf{X}_j^{0,\top} + \mathbf{A}_{j,\mathbf{v}\mathbf{v}}(\mathbf{U}_j - \mathbf{U}_{j-1}) \mathbf{X}_j^{0,\top} \right). \end{aligned}$$

Note that the highest memory requirements come from storing $\mathbf{L} \in \mathbb{R}^{N \times r}$. Computing $\tilde{\mathbf{X}}^0$, $\tilde{\boldsymbol{\alpha}}_\pm^0$ and $\tilde{\boldsymbol{u}}_\pm^0$ requires $\mathcal{O}(r^2 \cdot N_x)$ operations and computing $\mathbf{A} \cdot \mathbf{L}$ requires $\mathcal{O}(N \cdot r)$ operations, since \mathbf{A} only has off-diagonal entries. The multiplication of \mathbf{L} and $\tilde{\mathbf{X}}^0$, $\tilde{\boldsymbol{\alpha}}_\pm^0$ as well as $\tilde{\boldsymbol{u}}_\pm^0$ requires $\mathcal{O}(r^2 \cdot N)$ operations, i. e., we have a computational cost for the L -step of $C_L \lesssim \mathcal{O}(r^2 \cdot (N_x + N))$.

S-step: To derive the S -step, we represent the microscopic solution \mathbf{V} at spatial cell j as $\mathbf{V}_j(t) = \mathbf{W}^1 \mathbf{S}(t)^\top \mathbf{X}_j^1$. Moreover, we test with \mathbf{X}^1 and \mathbf{W}^1 , i. e., we multiply the right-hand side with \mathbf{X}_j^1 and sum over j as well as multiply with $\mathbf{W}^{1,\top}$. With the previous definitions we have

$$\begin{aligned} \dot{\mathbf{S}} &= \frac{1}{2\Delta t} \mathbf{S}(t) \tilde{\mathbf{X}}^1 - \frac{1}{4\Delta x} \left(\mathbf{W}^{1,\top} \mathbf{A} \mathbf{W}^1 \mathbf{S}(t)^\top (\tilde{\boldsymbol{\alpha}}_+^1 + \tilde{\boldsymbol{\alpha}}_-^1) + \mathbf{S}(t)^\top (\tilde{\boldsymbol{u}}_+^1 + \tilde{\boldsymbol{u}}_-^1) \right) \\ &\quad - \frac{1}{2\Delta x} \left(\mathbf{W}^{1,\top} \mathbf{A}_{j+1,\mathbf{v}\mathbf{v}}(\mathbf{U}_{j+1} - \mathbf{U}_j) \mathbf{X}_j^{1,\top} + \mathbf{W}^{1,\top} \mathbf{A}_{j,\mathbf{v}\mathbf{v}}(\mathbf{U}_j - \mathbf{U}_{j-1}) \mathbf{X}_j^{1,\top} \right). \end{aligned}$$

The memory requirements are $\mathcal{O}(r^2)$ and following the discussion for the K and L -steps, the computational costs for the S -step again are $C_S \lesssim \mathcal{O}(r^2 \cdot (N_x + N))$.

6.2.2 Friction step

For the friction step eq. (7) we have according to eq. (19)

$$\dot{\mathbf{V}}_j = \frac{1}{h_j^2} \mathbf{G}_1 \mathbf{V}_j + \frac{1}{h_j} \mathbf{G}_2 \mathbf{V}_j + u_{m,j} \mathbf{g}.$$

For simplicity of notation, we define the matrix *ordinary differential equation* (ODE)

$$\dot{\mathbf{V}} = \mathbf{h}^{-2}\mathbf{V}\mathbf{G}_1^\top + \mathbf{h}^{-1}\mathbf{V}\mathbf{G}_2^\top + \mathbf{u}_m\mathbf{g}^\top, \quad (25)$$

where $\mathbf{h} = \text{diag}(h_1, \dots, h_{N_x})$ and $\mathbf{u}_m = \text{diag}(u_{m,1}, \dots, u_{m,N_x})$ will be the values obtained from a previous macro friction update eq. (6) and assumed known during the micro step eq. (7). Let us again derive K , L and S -steps and directly define a time discretization.

K -step: Let us use the representation $\mathbf{V} = \mathbf{K}(t)\mathbf{W}^{1,\top}$ and test with \mathbf{W}^1 . Then, the K -step equation reads

$$\dot{\mathbf{K}} = \mathbf{h}^{-2}\mathbf{K}\mathbf{W}^{1,\top}\mathbf{G}_1^\top\mathbf{W}^1 + \mathbf{h}^{-1}\mathbf{K}\mathbf{W}^{1,\top}\mathbf{G}_2^\top\mathbf{W}^1 + \mathbf{u}_m\mathbf{g}^\top\mathbf{W}^1.$$

Since friction terms are commonly stiff, we use an implicit Euler method to discretize in time. That is, for a fixed spatial cell j and defining $\widehat{\mathbf{G}}_1 := \mathbf{W}^{1,\top}\mathbf{G}_1\mathbf{W}^1$ as well as $\widehat{\mathbf{G}}_2 := \mathbf{W}^{1,\top}\mathbf{G}_2\mathbf{W}^1$ we have

$$\left(\mathbf{I}_r - \Delta t\mathbf{h}_j^{-2}\widehat{\mathbf{G}}_1 - \Delta t\mathbf{h}_j^{-1}\widehat{\mathbf{G}}_2\right)\mathbf{K}_j^{n+1} = \mathbf{K}_j^n + \Delta t\mathbf{u}_{m,j}^{n+1}\mathbf{g}^\top\mathbf{W}^1,$$

where $u_{m,j}^{n+1}$ is the updated velocity from the macro friction step eq. (6).

We again retrieve the time updated spatial basis which we denote by \mathbf{X}^2 by a QR decomposition of \mathbf{K}^{n+1} . Hence, at N_x spatial cells, we need to solve a linear system with r unknowns. Moreover, we have to compute flux matrices with r^2 entries which require N operations per entry. Thus, the computational costs are $C_K^f \lesssim N_x \cdot r^3 + N \cdot r^2$.

L -step: Use the representation $\mathbf{V} = \mathbf{X}^1\mathbf{L}^\top$ and test the transposed of (25) with \mathbf{X}^1 . Then, the L -step equation reads

$$\dot{\mathbf{L}} = \mathbf{G}_1\mathbf{L}\mathbf{X}^{1,\top}\mathbf{h}^{-2}\mathbf{X}^1 + \mathbf{G}_2\mathbf{L}\mathbf{X}^{1,\top}\mathbf{h}^{-1}\mathbf{X}^1 + \mathbf{g}\mathbf{u}_m^\top\mathbf{X}^1.$$

Let us define $\widehat{\mathbf{h}}_1^{-2} := \mathbf{X}^{1,\top}\mathbf{h}^{-2}\mathbf{X}^1$ and $\widehat{\mathbf{h}}_1^{-1} := \mathbf{X}^{1,\top}\mathbf{h}^{-1}\mathbf{X}^1$ and again use an implicit Euler time discretization. This gives

$$\mathbf{L}^{n+1} - \Delta t\mathbf{G}_1\mathbf{L}^{n+1}\widehat{\mathbf{h}}_1^{-2} - \Delta t\mathbf{G}_2\mathbf{L}^{n+1}\widehat{\mathbf{h}}_1^{-1} = \mathbf{L}^n + \Delta t\mathbf{g}\mathbf{u}_m^{n+1,\top}\mathbf{X}^1.$$

The time updated coefficient basis which we denote by \mathbf{W}^2 is then obtained by a QR decomposition of \mathbf{L}^{n+1} . Hence, we need to solve an $r \cdot N$ system of linear equations which requires $\mathcal{O}(r^3 \cdot N^3)$ operations. Moreover, computing $\widehat{\mathbf{h}}_1^{-1}$ and $\widehat{\mathbf{h}}_1^{-2}$ requires $\mathcal{O}(N_x \cdot r^2)$ operations, hence $C_L^f \lesssim r^3 \cdot N^3 + N_x \cdot r^2$.

S -step: Use the representation $\mathbf{V} = \mathbf{X}^2\mathbf{S}\mathbf{W}^{2,\top}$ and test (25) with \mathbf{X}^2 and \mathbf{W}^2 . Then, the S -step equation reads

$$\dot{\mathbf{S}} = \widehat{\mathbf{h}}_2^{-2}\mathbf{S}\widehat{\mathbf{G}}_1^\top + \widehat{\mathbf{h}}_2^{-1}\mathbf{S}\widehat{\mathbf{G}}_2^\top + \mathbf{X}^{2,\top}\mathbf{u}_m\mathbf{g}^\top\mathbf{W}_2.$$

An implicit Euler time discretization gives with $\mathbf{S}^n = \mathbf{X}^{2,\top}\mathbf{X}^1\mathbf{S}^1\mathbf{W}^{1,\top}\mathbf{W}^2$

$$\mathbf{S}^{n+1} - \Delta t\widehat{\mathbf{h}}_2^{-2}\mathbf{S}^{n+1}\widehat{\mathbf{G}}_1^\top - \Delta t\widehat{\mathbf{h}}_2^{-1}\mathbf{S}^{n+1}\widehat{\mathbf{G}}_2^\top = \mathbf{S}^n + \Delta t\mathbf{X}^{2,\top}\mathbf{u}_m^{n+1,\top}\mathbf{g}^\top\mathbf{W}_2.$$

Hence, we need to solve an r^2 system of linear equations which requires $\mathcal{O}(r^6)$ operations. Moreover, computing flux matrices requires $\mathcal{O}((N_x + N) \cdot r^2)$ operations, hence $C_S^f \lesssim r^2 \cdot (N + N_x) + r^6$.

Remark. Note that the implicit L -step exhibits high computational costs of $O(r^3 \cdot N^3)$. Nevertheless, we are able to separate the spatial degrees of freedom from the number of moments, which are commonly much smaller than the number of spatial cells. Therefore, we expect a significant reduction of computational costs by DLRA, which however does not resemble its full potential. Note that DLRA will become substantially more efficient for two-dimensional spatial domains, since in this case the number of spatial cells drastically increases and thereby removes the computational bottle neck of matrix inversions performed in the L -step.

7 Numerical experiments

As numerical examples of the model reduction techniques developed in the previous sections, we consider two test cases: (1) a water column (also called dam break) test case similar to the test case in [29] and (2) a smooth wave similar to the test case in [32]. All numerical experiments can be reproduced with the openly available source code [31]. The simulations have been performed on 11th Gen Intel(R) Core(TM) i7-11850H CPUs (8 processing units).

7.1 Water column or dam break test case

In first test case, we investigate a water column or dam break scenario defined by the settings in table 1. Initially, the water is at rest and the height profile is defined as $h(x) = 0.3 + 0.35 \cdot (\tanh(x) - \tanh(x - 0.2))$, for $x \in [-1, 1]$ leading to a water column within $[0, 0.2]$ with slightly smoothed boundaries. The friction parameters are $\nu = 1.0$ and $\lambda = 0.5$ which slow down velocities close to the bottom.

friction coefficient	$\lambda = 0.5$
slip length	$\nu = 1.0$
temporal domain	$t \in [0, 0.2]$
spatial domain	$x \in [-1, 1]$
spatial resolution	$N_x = 2000$
initial height	$h(x) = 0.3 + 0.35 \cdot (\tanh(x) - \tanh(x - 0.2))$
initial velocity	$u(0, x, \zeta) = 0$
CFL number	CFL = 0.25
spatial discretization	path-conservative FVM [28]

Table 1: Simulation setup for water column test case.

The numerical discretization is performed using $N_x = 2000$ cells and a CFL number of 0.25 for time stepping within $t \in [0, 0.2]$. For the full-order HSWME model, we consider $N = 100$ coefficients, leading to a large system of coupled PDEs. For the model reduction, we first consider a fixed number of $r = 5$ basis function, which largely reduces the complexity of the reduced POD-Galerkin and DLRA models.

The trial and test space for the POD-Galerkin approach is spanned by the POD-basis. It is setup offline from the concatenation of the snapshots for two different trajectories sampled with slip length $\nu \in \{0.1, 10\}$. The snapshots are shown for the water height in fig. 2. From the snapshot matrix $\mathbf{V}^{\text{POD}} \in \mathbb{R}^{(2N_t N_x) \times N}$ we can compute the POD basis

with help of the SVD eq. (22) and evaluate the projected right hand side efficiently for the testing slip length $\nu = 1$.

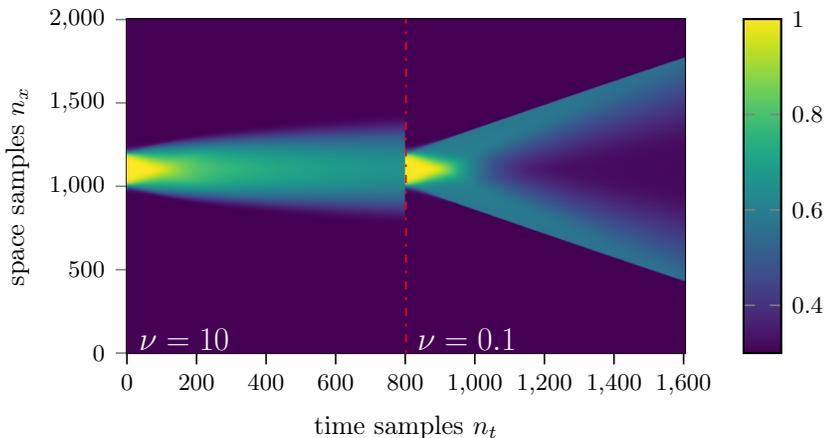


Figure 2: Sampled snapshot data of the POD, shown for the water height component.

The numerical results shown in fig. 3 compare the numerical results of (1) the full-order HSWME model, (2) the lowest-order SWE model, (3) the new macro-micro decomposition POD-Galerkin, and (4) the new macro-micro decomposition DLRA. The full-order HSWME model clearly depicts two waves symmetrically moving left and right, respectively. The simple SWE model uses a constant velocity profile with zero micro structure and thus cannot capture the complex dynamics induced by the bottom friction, which slows down the velocity profile at the bottom. The new macro-micro decomposition POD-Galerkin and DLRA methods, yield optically indistinguishable solutions from the full-order HSWME model, even though only $r = 5$ basis functions are chosen. This emphasizes the good approximation quality of the reduced models despite a small number of basis functions.

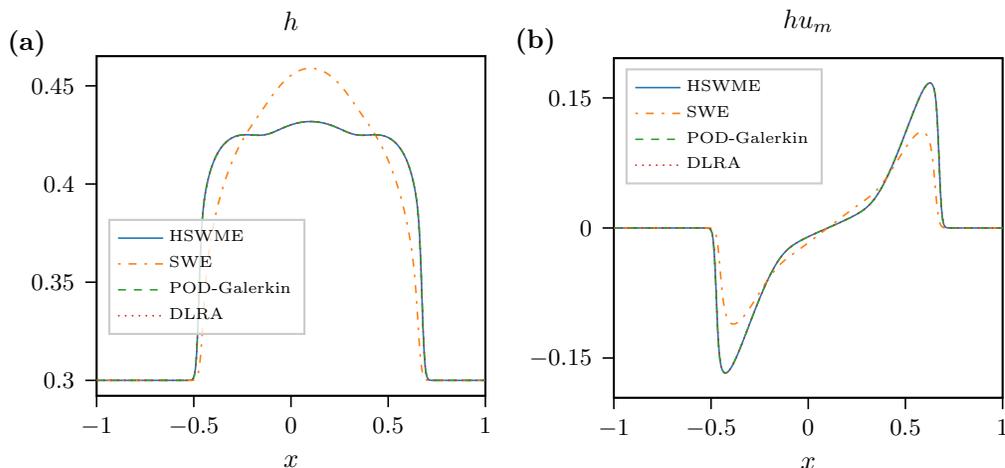


Figure 3: Water column test case comparison of macroscopic quantities water height h (a) and momentum hu_m (b) for full-order HSWME, SWE, POD-Galerkin, and DLRA using rank $r = 5$. Both reduced models DLRA and POD-Galerkin yield indistinguishable results from the full-order model while the simple SWE model shows insufficient accuracy.

In fig. 4 the water velocity profiles are plotted each time for different positions: $x = 0.05$,

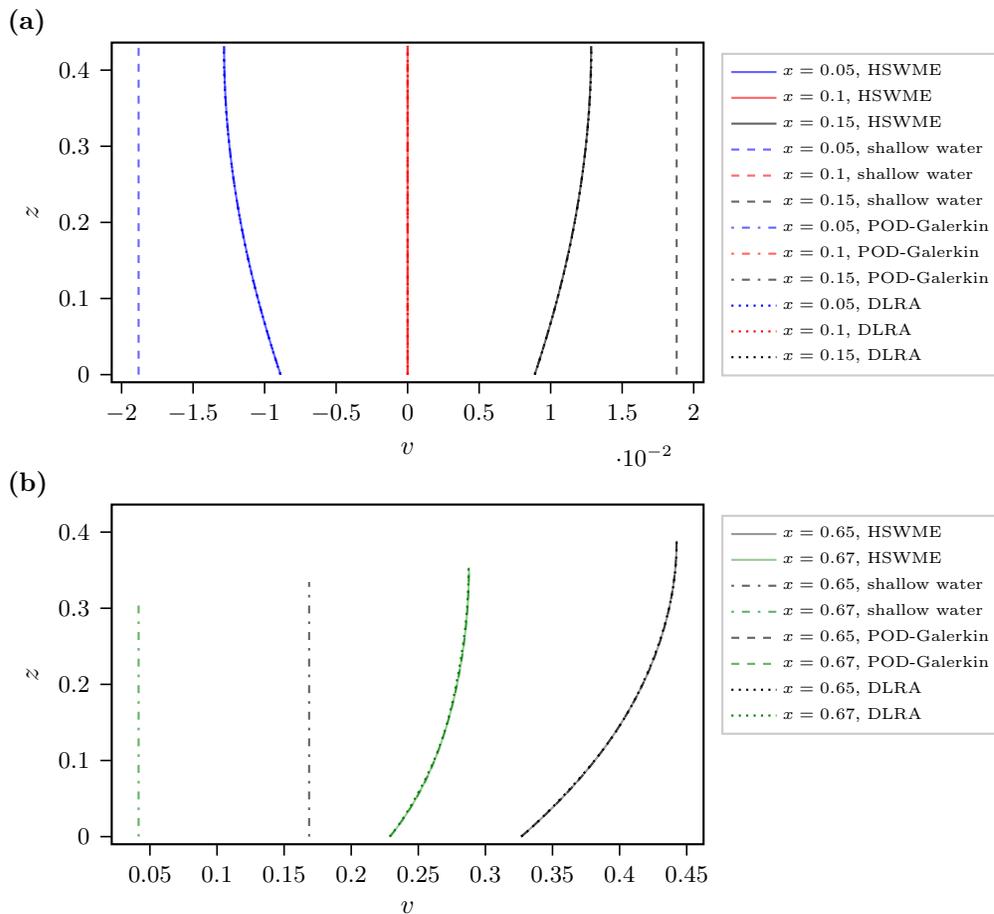


Figure 4: Water column test case comparison of velocity profiles close to the domain center (a) and close to the shock wave (b) for full-order HSWME, SWE, POD-Galerkin, and DLRA using rank $r = 5$. Both reduced models DLRA and POD-Galerkin also yield indistinguishable results from the full-order model while the simple SWE model shows insufficient accuracy and wrong propagation speeds.

0.0, 0.15 close to the center of the domain in fig. 4a and $x = 0.65, 0.67$ close to the shock wave in fig. 4b. In fig. 4a, we clearly see that also the velocity profiles of the full-order model and the reduced POD-Galerkin and DLRA models agree almost perfectly at all three points. The SWE model on the other hand shows a overestimation of the average velocity at both positions. This is due to wrong propagation speeds of the SWE model [29] and clearly shows why this simple model is not useful in simulations of such complex cases. In fig. 4b, the profiles close to the shock wave are plotted and the reduced models again agree almost perfectly with the full-order model. Again the SWE model predicts wrong average profiles, in this case much smaller than the full model and the reduced models.

For the settings from above, fig. 5 shows the runtime comparison between the full-order HSWME, DLRA, SWE, and POD-Galerkin, where the POD-Galerkin runtime is divided into the offline precomputations and the online phase. The truncation ranks of DLRA $r = 4$ and POD-Galerkin $r = 3$ are tuned such that the relative L_2 errors of \mathbf{u} at the final time are approximately the same ($\approx 0.3\%$, compare fig. 6a). The DLRA method already reduces the runtime significantly. The SWE has the fastest runtime, but does not

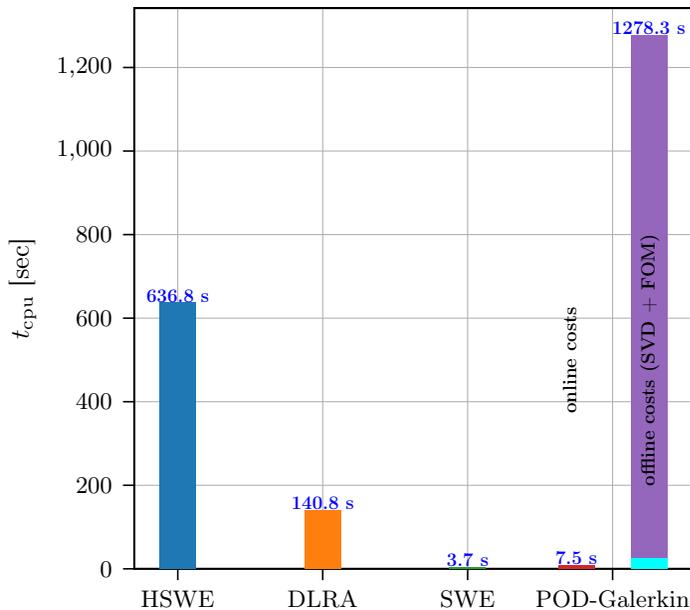


Figure 5: Water column test case runtime comparison between full-order HSWME, DLRA, SWE, POD-Galerkin (including offline precomputations and online phase separately) show a large speedup of the reduced models with respect to the full model. The simple SWE model is obviously fastest but does not achieve sufficient accuracy. The truncation ranks of DLRA $r = 4$ and POD-Galerkin $r = 3$ are tuned such that the relative L_2 errors of \mathbf{u} at the final time are approximately the same ($\approx 0.3\%$).

result in sufficient accuracy as seen in the previous figures. The POD-Galerkin method is equally as fast as the SWE during the online phase, but requires a relatively costly offline precomputation phase.

Increasing the rank of the reduced models leads to increasing accuracy at the expense of more runtime, as can be seen in fig. 6, where we compare the online computation time of POD-Galerkin with DLRA. It is clear that POD-Galerkin seems to be faster because the offline precomputations are not taken into account here. The relative errors of both reduced models with respect to the full solution quickly decrease when using more basis functions that allow presentations closer to the full-model. This goes hand in hand with a change in runtime as more basis functions lead to a larger system of equations to be solved. Overall, a speedup of up to 100 can be achieved and relative errors can be as small as 10^{-9} for the reduced methods. Note that since we apply MOR only in the microscopic higher moments (v -components) the reduced DLRA model converges towards the SWE with $r \rightarrow 0$. Therefore, we obtain small relative errors even with a small number of modes.

As a summary of this first test case, we see very good accuracy of the reduced models with small rank and significant speedup that can even be amplified by further reducing the rank.

7.2 Smooth wave

This second test case closely follows the general simulation test cases in [32] and its setup is given in table 2. It describes a smooth wave given by the initial height function

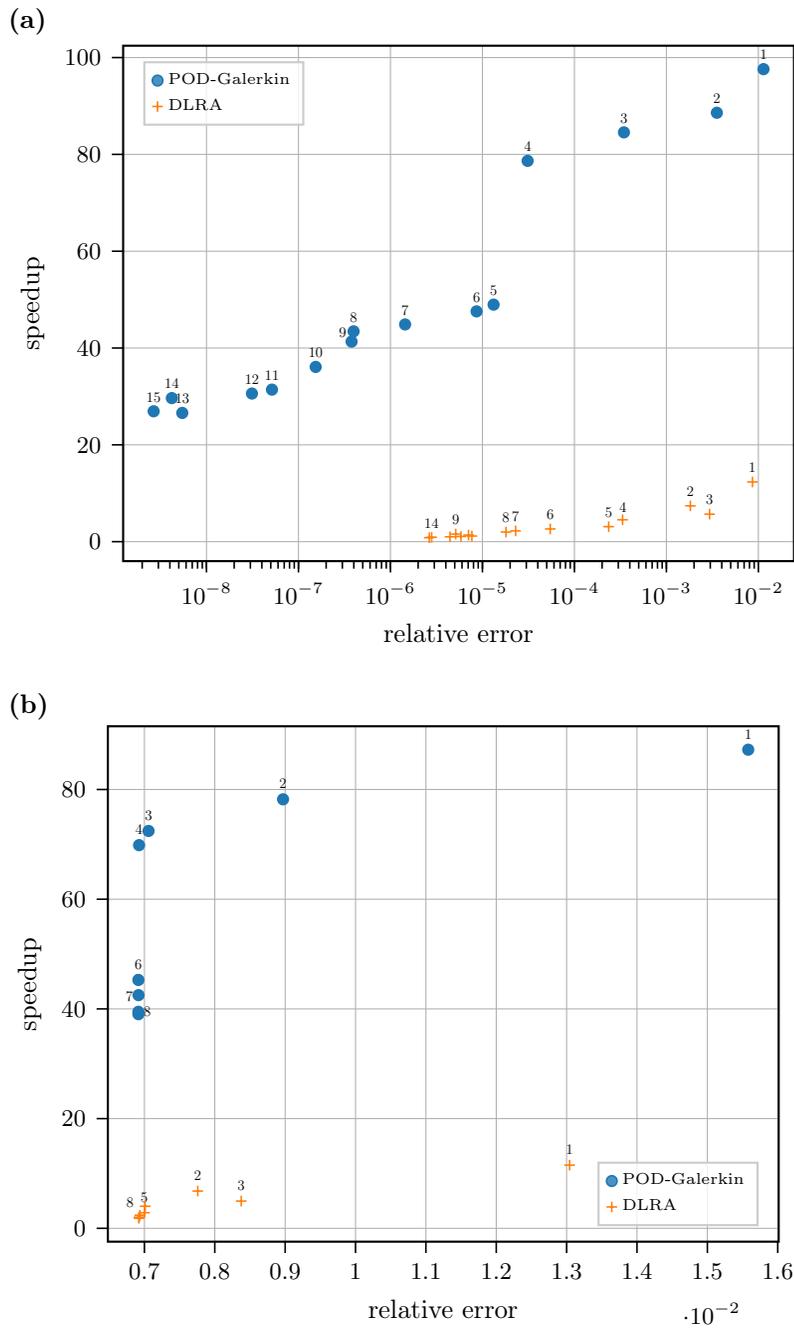


Figure 6: Water column test case runtime comparison speedup and error comparison between DLRA, POD-Galerkin (without offline precomputation phase) in comparison to full HSWME model runtime and accuracy. The rank of the corresponding simulation is written above or next to the data point. The relative error denotes the L_2 error of $u = (h, hu_m)$ at the final time $t = 0.2$. In (a) we compare the solution of the reduced system to the solution sampled with N_x cells and in (b) with a finer resolution of $2N_x$ cells.

$h(x) = 1 + \exp(3 \cos(\pi(x + 0.5)))/\exp(4)$ travelling through a periodic domain $x \in [-1, 1]$. The initial velocity profile is chosen as $u(0, x, \zeta) = 0.25 \cdot (1 - \phi_1(\zeta) + \phi_N(\zeta))$, leading to $u_m = 0.25$, $\alpha_1 = -0.25$, and $\alpha_N = 0.25$ according to [29] so that the hyperbolic model in eq. (11) and eq. (10) is necessary to result in a well-posed model. We choose a simulation time $t \in [0, 0.2]$, in which a complex wave pattern is emerging inside the domain.

friction coefficient	$\lambda = 0.1$
slip length	$\nu = 0.1$
temporal domain	$t \in [0, 0.2]$
spatial domain	periodic $x \in [-1, 1]$
spatial resolution	$N_x = 2000$
initial height	$h(x) = 1 + \exp(3 \cos(\pi(x + 0.5)))/\exp(4)$
initial velocity	$u(0, x, \zeta) = 0.25 \cdot (1 - \phi_1(\zeta) + \phi_N(\zeta))$
CFL number	CFL = 0.25
spatial discretization	path-conservative FVM [28]

Table 2: Simulation setup for smooth wave test case.

The numerical discretization uses the same parameters as before. The test is carried out using $N_x = 2000$ cells and a CFL number of 0.25 for the time interval $t \in [0, 0.2]$. The full-order HSWME model uses $N = 100$ coefficients and the reduced models use a fixed number of $r = 5$ basis function.

Similar to the water column test case, we compute the POD-basis from the snapshots of two trajectories simulated with the full HSWME at $\nu \in \{10^{-2}, 1\}$. The friction parameters are now chosen as $\nu = 0.1$ and $\lambda = 0.1$.

We first show the numerical results for the macroscopic water height h and momentum hu_m in fig. 7 for (1) the full-order HSWME model, (2) the lowest-order SWE model, (3) the new macro-micro decomposition POD-Galerkin, and (4) the new macro-micro decomposition DLRA. As for the first test case, the simple SWE model fails at capturing the complex dynamics of the test case, which is indicated by a wrong solution for both the water height h and the momentum hu_m . In contrast, both new macro-micro decomposition POD-Galerkin and DLRA, yield a very good match of the full-order HSWME model with very few basis function.

In fig. 8 the water velocity profiles for the smooth wave test case are plotted each time for different positions: $x = 0.05, 0.0, 0.15$ close to the center of the domain in fig. 8a and $x = 0.65, 0.67$ further away from the center in fig. 8b. In fig. 8a, the velocity profiles of the full-order model agree well with the reduced POD-Galerkin and DLRA models at all three points, while there are some small differences of the maximum velocity value due to the complexity of the test case and the significant model reduction. Note that the SWE model (not plotted here for conciseness) would completely fail at predicting these maximum velocity values due to the averaging procedure. The velocity profiles at positions further away from the center in fig. 8b yield a similar result. This time it seems that the DLRA method yields slightly less accurate solutions than the POD-Galerkin solution with the precomputed basis. However, both methods still result in very good accuracy and capture both the qualitative and the quantitative velocity profiles well.

For this smooth wave test case, we also want to emphasize one main property of our newly developed macro-micro decomposition reduced models, which is guaranteed mass conservation by construction. In fig. 9, the time evolutions of the total mass $\int_{-1}^1 h dx$, the

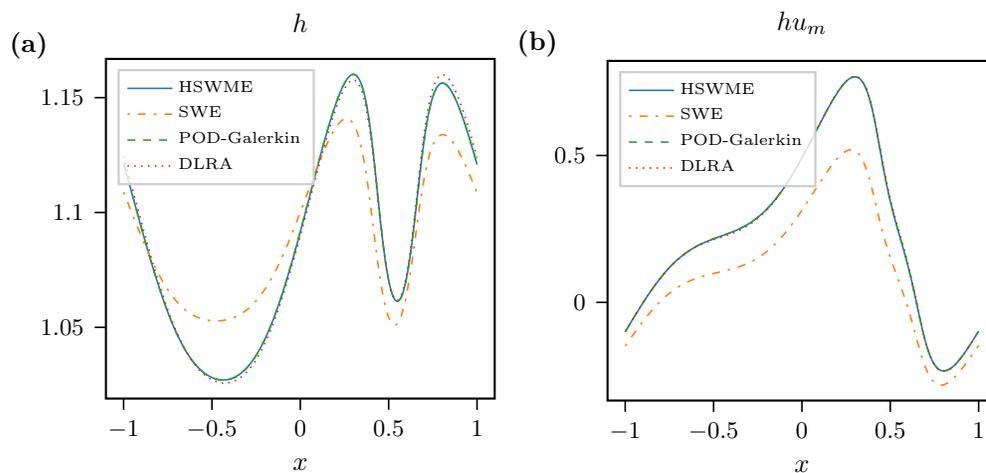


Figure 7: Smooth wave test case comparison of macroscopic quantities water height h (a) and momentum hu_m (b) for full-order HSWME, SWE, POD-Galerkin, and DLRA using rank $r = 5$. Again, the reduced models DLRA and POD-Galerkin yield very good approximations of the full-order model while the simple SWE model fails.

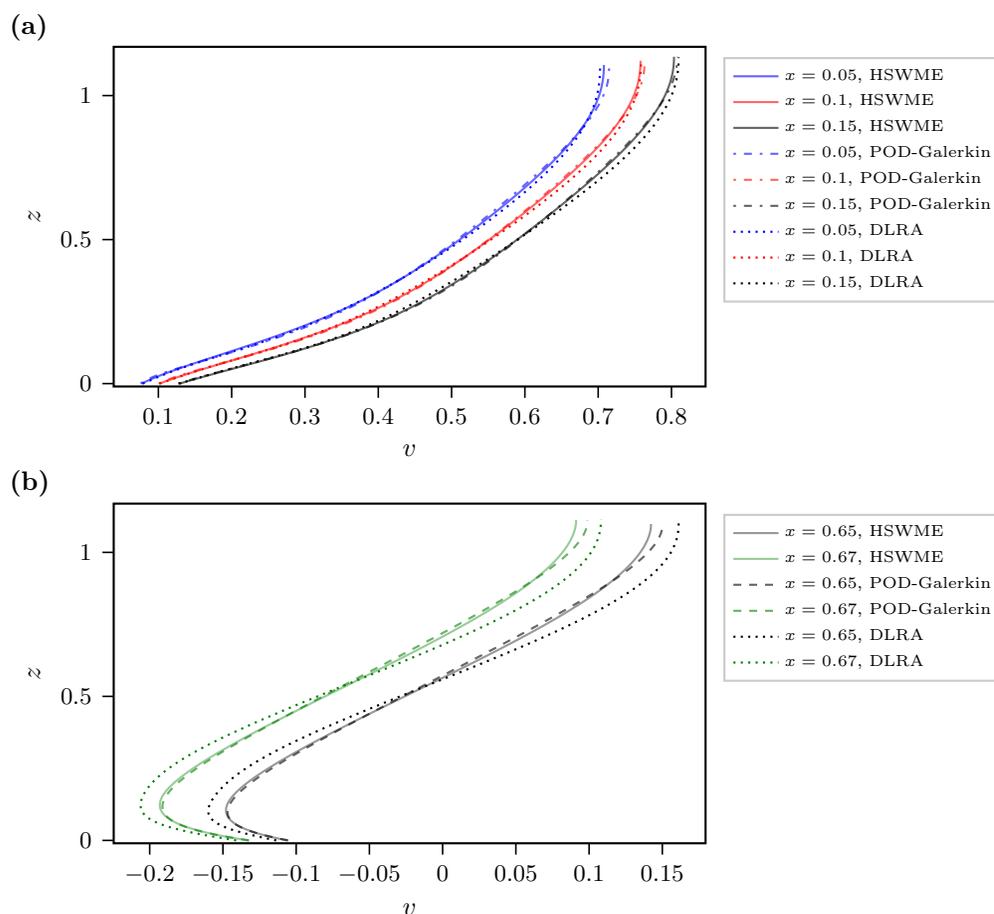


Figure 8: Smooth wave test case comparison of velocity profiles close to the domain center (a) and close to the shock wave (b) for full-order HSWME, POD-Galerkin, and DLRA using rank $r = 5$ (SWE omitted for conciseness). Both reduced models DLRA and POD-Galerkin yield good results in comparison with the full-order model.

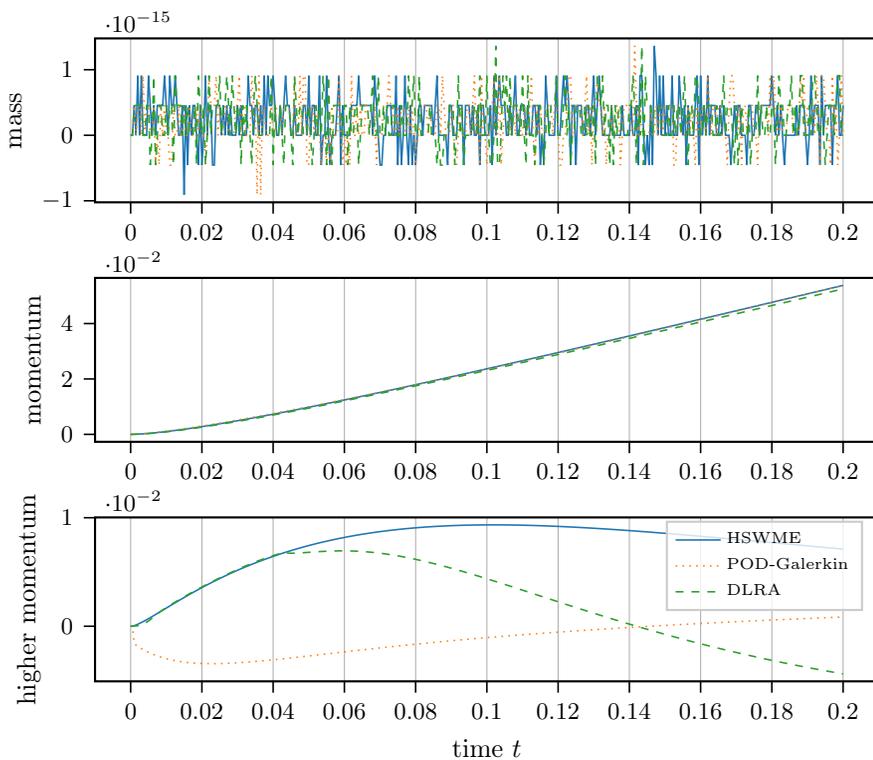


Figure 9: Smooth wave test case time evolution of the total mass ($\int_{-1}^1 h dx$), momentum ($\int_{-1}^1 hu dx$) and higher momentum ($\int_{-1}^1 h\alpha_4 dx$) relative to their respective initial values plotted for the full HSWME model and both reduced POD-Galerkin and DLRA models. The mass is conserved and the momentum accurately follows the full model reference solution.

total momentum $\int_{-1}^1 hu_m dx$ and the total fourth higher moment $\int_{-1}^1 h\alpha_4 dx$ are plotted in terms of relative deviation from the initial values. It is clearly seen that the total mass is constant as changes are within machine precision. The total momentum and total higher momentum are not conserved in agreement with the underlying PDE model, which includes friction terms for the corresponding equations leading to a loss of momentum due to bottom friction, for example. The mass conservation is achieved due to the macro-micro decomposition formulation which includes explicitly solving for the water height, while applying the model reduction only to the remaining microscopic velocity profile coefficients. While the total momentum is not constant, its evolution is in very good agreement with the full HSWME model for both reduced models since also the equation for hu_m is apart from the model reduction process. Some deviations are seen for the total fourth momentum, obviously originating from the model reduction process for that variable.

With fig. 10 we want to emphasize that a naive application of model reduction techniques does not lead to conservation of mass. This is done by comparison of our new macro-micro decomposition conservative DLRA, where the evolution of the macroscopic water height h and momentum hu_m is decoupled from the microscopic reduced coefficient system, with a naive (non-conservative) DLRA, where the complete system including water height h , momentum hu_m and coefficients $h\alpha_i$ is reduced as a whole. It is clearly seen that only the macro-micro decomposition conservative DLRA method achieves mass

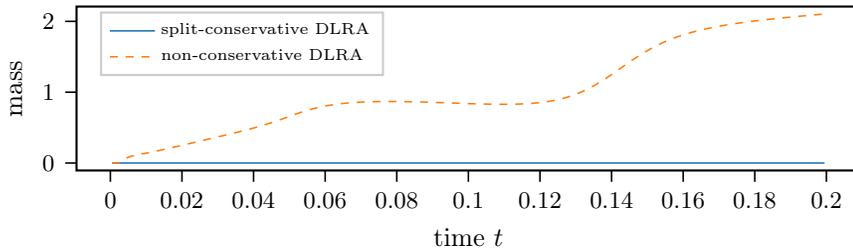


Figure 10: Smooth wave test case time evolution of the total mass ($\int_{-1}^1 h dx$) relative to its respective initial value plotted for the novel macro-micro decomposition conservative DLRA and a naive (non-conservative) DLRA. The mass is only conserved for the macro-micro decomposition conservative DLRA.

conservation.

In summary, the smooth wave test case from [32] shows the successful model reduction using both macro-micro decomposition DLRA and POD-Galerkin, including conservation of mass, which is not achieved by a naive model reduction approach.

Comparing both MOR methods, we observe that DLRA exhibits an increased runtime in comparison to the online phase of POD-Galerkin. However, DLRA does not require a computationally expensive and memory intensive offline phase. Furthermore, since DLRA utilizes time-dependent basis functions, it exhibits two advantages over POD-Galerkin. First, since basis information can be added and removed in time, the approximation space at a given rank is richer than for POD-Galerkin. Therefore, problems like slow decaying Kolmogorov N -width [18, 43] can be avoided. Second, when the dynamics in the online phase is not captured by the POD-ansatz space, POD-Galerkin requires an expensive retraining while DLRA adapts automatically to such situations. A main advantage of POD-Galerkin, besides the reduced runtime is, that it does not require the derivation of new evolution equations. Moreover, in the case of certain non-linearities, efficient evolution equations for DLRA might not be available.

8 Conclusion

In this work we proposed mass conservative model order reduction methods for the hyperbolic shallow water moment equations that yield fast and accurate solutions. Mass conservation is achieved by decomposing the macroscopic water height and momentum equations from the microscopic higher-order moments and applying model order reduction solely to the microscopic higher-order moment equations. Additionally, the decomposition allows to recover the naive SWE for vanishing truncation rank of the reduced HSWME, resulting in a very accurate reduced model even for small number of modes. We use two model order reduction methods, namely POD-Galerkin and dynamical low-rank approximations to accelerate the computation and the reduce memory footprint. The methods can produce speedups of up to 100 compared to the full HSWME, while the introduced approximation errors are negligible.

The work in this paper opens up possibilities for future work on model reduction for shallow water moment models. An interesting extension would be to use DLRA to generate basis functions for POD. Furthermore, employing rank-adaptive methods can lead to further runtime improvements.

Author Contribution Statement (CRediT)

All authors contributed equally to this publication. The original draft and all subsequent edits and reviews were done equally by all authors. The authors contributions differ in the following points:

Julian Koellermeier: initial idea, methodology, implementation of HSWME, setup of test cases
Philipp Krahs: implementation of POD-Galerkin, simulation/setup of numerical tests, visualization
Jonas Kusch: initial idea, methodology, implementation of HSWME, implementation of DLRA, simulation/setup of numerical tests, visualization

Acknowledgement

The authors would like to acknowledge the financial support of the CogniGron research center and the Ubbo Emmius Funds (University of Groningen). Jonas Kusch was funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) – 491976834. The authors were granted access to the HPC resources of IDRIS under the allocation No. AD012A01664R1 attributed by Grand Équipement National de Calcul Intensif (GENCI). Centre de Calcul Intensif d’Aix-Marseille is acknowledged for granting access to its high performance computing resources. Furthermore, we would like to thank Yannick Schubert for detailed reading and commenting on the work.

References

- [1] A. Amrita and J. Koellermeier. Projective Integration for Hyperbolic Shallow Water Moment Equations. *Axioms*, 11(5):235, 2022. 7
- [2] P. Astrid, S. Weiland, K. Willcox, and T. Backx. Missing point estimation in models described by proper orthogonal decomposition. *IEEE Transactions on Automatic Control*, 53(10):2237–2251, 2008. 13
- [3] Z. Cai, Y. Fan, and R. Li. Globally hyperbolic regularization of Grad’s moment system in one dimensional space. *Commun. Math. Sci.*, 11(2):547–571, 2013. 6
- [4] M. Castro and E. Fernández-Nieto. A class of computationally fast first order finite volume solvers: PVM methods. *SIAM Journal on Scientific Computing*, 34(4):A2173–A2196, 2012. 8
- [5] M. J. Castro, P. G. LeFloch, M. L. Munoz-Ruiz, and C. Pares. Why many theories of shock waves are necessary: Convergence error in formally path-consistent schemes. *Journal of Computational Physics*, 227(17):8107–8129, 2008. 7
- [6] G. Ceruti, J. Kusch, and C. Lubich. A rank-adaptive robust integrator for dynamical low-rank approximation. *BIT Numerical Mathematics*, pages 1–26, 2022. 2, 15
- [7] G. Ceruti and C. Lubich. An unconventional robust integrator for dynamical low-rank approximation. *BIT Numerical Mathematics*, 62(1):23–44, 2022. 2

- [8] G. Ceruti, C. Lubich, and H. Walach. Time integration of tree tensor networks. *SIAM Journal on Numerical Analysis*, 59(1):289–313, 2021. 14
- [9] S. Chaturantabut and D. C. Sorensen. Nonlinear model reduction via discrete empirical interpolation. *SIAM Journal on Scientific Computing*, 32(5):2737–2764, 2010. 13
- [10] M. Christen, J. Kowalski, and P. Bartelt. Ramms: Numerical simulation of dense snow avalanches in three-dimensional terrain. *Cold Regions Science and Technology*, 63(1-2):1–14, 2010. 1
- [11] P. Courtier and J.-F. Geleyn. A global numerical weather prediction model with variable resolution: Application to the shallow-water equations. *Quarterly Journal of the Royal Meteorological Society*, 114(483):1321–1346, 1988. 1
- [12] L. Einkemmer, J. Hu, and J. Kusch. Asymptotic-preserving and energy stable dynamical low-rank approximation. *arXiv preprint arXiv:2212.12012*, 2022. 4
- [13] L. Einkemmer, J. Hu, and Y. Wang. An asymptotic-preserving dynamical low-rank method for the multi-scale multi-dimensional linear transport equation. *Journal of Computational Physics*, page 110353, 2021. 4
- [14] L. Einkemmer, A. Ostermann, and C. Scalone. A robust and conservative dynamical low-rank algorithm. *arXiv preprint arXiv:2206.09374*, 2022. 2, 15
- [15] Y. Fan, J. Koellermeier, J. Li, R. Li, and M. Torrilhon. Model reduction of kinetic equations by operator projection. *Journal of Statistical Physics*, 162(2):457–486, 2016. 1, 6
- [16] C. Farhat, P. Avery, T. Chapman, and J. Cortial. Dimensional reduction of nonlinear finite element dynamic models with finite rotations and energy-based mesh sampling and weighting for computational efficiency. *International Journal for Numerical Methods in Engineering*, 98(9):625–662, 2014. 13
- [17] J. Garres-Díaz, T. M. de Luna, M. J. Castro, and J. Koellermeier. Shallow water moment models for bedload transport problems. *Communications in Computational Physics*, 11(3):435–467, 2021. 1, 6
- [18] C. Greif and K. Urban. Decay of the Kolmogorov n -width for wave problems. *Applied Mathematics Letters*, 96:216–222, 2019. 3, 11, 26
- [19] N. Halko, P. G. Martinsson, and J. A. Tropp. Finding structure with randomness: probabilistic algorithms for constructing approximate matrix decompositions. *SIAM Review*, 53(2):217–288, 2011. 12
- [20] C. Hauck and S. Schnake. A predictor-corrector strategy for adaptivity in dynamical low-rank approximations. *arXiv preprint arXiv:2209.00550*, 2022. 2
- [21] Q. Huang, J. Koellermeier, and W.-A. Yong. Equilibrium stability analysis of hyperbolic shallow water moment equations. *Math. Method. Appl. Sci.*, 45(10):6459–6480, 2022. 6, 7, 10

- [22] B. Karasözen, S. Yıldız, and M. Uzunca. Structure preserving model order reduction of shallow water equations. *Mathematical Methods in the Applied Sciences*, 44(1):476–492, 2021. 2
- [23] B. Karasözen, S. Yıldız, and M. Uzunca. Energy preserving reduced-order modeling of the rotating thermal shallow water equation. *Physics of Fluids*, 34(5):056603, 2022. 2
- [24] M. A. Kern, P. A. Bartelt, and B. Sovilla. Velocity profile inversion in dense avalanche flow. *Annals of Glaciology*, 51(54):27–31, 2010. 5
- [25] E. Kieri, C. Lubich, and H. Walach. Discretized dynamical low-rank approximation in the presence of small singular values. *SIAM Journal on Numerical Analysis*, 54(2):1020–1038, 2016. 2
- [26] O. Koch and C. Lubich. Dynamical low-rank approximation. *SIAM Journal on Matrix Analysis and Applications*, 29(2):434–454, 2007. 2, 13
- [27] J. Koellermeier and M. Castro. High-order non-conservative simulation of hyperbolic moment models in partially-conservative form. *East Asian Journal on Applied Mathematics*, 11(3), 2021. 8
- [28] J. Koellermeier and E. Pimentel. Steady states and well-balanced schemes for shallow water moment equations with topography. *Appl. Math. Comput.*, 427, 2022. 6, 7, 18, 23
- [29] J. Koellermeier and M. Rominger. Analysis and numerical simulation of hyperbolic shallow water moment equations. *Commun. Comp. Phys.*, 28((3)):1038–1084, 2020. 1, 6, 18, 20, 23
- [30] J. Koellermeier, R. P. Schaerer, and M. Torrilhon. A framework for hyperbolic approximation of kinetic equations using quadrature-based projection methods. *Kinetic and Related Models*, 7(3):531–549, 2014. 1, 6
- [31] J. Kollermeier, P. Krah, and J. Kusch. *Numerical testcases for "Dynamical low-rank approximation for Burgers' equation with uncertainty"*, 2023. <https://github.com/JonasKu/Publication-Split-conservative-model-order-reduction-for-hyperbolic-shallow-water-moment-equations.git>. 18
- [32] J. Kowalski and M. Torrilhon. Moment approximations and model cascades for shallow flow. *Communications in Computational Physics*, 25, 2019. 1, 5, 6, 18, 21, 26
- [33] P. Krah, T. Engels, K. Schneider, and J. Reiss. Wavelet adaptive proper orthogonal decomposition for large-scale flow data. *Advances in Computational Mathematics*, 48(2):1–40, 2022. 12
- [34] K. Kunisch and S. Volkwein. Galerkin proper orthogonal decomposition methods for a general equation in fluid dynamics. *SIAM Journal on Numerical Analysis*, 40(2):492–515, 2002. 2
- [35] J. Kusch, L. Einkemmer, and G. Ceruti. On the stability of robust dynamical low-rank approximations for hyperbolic problems. *SIAM Journal on Scientific Computing*, 45(1):A1–A24, 2023. 2

- [36] J. Kusch and P. Stammer. A robust collision source method for rank adaptive dynamical low-rank approximation in radiation therapy. *ESAIM: M2AN*, 2022. 2
- [37] T. Lassila, A. Manzoni, A. Quarteroni, and G. Rozza. Model order reduction in fluid dynamics: challenges and perspectives. *Reduced Order Methods for modeling and computational reduction*, pages 235–273, 2014. 2
- [38] A. Lozovskiy, M. Farthing, and C. Kees. Evaluation of galerkin and petrov–galerkin model reduction for finite element approximations of the shallow water equations. *Computer Methods in Applied Mechanics and Engineering*, 318:537–571, 2017. 2
- [39] A. Lozovskiy, M. Farthing, C. Kees, and E. Gildin. Pod-based model reduction for stabilized finite element approximations of shallow water flows. *Journal of Computational and Applied Mathematics*, 302:50–70, 2016. 2
- [40] C. Lubich and I. V. Oseledets. A projector-splitting integrator for dynamical low-rank approximation. *BIT Numerical Mathematics*, 54(1):171–188, 2014. 2, 14
- [41] J. L. Lumley. The structure of inhomogeneous turbulent flows. *Atmospheric turbulence and radio wave propagation*, pages 166–178, 1967. 2
- [42] L. Mansilla Alvarez, P. Blanco, C. Bulant, E. Dari, A. Veneziani, and R. Feijóo. Transversally enriched pipe element method (tepem): An effective numerical approach for blood flow modeling. *International journal for numerical methods in biomedical engineering*, 33(4):e2808, 2017. 2
- [43] M. Ohlberger and S. Rave. Reduced basis methods: Success, limitations and future challenges. *Proceedings of the Conference Algoritmy*, pages 1–12, 2016. 3, 11, 26
- [44] B. Peherstorfer. Model reduction for transport-dominated problems via online adaptive bases and adaptive sampling. *SIAM Journal on Scientific Computing*, 42(5):A2803–A2836, Jan. 2020. Publisher: Society for Industrial and Applied Mathematics. 2
- [45] S. Perotto, A. Ern, and A. Veneziani. Hierarchical local model reduction for elliptic problems: a domain decomposition approach. *Multiscale Modeling & Simulation*, 8(4):1102–1127, 2010. 2
- [46] S. Perotto, A. Reali, P. Rusconi, and A. Veneziani. Higamod: A hierarchical isogeometric approach for model reduction in curved pipes. *Computers & Fluids*, 142:21–29, 2017. 2
- [47] S. Perotto and A. Veneziani. Coupled model and grid adaptivity in hierarchical reduction of elliptic problems. *Journal of Scientific Computing*, 60(3):505–536, 2014. 2
- [48] K. Smetana and M. Ohlberger. Hierarchical model reduction of nonlinear partial differential equations based on the adaptive empirical projection method and reduced basis techniques. *ESAIM: Mathematical Modelling and Numerical Analysis*, 51(2):641–677, 2017. 2

- [49] R. Ștefănescu, A. Sandu, and I. M. Navon. Comparison of pod reduced order strategies for the nonlinear 2d shallow water equations. *International Journal for Numerical Methods in Fluids*, 76(8):497–521, 2014. 2
- [50] R. Ștefănescu, A. Sandu, and I. M. Navon. Pod/deim reduced-order strategies for efficient four dimensional variational data assimilation. *Journal of Computational Physics*, 295:569–595, 2015. 2
- [51] M. Torrilhon. Modeling nonequilibrium gas flow based on moment equations. *Annual Review of Fluid Mechanics*, 48(1):429–458, 2016. 5
- [52] M. Vogelius and I. Babuška. On a dimensional reduction method. i. the optimal selection of basis functions. *Mathematics of computation*, 37(155):31–46, 1981. 2
- [53] M. Vogelius and I. Babuška. On a dimensional reduction method. ii. some approximation-theoretic results. *Mathematics of computation*, 37(155):47–68, 1981. 2
- [54] M. Vogelius and I. Babuška. On a dimensional reduction method. iii. a posteriori error estimation and an adaptive approach. *Mathematics of computation*, 37(156):361–384, 1981. 2
- [55] R. Ștefănescu and I. Navon. Pod/deim nonlinear model order reduction of an ad implicit shallow water equations model. *Journal of Computational Physics*, 237:95–114, 2013. 2