
Saihu¹: A Common Interface of Worst-Case Delay Analysis Tools for Time-Sensitive Networks

Chun-Tso Tsai

School of Computer and Communication Sciences
École Polytechnique Fédérale de Lausanne
chun-tso.tsai@epfl.ch

Seyed Mohammadhossein Tabatabaee

School of Computer and Communication Sciences
École Polytechnique Fédérale de Lausanne
hossein.tabatabaee@epfl.ch

Stéphan Plassart

School of Computer and Communication Sciences
École Polytechnique Fédérale de Lausanne
stephan.plassart@epfl.ch

Jean-Yves Le Boudec

School of Computer and Communication Sciences
École Polytechnique Fédérale de Lausanne
jean-yves.leboudec@epfl.ch

ABSTRACT

Time-sensitive networks, as in the context of IEEE-TSN and IETF-Detnet, require bounds on worst-case delays. Various network analysis tools compute such bounds, but these tools are based on different methods and provide different valid delay bounds. Hence, it is essential to identify the best, smallest bounds. As of today, users must implement multiple pieces of code with different syntaxes for each tool, as each tool is implemented by different groups and uses different programming languages and syntaxes. This results in a significant amount of mechanical actions from users and being error-prone. In this paper, we present *Saihu*, a Python interface that integrates xTFA (supports TFA), DiscoDNC (supports LUBD, PMOO, SFA), and Panco (supports PLP and ELP), the three most frequently used worst-case network analysis tools. *Saihu* provides a general interface that enables defining the networks in a single XML or JSON file and executing all tools simultaneously without any adjustment for individual tools. *Saihu* also exports analysis results into formatted reports automatically, and it offers automatic network generation for certain types of networks. Therefore, with its straightforward syntax and ease of execution, *Saihu* reduces the burden on users and makes it a valuable tool for anyone working with time-sensitive networks. Lastly, we modularize the package to incorporate more tools in the future.

Keywords Worst-case Delay Analysis · Network Analysis Interface · Network Calculus · Time-Sensitive Networking

1 Introduction

The analysis of worst-case delay for a network is inherently crucial for many network applications, the metric is especially important to provide good Quality-of-Service (QoS) guarantees. One example to demonstrate the importance of network performance guarantee is the IEEE 802.1 standards on *Time-Sensitive Networking* [1]. Consequently, many models are proposed to capture the essence of a networked system. *Network Calculus* [2] is one of the very powerful frameworks providing deterministic performance guarantees of a network.

Because of the effectiveness of network calculus, many methods are developed to derive service guarantees for

many scenarios. Research teams around the globe have developed a series of analysis tools, i.e. software programs, to automate various analysis methods. To the best of the authors' knowledge², the existing research or industrial network analysis tools related to network calculus are DiscoDNC [3, 4], RTC Toolbox [5, 6], CyNC [7], RTaW-PEGASE [8], WoPANets [9], DelayLyzer [10], DEBORAH [11], NetCalBounds [12, 13], NCBounds [14], Siemens Network Planner (SINETPLAN) [15], xTFA [16], and Panco [17].

Each tool is implemented differently and possesses different strengths and weaknesses, so oftentimes researchers would like to compare the analysis results from individual tools as they may derive very different delay bounds for a

¹SAIHU stands for "Superimposed worst-case delay Analysis Interface for Human-friendly Usage."

²List from https://en.wikipedia.org/wiki/Network_calculus

network. We choose DNC, xTFA, and Panco as the first 3 tools included in Saihu. We choose DNC because it's already been used by many academic groups and includes several RTC functionalities, and it's also well-maintained and open-source. xTFA and Panco are chosen because they provide state-of-the-art methods to analyze a network with tighter bounds while being open-source at the same time. Meanwhile, we do not include tools like CyNC and DEBORAH as they are gradually out-of-date and lacking maintenance. RTaW-PEGASE, DelayLyzer, WoPANet, and SINETPLAN are private, so we don't have access to their tools. Finally, Panco should provide better or equal results when compared to NetCalBounds and NCBounds.

When multiple tools are used to analyze a network, they often come in different specifications and sometimes even in a different programming language. This causes great inconvenience for researchers as they need to constantly be aware of all the details of each tool and potentially switch programming environments to be able to use them. We believe most of the efforts spent here are mechanical and should not bother researchers. As a result, the purpose of Saihu is to simplify the whole process. Users can execute analyses and compare the results from each tool easily with a single interface and simple commands.

The name "Saihu" comes from "Superimposed worst-case delay Analysis Interface for Human-friendly Usage." It's also inspired by the Taiwanese word 師傅 (sai-hū), which means a master, an expert, or a qualified worker. The idea behind the name is when someone uses Saihu, it provides them the sense of consulting an expert. One only needs to describe their problem intuitively, "Saihu" takes care of all the miscellanies for you and only provides the essential information.

1.1 Motivation

Although there are abundant network analysis tools available for any potential network researchers, using these tools can still require quite some effort for the researchers.

First, learning to use a new tool can be troublesome. The level of complication varies by the complexity of the tool, one's familiarity with the programming language, and the quality of the tool's documentation. One may find themselves spending hours or days only to find the correct way to call the right commands. Second, re-implementing the same network with different tools is not only tedious but also error-prone. No one surely likes to go through the learning and implementation process over and over again just to see if there's any difference given from other tools. Besides, one has to be careful when switching tools to make sure the implementations correspond to the same network and not accidentally obtain an incorrect result by misusing one command.

Previously, to analyze a network, one must install each tool individually; learn its specifications and syntax through many examples and long documentation; and format the analysis result to read. When switching to another tool,

they would need to repeat the whole procedure. Moreover, because the input information of each tool, i.e. the way to define a network, varies significantly across tools, a user does not merely rewrite the same network in a different programming language but oftentimes has to redefine it in another network model.

Take the 3 tools Saihu includes for example: to analyze with xTFA, one installs the Python package, defines their network as an XML file with respective syntax, implements their analysis in Python code, and calls the correct method to extract the delay bounds. To analyze with DNC, defines their network and implements analysis in Java using DNC syntax, and extracts the result. To analyze with Panco, one defines the network and implements using Panco syntax, and extracts the result. Then, if one would like to compare the results, one may need to format the results obtained from each tool by themselves so that they are comparable.

Saihu aims at eliminating all the unnecessary complexities for network analysis. One only has to install and learn the interface once, define their network once, and implement their analysis with a very limited amount of code. Saihu also handles the analysis results and formats them to be easily readable. We believe the excellent mind of network researchers should focus on the insight from the data instead of the minor details while using these tools.

1.2 Contribution

Our main contribution is that we built a common interface that can execute multiple analysis tools at once. Figure 1 demonstrate the pipeline of our work. In short, we encapsulate the originally separated inputs and outputs of each tool with extra layers, allowing a single interface to execute multiple tools. A common output for tools also allows Saihu to generate formatted reports automatically. Moreover, because we separate "defining a network" from any specific programming language, we can simplify the definition and provide a more straightforward way to describe a network.

Let's follow Figure 1 from the bottom up. Let's say we have a network to be analyzed. First, we have 2 options. Because Saihu provides several network generation functions for certain types of networks, we can generate our network with a single command. If our network cannot be generated with any of the generation functions, we can choose to define our network as either an XML or a JSON file with respective syntax. Then Saihu takes care of the internal conversion and executes the tools. Saihu uses the XML file for xTFA if it's available or converts one from the JSON file. For DNC and Panco, Saihu reads the description from the JSON file and converts them into the original syntax required by DNC and Panco. If a JSON file is not available, it would be converted from the XML file. The execution of xTFA and Panco is direct Python commands, but since DNC is in Java, Saihu spawns a Java subprocess to execute DNC. After the tools execute their analyses internally, the analysis results are then automati-

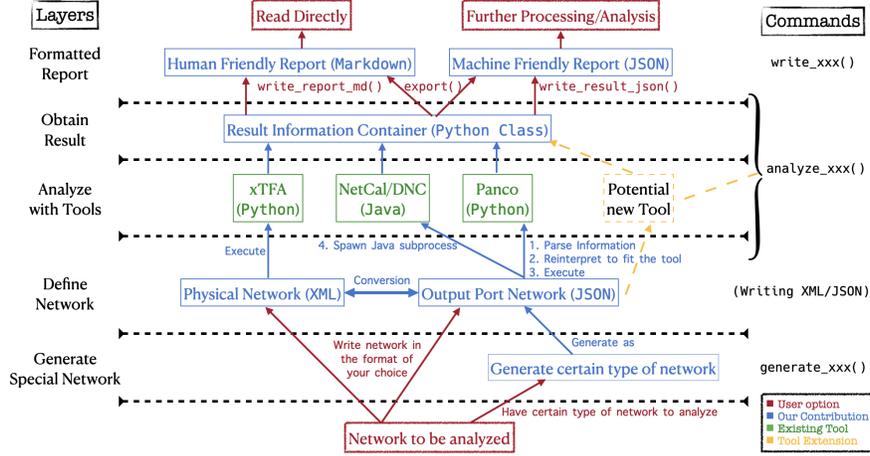


Figure 1: Pipeline of Saihu. Red represents the user options; blue is for our contribution; green is for the existing tools; and yellow is for the potential extension of Saihu for more tools. Saihu automates all the programming details in the middle and demands only a few commands listed on the right.

cally fed into a general *result information container* class. Users can choose to either export a human-friendly report or a machine-friendly report, or both. We list the commands required to obtain analysis results on the right, one can see that all the programming details in the middle are handled automatically and a Saihu user only needs to give the essential commands.

Furthermore, as we provide the general inputs and outputs, it would be easy to include more tools for Saihu in the future. By providing methods to allow the new tool to read one of the network description formats and feeds the result into the result container, any new tool developer can fit their tool into the Saihu framework.

To sum up, Saihu accomplishes the following:

- Allow users to define a network regardless of the tools of their choice.
- Allow easy generation of certain types of networks.
- Automate conversion between network description files.
- Translate network information and execute analyses for each tool.
- Export the analysis results into formatted reports automatically.

2 Background on Network Calculus

We recall some of the network calculus essentials for a better understanding of the framework used in Saihu. In the following context, we use the following notation: \mathbb{R}^+ is the set of non-negative real numbers; $[x]_+$ denotes $\max(0, x)$

The data flow is by convention modeled as a left-continuous wide-sense increasing function $R(t) : \mathbb{R}^+ \mapsto \mathbb{R}^+$ with respect to time t [2].

A system \mathcal{S} receives arrival data described as a cumulative function $R(t)$ and delivers departure data as another cumulative function $R^*(t)$. Figure 2a illustrates such a system \mathcal{S} . The benefit of representing a system like this is that we can observe system backlog and delay with such a model.

Definition 2.1 (Backlog and Delay [2]). *The backlog of a system at time t is*

$$b(t) = R(t) - R^*(t) \quad (1)$$

The virtual delay of a FIFO system at time t is

$$d_{FIFO}(t) = \inf \{ \tau \geq 0 : R(t) \leq R^*(t + \tau) \} \quad (2)$$

The backlog of a system can be viewed as the vertical distance between R and R^* . The FIFO (*First-in First-out*) delay is the horizontal distance between R and R^* . One may obtain other delay values if the multiplexing technique is not FIFO.

Since we are interested in the system guarantee instead of a single instance of data flow, we would like to have general bounds to the arrival and departure data flows. Therefore, we define *arrival curve* and *service curve* as the bounds of arrival and departure data flows.

Definition 2.2 (Arrival Curve [2]). *Given a wide-sense increasing function $\alpha : \mathbb{R}^+ \mapsto \mathbb{R}^+$, we say that a flow $R(t)$ is α -constrained if and only if for all $s \leq t$:*

$$R(t) - R(s) \leq \alpha(t - s) \quad (3)$$

We say $R(t)$ has α as an arrival curve.

Definition 2.3 (Service Curve [2]). *Given a wide-sense increasing function $\beta : \mathbb{R}^+ \mapsto \mathbb{R}^+$ and $\beta(0) = 0$. A system \mathcal{S} having $R(t)$ and $R^*(t)$ as its arrival and departure flows. We say \mathcal{S} offers a service curve β if and only if*

$$R^*(t) \geq (R \otimes \beta)(t) =: \inf_{s \leq t} \{ R(s) + \beta(t - s) \} \quad (4)$$

where \otimes denotes the min-plus convolution

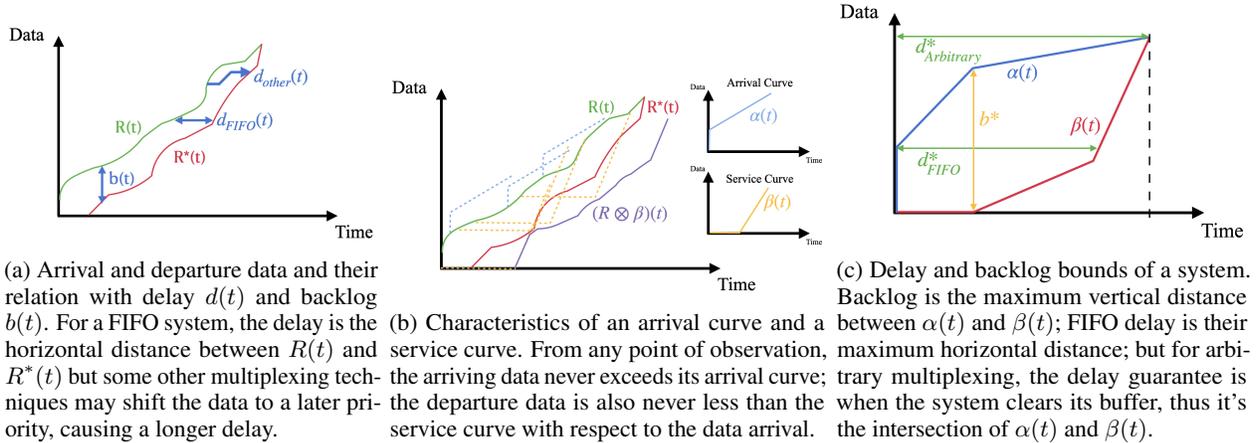


Figure 2: Network calculus framework. We let $R(t)$ and $R^*(t)$ be the arrival and departure data flow of a system; $\alpha(t)$ be the piecewise linear concave arrival curve and $\beta(t)$ be the piecewise linear convex service curve of a system.

Figure 2b illustrates the arrival and service curves. Any segment of arrival flow $R(t)$ is constrained by arrival curve α and the output curve $R^*(t)$ is always no less than the curve $R \otimes \beta$. As a result, an arrival curve upper bounds the incoming traffic, and a service curve lower bounds the outgoing traffic.

We consider 2 special types of curves throughout this paper, *token-bucket* (or sometimes called *leaky-bucket*) curve and *rate-Latency* curve.

Definition 2.4 (Token-bucket and Rate-latency [2]). A *token-bucket curve* $\gamma_{r,b}$ with arrival rate r and burst b is defined as

$$\gamma_{r,b}(t) = b + rt \quad (5)$$

A *rate-latency curve* $\beta_{R,T}$ with service rate R and latency T is defined as

$$\beta_{R,T}(t) = R[t - T]_+ \quad (6)$$

A token-bucket curve is determined by a burst b and an arrival rate r . Burst represents the maximum possible data volume that can arrive simultaneously, and arrival rate represents the maximum long-term data rate [17]. A rate-latency curve is determined by a latency T and a service rate R . Latency represents the time a server needs before starting to process the incoming data, and service rate represents the minimum rate to process data after the initial latency.

With the help of arrival and service curves, we can derive delay and backlog bounds for a system \mathcal{S} illustrated in Figure 2c. Suppose a system \mathcal{S} has arrival curve α and service curve β , its worst-case backlog b^* is the maximum vertical distance between α and β . Similarly, depending on the multiplexing technique applied to the system, its worst-case delay bound d^* is the maximum horizontal distance between α and β if \mathcal{S} is a FIFO system. If we don't have any information about its multiplexing technique, referred to as arbitrary multiplexing, the best we can say is that when α and β intersect each other, where all data has been

delivered out of the system. Consequently, the worst-case delay bound for arbitrary multiplexing is the time required for \mathcal{S} to clear its buffer.

While a service curve captures the slowest possible output speed of a system, a link's transmission capacity limits the speed as well. Hence, we model this phenomenon using a *greedy shaper* with a sub-additive function $\sigma : \mathbb{R}^+ \mapsto \mathbb{R}^+$ concatenated with a server. We consider a concatenation as shown in Figure 3. By convention we assume $\sigma(0) = 0$ and $\beta(t) \leq \sigma(t), \forall t \in \mathbb{R}^+$, meaning that the buffer is cleared at the beginning and the service never exceed its physical limitation. With the above definition, such greedy shaper conserves the service provided by the system due to theorem 2.1.

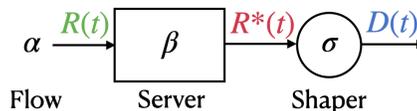


Figure 3: Shaping of departure data. A flow that has an arrival curve α feeds into a server with an arrival data flow $R(t)$. The server having service curve β takes $R(t)$ and gives a departure data flow $R^*(t)$ to a shaper with shaping function σ . The shaper takes $R^*(t)$ and shape the data flow as another departure $D(t)$.

Theorem 2.1 (Shaping conserves service [2]). *Following the system shown in Figure 3, we have*

$$D = R^* \otimes \sigma \geq (R \otimes \beta) \otimes \sigma = R \otimes (\beta \otimes \sigma) = R \otimes \beta \quad (7)$$

In the following context, we model the shaping function σ as a token-bucket curve $\gamma_{C,L}$ with transmission capacity C and the packet size L to capture the link capacity and packetization [17].

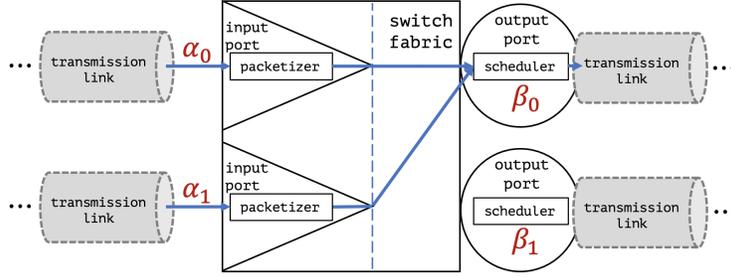


Figure 4: Device model. Without loss of generality, we use the indexing 0 and 1 but this model can have arbitrarily many input/output ports as well as the corresponding parameters.

3 System Model

Consider a device model defined in Figure 4 as any device in the network, and the devices are connected to each other by several transmission links with their transmission capacity.

A data flow with its source constrained by an arrival curve α goes into an input port of the device. The input port contains a packetizer, which stores the incoming bits in its buffer and releases them only when the whole packet is received. The effect of the packetizer and the capacity of the transmission link is characterized by a shaping function σ [2, page 49] that captures the transmission capacity of the link and the incoming packet length.

The switch fabric routes the data flow to different output ports according to the routing table. The scheduler with service curve β inside the output port provides a service with a multiplexing rule. It then feeds the data to the next transmission link and the departure curve becomes the arrival curve for the next device.

A network is composed of many devices mentioned above, interconnected by many transmission links. We refer to these devices as **servers** in the network. A network also has **flows**. Each flow has an arrival curve from its source and imposes the data across many servers with a fixed path. We assume all arrival curves are piece-wise linear concave functions and all service curves are piece-wise linear convex functions for all devices. In addition, we assume the aggregated data arrival rate never exceeds the service rate anywhere in the network.

Within the scope of this paper, we consider 2 representations where a network can be defined. Namely the *Physical Network* and the *Output Port Network*.

3.1 Physical Network

A physical network represents the physical connections between multiple switches and stations, as well as flows that travel through different input and output ports of switches. The idea of a physical network model is to represent the view of a real-world network without requiring too much re-interpretation from the researcher.

An example is given as Figure 5a. Suppose we are interested in the delay bounds of server s_0 and s_1 . Each flow i is constrained by an arrival curve α_i at the source, it is also characterized by a path that indicates all the physical nodes it travels. Each output port j provides a service curve β_j , and is attached with a designated link with a shaping function σ_j . By giving all the necessary parameters to each network component, we can analyze the delay and backlog experienced at each port.

3.2 Output Port Network

An output port network is an abstraction form to define a network. An example is given as Figure 5b. The idea is to only consider the output ports that have at least one flow that travels through. We assume the resource competition happens mainly at the output ports even if we provide full information as a physical network, so we consider only the used output ports. By doing so, we greatly simplify the complexity to describe a network.

Similar to the physical network, an output port network requires an arrival curve α_i for each flow i . The service curve β_j as well as the shaper attached to the link σ_j of port j are both defined for each node. As we put all the necessary information on output ports only, we can derive the same delay and backlog bounds for each port.

3.3 Conversion of the 2 Formats

Although we can obtain the bounds for each output port in both formats, this doesn't mean that the two formats are equivalent. A physical network can map to a unique expression of an output port network, but not conversely since most of the original information is lost. When Saihu converts an output port network to a physical network, we use the assumption that each output port is attached to a unique switch. Although it's not a one-to-one mapping, but any possible mapping provides a valid delay bound for our tools. As a result, we choose the simplest assumption to keep the conversion easy.

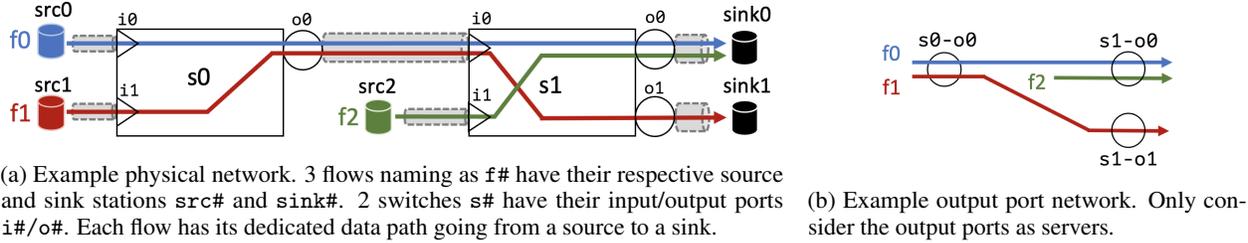


Figure 5: Example physical and output port networks

4 Included Tools

Saihu currently includes 3 tools, namely xTFA, DNC, and Panco. A summary of the supported method and tool pairs is listed in Figure 6.

Method\Tool	DNC	xTFA	Panco
TFA	✓	✓	✓
SFA	✓		✓
PLP			✓
ELP			✓
PMOO	✓		
TMA	✓		

Figure 6: Supported methods for each tool. A check “✓” on it means the tool supports the corresponding method.

xTFA [16]: xTFA is short for *experimental modular TFA*, which is developed in Python and supports a more advanced TFA (Total Flow Analysis). It takes an XML file as its input for network description, which we will discuss in more detail in Section 5.1.1. xTFA supports analyzing networks with cyclic dependency and multicast flows, i.e. a flow having multiple paths or potential splits. In other tools, a multicast flow will be treated as separated flows with the same arrival bounds.

DNC [3]: DNC is developed in Java and supports TFA, SFA (Separate Flow Analysis), PMOO (Pay Multiplexing Only Once) [3], and TMA (Tandem Matching Analysis) [4]. There’s no specific input description file for DNC, one has to define the network as a Java script if they use DNC directly. Saihu uses the information from an output port network to create a network in DNC syntax internally. Moreover, with DNC, one cannot manually set shaping with FIFO multiplexing but only with arbitrary multiplexing. Also, no analysis methods in DNC are capable of solving networks with cyclic dependency.

Panco [17]: Panco is developed in Python and supports TFA, SFA, PLP (Polynomial size Linear Program), and ELP (Exponential size Linear Program). Since all its methods are implemented as linear programs, it requires *lp-solve* [18]. Same as DNC, Panco doesn’t have a specific input description file, Saihu internally creates the network in Panco syntax from the information of an output port network. All the methods of Panco except ELP support networks with cyclic dependency.

5 Software Description

To execute analyses with Saihu, we roughly divide the tasks into 3 parts: describe a network to be analyzed; execute analyses with individual tools; and export reports back to the user. We will go through these 3 parts one by one.

5.1 Network Description File

As mentioned in Section 3, Saihu allows the user to write a network in either a *physical network* or an *output port network* format. While xTFA takes a physical network as an XML file and the others take an output port network as a JSON file, one can choose the format they prefer to define a network as Saihu automatically converts a file when needed.

5.1.1 Option 1: Defining Physical Network in XML

A physical network is written as an XML file according to the xTFA specification. It should at least contains 4 kinds of information: **General network information, Servers, Links, and Flows.**

Let’s take the implementation of Figure 5a as an example. First, every entry should be enclosed in one element `<elements>` as shown in Listing 1.

```
<?xml version="1.0" encoding="UTF-8"?>
<elements>
  <!-- All entries -->
</elements>
```

Listing 1: Examples of XML file. All network entries must inside an element `<elements>`.

A physical network must have exactly one `network` element to define general information across the network as its attributes, an example is shown in Listing 2. In this example, name is the name of the network, technology is a series of analysis parameters concatenated by the plus sign, and a default value of `minimum-packet-size`.

```
<network name="demo" technology="FIFO+IS"
  minimum-packet-size="4B"/>
```

Listing 2: Example of general network information. Contains name, technology used, and default values for other elements.

The attribute technology takes the following values. More may be found from [16].

- FIFO: FIFO multiplexing. It can be ARBITRARY for arbitrary multiplexing or left blank for tool default.
- IS: Input shaping. Consider the shaping effect.
- PK: Packetizer.
- CEIL: Fix precision when calculating network with cyclic dependency (used only in xTFA.)

One can also define some default values that possibly appear in other elements. For example, a minimum-packet-size is usually defined as an attribute of a flow element, while this value defined in the network element will be used as the default value if it's not defined in a flow element.

Second, the servers of the network can be defined as either a station or a switch, as shown in Listing 3. Although they are very different physically, in our tools they both mean data processing units or possible sources/sinks of a data flow.

```
<station name="src0"/>
<station name="src1"/>
<station name="src2"/>
<switch name="s0" service-latency="10us"
  service-rate="4Mbps"/>
<switch name="s1" service-latency="10us"
  service-rate="4Mbps"/>
<station name="sink0"/>
<station name="sink1"/>
```

Listing 3: Stations and switches. Name and possibly the default values to all its ports.

Both a station and a switch represent a physical node. The name of each node will be used to define flow paths and links. The service-latency and service-rate define a rate-latency service curve. The service parameters defined at this level serve as default values for all the links attached as outputs of this node.

Third, one must connect physical nodes with links, as shown in Listing 4. Saihu considers output ports as processing units, so the physical link from a physical node to another node has to be defined, along with the input/output ports used by the link. For example, the link lk:s0-s1 connects from the output port o0 of switch s0 to the input port i0 of switch s1.

```
<link name="lk:src0-s0" from="src0" to="s0"
  fromPort="o0" toPort="i0"/>
<link name="lk:src1-s0" from="src1" to="s0"
  fromPort="o0" toPort="i1"/>
<link name="lk:src2-s0" from="src2" to="s1"
  fromPort="o0" toPort="i1"/>
<link name="lk:s0-s1" from="s0" to="s1"
  fromPort="o0" toPort="i0"
  transmission-capacity="10Mbps"/>
<link name="lk:s1-sink0" from="s1" to="sink0"
  fromPort="o0" toPort="i0"
```

```
  transmission-capacity="10Mbps"/>
<link name="lk:s1-sink1" from="s1" to="sink1"
  fromPort="o1" toPort="i0"
  transmission-capacity="10Mbps"/>
```

Listing 4: Links connecting ports.

If the service of an output port needs to be considered in an analysis, one must define the service curve at the link that is directly attached to the output port. The transmission-capacity of the link can also be specified to consider line shaping. If no values are defined, the system tries to apply the default values defined at the upper levels, i.e. switch/station and network. Furthermore, if no values are found across all levels, the link is considered a dummy one and the output port attached to it will not be considered.

Finally, one must define flows for the network as shown in Listing 5. Each flow is defined by a flow element. The paths of a flow are defined by target elements, where each node it traverses is listed as path elements with its node attribute indicating the name of the physical node. In this format, multicast of a flow is possible by defining multiple target elements within the same flow.

```
<flow name="f0" arrival-curve="leaky-bucket"
  lb-burst="10B" lb-rate="10kbps"
  maximum-packet-size="50B" source="src0">
  <target>
    <path node="s0"/>
    <path node="s1"/>
    <path node="sink0"/>
  </target>
</flow>
<flow name="f1" arrival-curve="leaky-bucket"
  lb-burst="10B" lb-rate="10kbps"
  maximum-packet-size="50B" source="src1">
  <target>
    <path node="s0"/>
    <path node="s1"/>
    <path node="sink1"/>
  </target>
</flow>
<flow name="f2" arrival-curve="leaky-bucket"
  lb-burst="10B" lb-rate="10kbps"
  maximum-packet-size="50B" source="src2">
  <target>
    <path node="s1"/>
    <path node="sink0"/>
  </target>
</flow>
```

Listing 5: Flows. Must have a name and its arrival curve parameters along with its paths.

A flow element must have name and the arrival curve specified as its attributes. The keywords arrival-curve, lb-burst and lb-rate define a leaky-bucket curve at the source of the flow. Other parameters like the maximum-packet-size and minimum-packet-size can be also defined to consider packetization. Furthermore, as the definition represents a physical network, each

flow must have a data source that is an actual physical node. All the output ports involved in its path, including the output port of the source, will be analyzed by Saihu.

5.1.2 Option 2: Defining Output Port Network in JSON

While the XML file syntax is provided by xTFA, we design this JSON format ourselves in order to write an output port network in a concise way. The file should at least contains 3 kinds of information: **General network information**, **Servers**, and **Flows**. Let's take the implementation of Figure 5b as an example. First, all entries must be enclosed as a single JSON object (one {} to enclose all attributes.)

A network object is required to define general network information but only the name attribute is necessary. An example is shown in Listing 6.

```
"network": {
  "name": "demo",
  "packetizer": false,
  "multiplexing": "FIFO",
  "analysis_option": ["IS"],
  "time_unit": "us",
  "data_unit": "B",
  "rate_unit": "Mbps",
  "min_packet_length": "4B"
}
```

Listing 6: Network information. Contains some general information and default values or units used throughout the file.

The 3 keywords `packetizer`, `multiplexing`, and `analysis_option` are unique to the `network` object. `packetizer` is equivalent to the keyword `PK` in XML file; `multiplexing` can be either `FIFO` or `ARBITRARY`; and `analysis_option` takes other keywords defined in technology mentioned in Section 5.1.1.

Except for the network options, default values for servers and flows can also be defined at the network level. In the above example, we set the default time/data/rate units to be microsecond/byte/megabits-per-second across the file as well as the minimum packet length being 4 bytes.

Second, we need to define the `servers` for the network. Some may argue the term *server* instead of *output port* as we discussed in Section 3.2. The term *server* is a general term for a processing unit, and one can treat it as a black box that provides service.

The `servers` is presented as a JSON array, each object in this array is a server. Each server must at least have a name, and its service curve can be missing only when there exists a default value in `network` attribute. The parameters can be expressed in either a *string* or a *number*. A string is written as a number followed by a unit. For example, "10us" means 10 microseconds, and "50Mbps" means 50 megabits per second. If it's directly written as a number, the unit defined in the closest level is used. For example,

the time unit defined in server `s1-o0` is microsecond, so the latency 10 is read as 10 microseconds.

The object `service_curve` takes multiple rate-latency curves and uses the maximum among all these curves as its service curve. Rates and latencies are written as arrays, each pair of rate and latency values with the same index is a rate-latency curve. For example, in server `s0-o0`, the service curve has 2 segments defined by 2 rate-latency curves, one with a latency of 10 microseconds and a rate of 4 megabits per second, and the other with a latency of 1000 microseconds and a rate of 50 megabits per second.

Notice that in an output port network definition, we don't manually define links. The topology of the network is considered to be the *graph induced by flows*, i.e. a connection from server *A* to *B* exists only when there is at least one flow travels through *B* from *A*. Therefore, the transmission capacity of the link attached to an output port is directly defined on a server with the keyword `capacity`.

```
"servers": [
  {
    "name": "s0-o0",
    "service_curve": {
      "latencies": ["10us", 1000],
      "rates": [4, "50Mbps"]
    },
    "capacity": 100
  },
  {
    "name": "s1-o0",
    "service_curve": {
      "latencies": [10, "1ms"],
      "rates": [4, 50]
    },
    "capacity": 100,
    "time_unit": "us"
  },
  {
    "name": "s1-o1",
    "service_curve": {
      "latencies": [10],
      "rates": ["4Mbps"]
    },
    "capacity": 100
  }
]
```

Listing 7: Servers. A list that contains many servers, each with name and service parameters.

Finally, the `flows` are defined in a similar manner as servers as shown in Listing 8. Each object must have at least a name and a path. A path is represented as an array of server names, and the order in the list represents the sequence that the flow visits.

The representation of values and units is the same as servers, either being a string of a number with units, or a number that uses the default unit. The arrival curve at the source of a flow is defined by multiple token-bucket curves and taken as the minimum among all these curves. Similar to the service curve of a server, each pair of a burst and a

rate value represent a token-bucket curve. For example, the arrival curve of f0 has one token-bucket curve of burst 10 bytes and rate 10 kilobits per second, and the other curve of burst 2 kilobytes and rate 0.5 megabits per second.

```

"flows": [
  {
    "name": "f0",
    "path": ["s0-o0", "s1-o0"],
    "arrival_curve": {
      "bursts": [10, "2kB"],
      "rates": ["10kbps", 0.5]
    },
    "max_packet_length": 50,
    "rate_unit": "kbps"
  },
  {
    "name": "f1",
    "path": ["s0-o0", "s1-o1"],
    "arrival_curve": {
      "bursts": ["10B"],
      "rates": ["10kbps"]
    },
    "max_packet_length": 50
  },
  {
    "name": "f2",
    "path": ["s1-o0"],
    "arrival_curve": {
      "bursts": [10],
      "rates": ["10kbps"]
    },
    "max_packet_length": "50B",
    "min_packet_length": "4B"
  }
]

```

Listing 8: Flows. A list contains many flows. Each flow contains name, path, and parameters of the arrival data.

5.2 Tool Usage

In this section, we briefly introduce how to use Saihu to execute analyses. One would only need to import one file, i.e. *interface.py*, to use Saihu given that the project is installed correctly. The simplest way to use Saihu is shown in Listing 9. Once a network description file is available as either an XML or a JSON file, one can execute the following example to do the analysis.

```

from interface import TSN_Analyzer
analyzer = TSN_Analyzer("demo.json")
analyzer.analyze_all()
analyzer.export("demo")

```

Listing 9: Simple example to use Saihu.

The basic procedure to use Saihu is as follows: 1. initialize the analyzer with a target network description file; 2. execute the analysis with some tools; 3. export the results into reports.

The supported tools and methods are listed in Figure 6. To switch between different tools, one uses different func-

tions with names like *analyze_xxx*, where *analyze_all* means to use all the available tools. To switch methods, one gives different input arguments to each analysis function. An example is provided in Listing 10. One can execute multiple analyses and all the results will be stored in the internal buffer of the analyzer until the analyzer exports them into reports.

```

analyzer.analyze_dnc()
analyzer.analyze_xtfa("TFA")
analyzer.analyze_panco(methods=["SFA", "PLP"])

```

Listing 10: Execute different tools and methods.

5.3 Analysis Reports

Saihu can generate 2 reports, a *human-friendly report* and a *machine-friendly report*. A human-friendly report is written as a Markdown file that lists all the essential information. An example is shown in Figure 7. The analysis results are listed in 3 sections: per-flow end-to-end delay, per-server delay, and execution time. The delay bounds are presented in tables where each row is a flow or a server, and each column is a method executed by a tool. The last column contains the minimum result obtained in the current round of analysis. The execution time of each method by each tool is also listed for comparison.

Other than the analysis results, the report also contains some information about the user inputs, but in a more formatted manner. They are network topology, flow paths, and link utilization. Network topology is shown as a graph induced by flows. i.e. It's a directed graph where each node is an output port, and an edge from node A to B exists if there's at least one flow traversing from A to B. Flow paths are the same as the network description file, it can serve as a reassurance of user's input. Link utilization is computed node-wise, it is defined as the ratio between the aggregated arrival rate at a node and its service rate. e.g. If 2 flows have arrival rates of *2kbps* and *3kbps* respectively filling into a node, which has a service rate of *10kbps*. The link utilization at the node is therefore $(2 + 3)/10 = 0.5$.

A *machine-friendly report* stores only the execution outputs, namely the per-flow end-to-end delay, per-server delay, and execution time. It's written in JSON format for easy parsing from other programs. An example is presented in Listing 11.

```

{
  "name": "demo",
  "flow_e2e_delay": {
    "f0": {
      "Panco_TFA": 100.12500000000001,
      "Panco_PLP": 80.05,
      "DNC_TFA": 100.00375,
      "xTFA_TFA": 99.32394489448944
    },
    ...
  },
  "server_delay": {
    "s0-o0": {
      "Panco_TFA": 50.0,

```

Per flow end-to-end delay bound

Unit in microsecond

Flow name	Panco-PLP	DNC-TFA	Panco-TFA	xTFA-TFA	Minimum (best)
f0	80.050	100.004	100.125	99.324	80.050
f1	80.070	80.075	80.125	79.322	79.322
f2	50.070	50.004	50.125	49.324	49.324

(a) Flow end-to-end delay

Per server delay bound

Unit in microsecond

server name	Panco-PLP	DNC-TFA	Panco-TFA	xTFA-TFA	Minimum (best)
s0-o0	N/A	50.000	50.000	50.000	50.000
s1-o0	N/A	50.004	50.125	49.324	49.324
s1-o1	N/A	30.075	30.125	29.322	29.322
Total	N/A	130.079	130.250	128.646	128.646

(b) Server delay


Execution Time

Unit in milliseconds

method/tool	DNC	Panco	xTFA
PLP	N/A	144.896	N/A
TFA	23.000	23.839	46.020

(c) Execution time

Network Topology

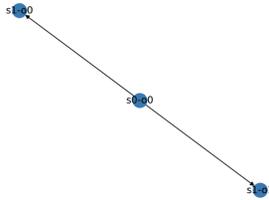

(d) Network topology

Flow paths

f0: s0-o0 -> s1-o0
 f1: s0-o0 -> s1-o1
 f2: s1-o0

(e) Flow paths

Network Link Utilization

Utilization for each link:

- s0-o0 : 0.005
- s1-o0 : 0.005
- s1-o1 : 0.0025

Maximum Link Utilization = 0.005

(f) Link utilization

Figure 7: Human-friendly report. It is written as a Markdown file. The analysis results include the flow end-to-end delay, server delay, and execution time. The values are listed in tables for each tool and method as shown in (a)(b)(c). The units are adjusted accordingly. It also contains input information like the network topology, paths of flows, and link utilization.

```

    "DNC_TFA": 50.0,
    "xTFA_TFA": 50.0
  },
  ...
  "execution_time": {
    "Panco_TFA": 62.70909309387207,
    "Panco_PLP": 243.81709098815918,
    "DNC_TFA": 32.0,
    "xTFA_TFA": 81.46500587463379
  },
  "units": {
    "flow_delay": "us",
    "server_delay": "us",
    "execution_time": "ms"
  }
}

```

Listing 11: Machine-friendly report. The flow end-to-end delays, server delays, and execution time are listed in pure numbers. The units these numbers use are also listed as one entry.

In order to let users parse the information easily, Saihu prints the results in numbers, accompanied by the units used in each section. Note that the human-friendly report always contains only 3 decimal digits according to the smallest value in the table, while there's no such rounding for the machine-friendly report. As a result, one should read the machine-friendly report if they require very precise results.

5.4 Network Generation

Saihu provides a series of functions to allow users to generate certain types of networks into a network description




Figure 8: Interleave tandem network

file. Currently, Saihu supports the generation of interleave tandem, mesh, and ring network. They contain specific topologies and routing rules for the flow paths. Users have the freedom to choose the size of the network (number of servers), the service parameters of servers, and the flow parameters of data arrival. The way these parameters are used within each type of network is specified in the respective sections.

Other than the predetermined routing rules, Saihu also provides a function to generate an arbitrary number of flows with random routing. This is particularly suitable for testing the possible traffic with a specific topology. More details will be shown in Section 5.4.4.

5.4.1 Interleave Tandem Network

Suppose we wish to generate a network of n servers, indexed from 0 to $n - 1$. An interleave tandem network has all its servers chained in a line. One flow f_0 goes through all servers from s_0 to s_{n-1} . The flow f_i is $s_{i-1} \rightarrow s_i$ for $i \in [1, n - 1]$. Illustrated by Figure 8. All the flows have identical arrival curves and maximum packet length at the source, defined by function arguments `burst`, `arrival_rate`, and `max_packet_length`. Likewise, All the servers have identical service curves and transmission capacity, defined by `latency`, `service_rate`, and `capacity`.

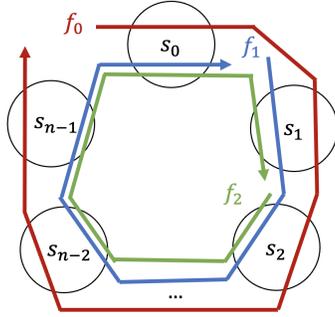


Figure 9: Ring network

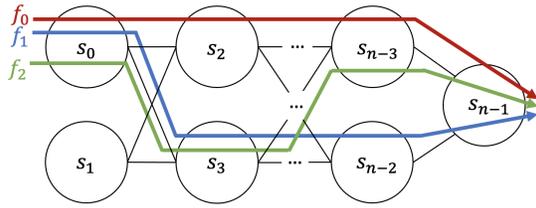


Figure 10: Mesh network. Only parts of the flows from s_0 are shown. There is a flow for every possible path from s_0 or s_1 to s_{n-1} .

5.4.2 Ring Network

A ring network is illustrated in Figure 9. There are n flows and n servers. The path of flow i is $s_i \rightarrow s_{i+1} \rightarrow \dots \rightarrow s_{i+n-1 \bmod n}$ for $0 \leq i \leq n-1$. A ring network is completely symmetrical with all its flows and servers being identical. All flows are defined by burst, arrival_rate, and max_packet_length. Similarly, all servers are defined by latency, service_rate, and capacity.

5.4.3 Mesh Network

A mesh network is illustrated in Figure 10. All flows start from either s_0 or s_1 . The flows go through all $2^{(n-1)/2}$ possible combinations of servers towards the right. e.g. $s_0 \rightarrow s_2 \rightarrow \dots$ and $s_1 \rightarrow s_2 \rightarrow \dots$ are both in the network. All servers have the same service curve and capacity except s_{n-1} has the doubled service rate. All flows have identical service curves and maximum packet length.

5.4.4 Fixed-Topology Random Routing Network

It's also possible to randomly generate a network defined as a JSON file with a fixed topology of switches. Users have the freedom to decide the number of flows, the topology of switches, and the service/arrival parameters. Each flow randomly routes from one switch to another without repeating the visited switch. We will show more details and use it as an example in Section 6.

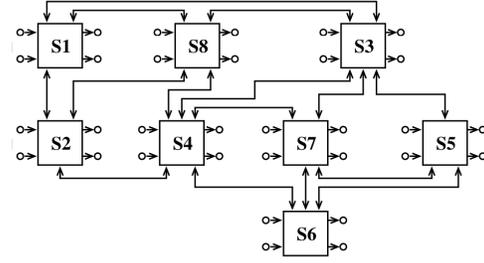


Figure 11: Industrial network [19]

5.5 Extension

As we showed in Figure 1, Saihu uses XML/JSON files as a common input and a general information container class as a common output for all the tools. This means to incorporate more tools into Saihu, one only needs to allow the new tool to parse one of the network description formats and feed the analysis results into the information container class. By doing so, they can keep other parts of Saihu untouched and only need to manage one tool at a time.

Moreover, it's also possible to include more network description formats. Because the two formats Saihu uses currently can convert to each other, one only has to make sure a new format can be converted to and from one of the formats Saihu supports. We believe this approach can help more people contribute to and expand Saihu in the future.

6 Example

Since we have demonstrated writing a network description file and a small example in Section 5.1, we present an example where we generate a network based on the topology shown in Figure 11 for example. This network topology is provided by Airbus as a test configuration [19]. We demonstrate an example code for network generation, analyzing, and result exporting is shown in Listing 12.

```
# To use Saihu interface / network generation
from interface import TSN_Analyzer
from src.netscript.net_gen \
    import generate_fix_topology_network
# Switch connection: a switch written as 'key'
# can route directly to its 'values'
connections = {
    "S1": ["S2", "S3", "S8"],
    "S2": ["S1", "S4", "S8"],
    "S3": ["S1", "S4", "S5", "S7", "S8"],
    "S4": ["S2", "S3", "S6", "S7", "S8"],
    "S5": ["S3", "S6", "S7"],
    "S6": ["S4", "S5", "S7"],
    "S7": ["S3", "S4", "S5", "S6"],
    "S8": ["S1", "S2", "S3", "S4"]
}
# Generate a network with 50 flows, connection
# defined above, and parameters.
# Save as "industry50.json"
```


Per flow end-to-end delay bound

Unit in millisecond

Flow name	Panco-PLP	xTFA-TFA	Minimum (best)
f1	324.203	327.045	324.203
f2	536.292	560.110	536.292
f3	583.882	613.682	583.882
f4	920.550	934.574	920.550
f5	462.651	486.256	462.651

(a) Flow end-to-end delay

Network Topology

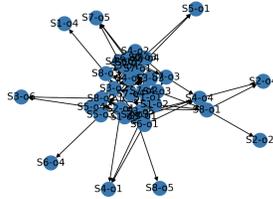

(d) Network topology

Per server delay bound

Unit in millisecond

server name	Panco-PLP	xTFA-TFA	Minimum (best)
S6-o1	N/A	131.415	131.415
S4-o1	N/A	195.630	195.630
S2-o1	N/A	5.384	5.384
S4-o2	N/A	142.447	142.447
S6-o2	N/A	185.134	185.134

(b) Server delay

Flow paths

f1: S6-o1 -> S4-o1
 f2: S2-o1 -> S4-o2 -> S6-o2 -> S7-o1 -> S5-o1
 f3: S1-o1 -> S3-o1 -> S4-o3 -> S8-o1
 f4: S1-o2 -> S8-o2 -> S3-o2 -> S5-o2 -> S7-o2 -> S6-o1 -> S4-o4
 f5: S5-o3 -> S6-o1 -> S4-o3 -> S8-o3 -> S1-o1 -> S3-o3

(e) Flow paths

Execution Time

Unit in second

method/tool	Panco	xTFA
PLP	33.313	N/A
TFA	N/A	2.058

(c) Execution time

Network Link Utilization

Utilization for each link:

- S6-o1 : 0.003644313664695741
- S4-o1 : 0.0007751609734171716
- S2-o1 : 0.005443001237612407
- S4-o2 : 0.016900187281424815
- S6-o2 : 0.0032019750003338715

(f) Link utilization

Figure 12: Human-friendly report from the execution of Listing 12. We only list the top 5 entries of each section due to limited space in this paper.

```
generate_fix_topology_network(
    num_flows=50,
    connections=connections,
    burst=("10B", "1024B"),
    arrival_rate=("200bps", "20kbps"),
    max_packet_length="128B",
    latency=("2us", "200ms"),
    service_rate=("1Mbps", "50Mbps"),
    capacity="256Mbps",
    save_dir="industry50.json"
)
# Initialize the tool with the generated network
analyzer = TSN_Analyzer("industry50.json")
# Analyze with specific methods by each tool
analyzer.analyze_xtfa()
analyzer.analyze_panco(methods="PLP")
analyzer.analyze_dnc(methods=["TFA", "SFA"])
# Export a json and a markdown report
analyzer.export(
    result_json="ind50_result.json",
    report_md="ind50_result.md")
```

Listing 12: Example code with network generation

First, we give the topology using a dictionary connections. Each key-value pair indicates all the links that can travel from one switch to another. For example, the entry "S1": ["S2", "S3", "S8"] means it's possible to go to "S2", "S3", and "S8" from S1.

Second, the arguments of the generation function include the number of flows one wishes to generate given the defined topology. As for the service and data arrival parameters, the function allows the user to define either a range as a tuple or a number. If it's defined as a range, the actual value will be chosen within the range uniformly randomly.

```
Generating random fixed-topology network of 50 flows and 8 switches...Done
Receiving a JSON file, converting to an XML ...Done
Analyzing "./temp/tempnet.xml" using xTFA-TFA...Done
Analyzing "industry50.json" using panco-PLP...Done
Analyzing "industry50.json" using DNC-TFA,SFA...Skip: network has cyclic dependency
and not allowed by DNC
Writing JSON result file...Done
Writing Markdown report...Done
```

Figure 13: Terminal message when executing Listing 12

For example, the arrival rate of a flow is decided between 200bps and 20kbps whenever a flow is generated. In case it's a number, the same number is assigned across all servers or flows.

Third, we analyze with xTFA using its default setting (TFA), with Panco using PLP, and with DNC using TFA and SFA. One will see the following message upon execution as shown in Figure 13. One may notice that although we ask DNC to execute, but Saihu skips it automatically since the generated network contains cyclic dependency.

Figure 12 provides the analysis result from this example execution. Since the parameters are randomly generated, the numerical results differ from each other. Moreover, we found the PLP finds a tighter delay bound for flows with much more computation time.

7 Conclusion

We presented Saihu, a Python interface that is capable of executing multiple network analysis tools that is easy to use and extend. Saihu provides methods to define a network and to retrieve the analysis results for multiple tools, which is achieved by having unified input and output layers for each tool and automating the required internal processing.

With the example provided in this paper, we showed that Saihu can indeed simplify many mechanical procedures previously hindering network researchers' works, and it can handle a real-world configuration with the tools it includes.

References

- [1] "Time-sensitive networking (tsn) task group," 2020. [Online]. Available: <https://1.ieee802.org/tsn/>
- [2] J.-Y. Le Boudec and P. Thiran, *Network Calculus: A Theory of Deterministic Queuing Systems for the Internet*. Berlin, Heidelberg: Springer-Verlag, 2001.
- [3] S. Bondorf and J. B. Schmitt, "The discodnc v2: A comprehensive tool for deterministic network calculus," in *Proceedings of the 8th International Conference on Performance Evaluation Methodologies and Tools*, ser. VALUETOOLS '14. Brussels, BEL: ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering), 2014, p. 44–49. [Online]. Available: <https://doi.org/10.4108/icst.Valuetools.2014.258167>
- [4] A. Scheffler and S. Bondorf, "Network calculus for bounding delays in feedforward networks of FIFO queueing systems," in *Proc. of the 18th International Conference on Quantitative Evaluation of Systems*, ser. QEST '21, August 2021, pp. 149–167. [Online]. Available: https://link.springer.com/chapter/10.1007/978-3-030-85172-9_8
- [5] A. Bouillard, L. Jouhet, and E. Thierry, "Service curves in Network Calculus: dos and don'ts," INRIA, Research Report RR-7094, 2009. [Online]. Available: <https://hal.inria.fr/inria-00431674>
- [6] L. Thiele, S. Chakraborty, and M. Naedele, "Real-time calculus for scheduling hard real-time systems," in *2000 IEEE International Symposium on Circuits and Systems (ISCAS)*, vol. 4, 2000, pp. 101–104 vol.4.
- [7] H. Schioler, H. P. Schwefel, and M. B. Hansen, "Cync: A matlab/simulink toolbox for network calculus," in *Proceedings of the 2nd International Conference on Performance Evaluation Methodologies and Tools*, ser. ValueTools '07. Brussels, BEL: ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering), 2007.
- [8] J. Migge, M. Fumey, and M. Boyer, "Pegase - a robust and efficient tool for worst-case network traversal time evaluation on afdx," in *Aerospace Technology Conference and Exposition*. SAE International, oct 2011. [Online]. Available: <https://doi.org/10.4271/2011-01-2711>
- [9] A. Mifdaoui and H. Ayed, "Wopanets: A tool for worst case performance analysis of embedded networks," in *2010 15th IEEE International Workshop on Computer Aided Modeling, Analysis and Design of Communication Links and Networks (CAMAD)*, 2010, pp. 91–95.
- [10] M. Schmidt, S. Veith, M. Menth, and S. Kehrer, "Delaylyzer: A tool for analyzing delay bounds in industrial ethernet networks," in *Measurement, Modelling, and Evaluation of Computing Systems and Dependability and Fault Tolerance*, K. Fischbach and U. R. Krieger, Eds. Cham: Springer International Publishing, 2014, pp. 260–263.
- [11] L. Bisti, L. Lenzi, E. Mingozzi, and G. Stea, "Deborah: A tool for worst-case analysis of fifo tandems," in *Leveraging Applications of Formal Methods, Verification, and Validation*, T. Margaria and B. Steffen, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 2010, pp. 152–168.
- [12] A. Bouillard and G. Stea, "Exact worst-case delay in fifo-multiplexing feed-forward networks," *IEEE/ACM Transactions on Networking*, vol. 23, no. 5, pp. 1387–1400, 2015.
- [13] A. Bouillard and É. Thierry, "Tight performance bounds in the worst-case analysis of feed-forward networks," *Discrete Event Dynamic Systems*, vol. 26, no. 3, pp. 383–411, Sep 2016. [Online]. Available: <https://doi.org/10.1007/s10626-015-0213-2>
- [14] A. Bouillard, "Stability and performance bounds in cyclic networks using network calculus," in *Formal Modeling and Analysis of Timed Systems*, É. André and M. Stoelinga, Eds. Cham: Springer International Publishing, 2019, pp. 96–113.
- [15] S. Kerschbaum, K.-S. Hielscher, and R. German, "The need for shaping non-time-critical data in profinet networks," in *2016 IEEE 14th International Conference on Industrial Informatics (INDIN)*, 2016, pp. 160–165.
- [16] L. Thomas, "Analysis of the side-effects on latency bounds of combinations of scheduling, redundancy and synchronization mechanisms in time-sensitive networks," Ph.D. dissertation, l'Institut Supérieur de l'Aéronautique et de l'Espace (ISAE-SUPAERO), 2022, thèse de doctorat dirigée par Mifdaoui, Ahlem et Le Boudec, Jean-Yves Informatique et Télécommunications Toulouse, ISAE 2022. [Online]. Available: <http://www.theses.fr/2022ESAE0041>
- [17] A. Bouillard, "Trade-off between accuracy and tractability of network calculus in fifo networks," *Performance Evaluation*, vol. 153, p. 102250, 2022. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0166531621000675>
- [18] M. Berkelaar, K. Eikland, and P. Notebaert, "lpsolve," May 2004. [Online]. Available: <https://lpsolve.sourceforge.net/5.5/>
- [19] S. M. Tabatabaee and J.-Y. L. Boudec, "Deficit round-robin: A second network calculus analysis," in *2021 IEEE 27th Real-Time and Embedded Technology and Applications Symposium (RTAS)*, 2021, pp. 171–183.